




Machine Learning

Neural Networks: Representation Non-linear hypotheses

Non-linear Classification

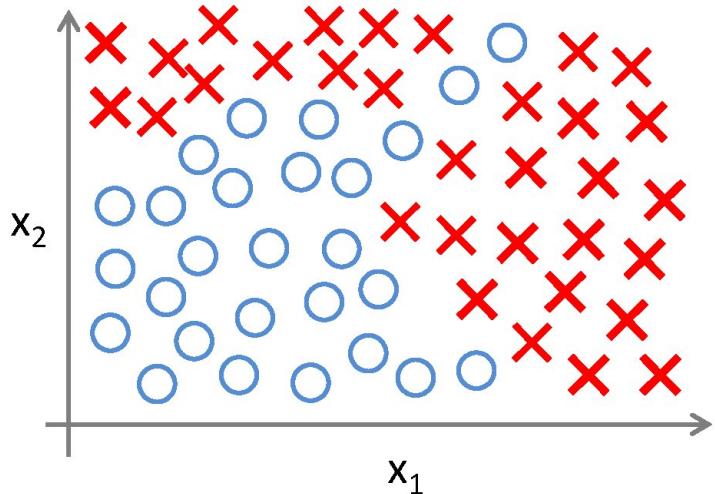

Including only subset
of quadratic features

$$g(\theta_0 + \theta_1 x_1 + \theta_2 x_2 + \theta_3 x_1 x_2 + \theta_4 x_1^2 x_2 + \theta_5 x_1^3 x_2 + \theta_6 x_1 x_2^2 + \dots)$$

x_1 = size

x_2 = # bedrooms

x_3 = # floors


x_4 = age

...

x_{100}

What is this?

You see this:

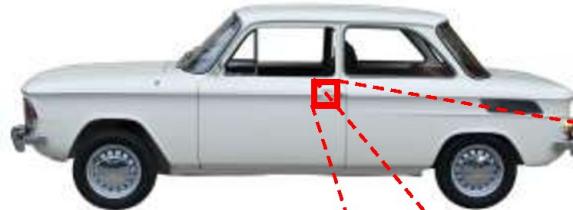

But the camera sees this:

194	210	201	212	199	213	215	195	178	158	182	209
180	189	190	221	209	205	191	167	147	115	129	163
114	126	140	188	176	165	152	140	170	106	78	88
87	103	115	154	143	142	149	153	173	101	57	57
102	112	106	131	122	138	152	147	128	84	58	66
94	95	79	104	105	124	129	113	107	87	69	67
68	71	69	98	89	92	98	95	89	88	76	67
41	56	68	99	63	45	60	82	58	76	75	65
20	43	69	75	56	41	51	73	55	70	63	44
50	50	57	69	75	75	73	74	53	68	59	37
72	59	53	66	84	92	84	74	57	72	63	42
67	61	58	65	75	78	76	73	59	75	69	50

Computer Vision: Car detection



Cars





Not a car

Testing:



What is this?

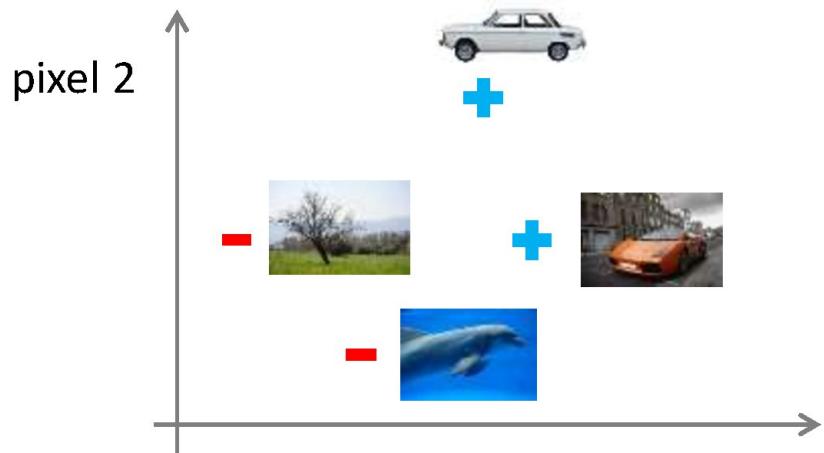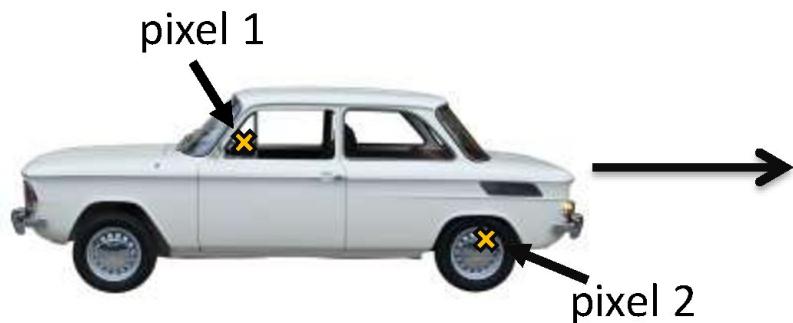

+


Cars

-


"Non"-Cars



pixel 1

Learning
Algorithm

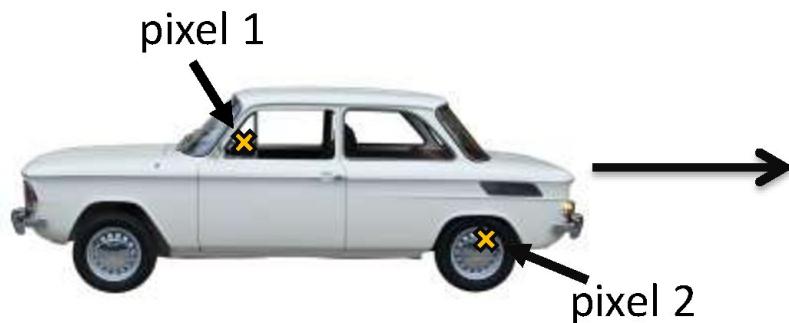

Learning
Algorithm

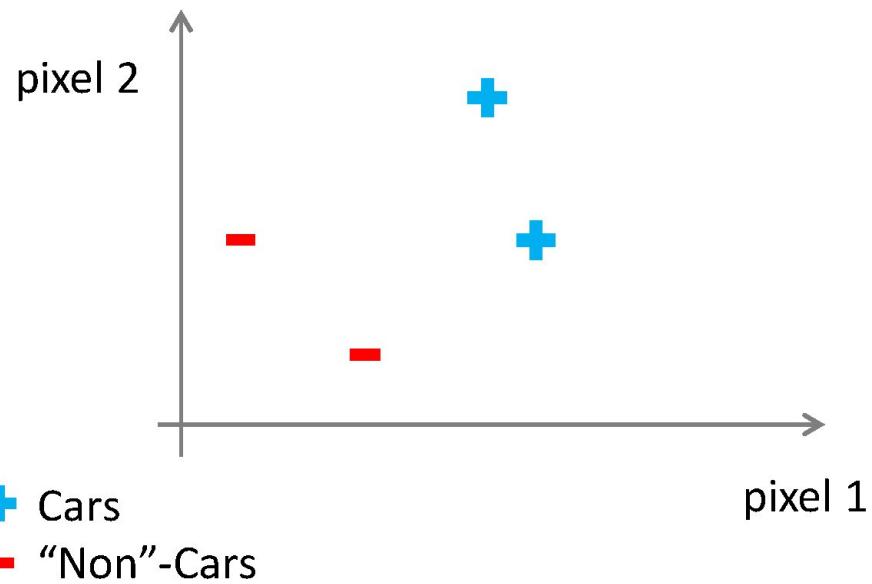

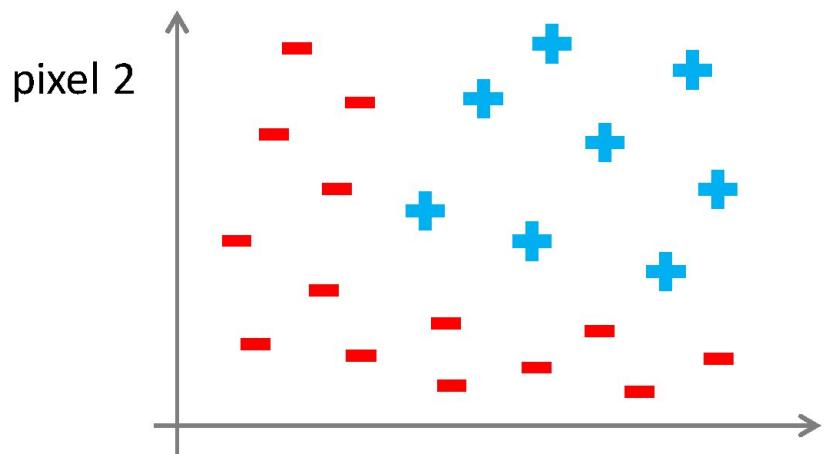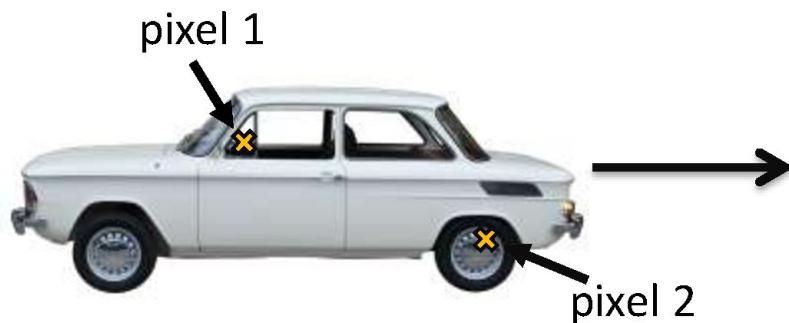

50×50 pixel images \rightarrow 2500 pixels
 $n = 2500$ (7500 if RGB)

$$x = \begin{bmatrix} \text{pixel 1 intensity} \\ \text{pixel 2 intensity} \\ \vdots \\ \text{pixel 2500 intensity} \end{bmatrix}$$

0-255

+

Cars

-

\"Non\"-Cars

pixel 1

Quadratic features ($x_i \times x_j$): ≈ 3 million features

$N^{2/2}$



Machine Learning

Neural Networks: Representation

Neurons and the brain


Neural Networks

Origins: Algorithms that try to mimic the brain.

Was very widely used in 80s and early 90s; popularity diminished in late 90s.


Recent resurgence: State-of-the-art technique for many applications

The “one learning algorithm” hypothesis

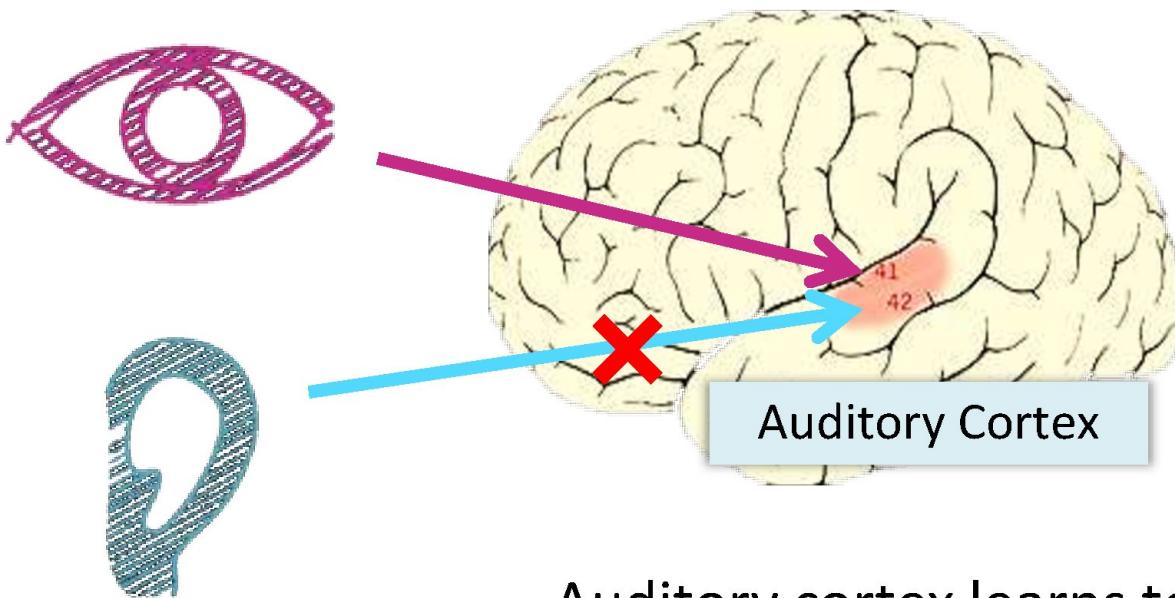

Auditory cortex learns to see

The “one learning algorithm” hypothesis

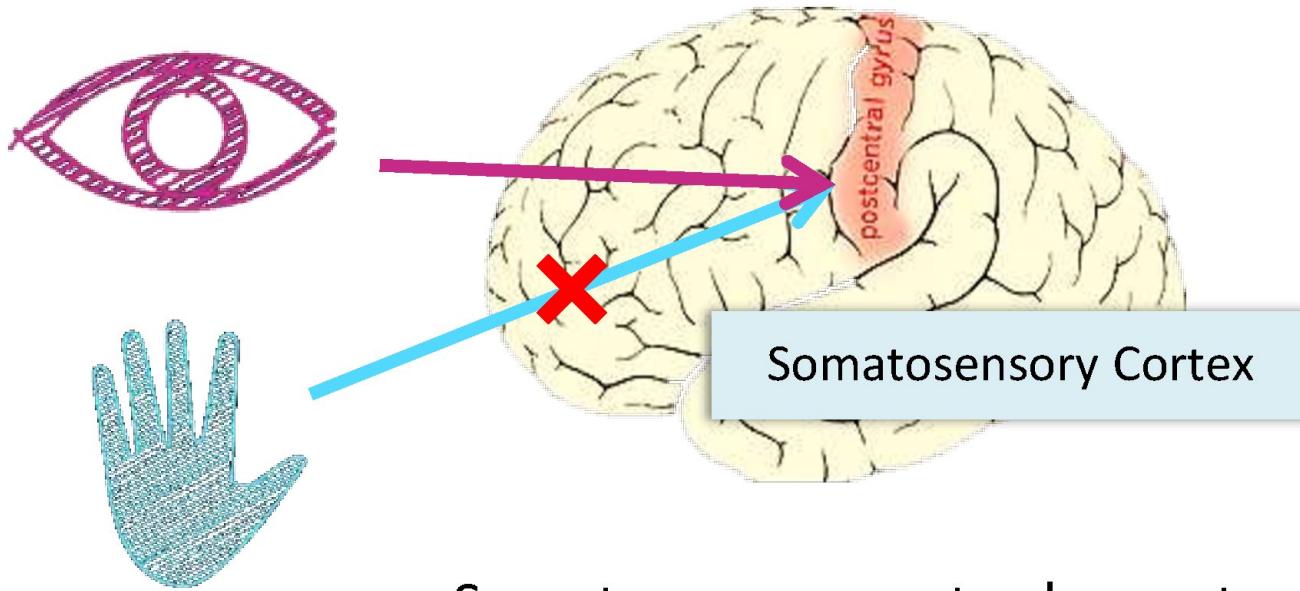

Somatosensory cortex learns to see


Sensor representations in the brain



Seeing with your tongue



Human echolocation (sonar)

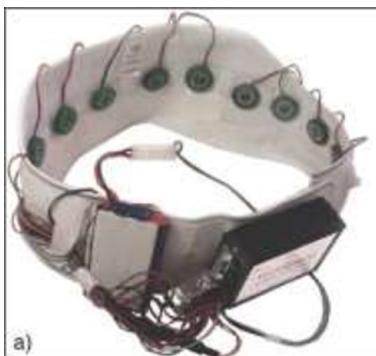

Haptic belt: Direction sense



Implanting a 3rd eye




Machine Learning


Neural Networks: Representation

Model representation I

Neuron in the brain

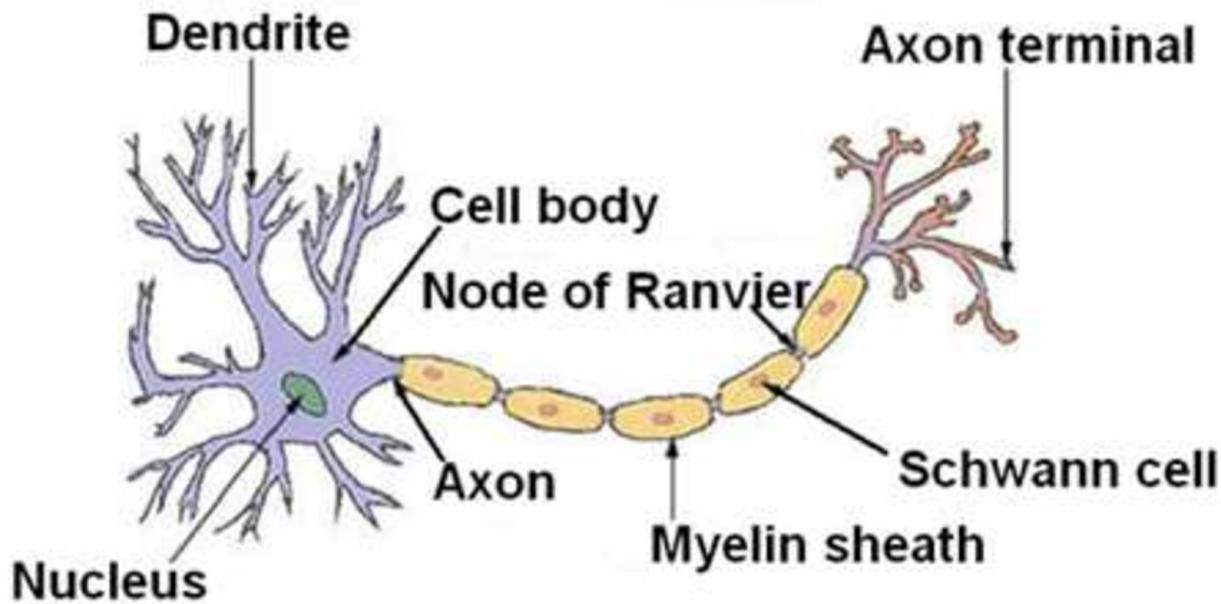


Neurons in the brain

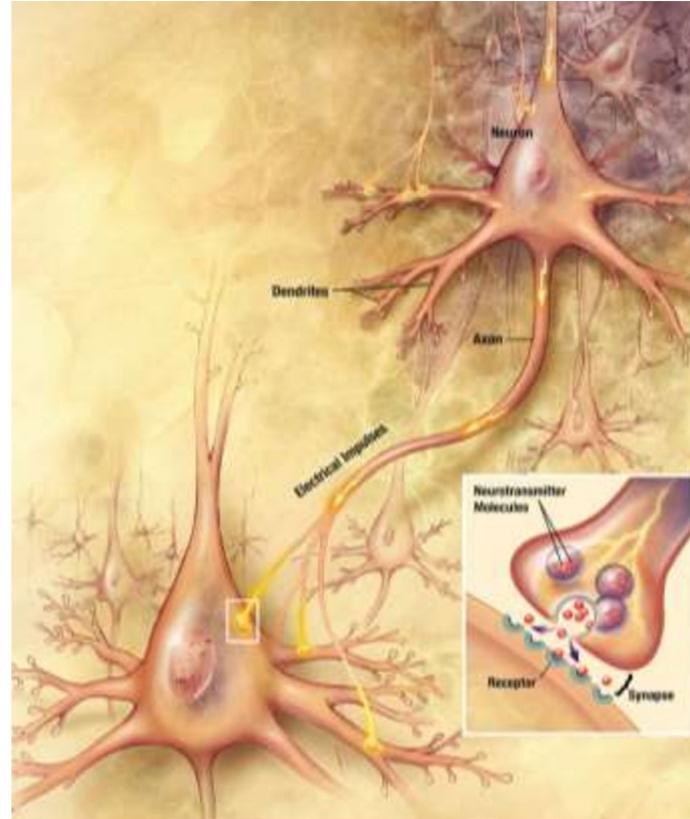

[Credit: US National Institutes of Health, National Institute on Aging]

Andrew Ng

Neuron model: Logistic unit

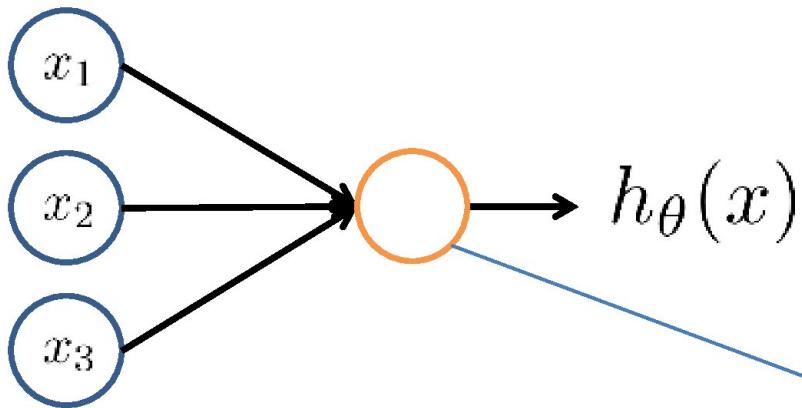


$$x = \begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ x_3 \end{bmatrix} \quad \theta = \begin{bmatrix} \theta_0 \\ \theta_1 \\ \theta_2 \\ \theta_3 \end{bmatrix}$$


Sigmoid (logistic) activation function.

(neuron [say]) Analogous to neurons body

Neural Network

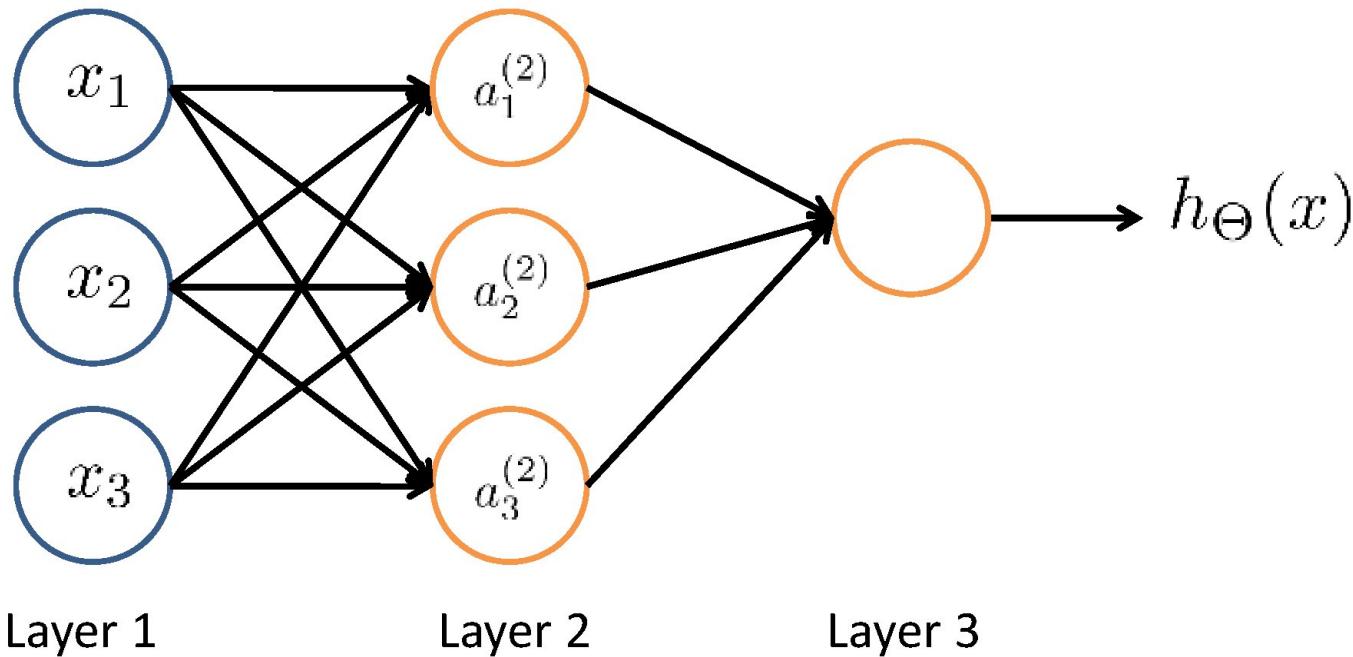

Neural Network

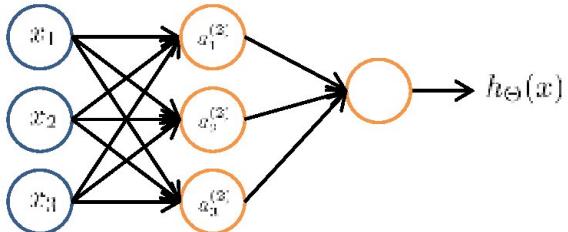

$a_i^{(j)}$ = “activation” of unit i in layer j

$\Theta^{(j)}$ = matrix of weights controlling
function mapping from layer j to
layer $j + 1$

$$a_1^{(2)} = g(\Theta_{10}^{(1)}x_0 + \Theta_{11}^{(1)}x_1 + \Theta_{12}^{(1)}x_2 + \Theta_{13}^{(1)}x_3)$$

$$a_2^{(2)} = g(\Theta_{20}^{(1)}x_0 + \Theta_{21}^{(1)}x_1 + \Theta_{22}^{(1)}x_2 + \Theta_{23}^{(1)}x_3)$$

$$a_3^{(2)} = g(\Theta_{30}^{(1)}x_0 + \Theta_{31}^{(1)}x_1 + \Theta_{32}^{(1)}x_2 + \Theta_{33}^{(1)}x_3)$$

$$h_\Theta(x) = a_1^{(3)} = g(\Theta_{10}^{(2)}a_0^{(2)} + \Theta_{11}^{(2)}a_1^{(2)} + \Theta_{12}^{(2)}a_2^{(2)} + \Theta_{13}^{(2)}a_3^{(2)})$$


If network has s_j units in layer j , s_{j+1} units in layer $j + 1$, then $\Theta^{(j)}$ will be of dimension $s_{j+1} \times (s_j + 1)$.



Machine Learning

Neural Networks: Representation Model representation II

Forward propagation: Vectorized implementation

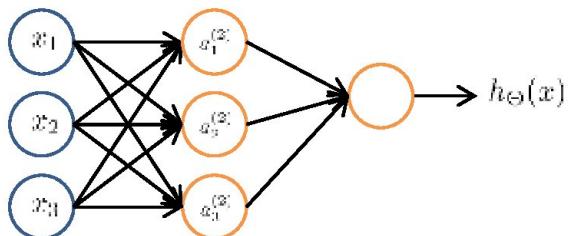

$$a_1^{(2)} = g(\Theta_{10}^{(1)} x_0 + \Theta_{11}^{(1)} x_1 + \Theta_{12}^{(1)} x_2 + \Theta_{13}^{(1)} x_3)$$

$$a_2^{(2)} = g(\Theta_{20}^{(1)} x_0 + \Theta_{21}^{(1)} x_1 + \Theta_{22}^{(1)} x_2 + \Theta_{23}^{(1)} x_3)$$

$$a_3^{(2)} = g(\Theta_{30}^{(1)} x_0 + \Theta_{31}^{(1)} x_1 + \Theta_{32}^{(1)} x_2 + \Theta_{33}^{(1)} x_3)$$

$$h_{\Theta}(x) = g(\Theta_{10}^{(2)} a_0^{(2)} + \Theta_{11}^{(2)} a_1^{(2)} + \Theta_{12}^{(2)} a_2^{(2)} + \Theta_{13}^{(2)} a_3^{(2)})$$

$$x = \begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ x_3 \end{bmatrix} \quad z^{(2)} = \begin{bmatrix} z_1^{(2)} \\ z_2^{(2)} \\ z_3^{(2)} \end{bmatrix}$$

$$z^{(2)} = \Theta^{(1)} x$$


$$a^{(2)} = g(z^{(2)})$$

Add $a_0^{(2)} = 1$.


$$z^{(3)} = \Theta^{(2)} a^{(2)}$$

$$h_{\Theta}(x) = a^{(3)} = g(z^{(3)})$$

Neural Network learning its own features

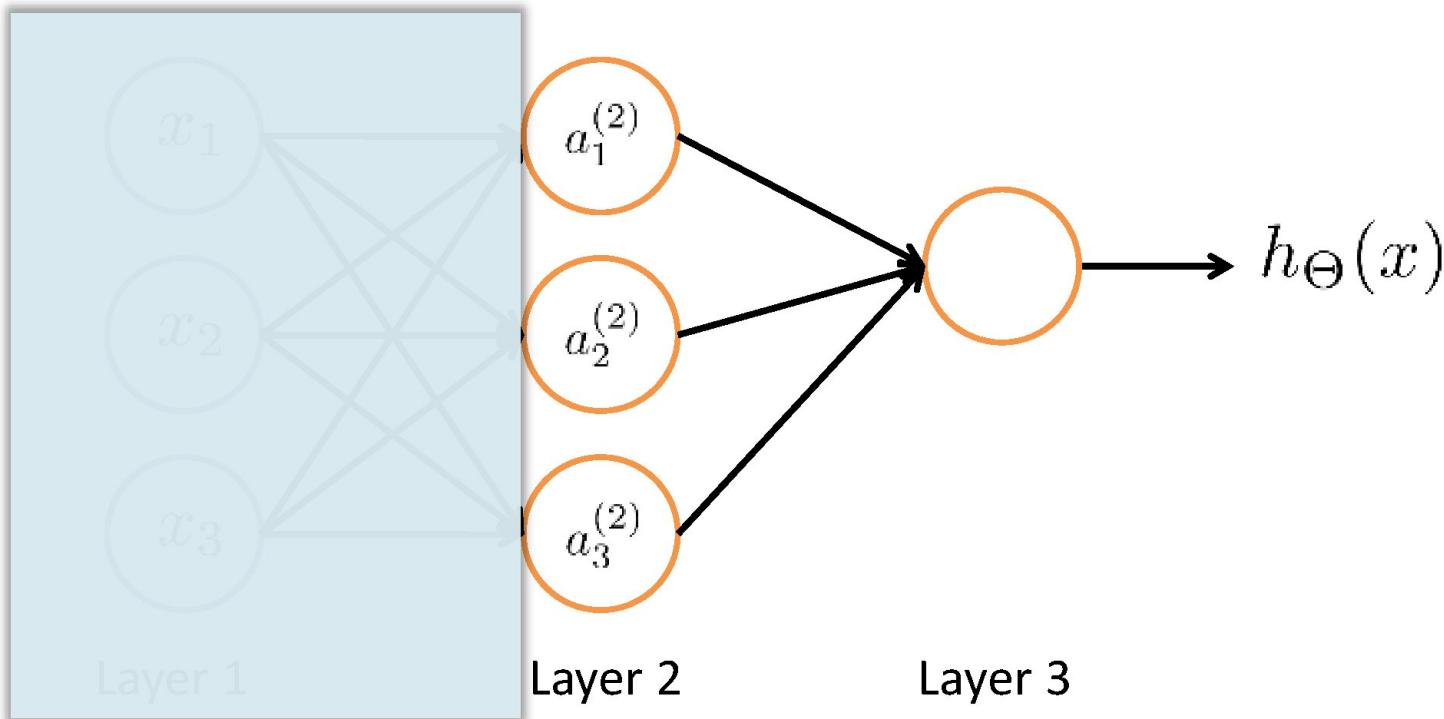

Other network architectures

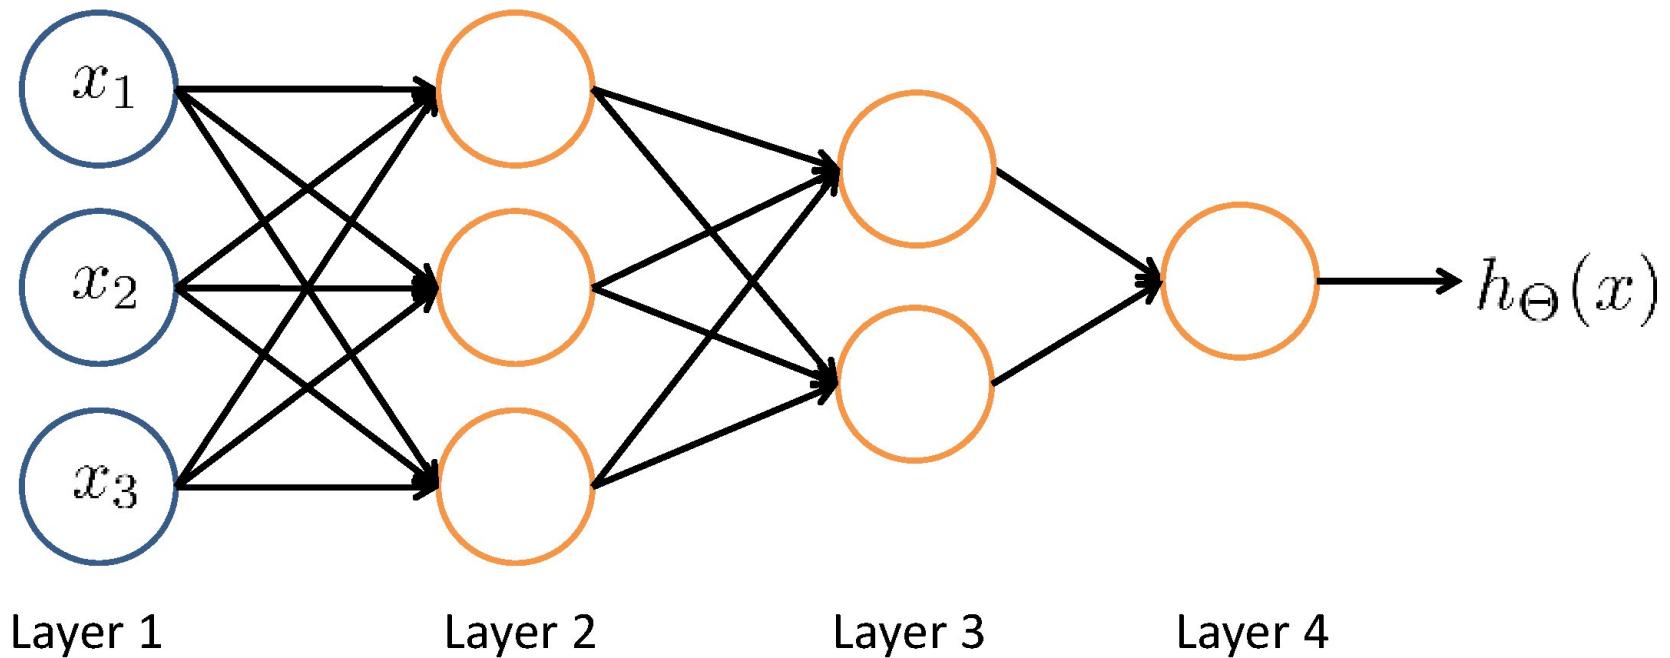



Machine Learning


Neural Networks: Representation

Examples and intuitions I


Non-linear classification example: XOR/XNOR

x₁, x₂ Features

x_1, x_2 are binary (0 or 1).

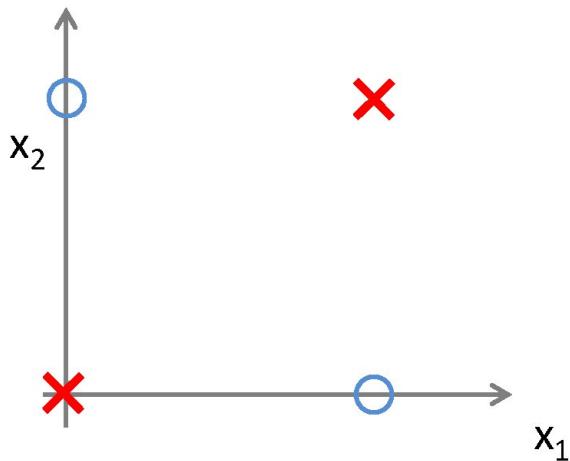



$$\begin{aligned}y &= x_1 \text{ XOR } x_2 \\x_1 \text{ XNOR } x_2 \\&\text{NOT } (x_1 \text{ XOR } x_2)\end{aligned}$$

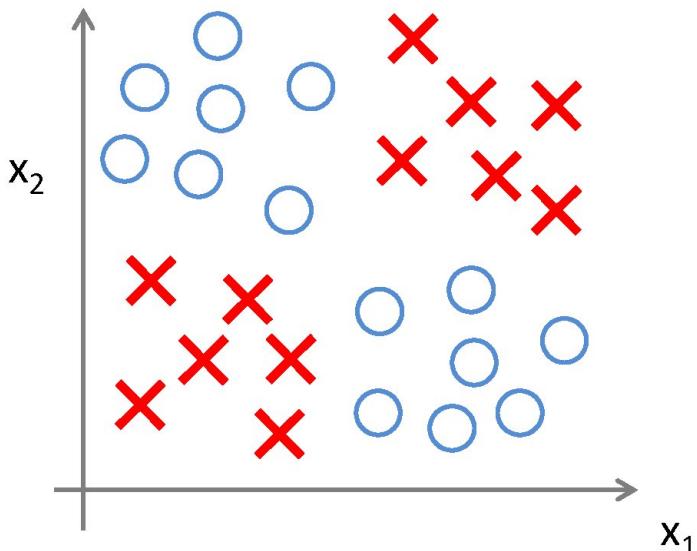

Simple example: AND


$$x_1, x_2 \in \{0, 1\}$$

$$y = x_1 \text{ AND } x_2$$

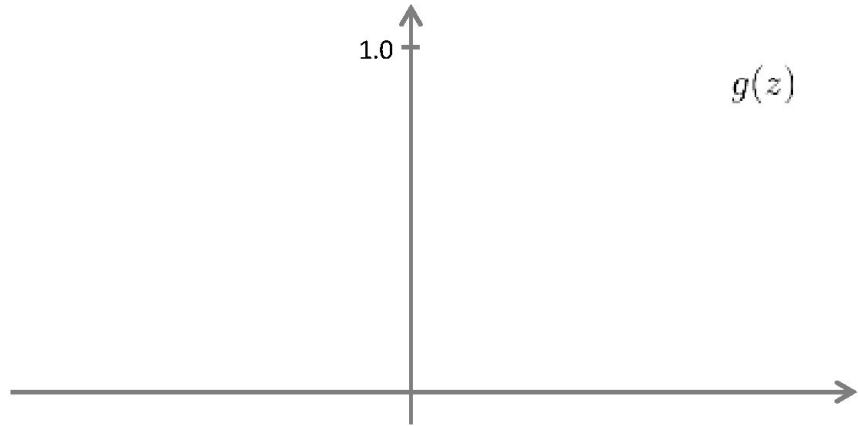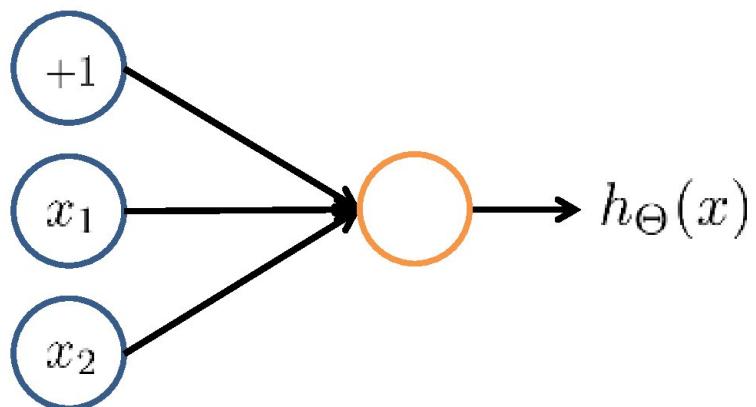

x_1	x_2	$h_{\Theta}(x)$
0	0	0
0	1	0.5
1	0	0.5
1	1	1

Example: OR function

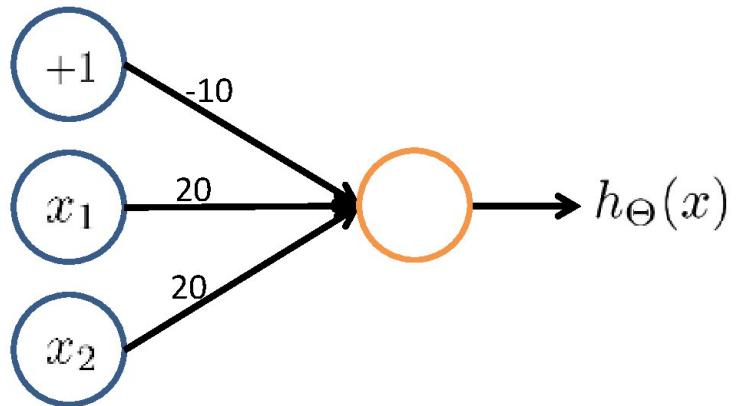


x_1	x_2	$h_\Theta(x)$
0	0	0
0	1	1
1	0	1
1	1	1




Machine Learning

Neural Networks: Representation

Examples and intuitions II

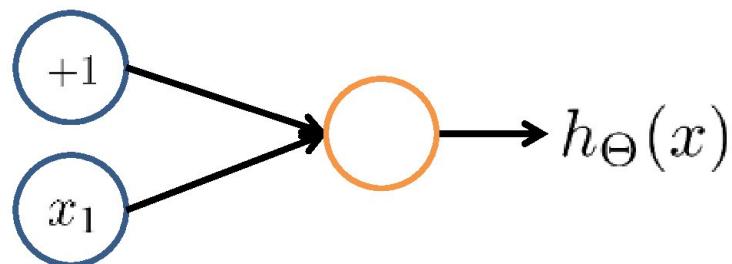
$x_1 \text{ AND } x_2$ $x_1 \text{ OR } x_2$ **Negation:**

$$h_\Theta(x) = g(10 - 20x_1)$$

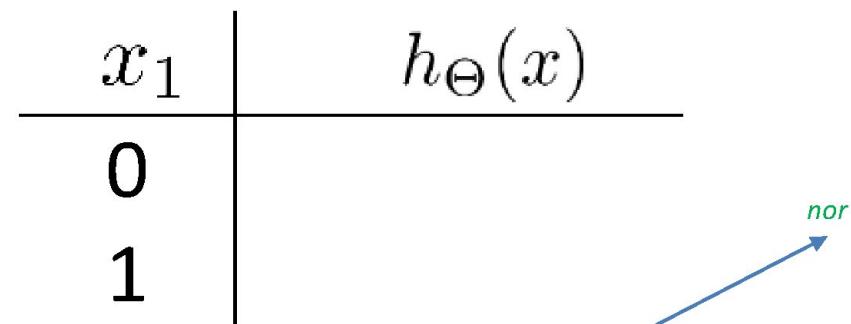


$$(\text{NOT } x_1) \text{ AND } (\text{NOT } x_2)$$


Putting it together: x_1 XNOR x_2

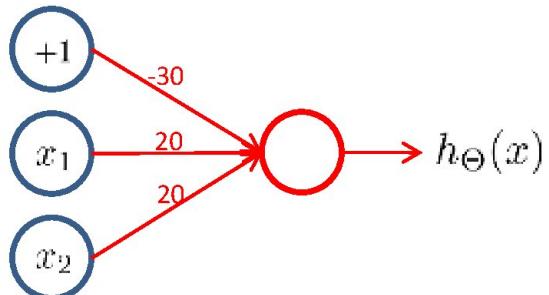

x_1 AND x_2

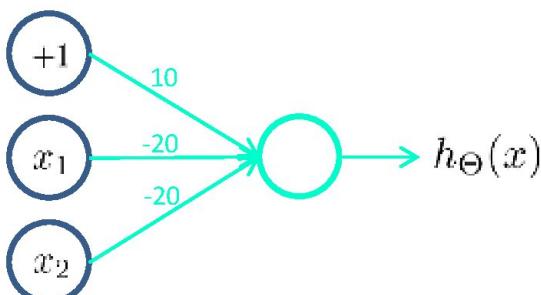

(NOT x_1) AND (NOT x_2)

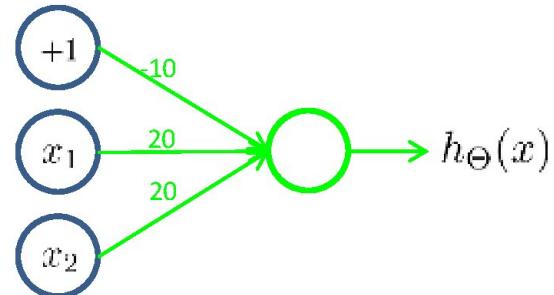


x_1 OR x_2




x_1	x_2	$a_1^{(2)}$	$a_2^{(2)}$	$h_{\Theta}(x)$
0	0			
0	1			
1	0			
1	1			


Neural Network intuition

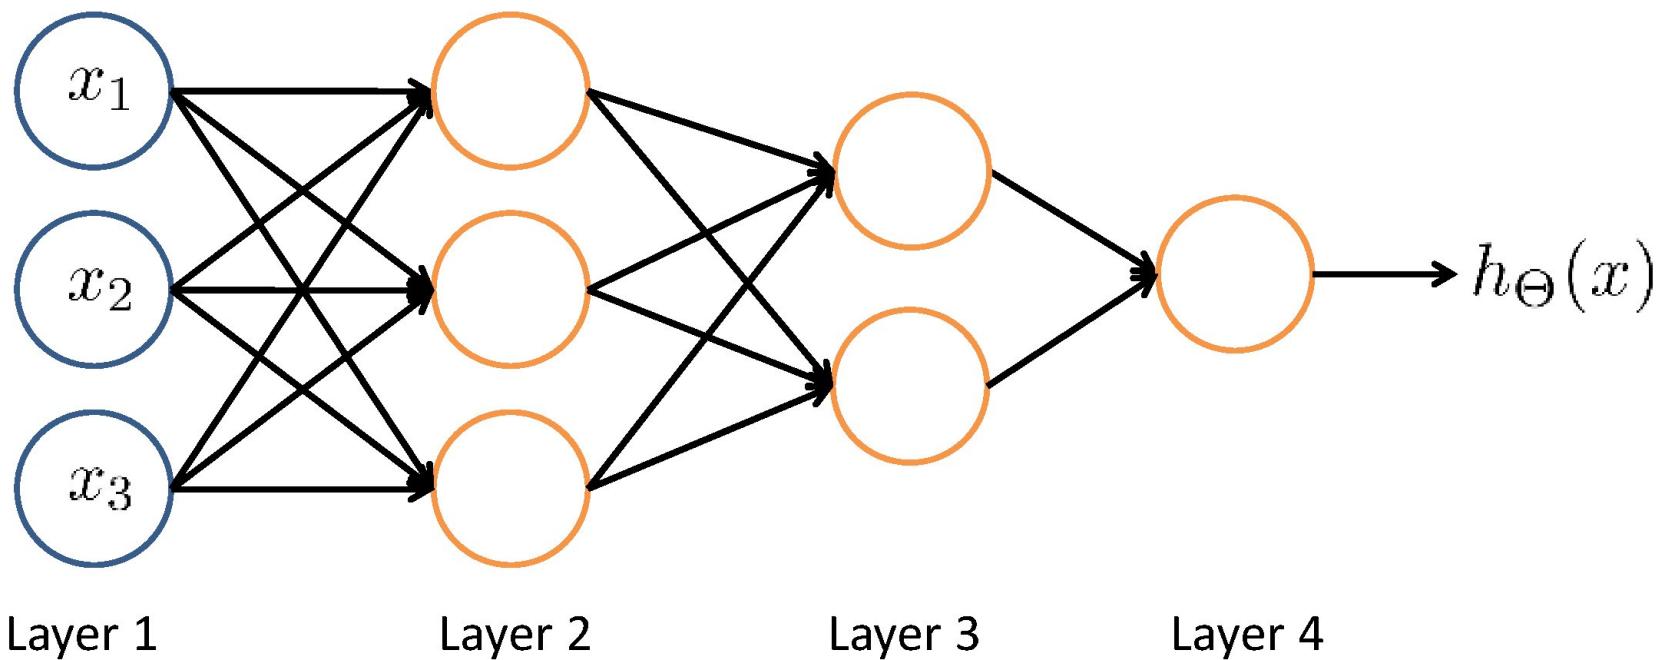

Handwritten digit classification

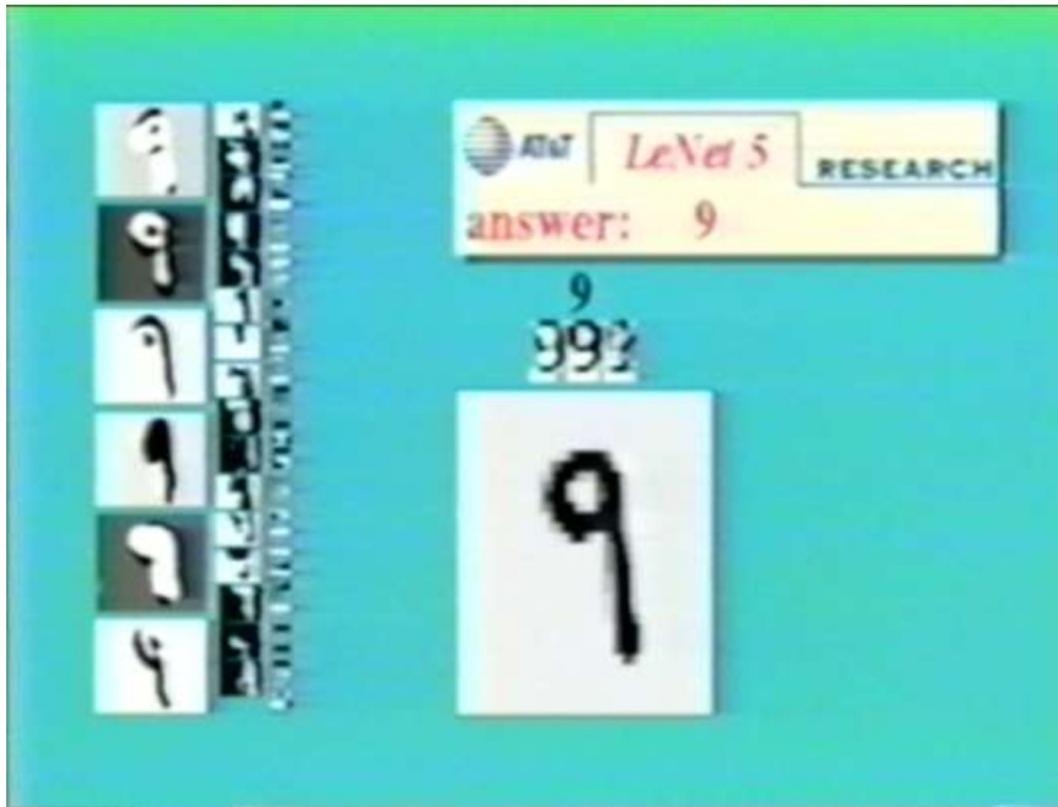

Handwritten digit classification

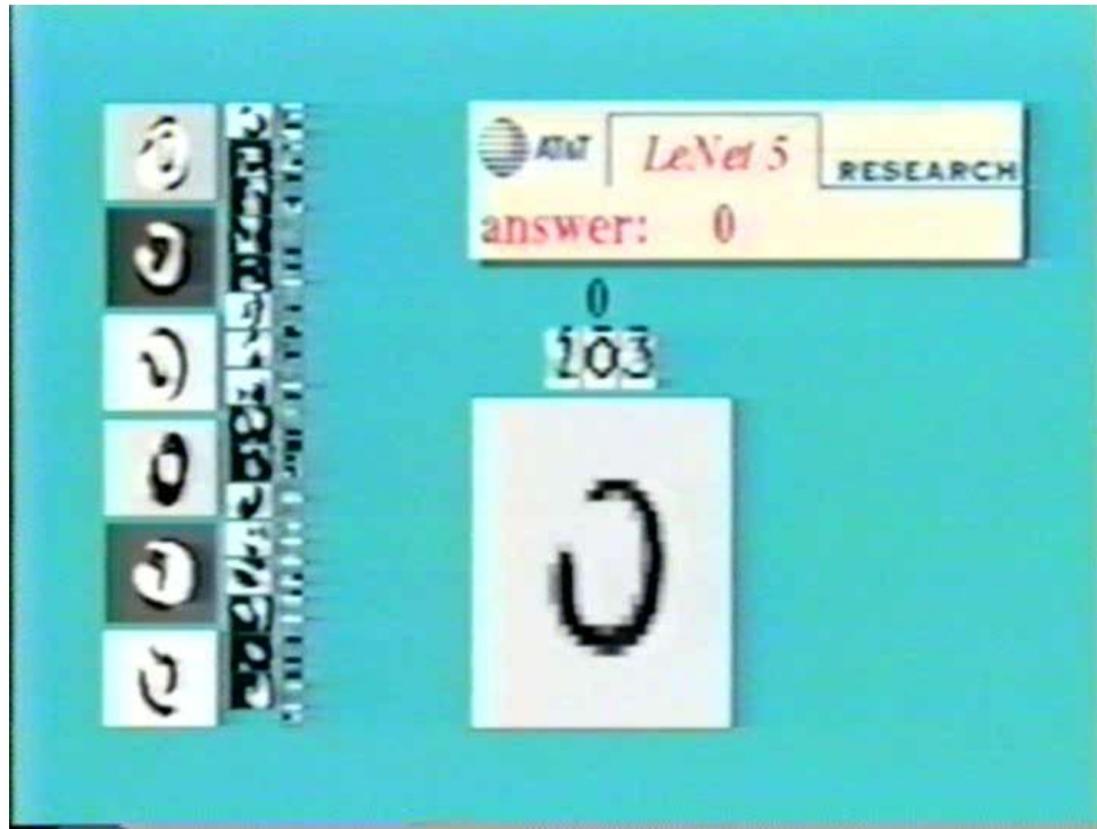



Machine Learning

Neural Networks: Representation

Multi-class classification

Multiple output units: One-vs-all.



Pedestrian




Car



Motorcycle




Truck

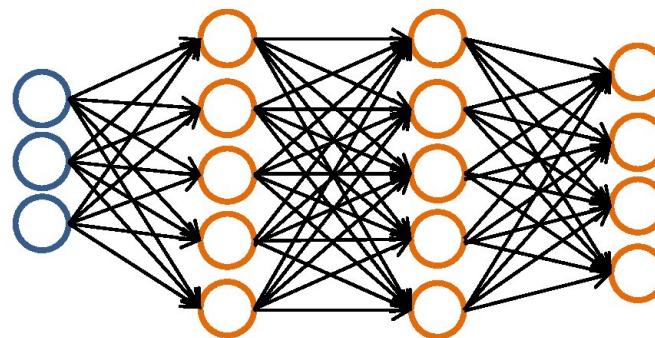

$$h_{\Theta}(x) \in \mathbb{R}^4$$

Want $h_{\Theta}(x) \approx \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}$, $h_{\Theta}(x) \approx \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}$, $h_{\Theta}(x) \approx \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}$, etc.
when pedestrian when car when motorcycle

Multiple output units: One-vs-all.

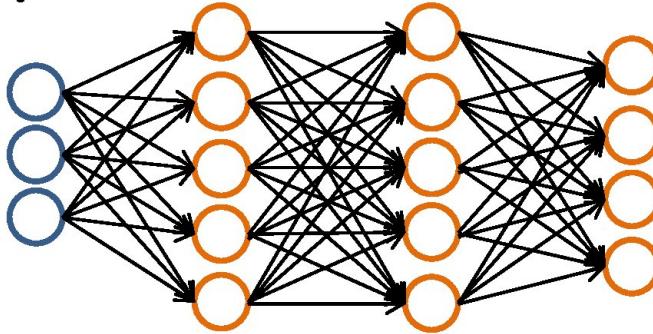

$$h_{\Theta}(x) \in \mathbb{R}^4$$

Want $h_{\Theta}(x) \approx \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}$, $h_{\Theta}(x) \approx \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}$, $h_{\Theta}(x) \approx \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}$, etc.
when pedestrian when car when motorcycle

Training set: $(x^{(1)}, y^{(1)}), (x^{(2)}, y^{(2)}), \dots, (x^{(m)}, y^{(m)})$

$y^{(i)}$ one of $\begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$
pedestrian car motorcycle truck