


3. The Anatomy of Our WordPress Theme

Our custom WordPress theme includes the complete source Less files for the Bootstrap framework as well as configuration code in PHP to enable the compiling of CSS from those Less files, thanks to the WP-LESS plug-in.

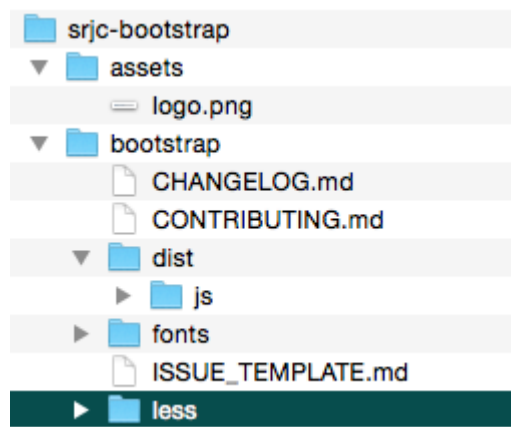

Take some time to review the files contained in the theme's subdirectory found at **/srjc-bootstrap/bootstrap/less/**.

Note in particular the two files **bootstrap.less** and **theme.less**. These two files incorporate by **@include** directives all of the other individual Less files in the subdirectory.

Also take a look at **variables.less** where most variables used by the Bootstrap framework, including grid column count, margins, fonts, sizing, colors, etc. are defined for all other Less files.

Try editing any of the values for the variables in the **variables.less** file and save the changed file back to your hosting environment. Try finding variables like **@grid-columns**, **@grid-gutter-width**, **@font-family-sans-serif**, or **@font-family-serif**.

Notice the CSS rules generated for your site by reloading a page and viewing the CSS rules in the browser's inspector.