

Straep — Data Models and Database Schema

Version: 1.0

Document owner: Engineering Team

Database: PostgreSQL 16

ORM: Django ORM (models.py)


Conventions:


- All primary keys are UUID unless noted.
 - All tables have `created_at` (auto) and `updated_at` (auto) unless noted.
 - Foreign keys use `_id` suffix.
 - Soft deletes: `deleted_at` timestamp (NULL = not deleted). Hard deletes are reserved for GDPR requests only.
 - Snake_case for all column names.
 - Enum types defined as `TextChoices` in Django.
-

Table of Contents

- 1. [Entity Relationship Overview](#)
 - 2. [Authentication and Users](#)
 - 3. [Profiles and Brand Pages](#)
 - 4. [Storefront — Products and Services](#)
 - 5. [Inquiries and Leads](#)
 - 6. [Posts and Feed](#)
 - 7. [Social Graph — Follows, Likes, Saves](#)
 - 8. [Subscriptions and Payments](#)
 - 9. [Templates and Marketplace](#)
 - 10. [Reviews and Trust](#)
 - 11. [Communities](#)
 - 12. [Notifications and Messaging](#)
 - 13. [Admin and Moderation](#)
 - 14. [Categories and Tags](#)
 - 15. [Full SQL Schema \(PostgreSQL\)](#)
 - 16. [Index Strategy](#)
 - 17. [Django Models Reference](#)
-

1. Entity Relationship Overview

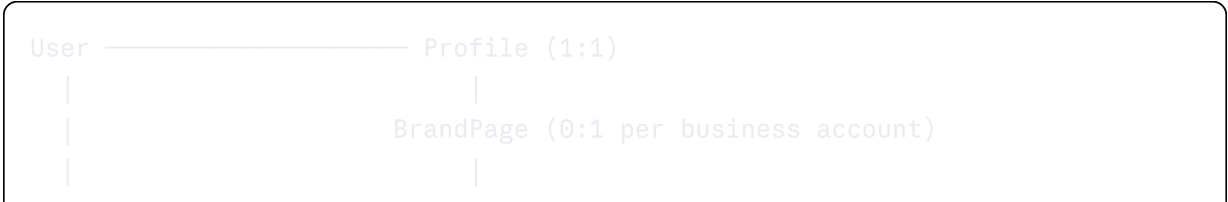

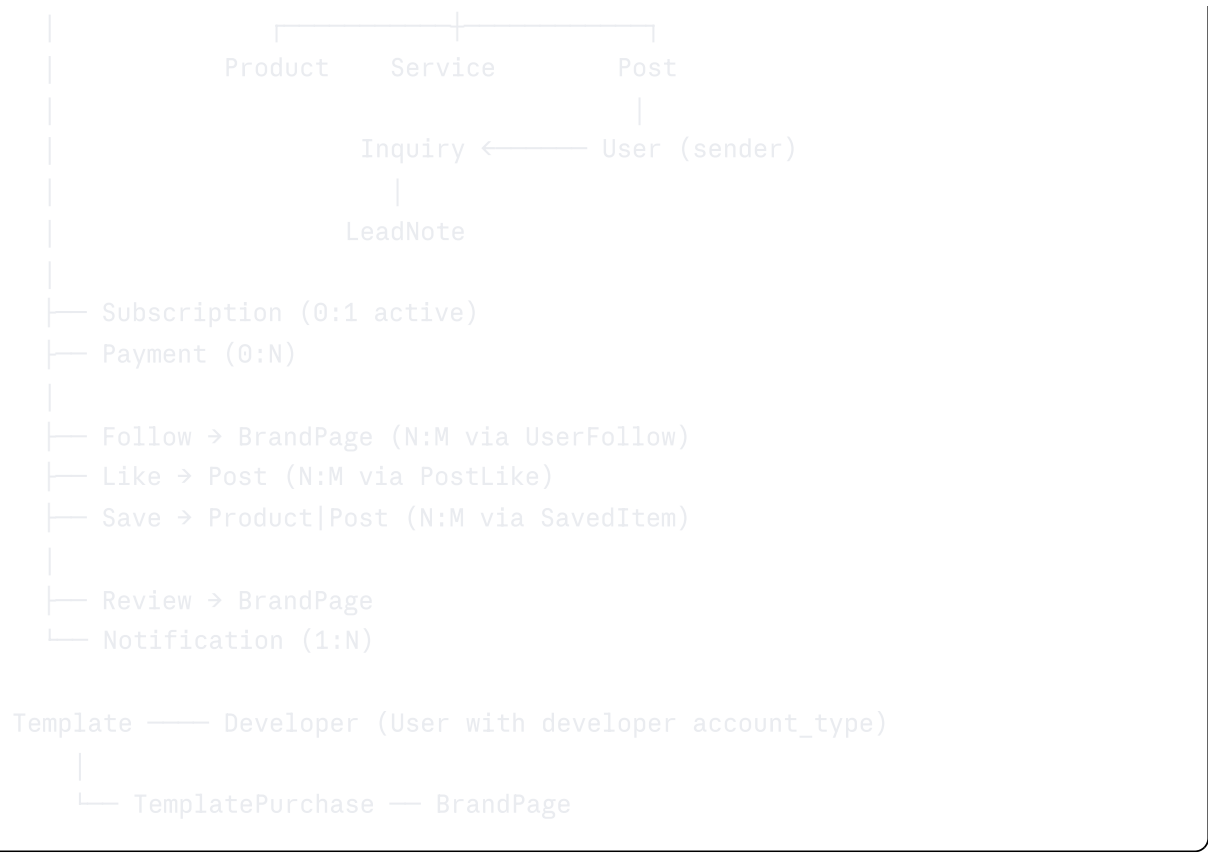

2. Authentication and Users

2.1 User

Core authentication entity. One row per registered account.

sql

```
CREATE TABLE users (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  email       VARCHAR(255) UNIQUE,
  phone       VARCHAR(20) UNIQUE,
  password_hash VARCHAR(255),
  account_type VARCHAR(20) NOT NULL
  CHECK (account_type IN ('personal', 'business', 'creator', 'de
  auth_provider VARCHAR(20) NOT NULL DEFAULT 'email'
  CHECK (auth_provider IN ('email', 'phone', 'google', 'apple'))

  provider_id  VARCHAR(255),          -- Google/Apple user ID
  is_verified  BOOLEAN NOT NULL DEFAULT FALSE,
  is_active    BOOLEAN NOT NULL DEFAULT TRUE,
  is_staff     BOOLEAN NOT NULL DEFAULT FALSE,
  is_superuser BOOLEAN NOT NULL DEFAULT FALSE,
  onboarding_step VARCHAR(50) DEFAULT 'account_type',
  onboarding_done BOOLEAN NOT NULL DEFAULT FALSE,
  last_login   TIMESTAMP WITH TIME ZONE,
  deleted_at   TIMESTAMP WITH TIME ZONE,
  created_at   TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at   TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);
```

Field notes:

- `email` and `phone` are both nullable but at least one must be present (enforced at application level).
- `provider_id` stores Google's `sub` or Apple's user identifier.
- `onboarding_step` tracks progress: `account_type` → `profile_setup` → `interests` → `follow_suggestions` → `complete`.
- `deleted_at` is set on soft delete. All queries must filter `WHERE deleted_at IS NULL`.

2.2 EmailVerification

OTPs for email and phone verification.

```
sql

CREATE TABLE email_verifications (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  code        VARCHAR(6) NOT NULL,
  channel     VARCHAR(10) NOT NULL CHECK (channel IN ('email', 'phone')),
  attempts    INTEGER NOT NULL DEFAULT 0,
  is_used     BOOLEAN NOT NULL DEFAULT FALSE,
  expires_at  TIMESTAMP WITH TIME ZONE NOT NULL,
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);
```

2.3 RefreshToken

Stored refresh tokens for JWT rotation.

sql

```
CREATE TABLE refresh_tokens (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  token_hash  VARCHAR(255) NOT NULL UNIQUE,  
  device_info VARCHAR(255),  
  is_revoked  BOOLEAN NOT NULL DEFAULT FALSE,  
  expires_at  TIMESTAMP WITH TIME ZONE NOT NULL,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);
```

2.4 PasswordResetToken

sql

```
CREATE TABLE password_reset_tokens (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  token_hash  VARCHAR(255) NOT NULL UNIQUE,  
  is_used     BOOLEAN NOT NULL DEFAULT FALSE,  
  expires_at  TIMESTAMP WITH TIME ZONE NOT NULL,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);
```

3. Profiles and Brand Pages

3.1 Profile

Personal profile data, separate from auth data. One row per user.

sql

```
CREATE TABLE profiles (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  user_id     UUID NOT NULL UNIQUE REFERENCES users(id) ON DELETE CASCADE,  
  display_name VARCHAR(100) NOT NULL,  
  username    VARCHAR(50) NOT NULL UNIQUE,  
  avatar_url  VARCHAR(500),  
  bio         TEXT,  
  location_city VARCHAR(100),  
  location_country VARCHAR(100),  
  website_url VARCHAR(500),  
  professional_title VARCHAR(100),          -- for creator accounts  
  follower_count INTEGER NOT NULL DEFAULT 0,  
  following_count INTEGER NOT NULL DEFAULT 0,  
  post_count   INTEGER NOT NULL DEFAULT 0,  
  interests    VARCHAR(50)[] DEFAULT '{}',  
  created_at   TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
  updated_at   TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);
```

Note: `follower_count`, `following_count`, and `post_count` are denormalised counters updated via triggers or application code. Do not compute these by COUNT queries in the hot path.

3.2 BrandPage

The central entity for all business, creator, and agency brand pages.

sql

```

CREATE TABLE brand_pages (
  id                UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  user_id           UUID NOT NULL UNIQUE REFERENCES users(id) ON DELETE CASCADE,
  username_slug     VARCHAR(50) NOT NULL UNIQUE, -- used in /p/:username
  business_name     VARCHAR(150) NOT NULL,
  tagline           VARCHAR(160),
  description        TEXT,
  category_id       UUID REFERENCES categories(id),
  industry          VARCHAR(100),
  location_city     VARCHAR(100),
  location_country  VARCHAR(100),

  -- Branding
  logo_url          VARCHAR(500),
  cover_url         VARCHAR(500),
  template_id       UUID REFERENCES templates(id),
  brand_color_primary VARCHAR(7),          -- hex, e.g. #4F39D9 -- Professional+
  brand_color_secondary VARCHAR(7),        -- hex -- Professional+
  button_style      VARCHAR(20) DEFAULT 'solid'
                  CHECK (button_style IN ('solid', 'outline', 'rounded', 'square')),
  heading_font      VARCHAR(100) DEFAULT 'Inter',
  body_font         VARCHAR(100) DEFAULT 'Inter',

  -- Page structure
  sections_json     JSONB NOT NULL DEFAULT '[]', -- ordered page sections
  draft_sections_json JSONB NOT NULL DEFAULT '[]', -- autosaved draft

  -- Status
  is_published      BOOLEAN NOT NULL DEFAULT FALSE,
  is_verified       BOOLEAN NOT NULL DEFAULT FALSE,
  verified_at       TIMESTAMP WITH TIME ZONE,
  remove_branding   BOOLEAN NOT NULL DEFAULT FALSE, -- Professional+

  -- Metrics (denormalised)
  follower_count    INTEGER NOT NULL DEFAULT 0,
  view_count        INTEGER NOT NULL DEFAULT 0,
  inquiry_count     INTEGER NOT NULL DEFAULT 0,
  response_rate     DECIMAL(5,2) DEFAULT 0.00, -- percentage
  avg_response_hours DECIMAL(5,1),

  -- Contact
  contact_email     VARCHAR(255),
  contact_phone     VARCHAR(20),
  whatsapp_number   VARCHAR(20),
  website_url       VARCHAR(500),

  -- Social links
  instagram_url     VARCHAR(500),
  twitter_url       VARCHAR(500),
  facebook_url      VARCHAR(500),
  linkedin_url      VARCHAR(500),

```

```
youtube_url      VARCHAR(500),
tiktok_url       VARCHAR(500),

-- SEO
meta_title       VARCHAR(70),
meta_description  VARCHAR(160),

deleted_at       TIMESTAMP WITH TIME ZONE,
created_at       TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
updated_at       TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);
```

3.2.1 sections_json Structure

The `sections_json` column stores the complete page layout as an ordered array of section objects:

json

```
[
  {
    "id": "sec_header",
    "type": "header",
    "visible": true,
    "order": 0,
    "settings": {
      "layout": "logo_left",
      "show_tagline": true
    }
  },
  {
    "id": "sec_about",
    "type": "about",
    "visible": true,
    "order": 1,
    "settings": {
      "content": "We are a Lagos-based design studio...",
      "show_hours": false
    }
  },
  {
    "id": "sec_products",
    "type": "products",
    "visible": true,
    "order": 2,
    "settings": {
      "display_mode": "grid",
      "columns_desktop": 3,
      "show_featured_only": false
    }
  }
]
```

Supported section types: `header`, `about`, `products`, `services`, `posts`, `testimonials`, `portfolio`, `contact`, `social_links`, `cta_button`, `team`, `faq`, `video_embed`, `custom_html`, `opportunity_board`.

3.3 BrandPageView

Tracks page view events for analytics.

```
sql
```



```
CREATE TABLE brand_page_views (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  brand_page_id  UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASCADE,
  viewer_user_id  UUID REFERENCES users(id) ON DELETE SET NULL,
  ip_address     INET,
  user_agent     VARCHAR(500),
  referrer       VARCHAR(500),
  viewed_at      TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);
```

Note: This table grows fast. Partition by month (`viewed_at`). Aggregate into a daily summary table (`brand_page_view_daily_stats`) via a nightly Celery task for analytics queries.

3.4 BrandPageViewDailyStats

Pre-aggregated daily stats for fast analytics queries.

```
sql

CREATE TABLE brand_page_view_daily_stats (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  brand_page_id  UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASCADE,
  date         DATE NOT NULL,
  view_count    INTEGER NOT NULL DEFAULT 0,
  unique_visitors INTEGER NOT NULL DEFAULT 0,
  new_followers  INTEGER NOT NULL DEFAULT 0,
  inquiry_count  INTEGER NOT NULL DEFAULT 0,
  UNIQUE (brand_page_id, date)
);
```

4. Storefront — Products and Services

4.1 Product

```
sql
```

```

CREATE TABLE products (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  brand_page_id  UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASCADE,
  name        VARCHAR(200) NOT NULL,
  description   TEXT,
  price        DECIMAL(12,2),
  currency     VARCHAR(3) NOT NULL DEFAULT 'NGN',
  category     VARCHAR(100),
  images       VARCHAR(500)[] DEFAULT '{}', -- Cloudinary URLs
  availability  VARCHAR(20) NOT NULL DEFAULT 'in_stock'
  CHECK (availability IN ('in_stock','out_of_stock','coming_s

  delivery_note TEXT,
  is_featured   BOOLEAN NOT NULL DEFAULT FALSE,
  is_archived   BOOLEAN NOT NULL DEFAULT FALSE,
  view_count    INTEGER NOT NULL DEFAULT 0,
  save_count    INTEGER NOT NULL DEFAULT 0,
  inquiry_count INTEGER NOT NULL DEFAULT 0,
  sort_order    INTEGER NOT NULL DEFAULT 0,
  deleted_at    TIMESTAMP WITH TIME ZONE,
  created_at    TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at    TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);

```

4.2 Service

```

sql

CREATE TABLE services (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  brand_page_id  UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASC
  name        VARCHAR(200) NOT NULL,
  description   TEXT,
  starting_price DECIMAL(12,2),
  currency     VARCHAR(3) NOT NULL DEFAULT 'NGN',
  duration_label VARCHAR(100), -- e.g. "1 hour", "3-5 days"
  consultation_available BOOLEAN NOT NULL DEFAULT FALSE,
  portfolio_proof_url VARCHAR(500),
  cta_type     VARCHAR(20) NOT NULL DEFAULT 'inquiry'
  CHECK (cta_type IN ('inquiry','booking','both')),
  is_archived   BOOLEAN NOT NULL DEFAULT FALSE,
  view_count    INTEGER NOT NULL DEFAULT 0,
  inquiry_count INTEGER NOT NULL DEFAULT 0,
  sort_order    INTEGER NOT NULL DEFAULT 0,
  deleted_at    TIMESTAMP WITH TIME ZONE,
  created_at    TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at    TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);

```

5. Inquiries and Leads

5.1 Inquiry

sql

```
CREATE TABLE inquiries (
    id UUID PRIMARY KEY DEFAULT gen_random_uuid(),
    brand_page_id UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASCADE,
    sender_user_id UUID REFERENCES users(id) ON DELETE SET NULL, -- NULL if user deleted account

    -- Sender info (stored separately to preserve data if sender deletes account)
    sender_name VARCHAR(150) NOT NULL,
    sender_email VARCHAR(255),
    sender_phone VARCHAR(20),

    message TEXT NOT NULL,
    product_interest VARCHAR(200), -- name of product/service they're interested in
    product_id UUID REFERENCES products(id) ON DELETE SET NULL,
    service_id UUID REFERENCES services(id) ON DELETE SET NULL,
    contact_preference VARCHAR(20) NOT NULL DEFAULT 'straep_message'
    CHECK (contact_preference IN ('straep_message', 'whatsapp')),

    -- Lead management
    status VARCHAR(30) NOT NULL DEFAULT 'new'
    CHECK (status IN ('new', 'contacted', 'in_discussion', 'closed')),
    is_read BOOLEAN NOT NULL DEFAULT FALSE,

    -- Source tracking
    source_page VARCHAR(500), -- which page the inquiry was submitted from
    ip_address INET,

    deleted_at TIMESTAMP WITH TIME ZONE,
    created_at TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
    updated_at TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);
```

5.2 LeadNote

Private notes added by the brand owner on a lead.

sql

```
CREATE TABLE lead_notes (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  inquiry_id  UUID NOT NULL REFERENCES inquiries(id) ON DELETE CASCADE,  
  author_user_id UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  content     TEXT NOT NULL,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);
```

5.3 LeadStatusHistory

Audit trail of status changes per lead.

```
sql  
  
CREATE TABLE lead_status_history (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  inquiry_id  UUID NOT NULL REFERENCES inquiries(id) ON DELETE CASCADE,  
  changed_by  UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  from_status VARCHAR(30),  
  to_status   VARCHAR(30) NOT NULL,  
  changed_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);
```

6. Posts and Feed

6.1 Post

```
sql
```

```

CREATE TABLE posts (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  author_id   UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  brand_page_id  UUID REFERENCES brand_pages(id) ON DELETE SET NULL,

  post_type   VARCHAR(30) NOT NULL
              CHECK (post_type IN ('text', 'image', 'video', 'product_update',

-- Core content
content       TEXT,
media_urls    VARCHAR(500)[] DEFAULT '{}',

-- Linked entities
product_id    UUID REFERENCES products(id) ON DELETE SET NULL,
service_id    UUID REFERENCES services(id) ON DELETE SET NULL,

-- Offer fields
offer_headline VARCHAR(80),
offer_discount VARCHAR(100),
offer_code     VARCHAR(50),
offer_expires_at  TIMESTAMP WITH TIME ZONE,

-- Event fields
event_title    VARCHAR(200),
event_start_at  TIMESTAMP WITH TIME ZONE,
event_end_at    TIMESTAMP WITH TIME ZONE,
event_location  VARCHAR(300),
event_link      VARCHAR(500),

-- Opportunity fields
opp_type       VARCHAR(50),          -- Job, Internship, Collaboration, et
opp_title      VARCHAR(200),
opp_requirements TEXT,
opp_deadline    TIMESTAMP WITH TIME ZONE,
opp_apply_url   VARCHAR(500),
opp_apply_on_straep BOOLEAN DEFAULT FALSE,

-- Status
is_published    BOOLEAN NOT NULL DEFAULT TRUE,
is_edited       BOOLEAN NOT NULL DEFAULT FALSE,
last_edited_at  TIMESTAMP WITH TIME ZONE,
is_reported     BOOLEAN NOT NULL DEFAULT FALSE,
is_removed      BOOLEAN NOT NULL DEFAULT FALSE,  -- removed by admin
removed_reason  VARCHAR(200),

-- Denormalised engagement counters
like_count      INTEGER NOT NULL DEFAULT 0,
comment_count   INTEGER NOT NULL DEFAULT 0,
share_count     INTEGER NOT NULL DEFAULT 0,
save_count      INTEGER NOT NULL DEFAULT 0,
view_count      INTEGER NOT NULL DEFAULT 0,

```

```
deleted_at      TIMESTAMP WITH TIME ZONE,  
created_at      TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
updated_at      TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);
```

6.2 Poll and PollOption

sql

```
CREATE TABLE polls (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  post_id     UUID NOT NULL UNIQUE REFERENCES posts(id) ON DELETE CASCADE,  
  question    VARCHAR(240) NOT NULL,  
  duration_hours INTEGER NOT NULL DEFAULT 24,  
  ends_at     TIMESTAMP WITH TIME ZONE NOT NULL,  
  total_votes INTEGER NOT NULL DEFAULT 0,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);  
  
CREATE TABLE poll_options (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  poll_id     UUID NOT NULL REFERENCES polls(id) ON DELETE CASCADE,  
  option_text VARCHAR(80) NOT NULL,  
  vote_count  INTEGER NOT NULL DEFAULT 0,  
  sort_order  INTEGER NOT NULL DEFAULT 0,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);  
  
CREATE TABLE poll_votes (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  poll_id     UUID NOT NULL REFERENCES polls(id) ON DELETE CASCADE,  
  poll_option_id UUID NOT NULL REFERENCES poll_options(id) ON DELETE CASCADE,  
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  voted_at    TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
  UNIQUE (poll_id, user_id) -- one vote per user per poll  
);
```

6.3 Comment

sql

```
CREATE TABLE comments (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  post_id     UUID NOT NULL REFERENCES posts(id) ON DELETE CASCADE,
  author_id   UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  parent_id   UUID REFERENCES comments(id) ON DELETE CASCADE, -- NULL =
  content     TEXT NOT NULL,
  is_removed  BOOLEAN NOT NULL DEFAULT FALSE,
  like_count  INTEGER NOT NULL DEFAULT 0,
  reply_count INTEGER NOT NULL DEFAULT 0,
  deleted_at  TIMESTAMP WITH TIME ZONE,
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);
```

6.4 UserFeedCache

Redis-backed feed, but the feed cursor is stored in PostgreSQL for persistence.

This is managed in Redis as a sorted set per user: `feed:{user_id}` → sorted by post timestamp (score). PostgreSQL is not used for feed storage — see the Tech Stack document for Redis feed design.

7. Social Graph — Follows, Likes, Saves

7.1 UserFollow

Follows between a user and a brand page.

```
sql
CREATE TABLE user_follows (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  follower_id UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  brand_page_id UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASCADE,
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  UNIQUE (follower_id, brand_page_id)
);
```

On insert: increment `brand_pages.follower_count` and `profiles.following_count` via trigger or application code.

On delete: decrement both.

7.2 PostLike

```
sql
```

```
CREATE TABLE post_likes (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  post_id     UUID NOT NULL REFERENCES posts(id) ON DELETE CASCADE,  
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
  UNIQUE (post_id, user_id)  
);
```

7.3 CommentLike

```
sql  
  
CREATE TABLE comment_likes (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  comment_id  UUID NOT NULL REFERENCES comments(id) ON DELETE CASCADE,  
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
  UNIQUE (comment_id, user_id)  
);
```

7.4 SavedItem

Polymorphic saves: a user can save a post, a product, or a service.

```
sql  
  
CREATE TABLE saved_items (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  item_type   VARCHAR(20) NOT NULL CHECK (item_type IN ('post', 'product',  
  post_id     UUID REFERENCES posts(id) ON DELETE CASCADE,  
  product_id  UUID REFERENCES products(id) ON DELETE CASCADE,  
  service_id  UUID REFERENCES services(id) ON DELETE CASCADE,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
  -- Ensure only one of post_id, product_id, service_id is set:  
  CONSTRAINT saved_item_single_target CHECK (  
    (post_id IS NOT NULL)::int +  
    (product_id IS NOT NULL)::int +  
    (service_id IS NOT NULL)::int = 1  
  ),  
  UNIQUE (user_id, item_type, post_id),  
  UNIQUE (user_id, item_type, product_id),  
  UNIQUE (user_id, item_type, service_id)  
);
```

7.5 PostReport

8. Subscriptions and Payments

8.1 SubscriptionPlan

Static plan configuration (can be a database table or a config file).

sql

```
CREATE TABLE subscription_plans (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  name        VARCHAR(50) NOT NULL UNIQUE,    -- free, professional, business  
  display_name VARCHAR(100) NOT NULL,  
  monthly_price_ngn DECIMAL(10,2) NOT NULL DEFAULT 0,  
  yearly_price_ngn DECIMAL(10,2) NOT NULL DEFAULT 0,  
  monthly_price_usd DECIMAL(10,2) NOT NULL DEFAULT 0,  
  yearly_price_usd DECIMAL(10,2) NOT NULL DEFAULT 0,  
  
  -- Feature limits (NULL = unlimited)  
  max_products      INTEGER,  
  max_services      INTEGER,  
  max_brand_pages   INTEGER DEFAULT 1,  
  max_team_members  INTEGER,  
  max_active_leads  INTEGER,  
  
  -- Feature flags (stored as JSONB for flexibility)  
  features          JSONB NOT NULL DEFAULT '{}',  
  
  is_active         BOOLEAN NOT NULL DEFAULT TRUE,  
  created_at        TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
  updated_at        TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);
```

features JSONB example:

json

```
{  
  "full_customisation": true,  
  "premium_templates": true,  
  "custom_fonts": true,  
  "remove_branding": true,  
  "advanced_analytics": true,  
  "lead_capture": true,  
  "testimonials_section": true,  
  "portfolio_section": true,  
  "team_section": false,  
  "opportunity_posting": false,  
  "template_upload": false  
}
```

8.2 Subscription

Active subscription record per user.

sql

```

CREATE TABLE subscriptions (
  id                UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  user_id           UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  plan_id           UUID NOT NULL REFERENCES subscription_plans(id),

  billing_cycle     VARCHAR(10) NOT NULL DEFAULT 'monthly'
                  CHECK (billing_cycle IN ('monthly', 'yearly')),
  status            VARCHAR(20) NOT NULL DEFAULT 'active'
                  CHECK (status IN ('active', 'trialing', 'past_due', 'c

  current_period_start  TIMESTAMP WITH TIME ZONE NOT NULL,
  current_period_end    TIMESTAMP WITH TIME ZONE NOT NULL,
  cancel_at_period_end  BOOLEAN NOT NULL DEFAULT FALSE,
  cancelled_at          TIMESTAMP WITH TIME ZONE,
  cancellation_reason    VARCHAR(100),

  -- Payment provider references
  payment_provider      VARCHAR(20) NOT NULL DEFAULT 'paystack'
                  CHECK (payment_provider IN ('paystack', 'stripe')),
  provider_customer_id  VARCHAR(200),    -- Paystack/Stripe customer ID
  provider_subscription_id VARCHAR(200),  -- Paystack/Stripe subscription ID

  -- Trial
  trial_ends_at         TIMESTAMP WITH TIME ZONE,

  created_at           TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at           TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);

```

Note: A user should only have one active subscription at a time. Enforce via a partial unique index:

```

sql

CREATE UNIQUE INDEX one_active_subscription_per_user
ON subscriptions (user_id)
WHERE status IN ('active', 'trialing', 'cancel_at_period_end');

```

8.3 Payment

Record of every payment event.

```

sql

```

```

CREATE TABLE payments (
  id                UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  user_id           UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  subscription_id   UUID REFERENCES subscriptions(id) ON DELETE SET NULL,

  amount            DECIMAL(12,2) NOT NULL,
  currency          VARCHAR(3) NOT NULL DEFAULT 'NGN',

  payment_type      VARCHAR(30) NOT NULL
                  CHECK (payment_type IN ('subscription', 'template_purchase')),
  status            VARCHAR(20) NOT NULL DEFAULT 'pending'
                  CHECK (status IN ('pending', 'success', 'failed', 'refunded')),

  -- Provider details
  payment_provider  VARCHAR(20) NOT NULL,
  provider_reference VARCHAR(200) UNIQUE,      -- Pystack/Stripe charge ID
  provider_response JSONB,                    -- full webhook payload (for debugging)

  -- Template purchase link
  template_id       UUID REFERENCES templates(id) ON DELETE SET NULL,

  paid_at           TIMESTAMP WITH TIME ZONE,
  refunded_at       TIMESTAMP WITH TIME ZONE,
  created_at        TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at        TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);

```

9. Templates and Marketplace

9.1 Template

sql

```

CREATE TABLE templates (
  id                UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  developer_id      UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,

  name              VARCHAR(150) NOT NULL,
  slug              VARCHAR(150) NOT NULL UNIQUE,
  category          VARCHAR(100) NOT NULL,
  short_description VARCHAR(300) NOT NULL,
  full_description  TEXT,

  price_ngn         DECIMAL(10,2) NOT NULL DEFAULT 0,
  price_usd         DECIMAL(10,2) NOT NULL DEFAULT 0,
  is_free           BOOLEAN NOT NULL GENERATED ALWAYS AS (price_ngn = 0) STORED,

  -- Assets
  preview_images    VARCHAR(500)[] DEFAULT '{}',
  package_url       VARCHAR(500),           -- Cloudinary/S3 URL to ZIP

  -- Metadata
  supported_sections VARCHAR(50)[] DEFAULT '{}',
  straep_version_min VARCHAR(20) DEFAULT '1.0',

  -- Status
  status            VARCHAR(20) NOT NULL DEFAULT 'pending'
  CHECK (status IN ('draft', 'pending', 'approved', 'rejected')),
  rejection_reason  TEXT,
  approved_at       TIMESTAMP WITH TIME ZONE,

  -- Metrics
  download_count    INTEGER NOT NULL DEFAULT 0,
  purchase_count    INTEGER NOT NULL DEFAULT 0,
  avg_rating        DECIMAL(3,2) DEFAULT 0.00,
  review_count      INTEGER NOT NULL DEFAULT 0,

  deleted_at        TIMESTAMP WITH TIME ZONE,
  created_at        TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at        TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);

```

9.2 TemplatePurchase

Records every install or purchase of a template.

```
sql
```

```

CREATE TABLE template_purchases (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  template_id UUID NOT NULL REFERENCES templates(id) ON DELETE CASCADE,
  buyer_id   UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  brand_page_id UUID REFERENCES brand_pages(id) ON DELETE SET NULL,
  payment_id  UUID REFERENCES payments(id) ON DELETE SET NULL,

  amount_paid  DECIMAL(10,2) NOT NULL DEFAULT 0,
  currency     VARCHAR(3) NOT NULL DEFAULT 'NGN',
  developer_share DECIMAL(10,2) NOT NULL DEFAULT 0,    -- 70% of amount_paid
  straep_share  DECIMAL(10,2) NOT NULL DEFAULT 0,    -- 30% of amount_paid

  created_at   TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  UNIQUE (template_id, buyer_id)  -- one purchase per user per template
);

```

9.3 DeveloperPayout

Payout requests from developers.

```

sql

CREATE TABLE developer_payouts (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  developer_id UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  amount      DECIMAL(10,2) NOT NULL,
  currency    VARCHAR(3) NOT NULL DEFAULT 'NGN',
  status      VARCHAR(20) NOT NULL DEFAULT 'pending'
  CHECK (status IN ('pending','processing','completed','failed')),
  bank_name   VARCHAR(100),
  account_number VARCHAR(20),
  account_name VARCHAR(150),
  provider_reference VARCHAR(200),
  processed_at  TIMESTAMP WITH TIME ZONE,
  created_at   TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at   TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);

```

10. Reviews and Trust

10.1 Review

```

sql

```

```

CREATE TABLE reviews (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  brand_page_id  UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASCADE,
  reviewer_id   UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  inquiry_id    UUID REFERENCES inquiries(id) ON DELETE SET NULL, -- must

  rating        SMALLINT NOT NULL CHECK (rating BETWEEN 1 AND 5),
  content       TEXT, -- optional written review

  -- Brand response
  response      TEXT,
  responded_at  TIMESTAMP WITH TIME ZONE,

  is_removed    BOOLEAN NOT NULL DEFAULT FALSE,
  removed_reason VARCHAR(200),

  created_at    TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at    TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  UNIQUE (brand_page_id, reviewer_id) -- one review per user per brand
);

```

10.2 VerificationRequest

Business verification applications.

```

sql

CREATE TABLE verification_requests (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  brand_page_id  UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASCADE,

  -- Submitted documents (Cloudinary URLs)
  registration_doc_url VARCHAR(500),
  id_doc_url          VARCHAR(500),
  address_proof_url   VARCHAR(500),

  status          VARCHAR(20) NOT NULL DEFAULT 'pending'
                  CHECK (status IN ('pending', 'approved', 'rejected', 'more_info')),
  reviewer_id     UUID REFERENCES users(id) ON DELETE SET NULL,
  review_notes    TEXT,
  reviewed_at     TIMESTAMP WITH TIME ZONE,

  created_at      TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  updated_at      TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);

```

11. Communities

Phase 3. Schema planned now for FK compatibility.

sql

```
CREATE TABLE communities (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  creator_id  UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  brand_page_id UUID REFERENCES brand_pages(id) ON DELETE SET NULL,  
  name        VARCHAR(150) NOT NULL,  
  slug        VARCHAR(150) NOT NULL UNIQUE,  
  description  TEXT,  
  cover_url   VARCHAR(500),  
  privacy     VARCHAR(20) NOT NULL DEFAULT 'public'  
              CHECK (privacy IN ('public', 'invite_only')),  
  member_count INTEGER NOT NULL DEFAULT 0,  
  is_active   BOOLEAN NOT NULL DEFAULT TRUE,  
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
  updated_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);  
  
CREATE TABLE community_members (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  community_id UUID NOT NULL REFERENCES communities(id) ON DELETE CASCADE,  
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  role        VARCHAR(20) NOT NULL DEFAULT 'member'  
              CHECK (role IN ('owner', 'moderator', 'member')),  
  joined_at   TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),  
  UNIQUE (community_id, user_id)  
);
```

12. Notifications and Messaging

12.1 Notification

sql


```
CREATE TABLE notifications (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  recipient_id  UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,  
  
  type         VARCHAR(50) NOT NULL,  
  -- Types: new_follower, new_inquiry, post_like, post_comment, comment_reply  
  --         template_approved, template_rejected, subscription_renewal,  
  --         payment_failed, inquiry_status_update, verification_approved, ver  
  
  -- Polymorphic reference to what triggered the notification  
  entity_type   VARCHAR(50),  
  entity_id     UUID,  
  
  title        VARCHAR(200),  
  body         TEXT,  
  action_url    VARCHAR(500),  
  
  is_read       BOOLEAN NOT NULL DEFAULT FALSE,  
  read_at      TIMESTAMP WITH TIME ZONE,  
  
  created_at    TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()  
);
```

Indexing: `CREATE INDEX idx_notifications_recipient_unread ON notifications (recipient_id, created_at DESC) WHERE is_read = FALSE;`

12.2 Conversation and Message

Phase 3.

sql

```

CREATE TABLE conversations (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  brand_page_id  UUID NOT NULL REFERENCES brand_pages(id) ON DELETE CASCADE,
  user_id       UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  inquiry_id     UUID REFERENCES inquiries(id) ON DELETE SET NULL,
  last_message_at  TIMESTAMP WITH TIME ZONE,
  is_resolved     BOOLEAN NOT NULL DEFAULT FALSE,
  created_at      TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  UNIQUE (brand_page_id, user_id)
);

CREATE TABLE messages (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  conversation_id  UUID NOT NULL REFERENCES conversations(id) ON DELETE CASCADE,
  sender_id       UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  content         TEXT NOT NULL,
  media_urls      VARCHAR(500)[] DEFAULT '{}',
  is_read         BOOLEAN NOT NULL DEFAULT FALSE,
  read_at         TIMESTAMP WITH TIME ZONE,
  deleted_at      TIMESTAMP WITH TIME ZONE,
  created_at      TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);

```

13. Admin and Moderation

13.1 AdminAuditLog

Immutable log of all admin actions.

```

sql

CREATE TABLE admin_audit_log (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  admin_user_id  UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  action        VARCHAR(100) NOT NULL,
  -- Actions: approve_template, reject_template, remove_post, warn_user,
  --           suspend_user, approve_verification, reject_verification,
  --           refund_payment, change_subscription, delete_brand_page, etc.
  target_type    VARCHAR(50),
  target_id      UUID,
  reason         TEXT,
  metadata       JSONB,          -- additional context
  created_at     TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
  -- No updated_at - this table is append-only
);

```

Enforce append-only:

```

sql

```

```
-- Revoke UPDATE and DELETE from the application database user
REVOKE UPDATE, DELETE ON admin_audit_log FROM straep_app;
```

13.2 UserSuspension

```
sql

CREATE TABLE user_suspensions (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  user_id     UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  admin_id    UUID NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  reason      TEXT NOT NULL,
  suspended_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW(),
  unsuspended_at  TIMESTAMP WITH TIME ZONE,
  is_active   BOOLEAN NOT NULL DEFAULT TRUE
);
```

14. Categories and Tags

14.1 Category

```
sql

CREATE TABLE categories (
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),
  name        VARCHAR(100) NOT NULL UNIQUE,
  slug        VARCHAR(100) NOT NULL UNIQUE,
  parent_id   UUID REFERENCES categories(id) ON DELETE SET NULL,
  icon_url    VARCHAR(500),
  sort_order  INTEGER NOT NULL DEFAULT 0,
  is_active   BOOLEAN NOT NULL DEFAULT TRUE,
  created_at  TIMESTAMP WITH TIME ZONE NOT NULL DEFAULT NOW()
);
```

Seed data — top-level categories: Fashion, Food & Restaurant, Beauty & Wellness, Technology, Education, Creative Services, Consulting, Real Estate, Health & Fitness, Retail, Events, Church & Ministry, NGO, Finance & Legal, Travel, Music & Entertainment

14.2 InterestTag

User interest tags (selected during onboarding and settings).

```
sql
```

```
CREATE TABLE interest_tags (  
  id          UUID PRIMARY KEY DEFAULT gen_random_uuid(),  
  name        VARCHAR(80) NOT NULL UNIQUE,  
  slug        VARCHAR(80) NOT NULL UNIQUE,  
  category_id UUID REFERENCES categories(id) ON DELETE SET NULL,  
  is_active   BOOLEAN NOT NULL DEFAULT TRUE  
);
```

15. Full SQL Schema (PostgreSQL)

The full schema is provided as a series of migration files in the repository. The sequence is:

```
migrations/  
  001_create_users.sql  
  002_create_profiles.sql  
  003_create_brand_pages.sql  
  004_create_products_services.sql  
  005_create_inquiries.sql  
  006_create_posts_comments.sql  
  007_create_social_graph.sql  
  008_create_subscriptions_payments.sql  
  009_create_templates.sql  
  010_create_reviews_trust.sql  
  011_create_notifications.sql  
  012_create_communities.sql  
  013_create_messages.sql  
  014_create_admin.sql  
  015_create_categories.sql  
  016_create_indexes.sql  
  017_seed_categories.sql  
  018_seed_plans.sql
```

Each file is idempotent (uses `CREATE TABLE IF NOT EXISTS`).

16. Index Strategy

16.1 Critical Indexes (Must exist before launch)

```
sql
```

```

-- Users lookup
CREATE INDEX idx_users_email ON users (email) WHERE deleted_at IS NULL;
CREATE INDEX idx_users_phone ON users (phone) WHERE deleted_at IS NULL;

-- Brand page lookup
CREATE INDEX idx_brand_pages_username_slug ON brand_pages (username_slug);
CREATE INDEX idx_brand_pages_category ON brand_pages (category_id) WHERE is_public;
CREATE INDEX idx_brand_pages_location ON brand_pages (location_city, location_country);
CREATE INDEX idx_brand_pages_verified ON brand_pages (is_verified) WHERE is_public;

-- Feed: get posts from a brand, newest first
CREATE INDEX idx_posts_author ON posts (author_id, created_at DESC) WHERE is_public;
CREATE INDEX idx_posts_brand_page ON posts (brand_page_id, created_at DESC) WHERE is_public;

-- Inquiry lookup for a brand
CREATE INDEX idx_inquiries_brand_page ON inquiries (brand_page_id, created_at DESC) WHERE is_public;
CREATE INDEX idx_inquiries_status ON inquiries (brand_page_id, status) WHERE deleted_at IS NULL;

-- Notifications for a user (unread first)
CREATE INDEX idx_notifications_recipient ON notifications (recipient_id, created_at DESC);
CREATE INDEX idx_notifications_unread ON notifications (recipient_id) WHERE is_unread;

-- Follows
CREATE INDEX idx_user_follows_follower ON user_follows (follower_id);
CREATE INDEX idx_user_follows_brand ON user_follows (brand_page_id);

-- Post likes
CREATE INDEX idx_post_likes_post ON post_likes (post_id);
CREATE INDEX idx_post_likes_user ON post_likes (user_id);

-- Products by brand
CREATE INDEX idx_products_brand ON products (brand_page_id, sort_order) WHERE is_public;

-- Subscriptions
CREATE INDEX idx_subscriptions_user ON subscriptions (user_id);
CREATE INDEX idx_subscriptions_provider_id ON subscriptions (provider_subscription_id);

-- Payments
CREATE INDEX idx_payments_provider_ref ON payments (provider_reference);

-- Analytics
CREATE INDEX idx_brand_page_views_date ON brand_page_view_daily_stats (brand_page_id, date);

```

17. Django Models Reference

The following shows the key Django model class structure. Full model files are in the codebase.

```
python
```

```
# apps/users/models.py
```

```
class User(AbstractBaseUser, PermissionsMixin):
    id = models.UUIDField(primary_key=True, default=uuid.uuid4)
    email = models.EmailField(unique=True, null=True, blank=True)
    phone = models.CharField(max_length=20, unique=True, null=True, blank=True)
    account_type = models.CharField(max_length=20, choices=AccountType.choices)
    is_verified = models.BooleanField(default=False)
    is_active = models.BooleanField(default=True)
    onboarding_step = models.CharField(max_length=50, default='account_type')
    onboarding_done = models.BooleanField(default=False)
    deleted_at = models.DateTimeField(null=True, blank=True)
    created_at = models.DateTimeField(auto_now_add=True)
    updated_at = models.DateTimeField(auto_now=True)

    class AccountType(models.TextChoices):
        PERSONAL = 'personal', 'Personal'
        BUSINESS = 'business', 'Business/Brand'
        CREATOR = 'creator', 'Creator/Professional'
        DEVELOPER = 'developer', 'Developer/Designer'
        AGENCY = 'agency', 'Agency'
```

```
# apps/brands/models.py
```

```
class BrandPage(models.Model):
    id = models.UUIDField(primary_key=True, default=uuid.uuid4)
    user = models.OneToOneField(User, on_delete=models.CASCADE)
    username_slug = models.SlugField(max_length=50, unique=True)
    business_name = models.CharField(max_length=150)
    sections_json = models.JSONField(default=list)
    draft_sections_json = models.JSONField(default=list)
    is_published = models.BooleanField(default=False)
    is_verified = models.BooleanField(default=False)
    # ... other fields
```

```
class Meta:
    indexes = [
        models.Index(fields=['username_slug']),
        models.Index(fields=['category', 'is_published']),
    ]
```

```
# apps/inquiries/models.py
```

```
class Inquiry(models.Model):
    id = models.UUIDField(primary_key=True, default=uuid.uuid4)
    brand_page = models.ForeignKey(BrandPage, on_delete=models.CASCADE, related_name='inquiries')
    sender_user = models.ForeignKey(User, on_delete=models.SET_NULL, null=True, related_name='sent_inquiries')
    sender_name = models.CharField(max_length=150)
    message = models.TextField()
    status = models.CharField(max_length=30, choices=LeadStatus.choices, default='new')

    class LeadStatus(models.TextChoices):
        NEW = 'new', 'New'
        CONTACTED = 'contacted', 'Contacted'
```

```
IN_DISCUSSION = 'in_discussion', 'In Discussion'
CONVERTED = 'converted', 'Converted'
CLOSED = 'closed', 'Closed'
REJECTED = 'rejected', 'Rejected'

# apps/subscriptions/models.py
class Subscription(models.Model):
    id = models.UUIDField(primary_key=True, default=uuid.uuid4)
    user = models.ForeignKey(User, on_delete=models.CASCADE)
    plan = models.ForeignKey(SubscriptionPlan, on_delete=models.PROTECT)
    billing_cycle = models.CharField(max_length=10, choices=[('monthly', 'Monthly')])
    status = models.CharField(max_length=20, choices=SubscriptionStatus.choices)
    current_period_start = models.DateTimeField()
    current_period_end = models.DateTimeField()
    cancel_at_period_end = models.BooleanField(default=False)
    payment_provider = models.CharField(max_length=20, default='paystack')
    provider_subscription_id = models.CharField(max_length=200, blank=True)

    class SubscriptionStatus(models.TextChoices):
        ACTIVE = 'active', 'Active'
        TRIALING = 'trialing', 'Trialing'
        PAST_DUE = 'past_due', 'Past Due'
        CANCELLED = 'cancelled', 'Cancelled'
        CANCEL_AT_PERIOD_END = 'cancel_at_period_end', 'Cancels at Period End'
        EXPIRED = 'expired', 'Expired'
```

End of Data Models and Database Schema Document

Next document: 08-API-Design.md