Evaluación modulo 2

Crear las Key pair

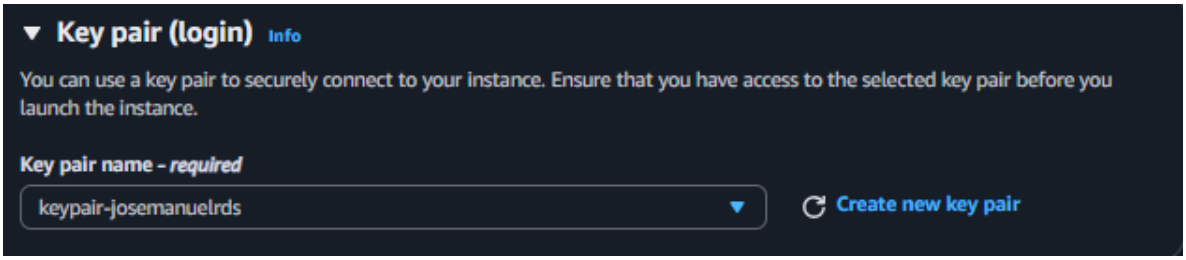

Crear dos grupos de seguridad uno para la EC2 y otro para la RDS

sg-0431e88248dd69b5a

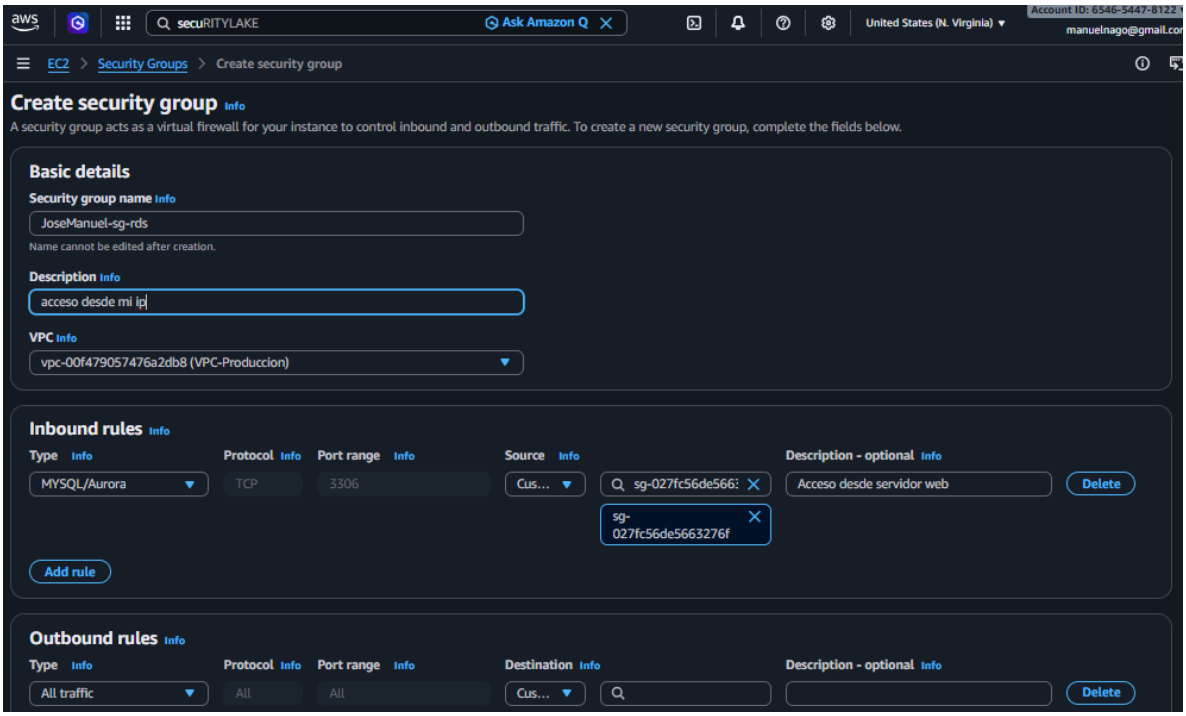

SG EC2

sg-027fc56de5663276f

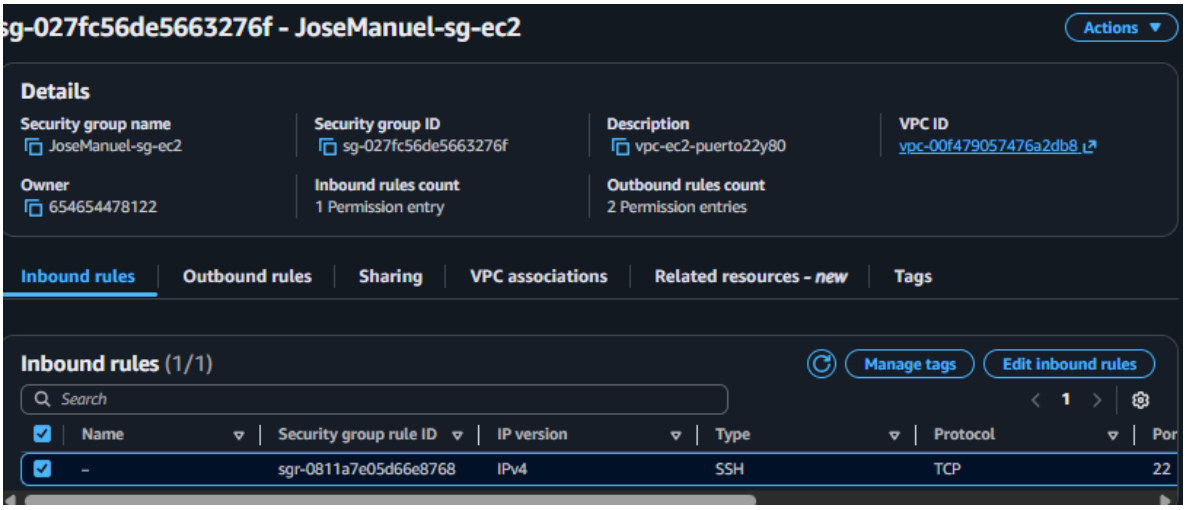

Lanzar una instancia de servidor web Amazon EC2 - t2.micro 8GB de almacenamiento

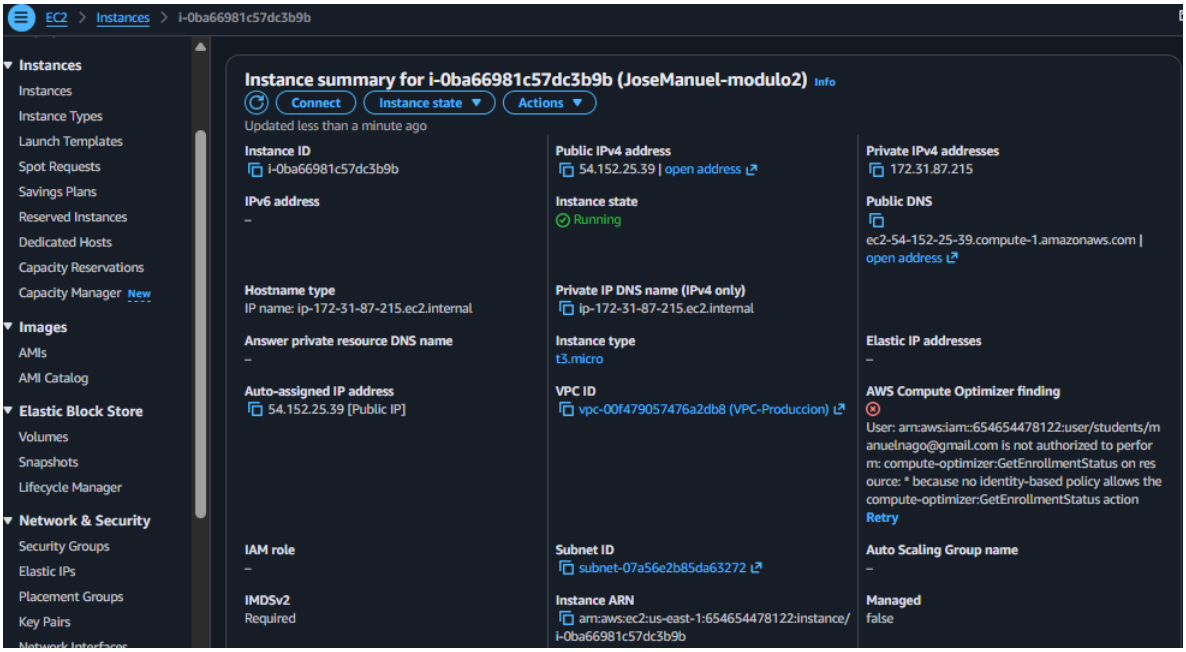

Lanzar una RDS Amazon RDS - db.t3.micro 5GB de almacenamiento tipo mysql no aurora mysql, configurar usuario y contraseña para conectarse

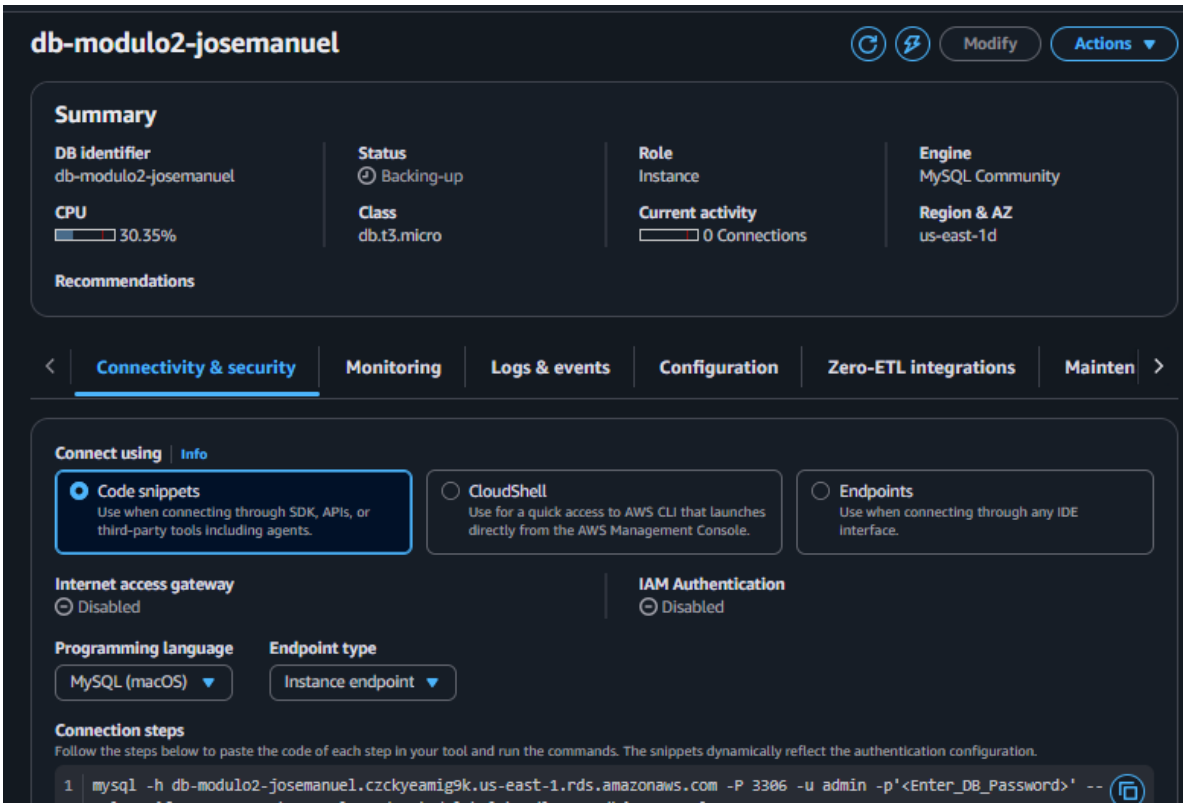

Instalar MariaDB

```
Package                    Arch   Version                    Repository   Size
==========================================================================
Installing:
 mariadb105                x86_64 3:10.5.29-1.amzn2023.0.1 amazonlinux 1.5 M
Installing dependencies:
 mariadb-connector-c       x86_64 3.3.10-1.amzn2023.0.1    amazonlinux 211 k
 mariadb-connector-c-config
                           noarch 3.3.10-1.amzn2023.0.1    amazonlinux 9.9 k
 mariadb105-common         x86_64 3:10.5.29-1.amzn2023.0.1 amazonlinux  28 k
 perl-Sys-Hostname         x86_64 1.23-477.amzn2023.0.7    amazonlinux  16 k

Transaction Summary
==========================================================================
```

Conectate a la EC2, instala el MariaDB

mysql -h db-modulo2-josemanuel.czckyeamig9k.us-east-1.rds.amazonaws.com -P 3306 -u admin -p

Ingresar el password

```
ec2-user@ip-172-31-87-215 ~]$ mysql -h db-modulo2-josemanuel.czckyeamig9k.
s-east-1.rds.amazonaws.com -P 3306 -u admin -p --ssl-verify-server-cert  -
ssl-ca=/certs/global-bundle.pem dbjosemanuel
nter password:
RROR 2026 (HY000): TLS/SSL error: I◆V (2)
ec2-user@ip-172-31-87-215 ~]$ Has dicho
ysql -h db-modulo2-josemanuel.czckyeamig9k.us-east-1.rds.amazonaws.com -P
306 -u admin -p
bash: Has: command not found
nter password:
elcome to the MariaDB monitor.  Commands end with ; or \g.
our MySQL connection id is 39
erver version: 8.4.8 Source distribution

opyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

ype 'help;' or '\h' for help. Type '\c' to clear the current input stateme
t.

ySQL [(none)]>
```

CREATE DATABASE laboratoriojosemanuel;

```
MySQL [(none)]> CREATE DATABASE laboratoriojosemanuel;
Query OK, 1 row affected (0.026 sec)

MySQL [(none)]> |
```

SHOW DATABASES;
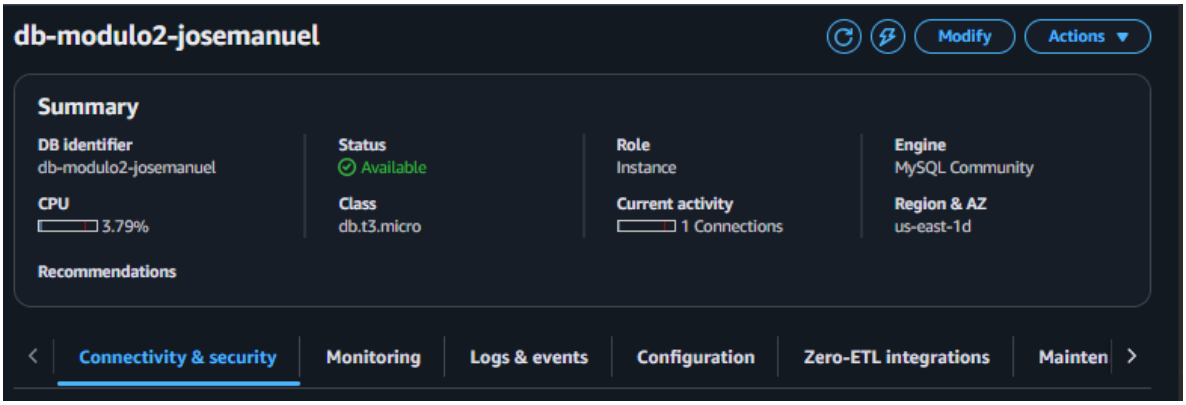
```
MySQL [(none)]> SHOW DATABASES;
+----------------------+
| Database             |
+----------------------+
| dbjosemanuel         |
| information_schema   |
| laboratoriojosemanuel |
| mysql                |
| performance_schema   |
| sys                  |
+----------------------+
6 rows in set (0.007 sec)

MySQL [(none)]>
```