Hands-on Lab: Joins in MySQL using phpMyAdmin

Estimated time needed: 20 minutes

In this lab, you will learn how to create tables and load data in the MySQL database service using the phpMyAdmin graphical user interface (GUI) tool.

Software Used in this Lab

In this lab, you will use MySQL is a Relational Database Management System (RDBMS) designed to efficiently store, manipulate, and retrieve data.



To complete this lab you will utilize MySQL relational database service available as part of IBM Skills Network Labs (SN Labs) Cloud IDE. SN Labs is a virtual lab environment used in this course.

Objectives

After completing this lab, you will be able to:

- 1. Determine the correct type of join to use for a given problem.
- 2. Write and execute joins to query data from multiple tables.

Database Used in this Lab

Mysql_learners database has been used in this lab.

Here you will be creating and inserting data into the below mentioned 3 tables

1.chicago_public_schools 2.chicago_socioeconomic_data 3.chicago_crime

Here you will be using 3 dump files for this purpose.

chicago public schools

chicago crime


chicago socioeconomic data

Task A: Create a database


1. Click on Skills Network Toolbox. In Database section, click MySQL.

To start the MySQL click Start.


about:blank 1/7

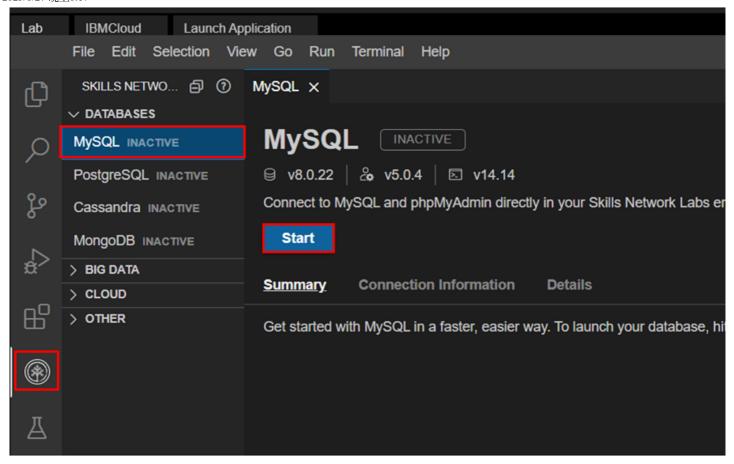

2. Once MySQL has started, click on phpMyAdmin button to open phpMyAdmin in the same window.

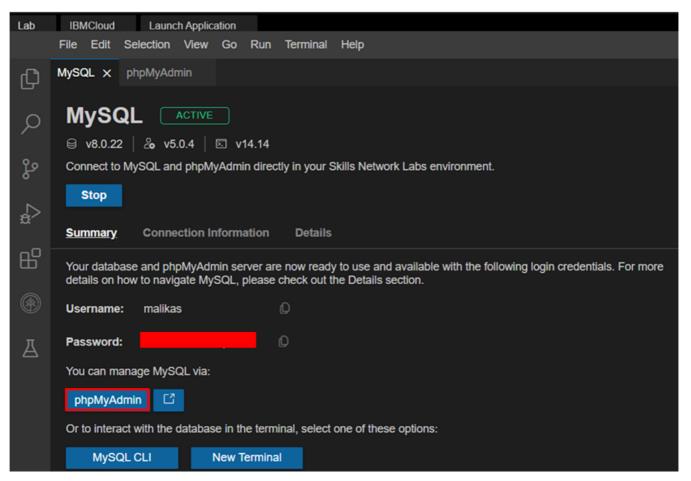

3. You will see the phpMyAdmin GUI tool.

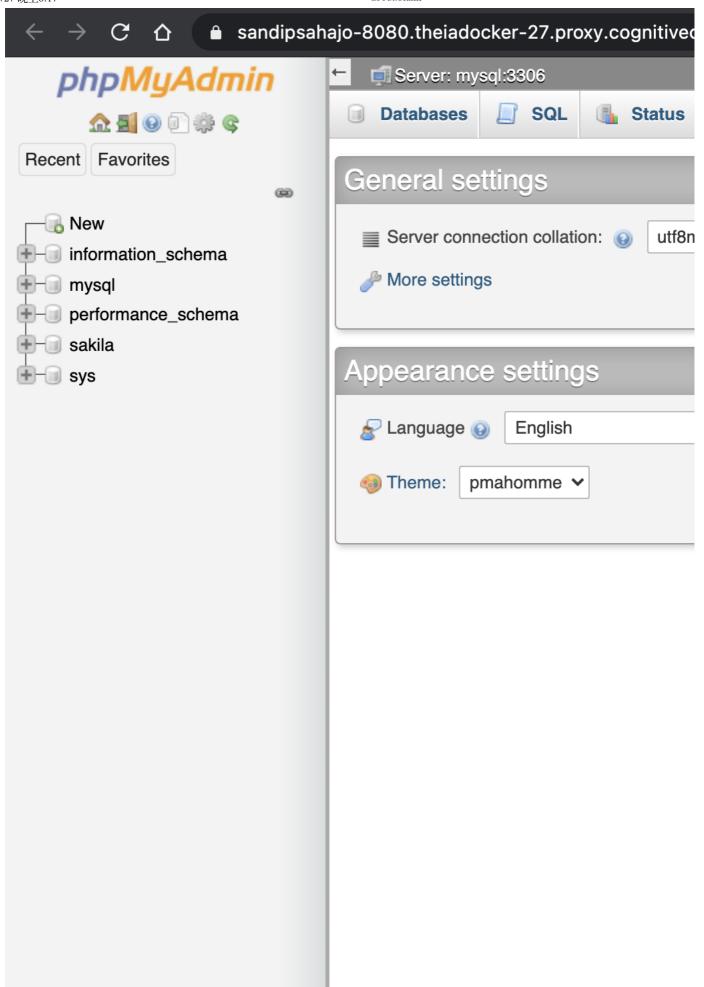


about:blank 3/7

4. In the tree-view, click New to create a new empty database. Then enter Mysql_Learners as the name of the database and click Create.

The encoding will be left as utf8mb4_0900_ai_ci. UTF-8 is the most commonly used character encoding for content or data.

Proceed to Task B.

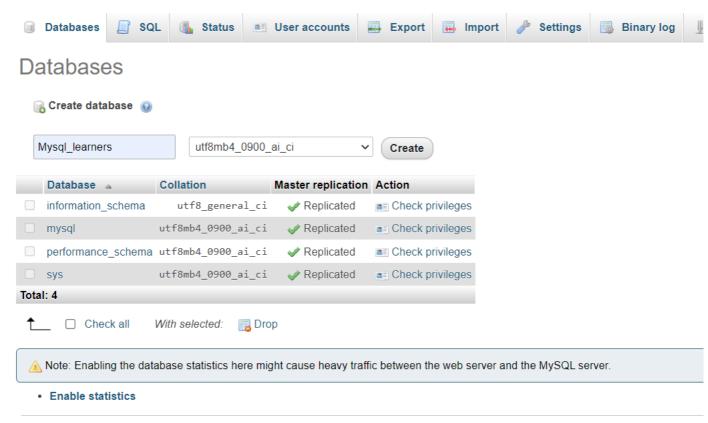


Load the dump files one by one into the database Mysql_learners by clicking the Import tab and choose the file. Click on Go button.

Importing into the database "Mysql_learners"

File to import:
File may be compressed (gzip, bzip2, zip) or uncompressed. A compressed file's name must end in .[format].[compression]. Example: .sql.zip
Browse your computer: Choose File chicago_puschools.sql (Max: 2,048KiB)
You may also drag and drop a file on any page.
Character set of the file: utf-8 v
Partial import:
✓ Allow the interruption of an import in case the script detects it is close to the PHP timeout limit. (This might be a good way to import large files,
Skip this number of queries (for SQL) starting from the first one:
Other options:
✓ Enable foreign key checks
Format:
Consolo


about:blank 4/7

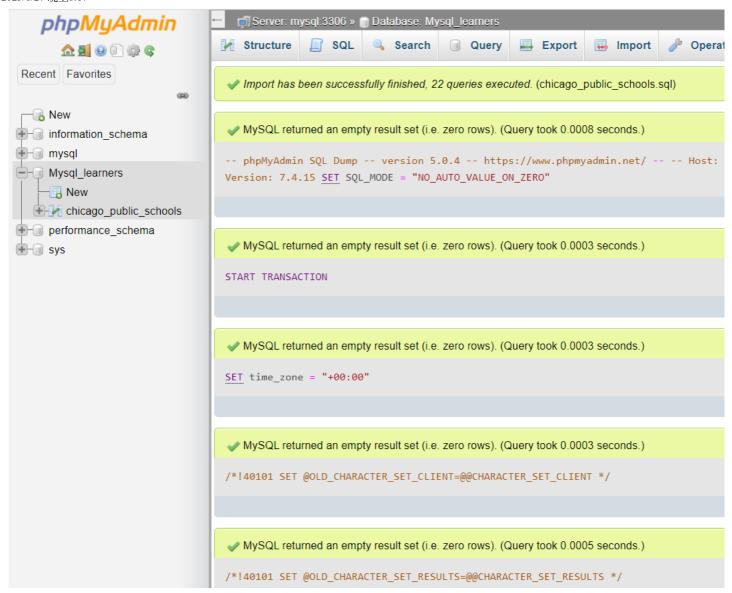

The tables are created and the data is loaded successfully. Repeat the same operation with the other 2 dump files to create and load the tables.

You will see a screen as below

about:blank 5/7

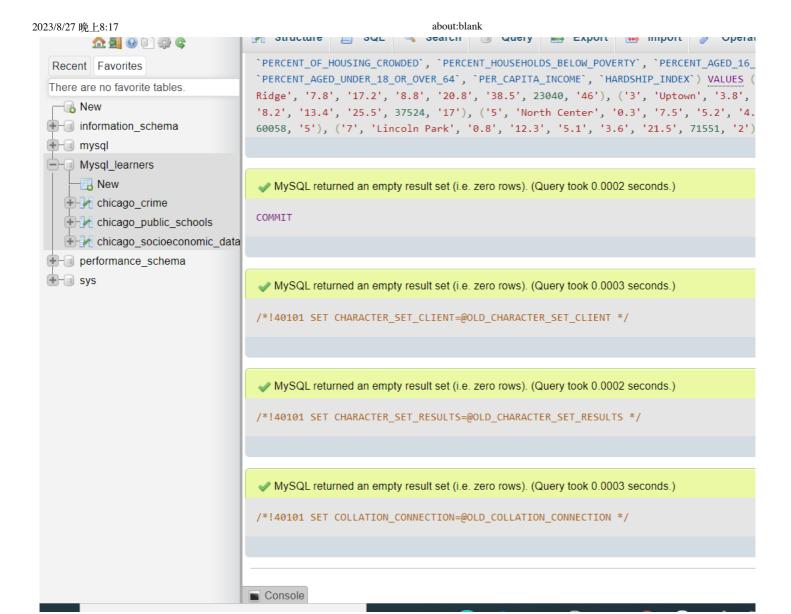

Exercise

Problem 1

List the case number, type of crime and community area for all crimes in community area number 18.

- ► Hint 1
- ► Hint 2
- ► Hint 3

Problem 2

List all crimes that took place at a school. Include case number, crime type and community name.

- ► Hint 1
- ► Hint 2
- ► Hint 3

Problem 3

For the communities of Oakland, Armour Square, Edgewater and CHICAGO list the associated community_area_numbers and the case_numbers.

- ► Hint 1
- ► Hint 2
- ► Hint 3

Congratulations! You have completed this lab, and you are ready for the next topic.

about:blank 6/7

Author(s)

Lakshmi Holla

Malika Singla

Changelog

Date	Version	Changed by	Change Description
2023-05-04	0.4	Rahul Jaideep	Updated Markdown file
2022-05-11	0.3	Appalabhaktula Hema	Updated hint
2022-04-07	0.2	Malika Singla	Updated screenshot
2022-02-10	0.1	Lakshmi Holla, Malika Singla	Initial Version

© IBM Corporation 2023. All rights reserved.

about:blank 7/7