

Introduction

...

Table of contents

| | |
|---|-----------|
| 1 Convolutional neural networks and their components | 3 |
| 1.1 Forward operation | 4 |
| 1.1.1 The activation function | 4 |
| 1.1.2 Fully-connected layer | 4 |
| 1.1.3 Convolutional layer | 5 |
| 1.1.4 Pooling layer | 6 |
| 1.1.5 Output layer | 7 |
| 1.2 Backward propagation | 7 |
| 1.2.1 Output layer | 7 |
| 1.2.2 Fully-connected layer | 8 |
| 1.2.3 Pooling | 8 |
| 1.2.4 Convolutional layer | 8 |
| 1.3 Fully-connected layer | 8 |
| 1.3.1 Layer level | 9 |
| 1.4 Convolutional layer | 10 |
| 1.4.1 Layer level | 10 |
| 1.5 Pooling layer | 12 |
| 1.6 Final layer | 12 |
| 2 Neural network concepts | 12 |
| 2.1 Training phase | 13 |
| 2.2 Optimization using gradient descent | 13 |
| 2.3 Activation function | 14 |
| 2.4 Softmax | 14 |
| 2.5 Forward propagation | 15 |
| 2.6 Backward propagation | 15 |
| 3 Convolutional Neural Networks | 15 |
| 3.1 The convolutional neuron | 17 |
| 3.2 The convolutional layer | 17 |
| 3.2.1 Where is the convolution? | 18 |
| 3.2.2 Multiple channels | 20 |
| 3.2.3 The stride | 20 |
| 3.2.4 Zero padding | 20 |
| 3.3 The pooling 'neuron' | 21 |
| 3.4 Backward Propagation | 21 |
| 4 Python Implementation | 21 |
| 4.1 Convolution function | 22 |
| 4.2 Max pooling | 22 |
| 4.3 Various functions | 22 |
| 5 Conclusion | 24 |

1 Convolutional neural networks and their components

Let us start this paper with a **brief** recall of what a neural network *is*. A neural network is, intuitively, a ‘network’ of ‘neurons’ which are connected together in a layered structure. Each layer contains several neurons that are each connected to all the neurons of the previous layer. The neurons are supposed to ‘look’ for certain ‘features’ in its input data. If the neuron ‘thinks’ that these features are present it ‘fires’. If it does not think that the input data has the features it is looking for, the neuron does not fire. In addition to layers of neurons, neural networks can also contain special ‘non-thinking’ layers. Layers in which there are no neurons.

A neural network’s job is to process some input data and produce a final ‘activation’. This final activation represents what the neural network ‘thinks’ about the input it has processed. A very common application of neural networks sees them used to classify large data sets. In this context, the output of the network is often interpreted as a probability which represents how confident the network is that one piece of data belongs to a particular class. The convolutional neural network that we are going to be using as an example in this paper, serves such a classification purpose.

In this section we are going to develop the equations which govern the operation of each layer in a convolutional neural network. In other words, the equations governing the operation of each component. We will start by looking at the forward operation of the network and then proceed with the backward operation.

Terminology and notation

Before we delve in to the components of a convolutional neural network we need to introduce some terms and notation. Scalars will be represented with a lowercase letter (e.g. x). Vectors will be represented with a bold lowercase letter (e.g. \mathbf{x}). Matrices will be represented with an uppercase letter (e.g. X). Tensors (three dimensional matrices) will be represented with a bold uppercase letter (e.g. \mathbf{X}).

Neurons in a neural network consist, in principle, of only two parts: a set of weights and a bias. Weights will be represented with the letter ‘ w ’ while the bias will be represented with the letter ‘ b ’. The preliminary output of a neuron (or layer of neurons), before it is passed through an activation, will be represented with the letter ‘ z ’. The output after activation will be represented with the letter ‘ a ’.

We need the ability to reference specific positions in the neural network and for that we need a lot of indexes. Since we want our mathematics to match our code to a certain extent, all the indices used in this paper will start at 0. The layer index which tells us which layer we are looking at will be written using a parenthetical superscript (e.g. $\mathbf{a}^{(l)}$ is the activation vector of layer l). Layers in a neural network are divided up by activations. Everything after an activation up until the next activation is part of the next layer. Furthermore, the layers in a neural network all have one or more channels. The neurons within a layer are connected to all the channels in that layer. It is through these channels that input data is sent to a neuron. The channel index which tells us which channel we are looking at will be written using a parenthetical subscript (e.g. $a_{(c)}^{(l)}$ is the scalar activation of layer l in channel c). The output of each neuron in a layer becomes a channel in the next layer. To reference both the input and output channel, a double parenthetical subscript will be used (e.g. $w_{(c,c')}^{(l)}$ is the scalar weight in layer l connecting channel c' from layer l to channel c in layer $l + 1$). To reference positions within a matrix we will use regular xy-coordinates (e.g. $a(x, y)$ is the scalar in row x at column y). Equations which relate a previous layer to the next one will generally use blue color for indices belonging to the previous layer. Red color will be used for the indices belonging to the next layer.

We will often need to know the *dimensions* of layer. How many channels does it have and what are the sizes of the matrices in that layer. These dimensions will be written using the greek letter eta (η) with a layer index and a subscript denoting which dimension is in question. A ‘c’ subscript means it is the number of channels in the layer *minus one*. A ‘x’ and ‘y’ subscript means it is row and column length *minus one* respectively. We use the letter η instead of n to remind the reader that all dimensions are subtracted 1, because we want all our indices to start at zero. As an example, if layer 3 has eight individual channels then $\eta_c^{(3)} = 7$.

The initial input to a network can be thought of as the first activation to the network. So we are going to denote the initial input using the appropriate ‘a’ letter with a zero in parenthetical subscript.

1.1 Forward operation

1.1.1 The activation function

All the ‘thinking’ layers of a neural network—those layers with neurons in them—make use of some activation function. A function that is non-linear which ultimately determines whether a neuron fires or not. When designing a network one can choose between several different possible activation functions. In this paper we are only going to be looking at the rectified linear unit (ReLU) activation function. Since it is the one that is used in our working example. We are going to be using the ReLU function with both scalars, vectors, matrices and tensors. For the larger ‘number structures’ the ReLU function is applied to each entry individually (i.e. each coordinate in a vector at a time). The ReLU function is defined as

$$\begin{aligned} \text{ReLU}(z) &= \max(0, z) \\ \text{ReLU}(\mathbf{z}) &= \begin{pmatrix} \text{ReLU}(z_0) \\ \text{ReLU}(z_1) \\ \vdots \\ \text{ReLU}(z_n) \end{pmatrix} \\ \text{ReLU}(\mathbf{Z}) &= \begin{pmatrix} \text{ReLU}(z_{0,0}) & \text{ReLU}(z_{0,1}) & \dots & \text{ReLU}(z_{0,n}) \\ \text{ReLU}(z_{1,0}) & \text{ReLU}(z_{1,1}) & \dots & \text{ReLU}(z_{1,n}) \\ \vdots & \vdots & \ddots & \vdots \\ \text{ReLU}(z_{m,0}) & \text{ReLU}(z_{m,1}) & \dots & \text{ReLU}(z_{m,n}) \end{pmatrix} \\ \text{ReLU}(\mathbf{Z}) &= \dots \end{aligned}$$

The index notation used here is only for illustration purposes with no semantic meaning.

1.1.2 Fully-connected layer

The fully-connected layer of a convolutional neural network is exactly the same as a regular layer of neurons from a classical multi-layer perceptron network. The layer takes a vector of scalar values as its input and returns a vector of scalar values as its output. Each neuron in a fully-connected layer contains a vector of weights and a bias. For the remainder of this section, let layer number l denote a fully-connected layer.

The equation governing the forward operation for this layer at the level of the individual neuron is

$$\begin{aligned}
z_{(c)}^{(l)} &= \sum_{c'=0}^{\eta_c^{(l-1)}} \left(w_{(c,c')}^{(l)} a_{(c')}^{(l-1)} \right) + b_{(c)}^{(l)} \\
a_{(c)}^{(l)} &= \text{ReLU} \left(z_{(c)}^{(l)} \right)
\end{aligned} \tag{1}$$

We can scale this equation up to the layer level. But first we need the following definitions.

$$\begin{aligned}
\mathbf{z}^{(l)} &= \begin{pmatrix} z_{(1)}^{(l)} \\ z_{(2)}^{(l)} \\ \vdots \\ z_{(\eta_c^{(l+1)})}^{(l)} \end{pmatrix} \\
W^{(l)} &= \begin{pmatrix} w_{(0,0)}^{(l)} & w_{(0,1)}^{(l)} & \dots & w_{(0,\eta_c^{(l)})}^{(l)} \\ w_{(1,0)}^{(l)} & w_{(1,1)}^{(l)} & \dots & w_{(1,\eta_c^{(l)})}^{(l)} \\ \vdots & \vdots & \ddots & \vdots \\ w_{(\eta_c^{(l+1)},0)}^{(l)} & w_{(\eta_c^{(l+1)},1)}^{(l)} & \dots & w_{(\eta_c^{(l+1)},\eta_c^{(l)})}^{(l)} \end{pmatrix} \\
\mathbf{a}^{(l-1)} &= \begin{pmatrix} a_{(1)}^{(l-1)} \\ a_{(2)}^{(l-1)} \\ \vdots \\ a_{(\eta_c^{(l)})}^{(l-1)} \end{pmatrix} \\
\mathbf{b}^{(l)} &= \begin{pmatrix} b_{(c)}^{(l)} \\ b_{(c)}^{(l)} \\ \vdots \\ b_{(c)}^{(l)} \end{pmatrix}
\end{aligned}$$

Using these definitions we can write equation (1) at the layer level using matrix multiplication.

$$\begin{aligned}
\mathbf{z}^{(l)} &= W^{(l)} \mathbf{a}^{(l-1)} + \mathbf{b}^{(l)} \\
\mathbf{a}^{(l)} &= \text{ReLU} \left(\mathbf{z}^{(l)} \right)
\end{aligned} \tag{2}$$

1.1.3 Convolutional layer

Descriptive text ...

The equation governing the forward operation for this layer at the level of the individual neuron is

$$\begin{aligned}
z_{(c)}^{(l)}(x, y) &= \sum_{c'}^{\eta_c^{(l-1)}} \left(\sum_{y'}^{\eta_y^{(l-1)}} \sum_{x'}^{\eta_x^{(l-1)}} \left(w_{(c,c')}^{(l)}(x', y') a_{(c)}^{(l-1)}(x + x', x + y') \right) \right) + b_{(c)}^{(l)} \\
a_{(c)}^{(l)}(x, y) &= \text{ReLU} \left(z_{(c)}^{(l)}(x, y) \right)
\end{aligned} \tag{3}$$

This equation is rather complex and ‘scaling’ it up to the layer level is not trivial at all. First we have to introduce the intermediary Hadamard product variable h .

$$h_{(\mathbf{c}, \mathbf{c}')}^{(l)}(\mathbf{x}, \mathbf{y}) = \sum_{\mathbf{y}'}^{\eta_y^{(l-1)}} \sum_{\mathbf{x}'}^{\eta_x^{(l-1)}} \left(w_{(\mathbf{c}, \mathbf{c}')}^{(l)}(\mathbf{x}', \mathbf{y}') a_{(\mathbf{c})}^{(l-1)}(\mathbf{x} + \mathbf{x}', \mathbf{x} + \mathbf{y}') \right)$$

$$h_{(\mathbf{c})}^{(l)}(\mathbf{x}, \mathbf{y}) = \sum_{\mathbf{c}'}^{\eta_c^{(l-1)}} h_{(\mathbf{c}, \mathbf{c}')}^{(l)}(\mathbf{x}, \mathbf{y})$$

We call it the Hadamard product because the mathematical operation that correspond to the sum over \mathbf{y}' and \mathbf{x}' is the Hadamard product. From here we can scale up the variables in a straight forward way.

$$Z_{(\mathbf{c})}^{(l)} = \begin{pmatrix} z_{\mathbf{c}}^{(l)}(\mathbf{0}, \mathbf{0}) & z_{\mathbf{c}}^{(l)}(\mathbf{0}, \mathbf{1}) & \dots & z_{\mathbf{c}}^{(l)}(\mathbf{0}, \eta_y^{(l)}) \\ z_{\mathbf{c}}^{(l)}(\mathbf{1}, \mathbf{0}) & z_{\mathbf{c}}^{(l)}(\mathbf{1}, \mathbf{1}) & \dots & z_{\mathbf{c}}^{(l)}(\mathbf{1}, \eta_y^{(l)}) \\ \vdots & \vdots & \ddots & \vdots \\ z_{\mathbf{c}}^{(l)}(\eta_x^{(l)}, \mathbf{0}) & z_{\mathbf{c}}^{(l)}(\eta_x^{(l)}, \mathbf{1}) & \dots & z_{\mathbf{c}}^{(l)}(\eta_x^{(l)}, \eta_y^{(l)}) \end{pmatrix}$$

$$H_{(\mathbf{c})}^{(l)} = \begin{pmatrix} h_{\mathbf{c}}^{(l)}(\mathbf{0}, \mathbf{0}) & h_{\mathbf{c}}^{(l)}(\mathbf{0}, \mathbf{1}) & \dots & h_{\mathbf{c}}^{(l)}(\mathbf{0}, \eta_y^{(l)}) \\ h_{\mathbf{c}}^{(l)}(\mathbf{1}, \mathbf{0}) & h_{\mathbf{c}}^{(l)}(\mathbf{1}, \mathbf{1}) & \dots & h_{\mathbf{c}}^{(l)}(\mathbf{1}, \eta_y^{(l)}) \\ \vdots & \vdots & \ddots & \vdots \\ h_{\mathbf{c}}^{(l)}(\eta_x^{(l)}, \mathbf{0}) & h_{\mathbf{c}}^{(l)}(\eta_x^{(l)}, \mathbf{1}) & \dots & h_{\mathbf{c}}^{(l)}(\eta_x^{(l)}, \eta_y^{(l)}) \end{pmatrix}$$

$$B_{(\mathbf{c})}^{(l)} = \begin{pmatrix} b_{\mathbf{c}}^{(l)} & b_{\mathbf{c}}^{(l)} & \dots & b_{\mathbf{c}}^{(l)} \\ b_{\mathbf{c}}^{(l)} & b_{\mathbf{c}}^{(l)} & \dots & b_{\mathbf{c}}^{(l)} \\ \vdots & \vdots & \ddots & \vdots \\ b_{\mathbf{c}}^{(l)} & b_{\mathbf{c}}^{(l)} & \dots & b_{\mathbf{c}}^{(l)} \end{pmatrix}$$

Before we can write down the equation which governs the operation at the layer level, we need to remove one more index.

$$\mathbf{Z}^{(l)} = \begin{pmatrix} Z_{(\mathbf{0})}^{(l)} & Z_{(\mathbf{1})}^{(l)} & \dots & Z_{(\eta_c^{(l)})}^{(l)} \end{pmatrix}$$

$$\mathbf{H}^{(l)} = \begin{pmatrix} H_{(\mathbf{0})}^{(l)} & H_{(\mathbf{1})}^{(l)} & \dots & H_{(\eta_c^{(l)})}^{(l)} \end{pmatrix}$$

$$\mathbf{B}^{(l)} = \begin{pmatrix} B_{(\mathbf{0})}^{(l)} & B_{(\mathbf{1})}^{(l)} & \dots & B_{(\eta_c^{(l)})}^{(l)} \end{pmatrix}$$

We can now write down the equation which governs the forward operation at the layer level.

$$\begin{aligned} \mathbf{Z}^{(l)} &= \mathbf{H}^{(l)} + \mathbf{B}^{(l)} \\ \mathbf{A}^{(l)} &= \text{ReLU}(\mathbf{Z}^{(l)}) \end{aligned} \tag{4}$$

1.1.4 Pooling layer

Descriptive text ...

Equations which give the dimensional relations.

The equation which governs the forward operation of the layer is

$$\begin{aligned}
a_{(c)}^{(l)}(x, y) &= \text{maxpool} \left(a_{(c)}^{(l-1)}(x, y) \right) \\
&= \max_{\substack{r_x \in [0 \dots \delta_x] \\ r_y \in [0 \dots \delta_y]}} \left(a_{(c)}^{(l-1)}(\textcolor{red}{x}s_x + r_x, \textcolor{red}{y}s_y + r_y) \right)
\end{aligned} \tag{5}$$

Going to the layer level is straightforward.

$$A_{(c)}^{(l)} = \begin{pmatrix} a_{(c)}^{(l)}(0, 0) & a_{(c)}^{(l)}(0, 1) & \dots & a_{(c)}^{(l)}(0, \eta_y^{(l)}) \\ a_{(c)}^{(l)}(1, 0) & a_{(c)}^{(l)}(1, 1) & \dots & a_{(c)}^{(l)}(1, \eta_y^{(l)}) \\ \vdots & \vdots & \ddots & \vdots \\ a_{(c)}^{(l)}(\eta_x^{(l)}, 0) & a_{(c)}^{(l)}(\eta_x^{(l)}, 1) & \dots & a_{(c)}^{(l)}(\eta_x^{(l)}, \eta_y^{(l)}) \end{pmatrix}$$

Which yields the rather boring layer equation

$$\begin{aligned}
\mathbf{A}^{(l)} &= \begin{pmatrix} A_{(0)}^{(l)} & A_{(1)}^{(l)} & \dots & A_{(\eta_c^{(l)})}^{(l)} \end{pmatrix} \\
\mathbf{A}^{(l)} &= \text{maxpool} \left(\mathbf{A}^{(l-1)} \right)
\end{aligned} \tag{6}$$

1.1.5 Output layer

Descriptive text ...

Note that the last layer before the output layer does not need an activation function.

The equations are

$$\tilde{y}_{(c)} = \frac{\exp(a_{(c)}^{(l)})}{\sum_{c^*=0}^{\eta_c^{(l)}} \exp(a_{(c^*)}^{(l)})} \tag{7}$$

$$\ell = - \sum_{c=0}^{\eta_c^{(l)}} y_{(c)} \log(\tilde{y}_{(c)}) \tag{8}$$

1.2 Backward propagation

1.2.1 Output layer

Descriptive text ...

$$\begin{aligned}
\frac{\partial L}{\partial \tilde{y}_{(c)}} &= \frac{\partial}{\partial \tilde{y}_{(c)}} \left(- \sum_{c^*=0}^{\eta_c^{(l)}} y_{(c^*)} \log(\tilde{y}_{(c^*)}) \right) = - \frac{y_{(c)}}{\tilde{y}_{(c)}} \\
\frac{\partial \tilde{y}_{(c)}}{\partial a_{(c)}^{(l)}} &= \frac{\partial}{\partial a_{(c)}^{(l)}} \left(\frac{\exp(a_{(c)}^{(l)})}{\sum_{c^*=0}^{\eta_c^{(l)}} \exp(a_{(c^*)}^{(l)})} \right) \\
&= \frac{\exp(a_{(c)}^{(l)})}{\sum_{c^*=0}^{\eta_c^{(l)}} \exp(a_{(c^*)}^{(l)})} - \left(\frac{\exp(a_{(c)}^{(l)})}{\sum_{c^*=0}^{\eta_c^{(l)}} \exp(a_{(c^*)}^{(l)})} \right)^2 \\
&= \tilde{y}_{(c)} - \left(\tilde{y}_{(c)} \right)^2 \\
&= \tilde{y}_{(c)}(1 - \tilde{y}_{(c)})
\end{aligned}$$

$$\frac{\partial L}{\partial a_{(c)}^{(l)}} = \frac{\partial L}{\partial \tilde{y}_{(c)}} \frac{\partial \tilde{y}_{(c)}}{\partial a_{(c)}^{(l)}} = -\frac{y_{(c)}}{\tilde{y}_{(c)}} \tilde{y}_{(c)}(1 - \tilde{y}_{(c)}) = \tilde{y}_{(c)} - y_{(c)} \quad (9)$$

1.2.2 Fully-connected layer

Descriptive text ...

$$\frac{\partial z_{(c)}^{(l)}}{\partial a_{(c^*)}^{(l-1)}} = \frac{\partial}{\partial a_{(c^*)}^{(l-1)}} \left(\sum_{c'=0}^{\eta_c^{(l-1)}} \left(w_{(c,c')}^{(l)} a_{(c')}^{(l-1)} \right) + b_{(c)}^{(l)} \right) = w_{(c,c^*)}^{(l)}$$

1.2.3 Pooling

Descriptive text ...

1.2.4 Convolutional layer

Descriptive text ...

1.3 Fully-connected layer

Admit that the choice of index is a bit odd but that it will make sense later. Regular formula.

$$Z_{\underline{c}}^{(l+1)} = \sum_{c'=0}^{\eta_c^{(l)}} \left(W_{\underline{c}'}^{(l,\underline{c})} Z_{\underline{c}'}^{(l)} \right) + b^{(l,\underline{c})} \quad (10)$$

Partial derivative with respect to a $Z^{(l)}$.

$$\begin{aligned} \frac{\partial Z_{\underline{c}}^{(l+1)}}{\partial Z_{\underline{c}^*}^{(l)}} &= \frac{\partial}{\partial Z_{\underline{c}^*}^{(l)}} \left(\sum_{c'=0}^{\eta_c^{(l)}} \left(W_{\underline{c}'}^{(l,\underline{c})} Z_{\underline{c}'}^{(l)} \right) + b^{(l,\underline{c})} \right) \\ &= \sum_{c'=0}^{\eta_c^{(l)}} \left(\frac{\partial}{\partial Z_{\underline{c}^*}^{(l)}} \left(W_{\underline{c}'}^{(l,\underline{c})} Z_{\underline{c}'}^{(l)} \right) \right) + 0 \\ &= W_{\underline{c}^*}^{(l,\underline{c})} \end{aligned} \quad (11)$$

Partial derivative with respect to a $W^{(l,\underline{c})}$.

$$\begin{aligned} \frac{\partial Z_{\underline{c}}^{(l+1)}}{\partial W_{\underline{c}^*}^{(l,\underline{c})}} &= \frac{\partial}{\partial W_{\underline{c}^*}^{(l,\underline{c})}} \left(\sum_{c'=0}^{\eta_c^{(l)}} \left(W_{\underline{c}'}^{(l,\underline{c})} Z_{\underline{c}'}^{(l)} \right) + b^{(l,\underline{c})} \right) \\ &= \sum_{c'=0}^{\eta_c^{(l)}} \left(\frac{\partial}{\partial W_{\underline{c}^*}^{(l,\underline{c})}} \left(W_{\underline{c}'}^{(l,\underline{c})} Z_{\underline{c}'}^{(l)} \right) \right) + 0 \\ &= Z_{\underline{c}^*}^{(l)} \end{aligned} \quad (12)$$

Partial derivative with respect to the bias $b^{(l,\underline{c})}$.

$$\begin{aligned}
\frac{\partial Z_c^{(l+1)}}{\partial b^{(l,c)}} &= \frac{\partial}{\partial b^{(l,c)}} \left(\sum_{c'=0}^{\eta_c^{(l)}} \left(W_{c'}^{(l,c)} Z_{c'}^{(l)} \right) + b^{(l,c)} \right) \\
&= \sum_{c'=0}^{\eta_c^{(l)}} \left(\frac{\partial}{\partial b^{(l,c)}} \left(W_{c'}^{(l,c)} Z_{c'}^{(l)} \right) \right) + 1 \\
&= 1
\end{aligned} \tag{13}$$

1.3.1 Layer level

Now let us move on up to the layer level. Z without a subscript represents a column vector of all the entries.

$$Z^{(l)} = \begin{pmatrix} Z_1^{(l)} \\ Z_2^{(l)} \\ \vdots \\ Z_{\eta_c^{(l)}}^{(l)} \end{pmatrix}$$

W without a neuron index and without a subscript represents a matrix. The neuron index selects row and the channel index selects column.

$$W^{(l)} = \begin{pmatrix} W_1^{(l,1)} & W_2^{(l,1)} & \dots & W_{\eta_c^{(l)}}^{(l,1)} \\ W_1^{(l,2)} & W_2^{(l,2)} & \dots & W_{\eta_c^{(l)}}^{(l,2)} \\ \vdots & \vdots & \ddots & \vdots \\ W_1^{(l,\eta_c^{(l+1)})} & W_2^{(l,\eta_c^{(l+1)})} & \dots & W_{\eta_c^{(l)}}^{(l,\eta_c^{(l+1)})} \end{pmatrix}$$

b without a neuron index is a column vector of biases.

$$b^{(l)} = \begin{pmatrix} b^{(l,1)} \\ b^{(l,2)} \\ \vdots \\ b^{(l,\eta_c^{(l)})} \end{pmatrix}$$

Regular formula.

$$Z^{(l+1)} = W^{(l)} \cdot Z^{(l)} + b^{(l)} \tag{14}$$

Gradient with respect to a $Z^{(l)}$. Hvordan skrive gradient med hensyn på noe?

$$\frac{\partial Z^{(l+1)}}{\partial Z^{(l)}} = W^{(l)} \tag{15}$$

Gradient with respect to a $W^{(l)}$.

$$\frac{\partial Z^{(l+1)}}{\partial W^{(l)}} = Z^{(l)} \tag{16}$$

Gradient with respect to a $b^{(l,c)}$.

$$\frac{\partial Z^{(l+1)}}{\partial b^{(l)}} = \begin{pmatrix} 1 \\ 1 \\ \vdots \\ 1 \end{pmatrix} \quad (17)$$

1.4 Convolutional layer

Introduce the indexes. y selects row while x selects column. Regular formula.

$$Z_{c,y,x}^{(l+1)} = \sum_{c'=0}^{\eta_c^{(l)}} \sum_{y'=0}^{\eta_y^{(l)}} \sum_{x'=0}^{\eta_x^{(l)}} \left(W_{c',y',x'}^{(l,c)} Z_{c',y+y',x+x'}^{(l)} \right) + b^{(l,c)} \quad (18)$$

Partial derivative with respect to a $Z_{(l)}$. $c^* \in [c \dots c + \eta_c^{(l)}]$. $y^* \in [y \dots y + \eta_y^{(l)}]$. $x^* \in [x \dots x + \eta_x^{(l)}]$.

$$\begin{aligned} \frac{\partial Z_{c,y,x}^{(l+1)}}{\partial Z_{c^*,y^*,x^*}^{(l)}} &= \frac{\partial}{\partial Z_{c^*,y^*,x^*}^{(l)}} \left(\sum_{c'=0}^{\eta_c^{(l)}} \sum_{y'=0}^{\eta_y^{(l)}} \sum_{x'=0}^{\eta_x^{(l)}} \left(W_{c',y',x'}^{(l,c)} Z_{c',y+y',x+x'}^{(l)} \right) + b^{(l,c)} \right) \\ &= \sum_{c'=0}^{\eta_c^{(l)}} \sum_{y'=0}^{\eta_y^{(l)}} \sum_{x'=0}^{\eta_x^{(l)}} \left(\frac{\partial}{\partial Z_{c^*,y^*,x^*}^{(l)}} \left(W_{c',y',x'}^{(l,c)} Z_{c',y+y',x+x'}^{(l)} \right) \right) + 0 \\ &= W_{c^*,y^*,x^*}^{(l,c)} \end{aligned} \quad (19)$$

Partial derivative with respect to a $W^{(l,c)}$. $c^* \in [0 \dots \eta_c^{(l)}]$. $y^* \in [0 \dots \eta_y^{(l)}]$. $x^* \in [0 \dots \eta_x^{(l)}]$.

$$\begin{aligned} \frac{\partial Z_{c,y,x}^{(l+1)}}{\partial W_{c^*,y^*,x^*}^{(l,c)}} &= \frac{\partial}{\partial W_{c^*,y^*,x^*}^{(l,c)}} \left(\sum_{c'=0}^{\eta_c^{(l)}} \sum_{y'=0}^{\eta_y^{(l)}} \sum_{x'=0}^{\eta_x^{(l)}} \left(W_{c',y',x'}^{(l,c)} Z_{c',y+y',x+x'}^{(l)} \right) + b^{(l,c)} \right) \\ &= \sum_{c'=0}^{\eta_c^{(l)}} \sum_{y'=0}^{\eta_y^{(l)}} \sum_{x'=0}^{\eta_x^{(l)}} \left(\frac{\partial}{\partial W_{c^*,y^*,x^*}^{(l,c)}} \left(W_{c',y',x'}^{(l,c)} Z_{c',y+y',x+x'}^{(l)} \right) \right) + 0 \\ &= Z_{c^*,y+y^*,x+x^*}^{(l)} \end{aligned} \quad (20)$$

Partial derivative with respect to $b^{l,c}$.

$$\begin{aligned} \frac{\partial Z_{c,y,x}^{(l+1)}}{\partial b^{(l,c)}} &= \frac{\partial}{\partial b^{(l,c)}} \left(\sum_{c'=0}^{\eta_c^{(l)}} \sum_{y'=0}^{\eta_y^{(l)}} \sum_{x'=0}^{\eta_x^{(l)}} \left(W_{c',y',x'}^{(l,c)} Z_{c',y+y',x+x'}^{(l)} \right) + b^{(l,c)} \right) \\ &= 1 \end{aligned} \quad (21)$$

1.4.1 Layer level

Now let us move up to the layer level. To progress up to the layer level we only need to deal with the hadamard product. After that everything is exactly the same as for the fully-connected layer. $Z_c^{(l)}$ represents a two dimensional matrix.

$$Z_{\mathbf{c}}^{(l)} = \begin{pmatrix} Z_{\mathbf{c},1,1}^{(l)} & Z_{\mathbf{c},1,2}^{(l)} & \cdots & Z_{\mathbf{c},1,\eta_x^{(l)}}^{(l)} \\ Z_{\mathbf{c},2,1}^{(l)} & Z_{\mathbf{c},2,2}^{(l)} & \cdots & Z_{\mathbf{c},2,\eta_x^{(l)}}^{(l)} \\ \vdots & \vdots & \ddots & \vdots \\ Z_{\mathbf{c},\eta_y^{(l)},1}^{(l)} & Z_{\mathbf{c},\eta_y^{(l)},2}^{(l)} & \cdots & Z_{\mathbf{c},\eta_y^{(l)},\eta_x^{(l)}}^{(l)} \end{pmatrix}$$

$W_{\mathbf{c}'}^{l,\mathbf{c}}$ also represents a two dimensional matrix.

$$W_{\mathbf{c}'}^{l,\mathbf{c}} = \begin{pmatrix} W_{\mathbf{c}',1,1}^{l,\mathbf{c}} & W_{\mathbf{c}',1,2}^{l,\mathbf{c}} & \cdots & W_{\mathbf{c}',1,\eta_x^{(l)}}^{l,\mathbf{c}} \\ W_{\mathbf{c}',2,1}^{l,\mathbf{c}} & W_{\mathbf{c}',2,2}^{l,\mathbf{c}} & \cdots & W_{\mathbf{c}',2,\eta_x^{(l)}}^{l,\mathbf{c}} \\ \vdots & \vdots & \ddots & \vdots \\ W_{\mathbf{c}',\eta_y^{(l)},1}^{l,\mathbf{c}} & W_{\mathbf{c}',\eta_y^{(l)},2}^{l,\mathbf{c}} & \cdots & W_{\mathbf{c}',\eta_y^{(l)},\eta_x^{(l)}}^{l,\mathbf{c}} \end{pmatrix}$$

I will denote the hadamard product by \odot . Here we introduce the intermediary variable $H_{\mathbf{c}'}^{(l,\mathbf{c})}$. It is the hadamard product of $Z_{\mathbf{c}}^{(l)}$ with $W_{\mathbf{c}'}^{l,\mathbf{c}}$.

$$H_{\mathbf{c}'}^{(l,\mathbf{c})} = W_{\mathbf{c}'}^{(l,\mathbf{c})} \odot Z_{\mathbf{c}}^{(l)} = \sum_{\mathbf{y}'=0}^{\eta_y^{(l)}} \sum_{\mathbf{x}'=0}^{\eta_x^{(l)}} \left(W_{\mathbf{c}',\mathbf{y}',\mathbf{x}'}^{(l,\mathbf{c})} Z_{\mathbf{c},\mathbf{y}+\mathbf{y}',\mathbf{x}+\mathbf{x}'}^{(l)} \right)$$

Substituting for it in Formula 18 we get an expression early similar to Formula 10.

$$Z_{\mathbf{c}}^{(l+1)} = \sum_{\mathbf{c}'=0}^{\eta_{\mathbf{c}}^{(l)}} \left(H_{\mathbf{c}'}^{(l,\mathbf{c})} \right) + b^{(l,\mathbf{c})} \quad (22)$$

The hadamard product is nothing more than a long finite sum of different weights and products. Taking the partial derivative of it—with respect to any one of them—yields the cooresponding weight or product entry. Thus we have that.

$$\frac{\partial H_{\mathbf{c}'}^{(l,\mathbf{c})}}{\partial Z_{\mathbf{c}}^{(l)}} = W_{\mathbf{c}'}^{(l,\mathbf{c})} \quad (23)$$

$$\frac{\partial H_{\mathbf{c}'}^{(l,\mathbf{c})}}{\partial W_{\mathbf{c}'}^{(l,\mathbf{c})}} = Z_{\mathbf{c}}^{(l)} \quad (24)$$

If we scale up even further we get the formula which relates layer $l+1$ with layer l .

$$H^{(l)} = \begin{pmatrix} H^{(l,1)} \\ H^{(l,2)} \\ \vdots \\ H^{(l,\eta_c^{(l)})} \end{pmatrix} = \begin{pmatrix} \sum_{\mathbf{c}'=0}^{\eta_c^{(l)}} \left(H_{\mathbf{c}'}^{(l,1)} \right) \\ \sum_{\mathbf{c}'=0}^{\eta_c^{(l)}} \left(H_{\mathbf{c}'}^{(l,2)} \right) \\ \vdots \\ \sum_{\mathbf{c}'=0}^{\eta_c^{(l)}} \left(H_{\mathbf{c}'}^{(l,\eta_c^{(l)})} \right) \end{pmatrix}$$

Let us now calculate the partial derivatives.

$$\frac{\partial Z_{\mathbf{c}}^{(l+1)}}{Z_{\mathbf{c}'}^{(l)}} = \quad (25)$$

1.5 Pooling layer

A non thinking layer, good for adjusting the networks performance.

1.6 Final layer

$$w_{(c',c)}^{(l)}(y,x)$$

2 Neural network concepts

A neural network can be used for solving a wide array of problems in computer science, arguably the most common of which lies in computer vision. The purpose of this section is to explain and demonstrate the motivation behind the structure of a typical neural network: the multi-layered perceptron (MLP). These neural networks can be applied to a wide range of problems, but for this section we are going to focus on computer vision.

The MLP performs well in image classification. The network can be considered a function with a number of inputs equal to the number of pixels in the image times three in the case of an RGB. The number of outputs is in this case the number of classes. This is obviously an extremely complicated function and finding the exact function is near impossible. A more intelligent approach is to approximate it with composition of several easily computed functions, such as linear functions. Figure 1 on page 12 presents a visualization of this concept.

The structure is loosely based on neuroscience; the nodes are often called neurons, which in reality is a number describing whether or not the neuron is active. The connections between neurons are called weights, denoted W , and translates how much the activation of one neuron should impact the activation of a following neuron. Lastly, we usually add constant values called

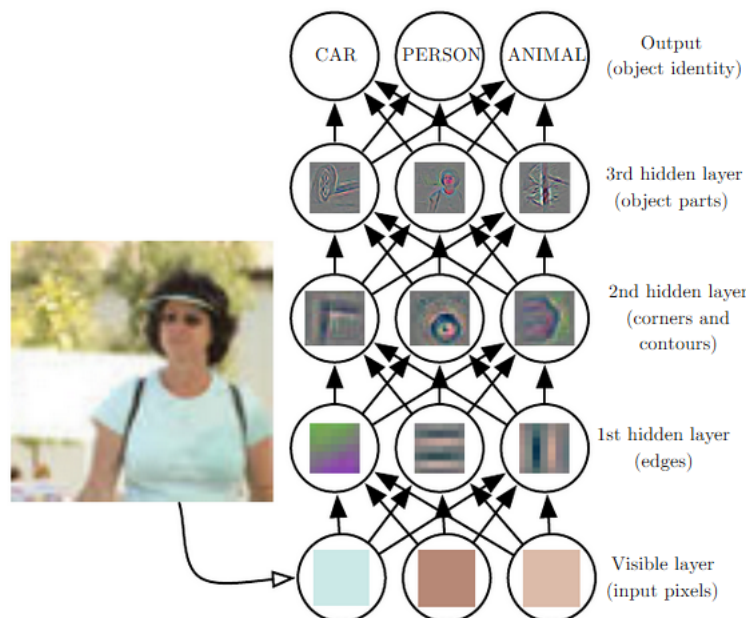


Figure 1 A visual

biases noted b . These values can be seen as thresholds in order for a neuron to activate. Parallel neurons are joined in layers denoted by $X^{(l)}$ where l is the layer index.

An MLP is a so-called fully connected neural network. This means that each neuron in layer $X^{(l)}$, impacts the activation of each neuron in the following layer $X^{(l+1)}$. With these notations, the passage from layer to the next can be written

$$X^{(l+1)} = WX^{(l)} + b \quad (26)$$

A simple network might consist of two such layers with Y number of neurons each. This means (Y) number of adjustable parameters! With the structure defined, we have yet to determine the parameters. This is where the training phase enters.

2.1 Training phase

The idea is simple. We start out with a large dataset with n classified examples, called a training set and we adjust our network to fit these data. The hope is then that the network will be able to classify new images with these same parameters. In order to quantify the performance of the MLP during the training phase, we introduce a cost function that, in short, is a non-negative function that is closer to zero the better the network performs. Knowing the desired output with the corresponding input, we look to minimize this cost function by adjusting the parameters of the MLP i.e. its weights and biases. This can be seen as an optimization problem with thousands of inputs (in our case, Y weights and biases). For demonstration purposes, we will explain the concept of gradient descent, an intuitive and common optimization algorithm.

2.2 Optimization using gradient descent

We have a function that we want to minimize without calculating all its possible values. The gradient of the function is an operation that tells us which inputs to adjust and by how much, in order to increase the function by as much as possible in a given point. Visually, it can be considered the direction in the input space that increases the output the most. In our case, we want to decrease the cost by as much as possible so we take the negative value of the gradient. As such, the gradient descent algorithm consists of, at each iteration, calculating the cost and its gradient, adjusting the inputs by "stepping in the direction of the gradient" (Figure 2) and repeating until we have found a local minimum or until the cost is sufficiently low. A limitation to this algorithm, is that there can be several local minima and there is no guarantee of finding the lowest one. In practice, though, the local minima in the context of neural networks are usually sufficiently low.

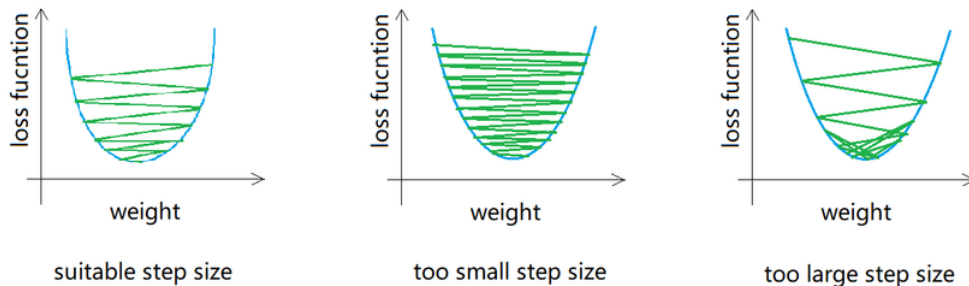


Figure 2 A visual

In the context of training a neural network, we have yet to introduce a way to calculate this very important gradient of the cost function. To do so, we first need to determine a mathematical expression of the neural network itself. In fact, the network typically consists of more than just linear functions.

2.3 Activation function

Up until now, we have introduced a transition from one layer to the next as a linear transformation. The problems we want the network to solve are usually far from linear, which is why we introduce a non-linear activation function ϕ . We now have

$$X^{(l+1)} = \phi(WX^{(l)} + b) \quad (27)$$

There are different variants of activation functions. In some cases, we want to avoid too large values. For optimization purposes, we also want the activation function to be derivable. Both the sigmoid function defined as

$$\phi(x) = \frac{1}{1 + e^{-x}} \quad (28)$$

and the arctan function have these desired properties, though the simple ReLU defined as

$$\phi(x) = \max(0, x)$$

is shown to be more efficient for optimization (source Goodfellow) and thus more common in practice.

2.4 Softmax

Before evaluating a cost function, we transform the output layer in a way that their values are positive and their sum is equal to 1. In this way, each value in the output layer can be interpreted as the probability that a given input is classified as such. This is done using the softmax function defined as

$$\sigma(z_i) = \frac{\exp(z_i)}{\sum_{j=1}^k \exp(z_j)} \quad (29)$$

where k is equal to the number of outputs.

While in the training phase, we obviously know the desired output to each input, thus we want that specific neuron to have a value close to 1, and all the others to be close to 0. The loss function,

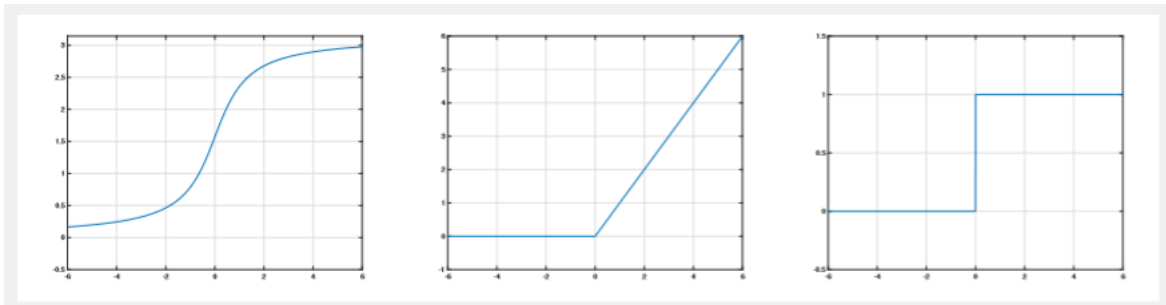


Figure 3 A visual

which quantifies “how close” the network’s guess is to a given output, can have different definitions depending on the problem. For instance, a common loss function that pairs well with the softmax function, is the negative log-likelihood defined as

$$L_i = -\log(y_i) \quad (30)$$

In order to quantify how well the network performs on the entire training set, we want to evaluate the loss function on each data-input. The cost function can then be defined as $\sum_{i=1}^n L_i$. Or the sum of losses.

2.5 Forward propagation

We now have an expression for each component in the neural network. Let’s see how they are assembled in the forward propagation (Figure 4).

2.6 Backward propagation

Backward propagation, finding the gradient. As previously mentioned, the NN can be seen as a composition of functions of several functions of which we can easily find the derivate. Intuitively, in order to find the gradient of the cost function with respect to the weights and biases, we can just apply the chain rule (Figure 5). As we can see, the output layer is dependent on its preceding layer, weights and biases, which, in turn, depends on the previous parameters. This creates a cascade of gradients calculated from the output- to the input layer, hence the name backward propagation.

After iterating over the training set, we now have the gradients needed for the optimization algorithm, which in turn allows us to adjust the weights and biases in order to, iteration by iteration, reach a local minimum. In practice, this approach performs relatively well, though there are improvements to be made. In the following chapters, we will examine how convolutional neural networks differs from the classic MLP.

3 Convolutional Neural Networks

A convolutional neural network is an evolution of a classical multilayer perceptron network. Recall the basic principle underpinning how a normal neuron in a neural network is supposed to work. The neuron is supposed to ‘look’ for features in its input data. If the neuron ‘thinks’ that those features are present in the input data it ‘fires’. Otherwise the neuron does not fire.

In a classical multilayer perceptron network this is implemented in the following way. Each neuron contains a vector of weights, a bias and an activation function. The input to the neuron—which must be a vector of equal length to the neuron’s own weight vector—is combined with the neuron’s weight vector using the dot product. The neuron’s bias is added onto the result which in turn is passed to the activation function which finally determines if the neuron ‘fires’ or not.

Using several layers of neurons one can achive quite remarkable results using this implementation of a neural network. However, a multilayer perceptron is inherently limited. The major problem is that neurons in these kinds of networks only accept input that is in the form of a vector. This means that for applications where it is not natural for the input to be in a vector format, say image recognition, the input first has to be translated to a vector format. Usually this results in a loss of information contained in the input. In the typical case of image recongition, the input is in the form of one or more arrays of two dimention. For a multilayer perceptron to treat this input, the images has to be ‘flattend’ into a vector of one dimention before it can be passed on to the network. This procedure eliminates some of the pixel relations in the image. To deduce this,

consider the process of reconstructing a flattened image. If the image's dimensions prior to being flattened is not known, it is impossible, without the aid of pattern recognition, to reconstruct the image and be sure the reconstruction is equal to the original image.

To fix this problem, we can use a 'simple' solution. Instead of having the neuron contain a vector of weights, let it have an array of weights. If we change the neuron's vector of weights into an array, we also need to change the operation that is used to combine the weights with the input (which in a neuron of a multilayer perceptron is the dot product). There are two things to consider here. The purpose of the weights is to look for features or *patterns* in the input—by emphasizing or deemphasizing certain aspects—and the operation must reflect this purpose of the weights. Furthermore, the result of the operation should be a single number which, in a sense, represents the neuron's 'initial' confidence that the feature it is looking for is present in the input. The operation which does both of these things is the *Hadamard product*. The Hadamard product can be viewed as an extension of the dot product to two dimensional arrays. It combines two arrays—of the same dimensions—by multiplying corresponding entries together and summing the results. Which is precisely what the dot product does with two vectors.

The Hadamard product (Hp) of two matrices A, B with entries $a_{i,j}, b_{i,j}$ of equal dimensions is

$$\text{Hp}(A, B) = \sum_j \sum_i a_{i,j} \cdot b_{i,j} \quad (31)$$

Another thing we need to take into account is the dimensions of our new weight array. If we were to proceed analogically to how a multilayer perceptron works, the array should have the same size as the input to the neuron. 'Connecting' each value in the input to an individual weight in the neuron. But this approach means that each neuron, in principle, looks for a single feature in the entire input at once. A more refined approach, is to let the neuron's weight array be smaller in size than its input. Instead of applying the weight array (using the Hadamard product) to the entire input at once, we apply it (still using the Hadamard product) to portions of the input separately. Intuitively, this means that the weight arrays are 'scanned' across the entire input image. This allows the neuron to be trained to look for a single feature, such as a 'sharp edge' or a 'round corner', in multiple areas of the input. The result of this method will no longer be a single number representing how 'initially' confident the neuron is that a particular feature is present in the input **as a whole**. Rather, the result becomes a *feature map*. Another two dimensional array which represents how 'initially' confident the neuron is that a particular feature is present in **specific locations** of the input.

Going one step further, we can allow the neuron to treat inputs of not only a single two dimensional array, but several two dimensional arrays. A typical example where the input would consist of several interlinked two dimensional arrays is RGB images. An RGB image consists of three arrays of pixel values (numbers) that describe how red, green and blue an image is in each pixel. The number of interlinked two dimensional arrays present in the input, is known as the number of *channels* that the input has. In order for our neuron to treat inputs with more than one channel we let the neuron have as many channels as the input. That is to say, we equip the neuron with a weight array for each channel in the input. For each channel the weight arrays are applied to the input (using Hadamard) and the result in each channel is combined to form a final single feature map.

A neural network which makes use of layers of neurons of this kind, is a convolutional neural network. The multi-channel two dimensional arrays of weights inside each such neuron is called the neuron's *kernel* or *filter*. Why are these neural networks called convolutional neural networks? That will be explained in the next section.

3.1 The convolutional neuron

Let us start this section with a simple convolutional neuron. The neuron's kernel consists of a single weight matrix (one channel), some bias and some activation function. Consequently, the input that this neuron accepts is any one channel two dimensional array of size greater than its kernel.

The process of calculating the neurons 'initial' confidence that the feature it is looking for is present in the input, is illustrated by Figure 4 on page 19. Figure 4 shows how the kernel 'scans' the entire input array to compute the feature map. Let us construct the general formula for this feature map.

We will denote the feature map, kernel and input as F , K and M respectively. They are two dimensional arrays and their individual entries will be denoted as $F(x, y)$ where x is the column index and y the row index. The indexes will all start at zero (e.g. $M(1, 2)$ is the entry in the second column, third row of M). There are many lengths involved in working with three separate arrays, various lengths will here be denoted by n . A subscript, either x or y , will indicate if it is a horizontal or vertical length and a subsequent argument will indicate which array the length belongs to. So for example, $n_x(M)$ is the horizontal length of the input array—the number of columns or x 's in M .

If the input represents a typical MNIST image with dimensions 28x28, then $n_x(M) = 28$ and $n_y(M) = 28$. In this scenario, the indices of M range in $[0..n_x(M) - 1] \times [0..n_y(M) - 1]$.

Let us say that the kernel scans its input one column and one row at a time. In this scenario, the output feature map will have dimensions

3.2 The convolutional layer

Okay this is where I will start developing the mathematics. First we need to define the various variables used and some terminology. A network has several layers and each layer has its own specific attributes. A superscript enclosed in parantheses will be used as the layer index.

$$\begin{aligned}\delta x_Z^{(l+1)} &= \delta x_W^{(l)} - \delta x_Z^{(l)} + 1 \\ y_Z^{(l+1)} &= \delta y_W^{(l)} - \delta y_Z^{(l)} + 1\end{aligned}\tag{32}$$

$$\begin{aligned}\textcolor{red}{x} &\in [0..n_x(F) - 1] & \textcolor{red}{y} &\in [0..n_y(F) - 1] \\ \textcolor{blue}{x} &\in [0..n_x(K) - 1] & \textcolor{blue}{y} &\in [0..n_y(K) - 1]\end{aligned}\tag{33}$$

The product in layer l before activation, here denoted Z is given by the following formula
Regular formula

$$\textcolor{green}{Z}_{\textcolor{red}{x}, \textcolor{red}{y}, \textcolor{red}{c}}^{(l+1)} = \sum_{\textcolor{blue}{c}'=0}^{\delta c_Z^{(l)}} \sum_{\textcolor{blue}{y}'=0}^{\delta y_Z^{(l)}} \sum_{\textcolor{blue}{x}'=0}^{\delta x_Z^{(l)}} \left(W_{\textcolor{blue}{x}', \textcolor{blue}{y}', \textcolor{blue}{c}'}^{(l, \textcolor{red}{c})} Z_{\textcolor{red}{x}+\textcolor{blue}{x}', \textcolor{red}{y}+\textcolor{blue}{y}', \textcolor{red}{c}}^{(l)} \right) + b^{(l, \textcolor{red}{c})}\tag{34}$$

Derivative with respect to Z . $\textcolor{violet}{c}^* \in [\textcolor{red}{c}.. \textcolor{red}{c} + \delta c_W^{(l)}]$. $\textcolor{violet}{y}^* \in [\textcolor{red}{y}.. \textcolor{red}{y} + \delta y_W^{(l)}]$. $\textcolor{violet}{x}^* \in [\textcolor{red}{x}.. \textcolor{red}{x} + \delta x_W^{(l)}]$.

$$\begin{aligned}
\frac{\partial Z_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l+1)}}{\partial Z_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l)}} &= \frac{\partial}{\partial Z_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l)}} \left(\sum_{\mathbf{c}'=0}^{\delta c_W^{(l)}} \sum_{\mathbf{y}'=0}^{\delta y_W^{(l)}} \sum_{\mathbf{x}'=0}^{\delta x_W^{(l)}} \left(W_{\mathbf{x}', \mathbf{y}', \mathbf{c}'}^{(l, \mathbf{c})} Z_{\mathbf{x}+\mathbf{x}', \mathbf{y}+\mathbf{y}', \mathbf{c}'}^{(l)} \right) + b^{(l, \mathbf{c})} \right) \\
&= \sum_{\mathbf{c}'=0}^{\delta c_W^{(l)}} \sum_{\mathbf{y}'=0}^{\delta y_W^{(l)}} \sum_{\mathbf{x}'=0}^{\delta x_W^{(l)}} \frac{\partial}{\partial Z_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l)}} \left(\left(W_{\mathbf{x}', \mathbf{y}', \mathbf{c}'}^{(l, \mathbf{c})} Z_{\mathbf{x}+\mathbf{x}', \mathbf{y}+\mathbf{y}', \mathbf{c}'}^{(l)} \right) + b^{(l, \mathbf{c})} \right) \\
&= W_{\mathbf{x}', \mathbf{y}', \mathbf{c}'}^{(l, \mathbf{c})}
\end{aligned} \tag{35}$$

Derivative with respect to W . $\mathbf{c}^* \in [0 .. \delta c_W^{(l)}]$. $\mathbf{y}^* \in [0 .. \delta y_W^{(l)}]$. $\mathbf{x}^* \in [0 .. \delta x_W^{(l)}]$.

$$\begin{aligned}
\frac{\partial Z_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l+1)}}{\partial W_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l, \mathbf{c})}} &= \frac{\partial}{\partial W_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l, \mathbf{c})}} \left(\sum_{\mathbf{c}'=0}^{\delta c_W^{(l)}} \sum_{\mathbf{y}'=0}^{\delta y_W^{(l)}} \sum_{\mathbf{x}'=0}^{\delta x_W^{(l)}} \left(W_{\mathbf{x}', \mathbf{y}', \mathbf{c}'}^{(l, \mathbf{c})} Z_{\mathbf{x}+\mathbf{x}', \mathbf{y}+\mathbf{y}', \mathbf{c}'}^{(l)} \right) + b^{(l, \mathbf{c})} \right) \\
&= \sum_{\mathbf{c}'=0}^{\delta c_W^{(l)}} \sum_{\mathbf{y}'=0}^{\delta y_W^{(l)}} \sum_{\mathbf{x}'=0}^{\delta x_W^{(l)}} \frac{\partial}{\partial W_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l, \mathbf{c})}} \left(\left(W_{\mathbf{x}', \mathbf{y}', \mathbf{c}'}^{(l, \mathbf{c})} Z_{\mathbf{x}+\mathbf{x}', \mathbf{y}+\mathbf{y}', \mathbf{c}'}^{(l)} \right) + b^{(l, \mathbf{c})} \right) \\
&= Z_{\mathbf{x}^*+\mathbf{x}', \mathbf{y}^*+\mathbf{y}', \mathbf{c}^*}^{(l)}
\end{aligned} \tag{36}$$

Derivative with respect to b

$$\begin{aligned}
\frac{\partial Z_{\mathbf{x}^*, \mathbf{y}^*, \mathbf{c}^*}^{(l+1)}}{\partial b^{(l, \mathbf{c})}} &= \frac{\partial}{\partial b^{(l, \mathbf{c})}} \left(\sum_{\mathbf{c}'=0}^{\delta c_W^{(l)}} \sum_{\mathbf{y}'=0}^{\delta y_W^{(l)}} \sum_{\mathbf{x}'=0}^{\delta x_W^{(l)}} \left(W_{\mathbf{x}', \mathbf{y}', \mathbf{c}'}^{(l, \mathbf{c})} Z_{\mathbf{x}+\mathbf{x}', \mathbf{y}+\mathbf{y}', \mathbf{c}'}^{(l)} \right) + b^{(l, \mathbf{c})} \right) \\
&= 1
\end{aligned} \tag{37}$$

If we add a bias b to this filter, the formula becomes

$$F_*(\mathbf{x}, \mathbf{y}) = \sum_{\mathbf{y}} \sum_{\mathbf{x}} \left(K(\mathbf{x}, \mathbf{y}) \cdot M(\mathbf{x} + \mathbf{x}, \mathbf{y} + \mathbf{y}) + b \right) \tag{38}$$

Sending this formula through an activation function such as ReLU or the sigmoid function, we obtain the final output feature.

$$F_*(\mathbf{x}, \mathbf{y}) = \text{activation} \left(\sum_{\mathbf{y}} \sum_{\mathbf{x}} \left(K(\mathbf{x}, \mathbf{y}) \cdot M(\mathbf{x} + \mathbf{x}, \mathbf{y} + \mathbf{y}) + b \right) \right) \tag{39}$$

3.2.1 Where is the convolution?

In mathematics, the convolution operation is denoted by $*$ and the convolution s (itself a function) of two functions k and m is defined as

$$s(t) = (k * m)(t) = \int_{-\infty}^{+\infty} k(x) \cdot m(t - x) dx \tag{40}$$

$$s(\mathbf{x}) = (k * m)(\mathbf{x}) = \sum_{\mathbf{x}=-\infty}^{+\infty} k(\mathbf{x}) \cdot m(\mathbf{x} - \mathbf{x}) \tag{41}$$

For continuous (Eq. (40)) and discrete (Eq. (41)) functions respectively. On a computer, we are in practice always working with discrete convolutions so for us the convolution of interest is Eq. (41).

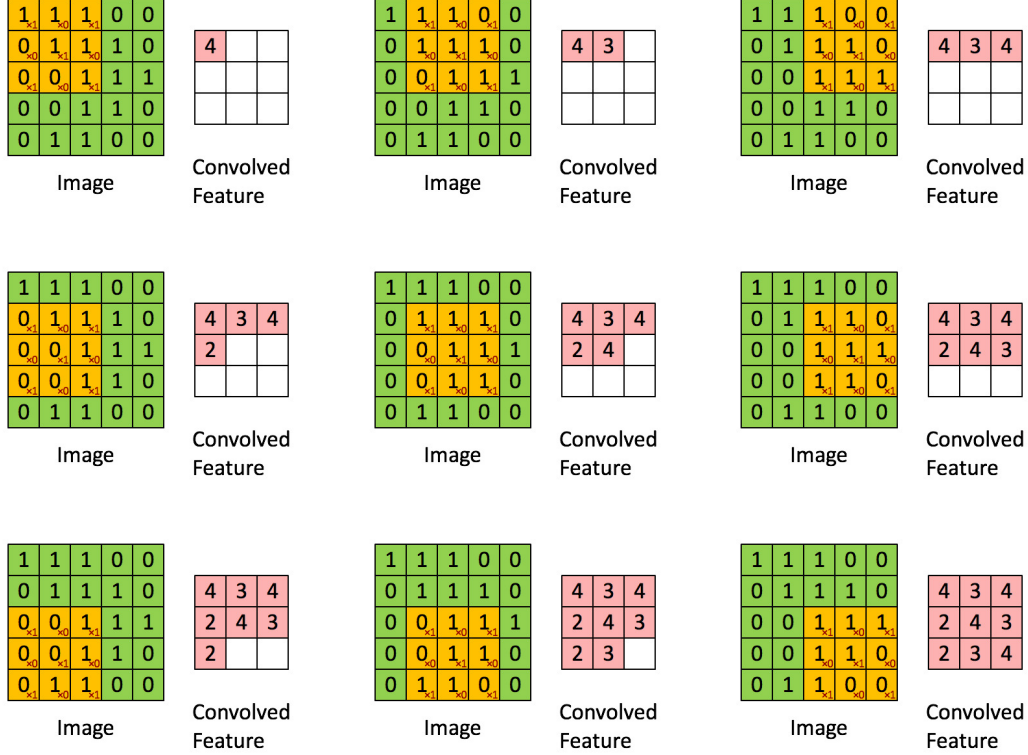


Figure 4 The basic forward operation of a convolutional layer

If we make the functions k and m two dimensional—they take two arguments as their input—their convolution also becomes two dimensional.

$$s(\mathbf{x}, \mathbf{y}) = (k * m)(\mathbf{x}, \mathbf{y}) = \sum_{\mathbf{y}=-\infty}^{+\infty} \sum_{\mathbf{x}=-\infty}^{+\infty} k(\mathbf{x}, \mathbf{y}) \cdot m(\mathbf{x} - \mathbf{x}, \mathbf{y} - \mathbf{y}) \quad (42)$$

Let us known say that k and m are two functions which each index an array of two dimentions. Meaning that the functions take two indexes as their input arguments. Let us further assume that k and m 's arrays are zero at any index but for those contained in a small area. For k that area is $[0..n_x(k) - 1] \times [0..n_y(k) - 1]$ and for m it is $[0..n_x(m) - 1] \times [0..n_y(m) - 1]$. In this case, the convolution of k and m reduces to

$$s(\mathbf{x}, \mathbf{y}) = (k * m)(\mathbf{x}, \mathbf{y}) = \sum_{\mathbf{y}=0}^{n_y(k)-1} \sum_{\mathbf{x}=0}^{n_x(k)-1} k(\mathbf{x}, \mathbf{y}) \cdot m(\mathbf{x} - \mathbf{x}, \mathbf{y} - \mathbf{y}) \quad (43)$$

Where $\mathbf{x} \in [0..n_x(m) - 1]$ and $\mathbf{y} \in [0..n_y(m) - 1]$.

The resemblance to Eq. (34) is already apparent but there is a subtle difference. Eq. (43) subtracts the blue indices from the red ones while Eq. (34) adds them together. The effect of subtracting instead of adding renders the convolution operation $(*)$ commutative.

$$(k * m)(\mathbf{x}, \mathbf{y}) = (m * k)(\mathbf{x}, \mathbf{y})$$

$$\sum_{\mathbf{x}} \sum_{\mathbf{y}} k(\mathbf{x}, \mathbf{y}) \cdot m(\mathbf{x} - \mathbf{x}, \mathbf{y} - \mathbf{y}) = \sum_{\mathbf{x}} \sum_{\mathbf{y}} m(\mathbf{x}, \mathbf{y}) \cdot k(\mathbf{x} - \mathbf{x}, \mathbf{y} - \mathbf{y}) \quad (44)$$

So what is the effect of replacing the pluses in Eq. (34) with minuses? Well at first glance it seems that you cannot do it as you would end up with indexes that are out of bounds for the input image M . But let us assume that M behaves as m meaning that it is zero everywhere where the indices are out of bounds. What you find if you visualize the computation of F using Eq. (43), is that it is effectively the same as using Eq. (34) with the kernel flipped about its horizontal and vertical axes. Which in turn means that flipping the kernel relative to the input, renders the computation of the feature map commutative. But this is a property that is usefull in mathematical contexts and less so for computing neural networks. It is Eq. (34) that is commonly used in machine learning applications and the associated mathematical operations is actually what is called the *cross-correlation*. Despite this, neural networks that implement these kinds of neurons are called convolutional even if the underlying mathematical operations is more often than not a close relative of the proper convolution operation.

3.2.2 Multiple channels

Let us return to Eq. (39) for a minute and ask: what happens if we add some channels to the input? Let us denote the number of channels by n_c . The input and kernel are now multi-channel arrays, their individual entries will be denoted as $K(i, j, c)$ with c ranging in $[0..n_c - 1]$ To calculate the feature map when multiple channels are present, we have to take into account the contribution of each individual channel. We do this by simply adding them together. Since we only want to add the bias of the filter once per entry in the feature map, the resulting modified formula becomes

$$F(x, y) = \text{activation} \left(\sum_y \sum_x \left(\sum_c \left(K(x, y, c) \cdot M(x + x, y + y, c) \right) \right) + b \right) \quad (45)$$

3.2.3 The stride

So far we have considered a feature map produced by scanning the kernel over the input one *step* at a time. As is demonstrated in Figure 4 on page 19. However, we could let the kernel take longer steps instead of moving just one row or one column at a time. The ‘length’ of each step that the kernel takes while moving over the input is what is known as the *stride*. Which we can further divide into the horizontal stride s_x and vertical stride s_y .

What purpose does altering the stride serve? Increasing the stride reduces the size of the resulting feature map since it is computed at fewer areas. Which has the net effect that the *computational complexity* of the neuron is reduced. However, it also means that the neuron studies its input less which can result in vital information in the input being overlooked. This is not a big problem as long as the features of the input is judged to be larger than the kernel that the neuron uses. So long as this is the case, increasing the stride of a neuron can significantly reduce its computational complexity without resulting in it no longer serving its purpose.

Let us now further develop Eq. (45) to take into account variable strides. It is as simple as multiplying the red indices with the strides.

$$F(x, y) = \text{activation} \left(\sum_y \sum_x \left(\sum_c \left(K(x, y, c) \cdot M(xs_x + x, ys_y + y, c) \right) \right) + b \right) \quad (46)$$

3.2.4 Zero padding

If we increase a neurons stride we can shrink the size of the resulting feature map. But it does not allow us to increase the size of the feature map! To do this, a technique known as *zero padding* is

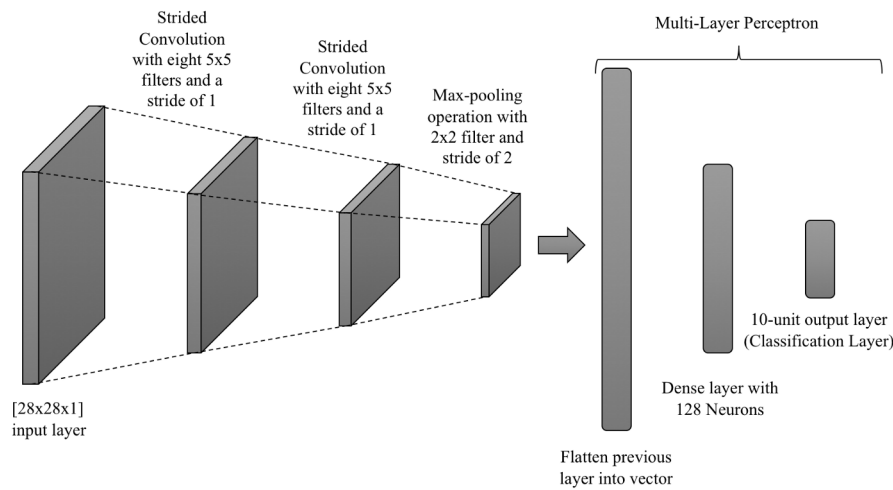


Figure 5 The architecture of the network

used. Instead of working with the input as is, one or more extra outer rows and columns of zeros are added onto it before the kernel is scanned across it. This allows us to increase the size of the resulting feature map.

This technique is predominantly used to make the feature map have the same dimensions as the input image in applications where this is desirable.

3.3 The pooling ‘neuron’

Downsampling and purpose of downsampling. Noise reduction and computational reduction.

3.4 Backward Propagation

Obtain formula for derivative of convolution and pooling.

4 Python Implementation

Known that we have taken a look at the theory behind convolutional neural networks, let us look at an implementation of one. The neural network we are going to be looking at is one written by Alejandro Escontrela. It is written in Python using the NumPy library and is publicly available at <https://github.com/Alescontrela/Numpy-CNN.git>

The network is going to tackle the classic neural network problem. Categorizing the handwritten digits in the MNIST database. Compared to other problems convolutional neural networks are commonly faced with, categorizing the MNIST images is rather simple. So the network will use a comparatively simple architecture as shown in Figure 5 on page 21. The network uses no zero padding. The first two layers consist of two identical convolutional layers. They are in turn followed by a single max-pooling layer which notably, uses a stride of 2. The output is then flattened and passed to a dense layer with 128 neurons. The output of this layer is passed to the final dense layer, which necessarily consists of 10 neurons.

4.1 Convolution function

Here is the python code for the forward convolution operation of the network

```
def convolution(image, filt, bias, s=1):
    '''
    Convolves `filt` over `image` using stride `s`
    '''
    (n_f, n_c_f, f, _) = filt.shape # filter dimensions
    n_c, in_dim, _ = image.shape # image dimensions

    out_dim = int((in_dim - f)/s)+1 # calculate output dimensions

    assert n_c == n_c_f, "Dimensions of filter must match dimensions of input image"

    out = np.zeros((n_f, out_dim, out_dim))

    # convolve the filter over every part of the image, adding the bias at each step.
    for curr_f in range(n_f):
        curr_y = out_y = 0
        while curr_y + f <= in_dim:
            curr_x = out_x = 0
            while curr_x + f <= in_dim:
                out[curr_f, out_y, out_x] = np.sum(filt[curr_f] * image[:, curr_y:curr_y+f,
curr_x:curr_x+f]) + bias[curr_f]
                curr_x += s
                out_x += 1
            curr_y += s
            out_y += 1

    return out
```

4.2 Max pooling

Here is the python code for the forward max-pooling operation of the network

4.3 Various functions

The network uses ReLU for its activation function,

```
def maxpool(image, f=2, s=2):
    '''
    Downsample `image` using kernel size `f` and stride `s`
    '''
    n_c, h_prev, w_prev = image.shape

    h = int((h_prev - f)/s)+1
    w = int((w_prev - f)/s)+1
```

```

    downsampled = np.zeros((n_c, h, w))
    for i in range(n_c):
        # slide maxpool window over each part of the image and assign the max value
        # at each step to the output
        curr_y = out_y = 0
        while curr_y + f <= h_prev:
            curr_x = out_x = 0
            while curr_x + f <= w_prev:
                downsampled[i, out_y, out_x] = np.max(image[i, curr_y:curr_y+f, curr_x:curr_x+f])
                curr_x += s
                out_x += 1
            curr_y += s
            out_y += 1
        return downsampled

def convolutionBackward(dconv_prev, conv_in, filt, s):
    """
    Backpropagation through a convolutional layer.
    """
    (n_f, n_c, f, _) = filt.shape
    (_, orig_dim, _) = conv_in.shape
    ## initialize derivatives
    dout = np.zeros(conv_in.shape)
    dfilt = np.zeros(filt.shape)
    dbias = np.zeros((n_f,1))
    for curr_f in range(n_f):
        # loop through all filters
        curr_y = out_y = 0
        while curr_y + f <= orig_dim:
            curr_x = out_x = 0
            while curr_x + f <= orig_dim:
                # loss gradient of filter (used to update the filter)
                dfilt[curr_f] += dconv_prev[curr_f, out_y, out_x] * conv_in[:, curr_y:curr_y+f,
curr_x:curr_x+f]
                # loss gradient of the input to the convolution operation (conv1 in
the case of this network)
                dout[:, curr_y:curr_y+f, curr_x:curr_x+f] += dconv_prev[curr_f, out_y,
out_x] * filt[curr_f]
                curr_x += s
                out_x += 1
            curr_y += s
            out_y += 1
        # loss gradient of the bias
        dbias[curr_f] = np.sum(dconv_prev[curr_f])

    return dout, dfilt, dbias

def maxpoolBackward(dpool, orig, f, s):
    """

```

Backpropagation through a maxpooling layer. The gradients are passed through the indices of greatest value in the original maxpooling during the forward step.

```
'''
(n_c, orig_dim, _) = orig.shape

dout = np.zeros(orig.shape)

for curr_c in range(n_c):
    curr_y = out_y = 0
    while curr_y + f <= orig_dim:
        curr_x = out_x = 0
        while curr_x + f <= orig_dim:
            # obtain index of largest value in input for current window
            (a, b) = nanargmax(orig[curr_c, curr_y:curr_y+f, curr_x:curr_x+f])
            dout[curr_c, curr_y+a, curr_x+b] = dpool[curr_c, out_y, out_x]

            curr_x += s
            out_x += 1
        curr_y += s
        out_y += 1

    return dout
```

- The problem the network is going to tackle (classic MNIST image recognition)
- The architecture of the network
- Choice of various functions and their associated code
- Results with time performance
- Possible Modifications

5 Conclusion

The advantages of a CNN over a NN.