

# Ejercicio tema 6 (documentación)

## Contenido


TOMCAT WXED .....	1
-------------------	---

### TOMCAT WXED

En primer lugar es necesario descargar tomcat, en este caso he descargado la versión 10.0.27 en formato zip y la extraigo.

Creación del usuario:


En la carpeta conf modificamos el fichero tomcat-users.xml para añadir un usuario que se llame tomcat con contraseña paso y roles manager-gui , admin y admin-gui.



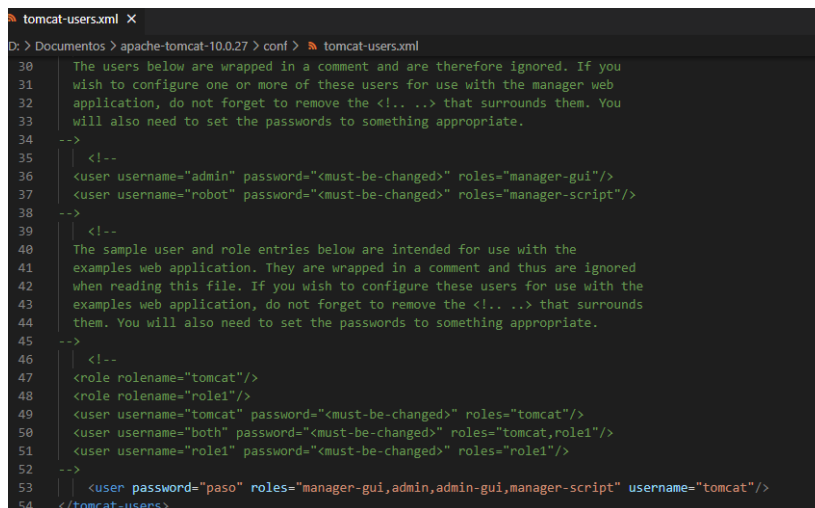


```
tomcat-users.xml X
D:\> Documentos > apache-tomcat-10.0.27 > conf > tomcat-users.xml
30 The users below are wrapped in a comment and are therefore ignored. If you
31 wish to configure one or more of these users for use with the manager web
32 application, do not forget to remove the <!-- ... > that surrounds them. You
33 will also need to set the passwords to something appropriate.
34 -->
35 | <!--
36 | <user username="admin" password="<must-be-changed>" roles="manager-gui"/>
37 | <user username="robot" password="<must-be-changed>" roles="manager-script"/>
38 | -->
39 | <!--
40 | The sample user and role entries below are intended for use with the
41 | examples web application. They are wrapped in a comment and thus are ignored
42 | when reading this file. If you wish to configure these users for use with the
43 | examples web application, do not forget to remove the <!-- ... > that surrounds
44 | them. You will also need to set the passwords to something appropriate.
45 | -->
46 | <!--
47 | <role rolename="tomcat"/>
48 | <role rolename="role1"/>
49 | <user username="tomcat" password="<must-be-changed>" roles="tomcat"/>
50 | <user username="both" password="<must-be-changed>" roles="tomcat,role1"/>
51 | <user username="role1" password="<must-be-changed>" roles="role1"/>
52 | -->
53 | <user password="paso" roles="manager-gui,admin,admin-gui,manager-script" username="tomcat"/>
54 </tomcat-users>
```

Netbeans:

Dentro de la pestaña tools de NetBeans creo un nuevo servidor de tipo tomcat.


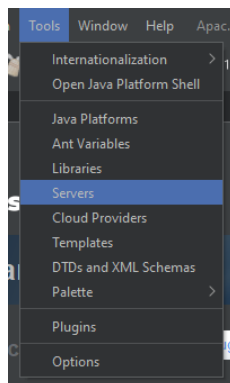


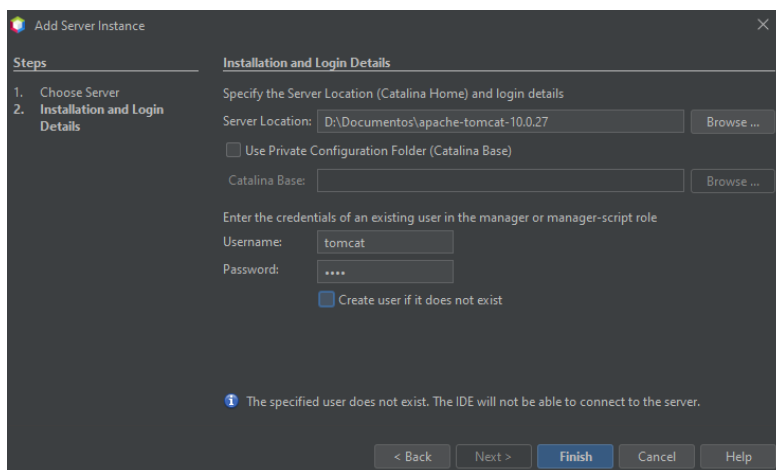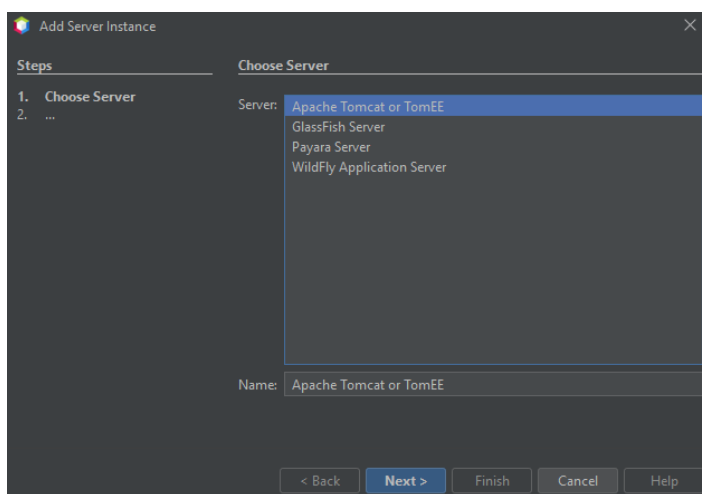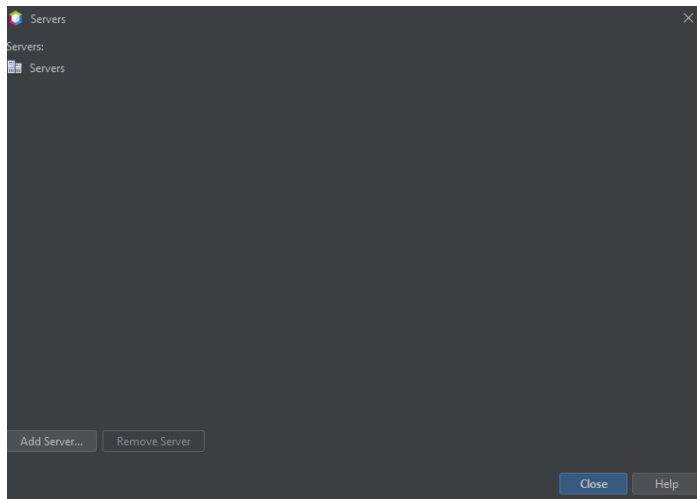




Añadimos el usuario tomcat y la contraseña es paso.

La ruta es donde se ha descomprimido el tomcat.


Comprobamos que todo esta funcionando...

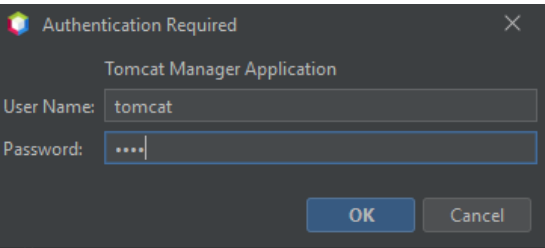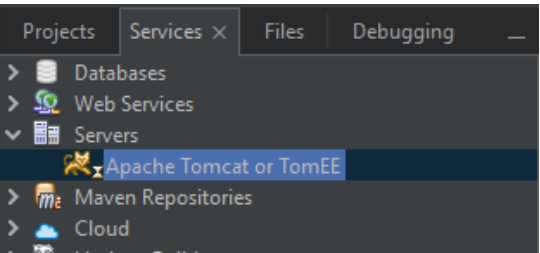


Desde la web permite acceder a todos los apartados:

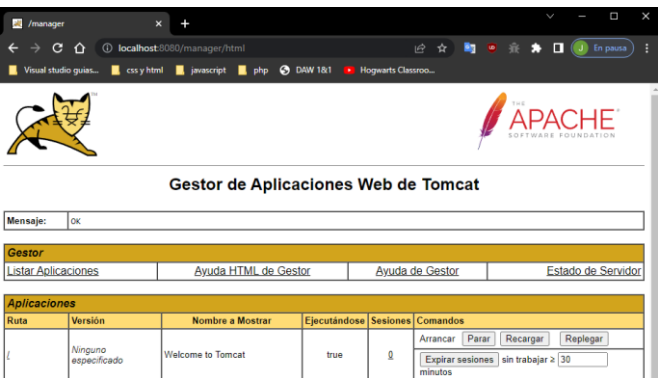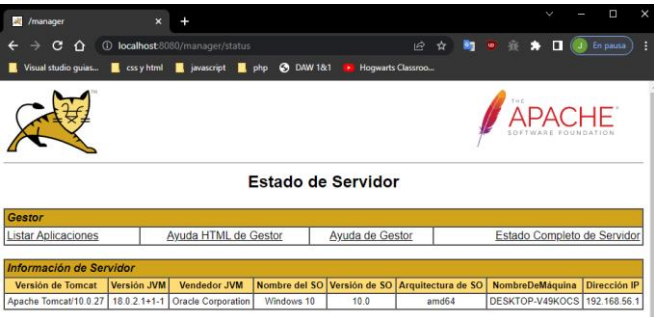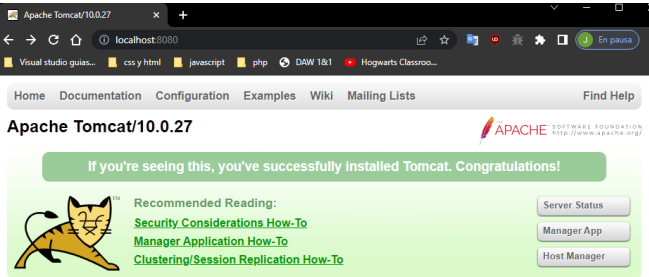


Josué Martínez Fernández

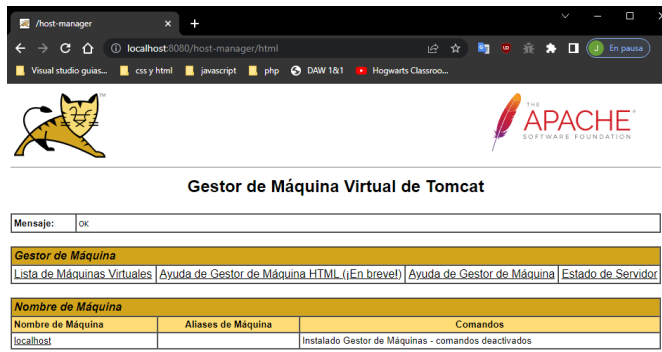

Creamos una nueva aplicación web java

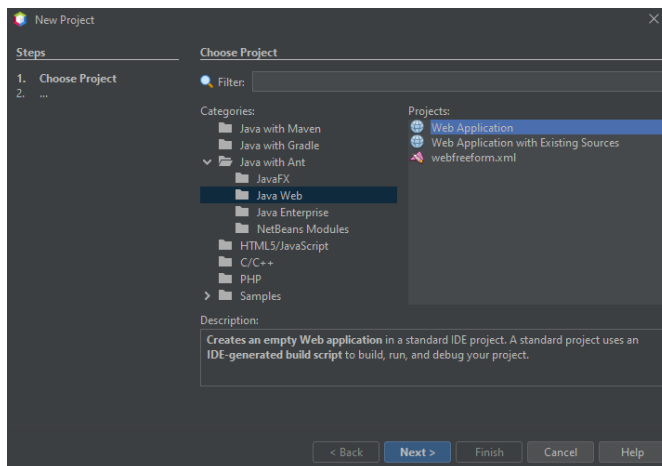


Nombre del proyecto Prueba 1

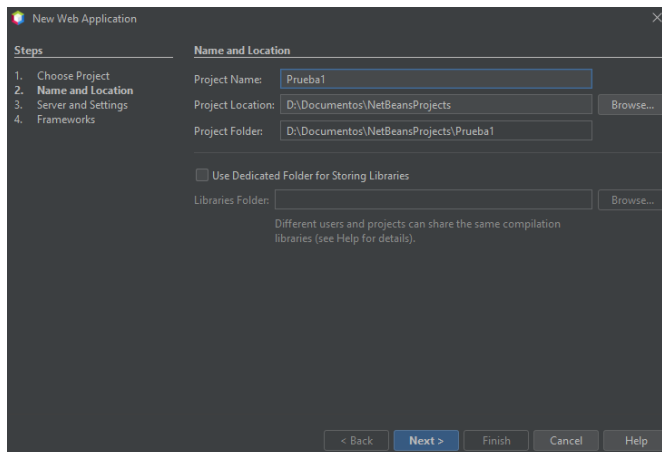


El tipo de servidor es el tomcat


Josué Martínez Fernández

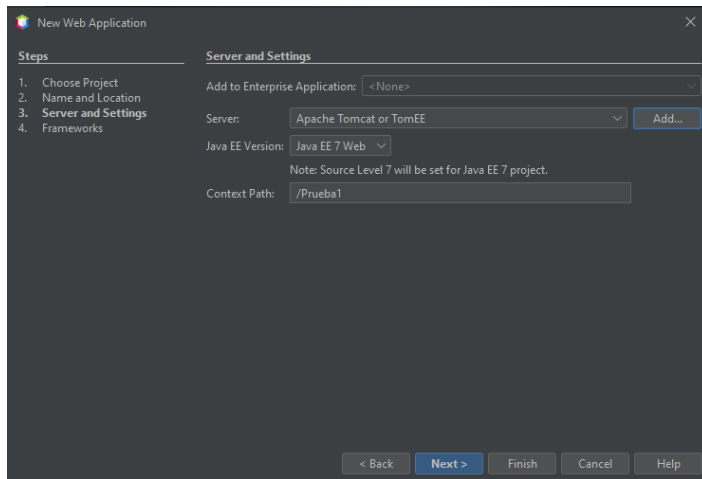



No seleccionamos ningún framework

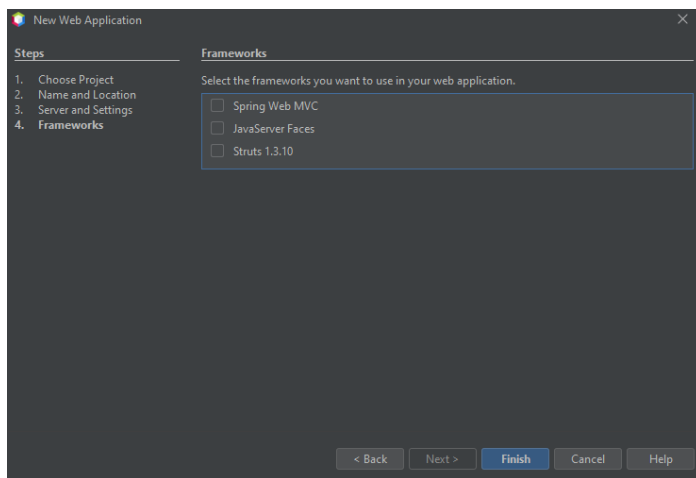


Eliminamos el index.html y creamos un index.jsp en su lugar

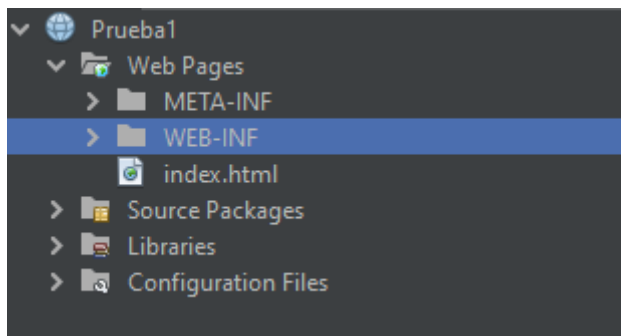


Josué Martínez Fernández

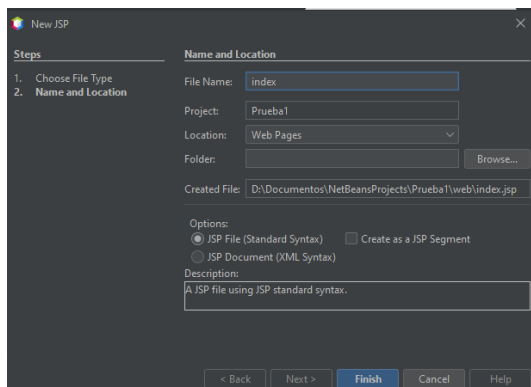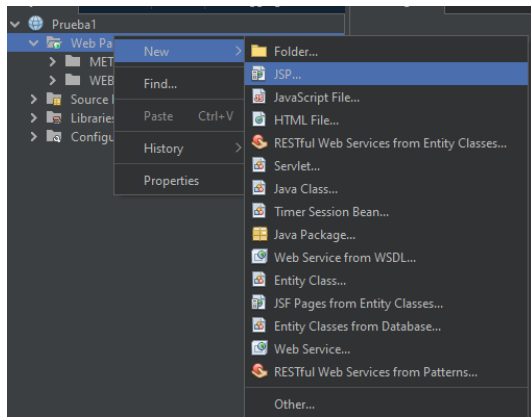

Este es el archivo JSP, contiene código html

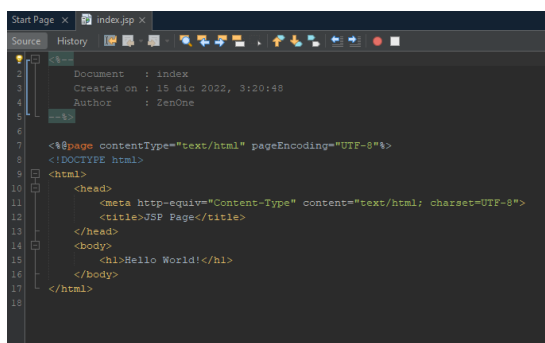

Ejecutamos el archivo

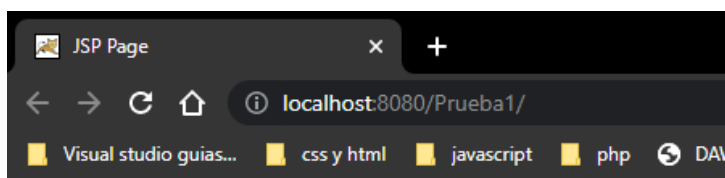

# Hello World!

---