

CTF 6 — Active or Inactive?

Goal: Display different UI depending on a student's status using Angular's conditional rendering.

School Request

"Some students are inactive."

Today's mission introduces `*ngIf`, one of Angular's most important directives. Instead of showing everything all the time, your Student Portal should decide what appears based on data.

You'll also prepare your app for real-world situations like empty lists and loading screens.

Flag 1 — Prepare Your Mission

Objective: Create a new branch for today's challenge.

Create and switch to a new Git branch.

Branch name:

`feature/conditional-ui`

Screenshot:

- The command used to create and switch to the new branch.



```
Problems Output Debug Console Terminal Ports
● PS C:\Users\JOWNIE\OneDrive\Documents\my-first-angular-project> git pull origin main
From https://github.com/Jownieeeeey09/ITFE403A_Malate
* branch      main      -> FETCH_HEAD
Already up to date.
● PS C:\Users\JOWNIE\OneDrive\Documents\my-first-angular-project> git branch feature/conditional-ui
● PS C:\Users\JOWNIE\OneDrive\Documents\my-first-angular-project> git switch feature/conditional-ui
Switched to branch 'feature/conditional-ui'
● PS C:\Users\JOWNIE\OneDrive\Documents\my-first-angular-project> git branch
feature/components
* feature/conditional-ui
feature/event-binding
feature/interpolation
feature/ngFor
main
```

Flag 2 — Give Students a Status

Objective: Add an **active** property to every student.

Each student object should now include a boolean status.

Example idea:

- **true**
- **false**

Make sure some students are active while others are inactive.

Screenshot:

- Your student data showing the new **active** property.

```
✓ @Component({
  selector: 'app-student-list',
  standalone: true,
  imports: [CommonModule],
  templateUrl: './student-list.html',
  styleUrls: ['./student-list.css']
})
✓ export class StudentList {
  ✓ students = [
    { name: 'Mary Beth D. Gracia', course: 'BSIT', yearLevel: '4th Year', isFavorite: false, active: true },
    { name: 'Bonna Mae L. Pitogo', course: 'BSIT', yearLevel: '4th Year', isFavorite: false, active: false },
    { name: 'Niel Jhon E. Celocia', course: 'BSIT', yearLevel: '4th Year', isFavorite: false, active: true },
    { name: 'Kurt Wojtyle S. Rizal', course: 'BSIT', yearLevel: '4th Year', isFavorite: false, active: false }
  ];
}
```

Flag 3 — Reveal Active Students

Objective: Display an "Active" badge only for active students.

Use Angular's ***ngIf** directive.


Hint: The badge should only appear when a student's status is **true**.

Screenshot:

- An active student displaying the badge.

Students

Student directory

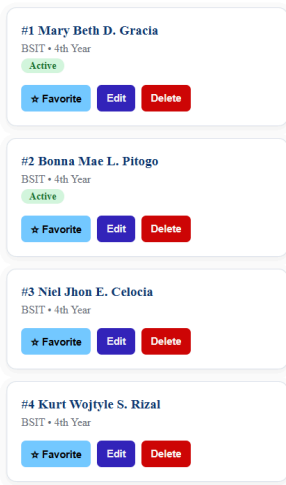

Flag 4 — Expose Inactive Students

Objective: Show a different badge for inactive students.


If a student isn't active, display something like:

- Inactive
- Disabled
- Offline

Use Angular's `else` template with `*ngIf`.

Screenshot:

- One active student.
- One inactive student.

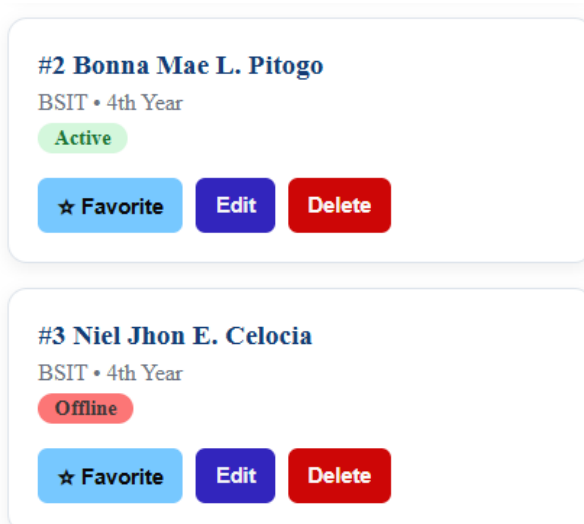

Flag 5 — Lock Inactive Actions

Objective: Prevent inactive students from using actions.

Choose one action button such as:

- Edit
- Favorite
- Delete

Only show or enable that button when the student is active.


Hint: `*ngIf` can hide elements completely.

Screenshot:

- Active student with the button visible.
- Inactive student with the button hidden or disabled.

Students

Student directory

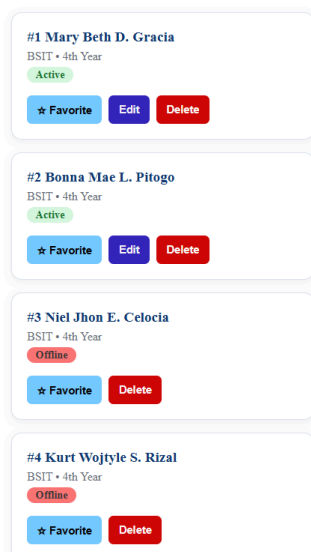

Flag 6 — Build an Empty State

Objective: Prepare for when there are no students.

If the student list becomes empty, display a friendly message instead of blank space.

Example ideas:

No students found.

Add your first student.

Hint: Check the array's length with `*ngIf`.


Screenshot:

- Student list before becoming empty.
- Empty-state message after removing all students.

BEFORE:

Students

Student directory

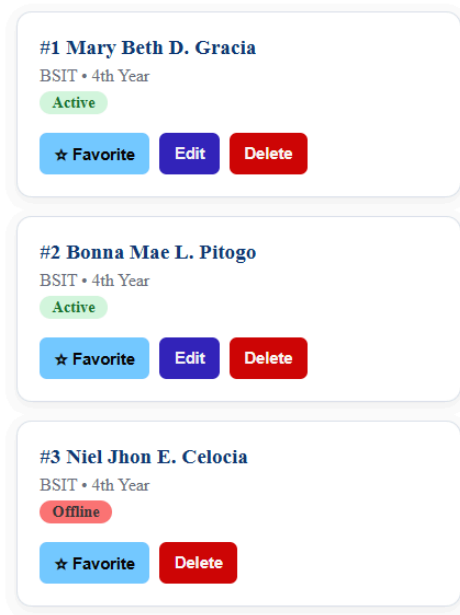

AFTER

Students

Student directory

Kurt Wojtyle S. Rizal was removed from the list.

No students found.
Add your first student to get started.

Flag 7 — Simulate Loading

Objective: Create a fake loading screen.

Before displaying the Student Portal, show a loading message.

Ideas:

- Loading students...
- Spinner icon
- Skeleton cards

After changing the loading variable, the student list should appear.

Hint: Use a boolean variable with `*ngIf`.

Screenshot:

- Loading screen.
- Student Portal after loading.

Students

Student directory

Loading students...

Students

Student directory

#1 Mary Beth D. Gracia

BSIT • 4th Year

Active

★ Favorite

Edit

Delete

#2 Bonna Mae L. Pitogo

BSIT • 4th Year

Active

★ Favorite

Edit

Delete

#3 Niel Jhon E. Celocia

BSIT • 4th Year

Offline

★ Favorite

Delete

#4 Kurt Wojtyle S. Rizal

BSIT • 4th Year

Offline

★ Favorite

Delete

Flag 8 — Mission Complete

Objective: Your Student Portal should now display different UI depending on its current state.

Checklist

- Students have an `active` property.
- Active students display an Active badge.
- Inactive students display an Inactive badge.
- At least one action changes based on student status.
- An empty-state message appears when no students exist.
- A loading screen appears before the student list.

Screenshot:

- Your completed Student Portal showing active and inactive students, conditional badges, loading state, and empty state working correctly.

Don Bosco Student Portal



Student ID: 23017616

Year Level: 4th Year

Nickname: YANG-YANG

Grade: 1.5
Passed

Stay updated with the latest school information

Enrollment for the First Semester AY 2026-2027 will end on August 08, 2026. Please complete your requirements on time.

August 01, 2026

Posted by: Student Affairs Office

Pin Delete

Registration for the annual Intramurals is now open. Students may register for sports and cultural events until September 05, 2026.

© 2026 Don Bosco Technical College - Cebu

Student directory

BSIT • 4th Year

☆ Favorite

Edit

Delete

BSIT • 4th Year

☆ Favorite

Edit

Delete

BSIT • 4th Year

☆ Favorite

Delet

BSIT • 4th Year

☆ Favorite

Delet

[Student directory](#)

No students found.
Add your first student to get started.


Student directory

Loading students...

Flag 9 — Commit Your Progress

Final Flag Screenshot

- Successful push to `feature/conditional-ui`

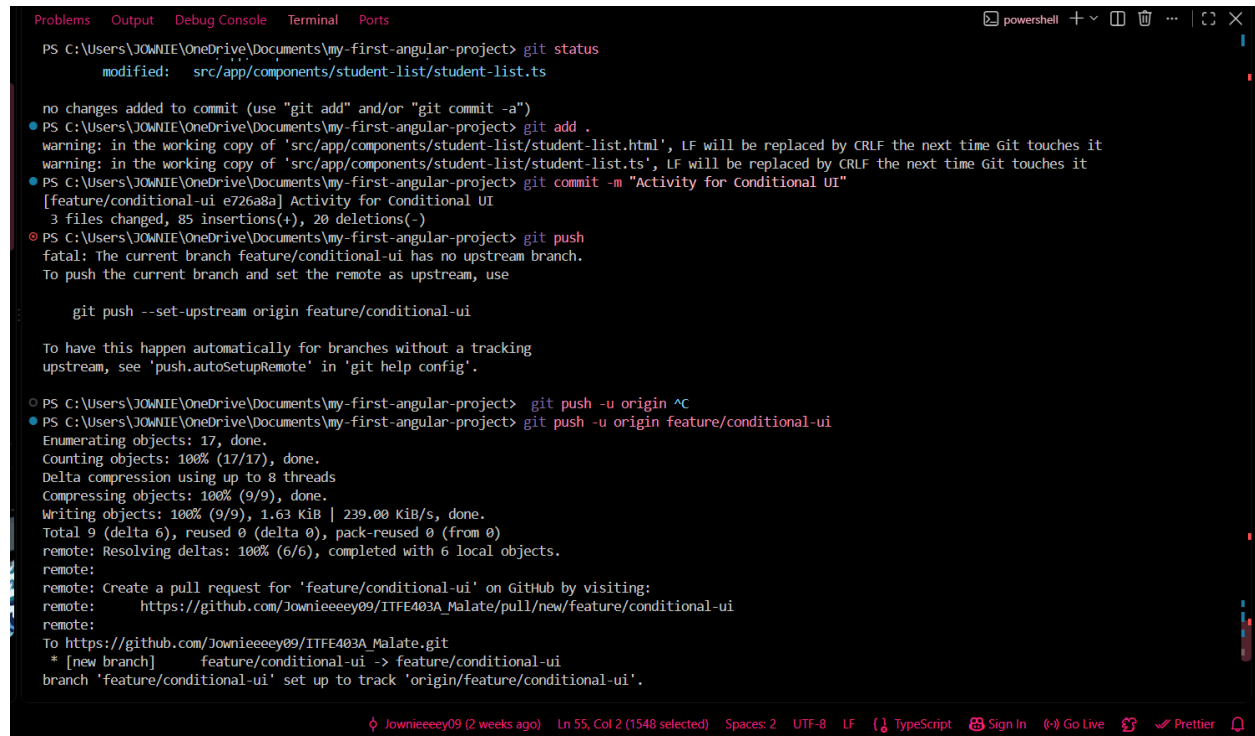

```
Problems Output Debug Console Terminal Ports
PS C:\Users\JOWNIEE\OneDrive\Documents\my-first-angular-project> git status
modified:   src/app/components/student-list/student-list.ts

no changes added to commit (use "git add" and/or "git commit -a")
• PS C:\Users\JOWNIEE\OneDrive\Documents\my-first-angular-project> git add .
warning: in the working copy of 'src/app/components/student-list/student-list.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/components/student-list/student-list.ts', LF will be replaced by CRLF the next time Git touches it
• PS C:\Users\JOWNIEE\OneDrive\Documents\my-first-angular-project> git commit -m "Activity for Conditional UI"
[feature/conditional-ui e726a8a] Activity for Conditional UI
3 files changed, 85 insertions(+), 20 deletions(-)
• PS C:\Users\JOWNIEE\OneDrive\Documents\my-first-angular-project> git push
fatal: The current branch feature/conditional-ui has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin feature/conditional-ui

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetUpRemote' in 'git help config'.

• PS C:\Users\JOWNIEE\OneDrive\Documents\my-first-angular-project> git push -u origin ^C
• PS C:\Users\JOWNIEE\OneDrive\Documents\my-first-angular-project> git push -u origin feature/conditional-ui
Enumerating objects: 17, done.
Counting objects: 100% (17/17), done.
Delta compression using up to 8 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (9/9), 1.63 KiB | 239.00 KiB/s, done.
Total 9 (delta 6), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (6/6), completed with 6 local objects.
remote:
remote: Create a pull request for 'feature/conditional-ui' on GitHub by visiting:
remote:   https://github.com/Jownieeey09/ITFE403A_Malate/pull/new/feature/conditional-ui
remote:
To https://github.com/Jownieeey09/ITFE403A_Malate.git
 * [new branch]      feature/conditional-ui -> feature/conditional-ui
branch 'feature/conditional-ui' set up to track 'origin/feature/conditional-ui'.
```