


Flag 1 – Prepare Your Environment

Objective: Install Node.js.

Screenshot:

- The command/The installer required for installing Node.js
- Run :
node -v
npm -v

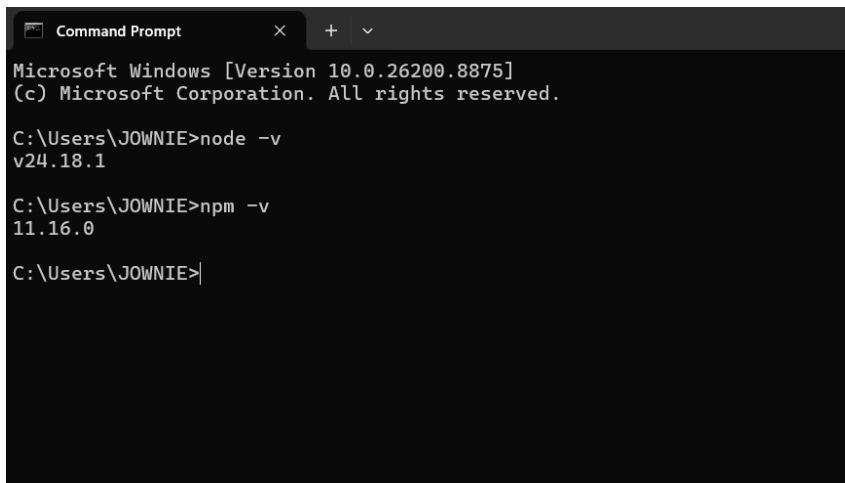

```
Command Prompt
Microsoft Windows [Version 10.0.26200.8875]
(c) Microsoft Corporation. All rights reserved.

C:\Users\JOWNIE>node -v
v24.18.1

C:\Users\JOWNIE>npm -v
11.16.0

C:\Users\JOWNIE>
```

Flag 2 — Unlock the Forge

Objective: Install Angular CLI.

Screenshot:

- The command to install the CLI
- Then run:
ng version

```
Command Prompt
C:\Users\JOWNIE>npm install -g @angular/cli
npm warn ERESOLVE overriding peer dependency
npm warn While resolving: @listr2/prompt-adapter-inquirer@4.2.4
npm warn Found: listr2@10.2.2
npm warn   node_modules/@angular/cli/node_modules/listr2
npm warn   listr2@"10.2.2" from @angular/cli@22.1.2
npm warn   node_modules/@angular/cli
npm warn   @angular/cli@"*" from the root project
npm warn
npm warn Could not resolve dependency:
npm warn peer listr2@"10.2.1" from @listr2/prompt-adapter-inquirer@4.2.4
npm warn   node_modules/@angular/cli/node_modules/@listr2/prompt-adapter-inquirer
npm warn   @listr2/prompt-adapter-inquirer@"4.2.4" from @angular/cli@22.1.2
npm warn   node_modules/@angular/cli
npm warn
npm warn Conflicting peer dependency: listr2@10.2.1
npm warn   node_modules/listr2
npm warn peer listr2@"10.2.1" from @listr2/prompt-adapter-inquirer@4.2.4
npm warn   node_modules/@angular/cli/node_modules/@listr2/prompt-adapter-inquirer
npm warn   @listr2/prompt-adapter-inquirer@"4.2.4" from @angular/cli@22.1.2
npm warn   node_modules/@angular/cli
added 180 packages in 34s

65 packages are looking for funding
  run `npm fund` for details
npm notice
npm notice New major version of npm available! 11.16.0 -> 12.0.2
npm notice Changelog: https://github.com/npm/cli/releases/tag/v12.0.2
npm notice To update run: npm install -g npm@12.0.2
npm notice
C:\Users\JOWNIE>
```

```
C:\Windows\system32\cmd.e: X + v
npm notice
npm notice New major version of npm available! 11.16.0 -> 12.0.2
npm notice Changelog: https://github.com/npm/cli/releases/tag/v12.0.2
npm notice To update run: npm install -g npm@12.0.2
npm notice
C:\Users\JOWNIE>ng version

Angular CLI
Node.js      : 24.18.1
Package Manager : npm 11.16.0
Operating System : win32 x64

C:\Users\JOWNIE>
```

Flag 3 — Forge Your Project

Objective: Create your first Angular project.

Screenshot:

- The command to create the project

```
C:\Windows\system32\cmd.exe X + v

C:\Users\JOWNIE\OneDrive\Documents>ng new my-first-angular-project

Would you like to share pseudonymous usage data about this project with the Angular Team at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more details and how to change this setting, see https://angular.dev/cli/analytics.

Yes

Thank you for sharing pseudonymous usage data. Should you change your mind, the following command will disable this feature entirely:

  ng analytics disable --global

Global setting: enabled
Local setting: No local workspace configuration file.
Effective status: enabled
/ Which stylesheet system would you like to use? CSS [ https://developer.mozilla.org/docs/Web/CSS ]
/ Do you want to enable Server-Side Rendering (SSR) and Static Site Generation (SSG/Prerendering)? No
/ Which AI tools should Angular integrate with? https://angular.dev/ai/development-with-ai None
CREATE my-first-angular-project/.prettierrc (173 bytes)
CREATE my-first-angular-project/angular.json (2030 bytes)
CREATE my-first-angular-project/package.json (800 bytes)
CREATE my-first-angular-project/README.md (1533 bytes)
CREATE my-first-angular-project/tsconfig.json (939 bytes)
CREATE my-first-angular-project/.editorconfig (331 bytes)
CREATE my-first-angular-project/.gitignore (666 bytes)
CREATE my-first-angular-project/tsconfig.app.json (412 bytes)
CREATE my-first-angular-project/tsconfig.spec.json (423 bytes)
CREATE my-first-angular-project/.vscode/extensions.json (134 bytes)
CREATE my-first-angular-project/.vscode/launch.json (490 bytes)
CREATE my-first-angular-project/.vscode/tasks.json (1020 bytes)
CREATE my-first-angular-project/src/main.ts (228 bytes)
CREATE my-first-angular-project/src/index.html (320 bytes)
CREATE my-first-angular-project/src/styles.css (81 bytes)
CREATE my-first-angular-project/src/app/app.spec.ts (714 bytes)
CREATE my-first-angular-project/src/app/app.ts (318 bytes)
CREATE my-first-angular-project/src/app/app.css (0 bytes)
CREATE my-first-angular-project/src/app/app.html (20488 bytes)
CREATE my-first-angular-project/src/app/app.config.ts (324 bytes)
CREATE my-first-angular-project/src/app/app.routes.ts (80 bytes)
CREATE my-first-angular-project/public/favicon.ico (15086 bytes)
/ Packages installed successfully.
node:events:487
  throw er; // Unhandled 'error' event
  ^

Error: spawn git ENOENT
    at ChildProcess._handle.onexit (node:internal/child_process:287:19)
    at onErrorNT (node:internal/child_process:508:16)
    at process.processTicksAndRejections (node:internal/process/task_queues:90:21)
```

```
Error: spawn git ENOENT
    at ChildProcess._handle.onexit (node:internal/child_process:287:19)
    at onErrorNT (node:internal/child_process:508:16)
    at process.processTicksAndRejections (node:internal/process/task_queues:90:21)
Emitted 'error' event on ChildProcess instance at:
    at ChildProcess._handle.onexit (node:internal/child_process:293:12)
    at onErrorNT (node:internal/child_process:508:16)
    at process.processTicksAndRejections (node:internal/process/task_queues:90:21) {
  errno: -4058,
  code: 'ENOENT',
  syscall: 'spawn git',
  path: 'git',
  spawnargs: [ '--version' ]
}

Node.js v24.18.1

C:\Users\JOWNIE\OneDrive\Documents>
```

Flag 4 — Power Up


Objective: Open the project in VS Code.

Screenshot:

- Your VS Code containing the new project

```
C:\Users\JOWNIE\OneDrive\Documents>cd
C:\Users\JOWNIE\OneDrive\Documents

C:\Users\JOWNIE\OneDrive\Documents>cd my-first-angular-project
C:\Users\JOWNIE\OneDrive\Documents\my-first-angular-project>code .
C:\Users\JOWNIE\OneDrive\Documents\my-first-angular-project>|
```

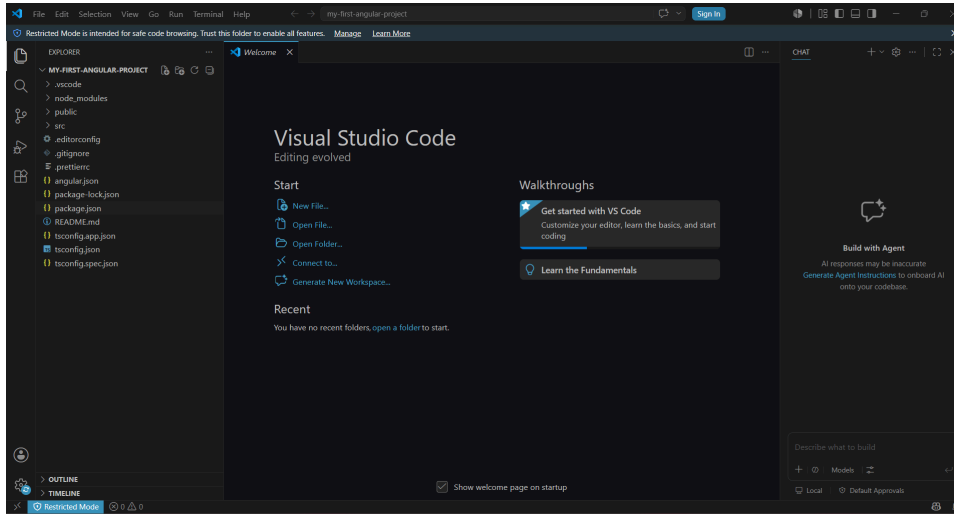

Flag 5 — Launch

Objective: Run the development server.

Screenshot:

- The command to run the development server
- The success message

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\JOWNIE\OneDrive\Documents\my-first-angular-project> ng serve

Would you like to share pseudonymous usage data about this project with the Angular Team
at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more
details and how to change this setting, see https://angular.dev/cli/analytics.

No
Global setting: enabled
Local setting: disabled
Effective status: disabled
Initial chunk files | Names | Raw size
main.js | main | 48.73 kB |
styles.css | styles | 95 bytes |
| Initial total | 48.83 kB

Application bundle generation complete. [7.173 seconds] - 2026-07-31T07:33:16.259Z

Watch mode enabled. Watching for file changes...
NOTE: Raw file sizes do not reflect development server per-request transformations.
→ Local: http://localhost:4200/
→ press h + enter to show help


3:33:18 PM [vite] (client) [optimizer] bundling dependencies...
```

Flag 6 — I See It

Objective: Open the application.

Screenshot:

- The browser
- The port it opened

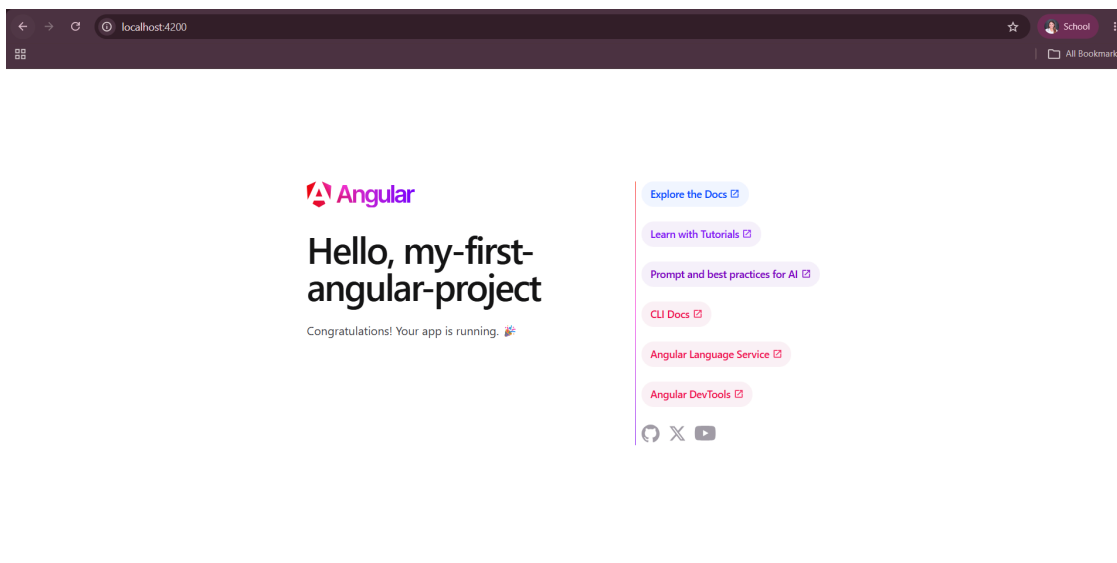


Flag 7 – Find the Entry Point

Objective: Figure out where the default Angular page comes from.

Screenshot:

- The location of the file where the default page is from

From the src/app/app.html

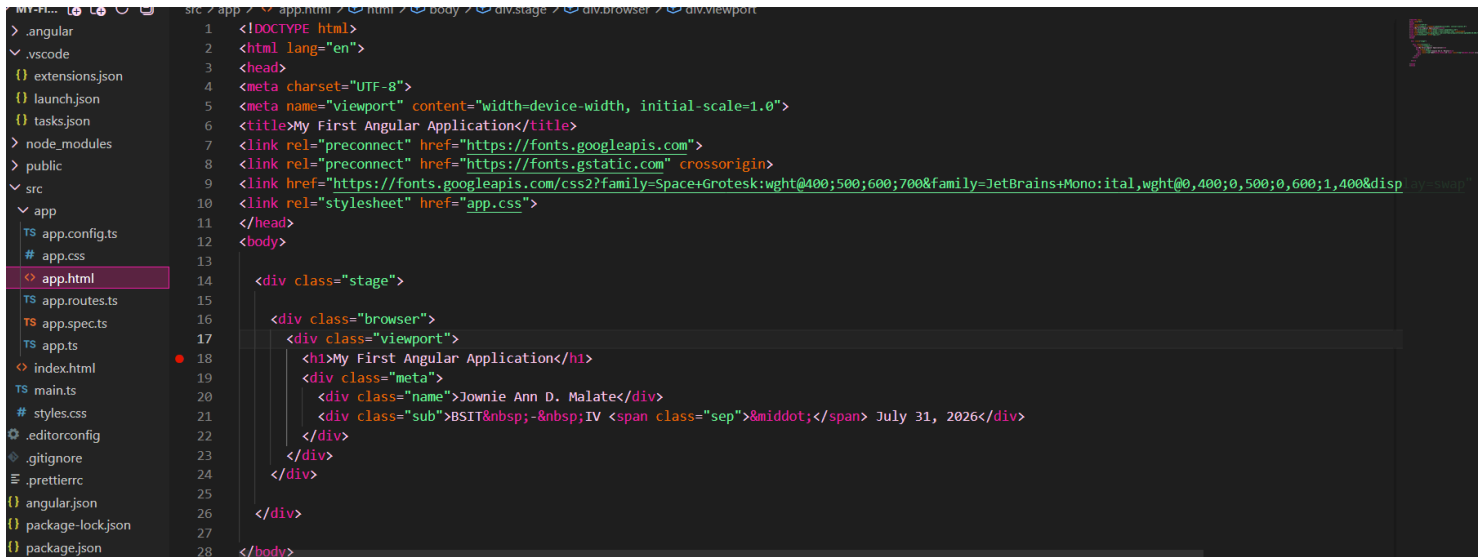

The screenshot shows a code editor with a file explorer on the left and a code editor on the right. The file explorer shows the project structure, with the file `src/app/app.html` selected. The code editor displays the content of `src/app/app.html`, which is an HTML file for an Angular application. The code includes a DOCTYPE declaration, a meta charset declaration, a meta viewport declaration, a title, and several link declarations for preconnect, stylesheet, and fonts. The body contains a div with class "stage" which contains a div with class "browser" which contains a div with class "viewport" which contains an h1, a meta div, and a sub div with a span and a date.

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <title>My First Angular Application</title>
7 <link rel="preconnect" href="https://fonts.googleapis.com">
8 <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
9 <link href="https://fonts.googleapis.com/css2?family=Space+Grotesk:wght@400;500;600;700&family=JetBrains+Mono:ital,wght@0,400;0,500;0,600;1,400&display=swap" rel="stylesheet">
10 <link rel="stylesheet" href="app.css">
11 </head>
12 <body>
13
14 <div class="stage">
15
16 <div class="browser">
17 <div class="viewport">
18 <h1>My First Angular Application</h1>
19 <div class="meta">
20 <div class="name">Jownie Ann D. Malate</div>
21 <div class="sub">BSIT&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&IV <span class="sep">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&</span> July 31, 2026</div>
22 </div>
23 </div>
24 </div>
25
26 </div>
27
28 </body>
```

Flag 8 – Claim Your App

Replace the default content with:

- Your full name
- Your course & section
- "My First Angular Application"
- Today's date

Screenshot:

- Your updated content of the code
- The updated browser UI

My First Angular Application

Jownie Ann D. Malate

BSIT - IV • July 31, 2026

Flag 9 – Personalize It

Without following a step-by-step tutorial, make **at least three** visual changes by researching how.

Examples:

- Change the background colour.
- Change the text colour.
- Centre the content.
- Increase font size.
- Add a border or rounded card.
- Change the font.
- Add an emoji or icon.

Screenshot:

- The code changed for personalizing
- The updated browser UI

```
MY-FIRST-ANGULAR-PROJ... src > app > # app.css > root
1 :root{
2   --bg: #1a0e16;
3   --panel: #241320;
4   --panel-line: #2a1f33;
5   --text-primary: #f7e8f0;
6   --text-secondary: #c88aa8;
7   --text-faint: #6b3a55;
8   --accent: #ff3d81;
9   --accent-dim: #7a1c47;
10  --accent-soft: #ff8fc0;
11  --success: #ff5fa2;
12 }
13
14 *{ margin:0; padding:0; box-sizing:border-box; }
15
16 html,body{
17   height:100%;
18 }
19
20 body{
21   background:
22     radial-gradient(circle at 1px 1px, rgba(255,143,192,0.05) 1px, transparent 0) 0 0/28px 28px,
23     var(--bg);
24   color: var(--text-primary);
25   font-family: 'JetBrains Mono', monospace;
26   min-height:100vh;
27   display:flex;
28   align-items:center;
```



Flag 10 – Add an Image

Research how to display an image in Angular.

It can be:

- Your favourite programming logo.
- Your favourite animal.
- Your own avatar.
- Any royalty-free image.

Screenshot:

- The code changed when adding an image
- The updated



```

src / app / < app.html / < body
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <title>My First Angular Applications</title>
7 <link rel="preconnect" href="https://fonts.googleapis.com">
8 <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
9 <link href="https://fonts.googleapis.com/css2?family=Playfair+Display:wght@600;700;800&family=Inter:wght@400;500;600&family=Space+Grotesk:wght@400;500;600;700;800" rel="stylesheet" href="app.css">
10 </head>
11 <body>
12
13
14 <div class="stage">
15
16 <div class="browser">
17 <div class="viewport">
18 <div class="portrait">
19 
20 </div>
21 <div class="eyebrow">Compiled successfully</div>
22 <h1>My First Angular Application</h1>
23 <div class="meta">
24 <div class="name">Jownie Ann D. Malate</div>
25 <div class="sub">BSIT&nbsp;-&nbsp;IV</div>
26 <div class="sep">July 31,2026</div>
27 </div>
28 </div>

```