


(a) The same target offset, reached two ways

RAP (as released)

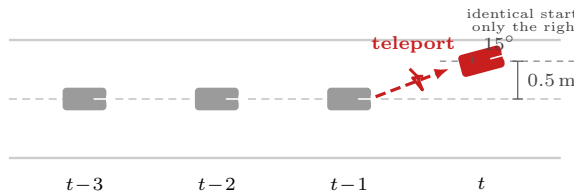


history frames unperturbed  $\Rightarrow \hat{\xi} \approx s_0 - \kappa(s_{-1}, a_{-1})$  is directly readable (shortcut)

$$\omega = 0.26 \text{ rad}/0.5 \text{ s} = 0.52 \text{ rad/s}$$

$$\Rightarrow a_{\text{lat}} = v\omega|_{v=20} \approx 10.5 \text{ m/s}^2$$

beyond friction limit – unreachable


KRP (ours)

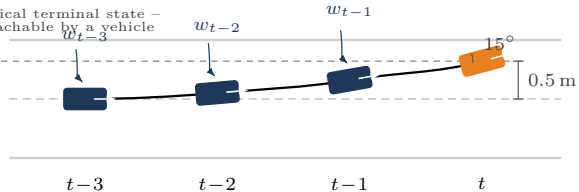

$$s_{k+1} = \kappa(s_k, a_k^{\text{log}} + w_k)$$

feasible by construction; history is re-rendered consistently

(b) Gradient-based mining of  $w^*$ , and its use in training

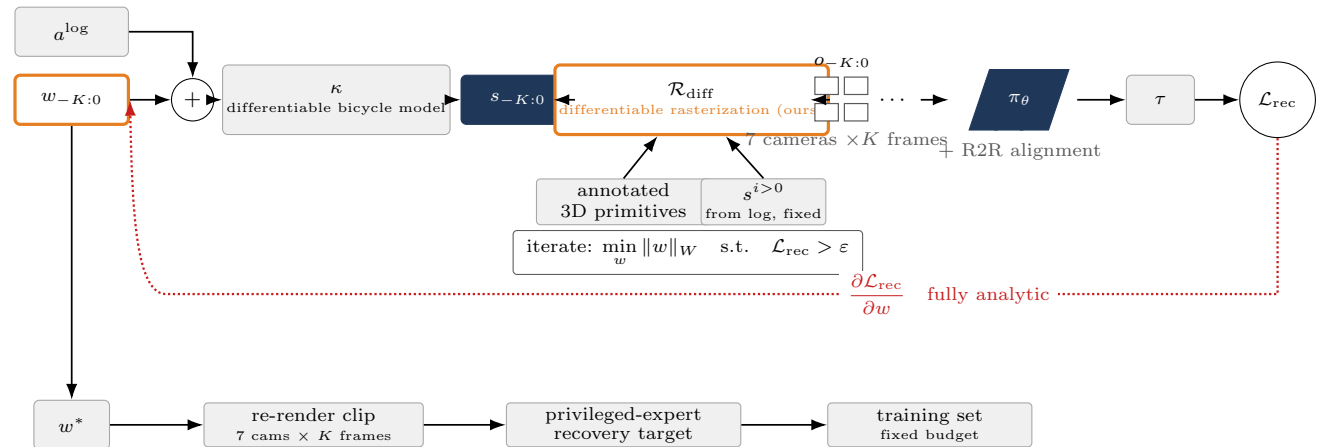

Legend

- $\longrightarrow$  forward computation
- $\cdots \longrightarrow$  gradient flow
- our contribution