


include/mtk_uni_stg
_grid_1d.h

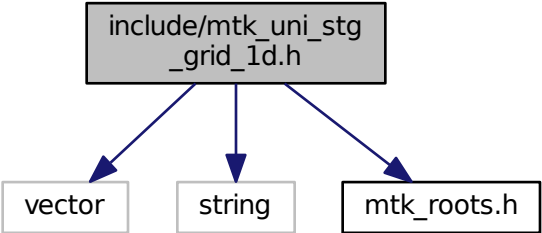

```
graph TD; A["include/mtk_uni_stg_grid_1d.h"] --> B["vector"]; A --> C["string"]; A --> D["mtk_roots.h"];
```

The diagram illustrates the dependencies of the header file `include/mtk_uni_stg_grid_1d.h`. It is represented by a grey rectangular box at the top. Three blue arrows originate from the bottom of this box and point to three separate white rectangular boxes below it. The first arrow points to the box labeled `vector`, the second to the box labeled `string`, and the third to the box labeled `mtk_roots.h`. This visualizes the preprocessor directives `#include <vector>`, `#include <string>`, and `#include "mtk_roots.h"` within the header file.

vector

string

mtk_roots.h