

MMI Assignment

SOLUTION KEY

Justin Pomeranz

This is the KEY

Problem 1: pi_EPTnoB

```
## 'summarise()' has grouped output by 'site_code'. You can override using the
## '.groups' argument.
```

```
## # A tibble: 8 x 2
##   site_code s_pi_no_b
##   <chr>      <dbl>
## 1 A55        56.0
## 2 A60        18.8
## 3 A68        36.4
## 4 A72       110.
## 5 A73       110.
## 6 A73EC     119.
## 7 A75CC      80.8
## 8 A75D      93.0
```

Problem 2: ClingerTax

```
## # A tibble: 8 x 2
##   site_code s_cling
##   <chr>      <dbl>
## 1 A55        55
## 2 A60        40
## 3 A68        65
## 4 A72        25
## 5 A73        35
## 6 A73EC      65
## 7 A75CC      90
## 8 A75D       35
```

Problem 3: IntolerantTax

```
## # A tibble: 8 x 2
##   site_code s_intol
##   <chr>      <dbl>
## 1 A55       42.9
## 2 A60       33.3
```

```
## 3 A68          61.9
## 4 A72          19.0
## 5 A73          23.8
## 6 A73EC        57.1
## 7 A75CC        66.7
## 8 A75D         23.8
```

Problem 4: PredatorTax

```
## # A tibble: 8 x 2
##   site_code s_pred
##   <chr>      <dbl>
## 1 A55        46.2
## 2 A60        30.8
## 3 A68        46.2
## 4 A72        23.1
## 5 A73        23.1
## 6 A73EC      69.2
## 7 A75CC      92.3
## 8 A75D       23.1
```

Problem 5: pi_ScraperTax

```
## 'summarise()' has grouped output by 'site_code'. You can override using the
## '.groups' argument.
```

```
## # A tibble: 7 x 2
##   site_code s_scrape
##   <chr>      <dbl>
## 1 A55        46.2
## 2 A60         9.31
## 3 A68        46.0
## 4 A73         8.34
## 5 A73EC      57.2
## 6 A75CC      58.8
## 7 A75D      78.6
```

Problem 6: Metrics from Tutorial

```
## # A tibble: 8 x 2
##   site_code s_total_tax
##   <chr>      <dbl>
## 1 A55        61.9
## 2 A60        42.9
## 3 A68         50
## 4 A72        28.6
## 5 A73        45.2
## 6 A73EC      61.9
## 7 A75CC     105.
## 8 A75D       45.2
```

```
## # A tibble: 8 x 2
##   site_code s_ept_tax
##   <chr>      <dbl>
## 1 A55         57.1
## 2 A60         44.9
## 3 A68         57.1
## 4 A72         24.5
## 5 A73         36.7
## 6 A73EC       61.2
## 7 A75CC       77.6
## 8 A75D        36.7
```

'summarise()' has grouped output by 'site_code', 'tot_n'. You can override
using the '.groups' argument.


```
## # A tibble: 8 x 2
##   site_code s_pi_sens
##   <chr>      <dbl>
## 1 A55         41.1
## 2 A60         11.8
## 3 A68         37.2
## 4 A72         96.4
## 5 A73         29.1
## 6 A73EC       53.4
## 7 A75CC       58.0
## 8 A75D        44.5
```

Problem 7: Mean MMMI and site info

```
## Joining with 'by = join_by(site_code)'  
## Joining with 'by = join_by(site_code)'  
## Joining with 'by = join_by(site_code)'  
## Joining with 'by = join_by(site_code)'  
## Joining with 'by = join_by(site_code)'  
## Joining with 'by = join_by(site_code)'  
## Joining with 'by = join_by(site_code)'
```

```
## # A tibble: 8 x 6
## # Rowwise:
##   site_code mmi_mean river_name pairwise distance impact_category
##   <chr>      <dbl> <chr>      <chr>      <dbl> <chr>
## 1 A55         53.4 Animas River - Howardsvi~ <NA>      1 reference
## 2 A60         33.2 Animas River - Below Arr~ <NA>      2 reference
## 3 A68         48.1 Animas River - Above Cem~ Animas_~  3 reference
## 4 A72         49.8 Animas River - Below Sil~ Animas_~  4 impacted
## 5 A73         37.0 Animas River - Above Elk~ Elk_Cr    5 impacted
## 6 A73EC       58.8 Elk Creek           Elk_Cr    NA reference
## 7 A75CC       80.1 Cascade Creek         Cascade~  NA reference
## 8 A75D        42.2 Animas River - Above Cas~ Cascade~  6 impacted
```

Problem 7: Pairwise plots

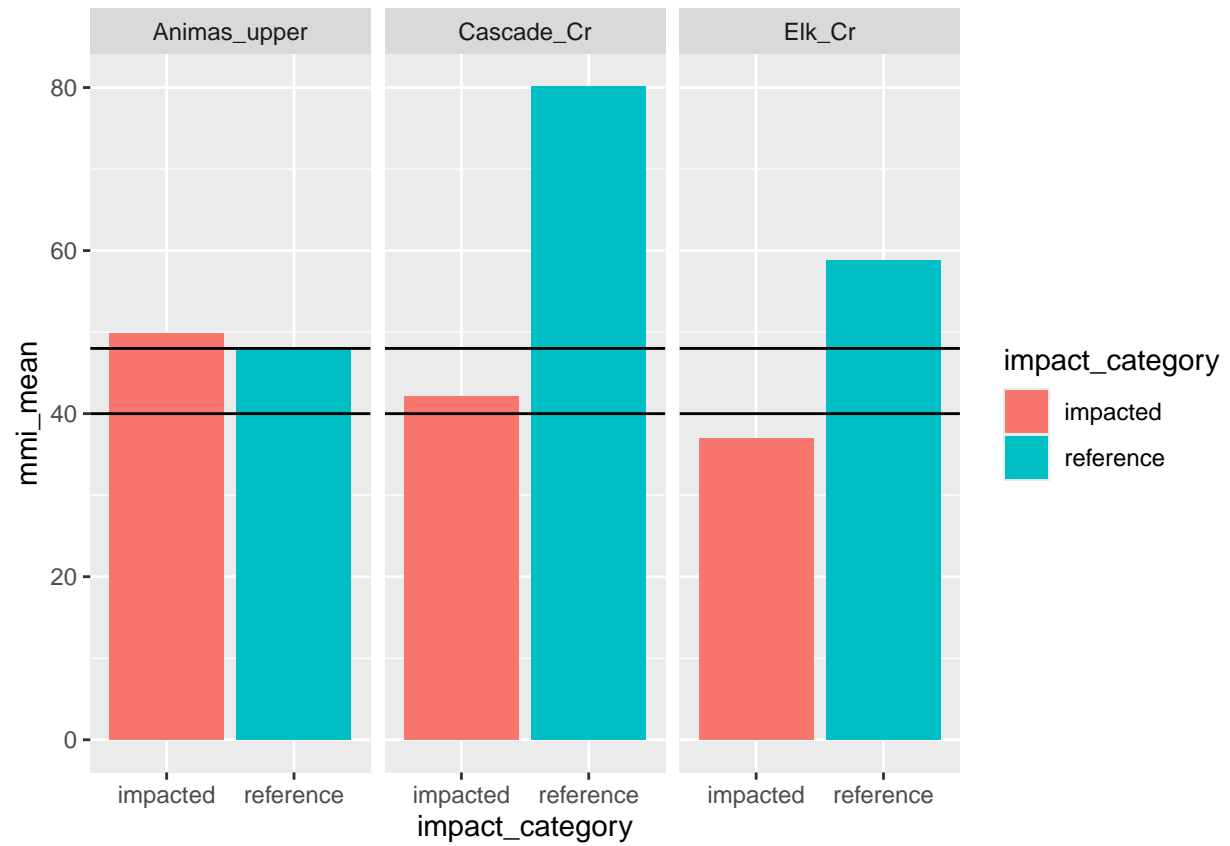

Problem 8: Longitudinal plots

