About this Site

Contents

Syllabus

- Syllabus
- Basic Facts
- Introduction to Computer Systems
- Tools and Resources
- Schedule
- Grading
- · Grading Policies
- Support
- General URI Policies
- Office Hours & Comms

Notes

- 1. Introduction
- 2. How does learning and knowledge work in computing?
- 3. How do I use git offline
- 4. Why Do I Need to Use a terminal?
- 5. Review and Abstraction
- 6. Survey of Hardware
- 7. What actually is git?
- 8. How does git work?
- 9. How do hashes work in git?
- 10. How can git help me?
- 11. How do we build Documentation?
- 12. Shell Scripting
- 13. How can I work on a remote server?
- 14. How does ssh really work? how can I be more secure?
- 15. What happens when I build code in C?
- 16. Why is the object file not human readable?
- 17. How do represent non integer numbers?
- 18. How can we use logical operations?
- 19. Why do we need to think about bitwise operations?

Activities

- KWL Chart
- · Prepare for the next class
- More Practice
- Deeper Explorations
- Project Information

- · Syllabus and Grading FAQ
- · Git and GitHub

Resources

- Glossary
- Language Specific References
- Cheatsheet
- · General Tips and Resources
- · How to Study in this class
- · Getting Help with Programming
- · Getting Organized for class
- · Advice from Dr. Brown's Data Science Students

Welcome to the course manual for Introduction to Computer Systems in Spring 2022 with Professor Brown.

This class meets TuTH 12:30-1:45 in Engineering Building Room 040.

This website will contain the syllabus, class notes, and other reference material for the class.

Course Calendar on BrightSpace



Tip

subscribe to that calendar in your favorite calendar application

Navigating the Sections

The Syllabus section has logistical operations for the course broken down into sections. You can also read straight through by starting in the first one and navigating to the next section using the arrow navigation at the end of the page.

This site is a resource for the course. We do not follow a text book for this course, but all notes from class are posted in the notes section, accessible on the left hand side menu, visible on large screens and in the menu on mobile.

The resources section has links and short posts that provide more context and explanation. Content in this section is for the most part not strictly the material that you'll be graded on, but it is often material that will help you understand and grow as a programmer and data scientist.

Reading each page

All class notes can be downloaded in multiple formats, including as a notebook. Some pages of the syllabus and resources are also notebooks, if you want to see behind the curtain of how I manage the course information.



Notes will have exercises marked like this

Question from Class

Questions that are asked in class, but unanswered at that time will be answered in the notes and marked with a box like this. Long answers will be in the main notes

Further reading

Notes that are mostly links to background and context will be highlighted like this. These are optional, but will mostly help you understand code excerpts they relate to.

Question from class

Ouestions that are asked in class. but unanswered at that time will be answered in the notes and marked with a box like this. Short questions will be in the margin note

Hint

Both notes and assignment pages will have hints from time to time. Pay attention to these on the notes, they'll typically relate to things that will appear in the assignment.

Think Ahead

Think ahead boxes will guide you to start thinking about what can go into your portfolio to build on the material at hand.

Syllabus

Welcome to CSC302: Introduction to Computer Systems.

In this syllabus you will find an overview of the course, information about your instructor, course policies, restatements of URI policies, reminders of relevant resources, and a schedule for the course.

This is a live document that will change over time, but a pdf copy is available for direct download or to view on GitHub. Note that this will become outdated over time.

Basic Facts

Introduction to Computer Systems

This new course links together different ideas that you have encountered but not covered deeply in other courses. We'll learn about tools used in programming and how they work. The goal of this course is to help you understand how your computer and programming environment work so that you can debug and learn independently more confident.

Quick Facts

- Course time: Spring 2022, TuTh 12:30PM 1:45PM
- · Credits: 4

To request a permission number complete this google form you must be signed into your URI google account to access the form

Why Take this course

- 1. use and understand git/ GitHub
- 2. make sense of cryptic compiler messages
- 3. understand how file organization impacts programming
- 4. fulfill your 300 level CSC elective requirement
- 5. preview ideas that will be explored in depth in 411 & 412

Topics covered

- · git and other version control
- · bash and other shell scripting
- · filesystems
- · basics of hardware
- · what happens when you compile code
- · what are the different types of software on your computer

Catalog Description

How the history and context of computing impacts the practice of computing today. Tools used in programming and computational problem solving. How programming works from high level languages to hardware. Survey of computer hardware and representation of information. Pre: CSC110, any 200 level CSC course, or equivalent.

Learning Outcomes

By the end of the semester, students will be able to:

- 1. Differentiate the different classes of tools used in computer science in terms of their features, roles, and how they interact and justify positions and preferences among popular tools
- 2. Identify the computational pipeline from hardware to high level programming language
- 3. Discuss implications of choices across levels of abstraction
- 4. Describe the context under which essential components of computing systems were developed and explain the impact of that context on the systems.

About this syllabus

You can get notification of changes from GitHub by "watching" the <u>repository</u> You can view the date of changes and exactly what changes were made on the Github <u>commit history</u> page.

Creating an <u>issue</u> is also a good way to ask questions about anything in the course it will prompt additions and expand the FAQ section. That will be linked when sovle and you will get a notification at that time.

About your instructor

Name: Dr. Sarah M Brown Office hours: TBA via zoom, link on BrightSpace

Dr. Sarah M Brown is a second year Assistant Professor of Computer Science, who does research on how social context changes machine learning. Dr. Brown earned a PhD in Electrical Engineering from Northeastern University, completed a postdoctoral fellowship at University of California Berkeley, and worked as a postdoctoral research associate at Brown University before joining URI. At Brown University, Dr. Brown taught the Data and Society course for the Master's in Data Science Program. You can learn more about me at my website or my research on my lab site.

You can call me Professor Brown or Dr. Brown, I use she/her pronouns.

The best way to contact me is e-mail or an issue on an assignment repo. For more details, see the Communication Section

Tools and Resources

We will use a variety of tools to conduct class and to facilitate your programming. You will need a computer with Linux, MacOS, or Windows. It is unlikely that a tablet will be able to do all of the things required in this course. A Chromebook may work, especially with developer tools turned on. Ask Dr. Brown if you need help getting access to an adequate computer.

All of the tools and resources below are either:

- · paid for by URI OR
- freely available online.

BrightSpace

Note

Seeing the BrightSpace site requires logging in with your URI SSO and being enrolled in the course

This will be the central location from which you can access all other materials. Any links that are for private discussion among those enrolled in the course will be available only from our course Brightspace site .

This is also where your grades will appear and how I will post announcements.

For announcements, you can <u>customize</u> how you receive them.

Prismia chat

Our class link for Prismia chat is available on Brightspace. Once you've joined once, you can use the link above or type the url: prismia.chat. We will use this for chatting and in-class understanding checks.

On Prismia, all students see the instructor's messages, but only the Instructor and TA see student responses.

Course Manual

The course manual will have content including the class policies, scheduling, class notes, assignment information, and additional resources.

Links to the course reference text and code documentation will also be included here in the assignments and class notes.

GitHub

You will need a GitHub Account. If you do not already have one, please create one by the first day of class. If you have one, but have not used it recently, you may need to update your password and login credentials as the Authentication rules changed in Summer 2021. In order to use the command line with https, you will need to create a Personal Access Token for each device you use. In order to use the command line with SSH, set up your public key.

Programming Environment

In this course, we will use several programming environments. In order to complete assignments you need the items listed in the requirements list. The easiest way to meet these requirements is to follow the recommendations below. I will provide instruction assuming that you have followed the recommendations. We will add tools throughout the semester, but the following will be enough to get started.



This is not technically a programming class, so you will not need to know how to write code from scratch in specific languages, but we will rely on programming environments to apply concepts.

Requirements:

- Python with scientific computing packages (numpy, scipy, jupyter, pandas, seaborn, sklearn)
- Git
- · A bash shell
- A web browser compatible with <u>Jupyter Notebooks</u>
- · nano text editor



all Git instructions will be given as instructions for the command line interface and GitHub specific instructions via the web interface. You may choose to use GitHub desktop or built in IDE tools, but the instructional team may not be able to help.

A Warning

Everything in this class will be tested with the up to date (or otherwise specified) version of Jupyter Notebooks. Google Colab is similar, but not the same, and some things may not work there. It is an okay backup, but should not be your primary work environment.

Recommendation:

- Install python via Anaconda
- if you use Windows, install Git and Bash with GitBash (video instructions).
- if you use MacOS, install Git with the Xcode Command Line Tools. On Mavericks (10.9) or above you can do this by trying to run git from the Terminal the very first time.git --version
- if you use Chrome OS, follow these instructions:
- 1. Find Linux (Beta) in your settings and turn that on.
- 2. Once the download finishes a Linux terminal will open, then enter the commands: sudo apt-get update and sudo apt-get upgrade. These commands will ensure you are up to date.
- 3. Install tmux with:

```
sudo apt -t stretch-backports install tmux
```

4. Next you will install nodejs, to do this, use the following commands:

```
curl -sL https://deb.nodesource.com/setup_14.x | sudo -E bash sudo apt-get install -y nodejs sudo apt-get install -y build-essential.
```

- 5. Next install Anaconda's Python from the website provided by the instructor and use the top download link under the Linux options.
- 6. You will then see a .sh file in your downloads, move this into your Linux files.
- 7. Make sure you are in your home directory (something like home/YOURUSERNAME), do this by using the pwd command.
- 8. Use the bash command followed by the file name of the installer you just downloaded to start the installation.
- 9. Next you will add Anaconda to your Linux PATH, do this by using the vim .bashrc command to enter the .bashrc file, then add the export PATH=/home/YOURUSERNAME/anaconda3/bin/:\$PATH line. This can be placed at the end of the file.
- 10. Once that is inserted you may close and save the file, to do this hold escape and type :x, then press enter. After doing that you will be returned to the terminal where you will then type the source .bashrc command.
- 11. Next, use the jupyter notebook -generate-config command to generate a Jupyter Notebook.
- 12. Then just type jupyter lab and a Jupyter Notebook should open up.

Video install instructions for Anaconda:

- Windows
- Mac

On Mac, to install python via environment, this article may be helpful

• I don't have a video for linux, but it's a little more straight forward.

Zoom (backup only & office hours only, Spring 2022 is in person)

This is where we will meet if for any reason we cannot be in person. You will find the link to class zoom sessions on Brightspace.

URI provides all faculty, staff, and students with a paid Zoom account. It *can* run in your browser or on a mobile device, but you will be able to participate in class best if you download the Zoom client on your computer. Please log in and configure your account. Please add a photo of yourself to your account so that we can still see your likeness in some form when your camera is off. You may also wish to use a virtual background and you are welcome to do so.

For help, you can access the instructions provided by IT.

Schedule

Overview

The following is a rough outline of topics in an order, these things will be filled into the concrete schedule above as we go. These are, in most cases bigger quetions than we can tackle in one class, but will give the general idea of how the class will go.

This plan accounts for 1 less week than we actually have. We will either go over somewhere or we'll use the last week for sharing projects, reflection, or an additional topic that comes up during the semester.

How does this class work?

one week

We'll spend the first two classes introducing some basics of GitHub and setting expectations for how the course will work. This will include how you are expected to learn in this class which requires a bit about how knowledge production in computer science works and a bit of the history.

How do all of these topics relate?

approximatley two weeks



🥊 Tip

We will integrate history throughout the whole course. Connecting ideas to one another, and especially in a sort of narrative form can help improve retention of ideas. My goal is for you to learn.

We'll also come back to different topics over and over again with a slightly different framing each time. This will both connect ideas, give you chance to practice recalling (more recall practice improves long term rentention of things you learn), and give you a chance to learn things in different ways.

We'll spend a few classes doing an overview where we go through each topic in a little more depth than an introduction, but not as deep as the rest of the semester. In this section, we will focus on how the different things we will see later all relate to one another more than a deep understanding of each one. At the end of this unit, we'll work on your grading contracts.

We'll also learn more key points in history of computing to help tie concepts together in a narrative.

Topics:

- bash
- man pages (built in help)
- · terminal text editor
- git
- · survey of hardware

- compilation
- · information vs data

What tools do Computer Scientists use?

approximately four weeks

Next we'll focus in on tools we use as computer scientists to do our work. We will use this as a way to motivate how different aspects of a computer work in greater detail.

Topics:

- linux
- git
- i/o
- · ssh and ssh keys
- · number systems
- file systems

What Happens When I run code?

approximately five weeks

Finally, we'll go in really deep on the compilation and running of code. In this part, we will work from the compilation through to assembly down to hardware and then into machine representation of data.

Topics:

- · software system and Abstraction
- programming languages
- · cache and memory
- compiliation
- linking
- basic hardware components

Finalized Order

Content from above will be expanded and slotted into specific classes as we go. This will always be a place you can get reminders of what you need to do next and/or what you missed if you miss a class as an overivew. More Details will be in other parts of the site, linked to here.

Date	Key Question	Prepation	Activities
2021-01-25	What are we doing this semester?	Create GitHub and Prismia accounts, take stock of dev environments	introductions, tool practice
2021-01-27	How does knowledge work in computing?	Read through the class site, notes, reflect on a thing you know well	course FAQ, knowledge discussion
2021-02-01	How do I use git offline?	review notes, reflect on issues, check environment, map cs knowledge	cloning, pushing, terminal basics
2021-02-03	Why do I need to use a terminal?	review notes, practice git offline 2 ways, update kwl	bash, organizing a project
2021-02-08	What are the software parts of a computer system?	practice bash, contribute to the course site, examine a software project	hardware simulator
2021-02-10	What are the hardware parts of a computer system?	practice, install h/w sim, review memory	hardware simulation
2021-02-15	How does git really work?	practice, begin contract, understand git	grading contract Q&A, git diff, hash
2021-02-17	What happens under the hood of git?	<u>things</u>	git plumbing and more bash (pipes and find)
2021-02-22	Why are git commit numbers so long?	<u>review, map git</u>	more git, number systems
2021-02-24	How can git help me when I need it?	reveiw numbers and hypothesize what git could help with	git merges
2021-03-01	How do programmers build documentation?	review git recovery, practice with rebase, merge, revert, etc; confirm jupyterbook is installed	templating, jupyterbook
2021-03-03	How do programmers auotmate mundane tasks?	convert your kwlrepo	shell scripting, pipes, more redirects, grep
2021-03-08	How do I work remotely?	install reqs, reflect on grade, practice scrip	ssh/ ssh keys, sed/ awk, file permissions
2021-03-10	How do programmers keep track of all these tools?	summarize IDE reflections	IDE anatomy
2021-03-22	Skipped		
2021-03-24	How do Developers keep track of all these tools?	[compare languages you know]	
2021-03-29	How do we choose among different programming languages?	[install c compiler]	
2021-03-31	What happens when I compile code?		
2021-04-05	Why is the object file unreadable?	[what are operators]	bits, bytes, and integers/character representtion
2021-04-07	What about non integer numbers?		floating point representation
2021-04-12	Where do those bitwise operations come from?	[review simulator]	gates, registers
2021-04-14	How do those components add up to the higher level components in a computer		
2021-04-19			
2021-04-21			
2021-04-26			
2021-04-28			

Table 1 Schedule

Grading

This section of the syllabus describes the principles and mechanics of the grading for the course.

Learning Outcomes

The goal is for you to learn and the grading is designed to as close as possible actually align to how much you have learned. So, the first thing to keep in mind, always is the course learning outcomes:

By the end of the semester, students will be able to:

- 1. Differentiate the different classes of tools used in computer science in terms of their features, roles, and how they interact and justify positions and preferences among popular tools
- 2. Identify the computational pipeline from hardware to high level programming language
- 3. Discuss implications of choices across levels of abstraction
- 4. Describe the context under which essential components of computing systems were developed and explain the impact of that context on the systems.

These are what I will be looking for evidence of to say that you met those or not.

Principles of Grading

Learning happens through practice and feedback. My goal as a teacher is for you to learn. The grading in this course is based on your learning of the material, rather than your completion of the activities that are assigned.

This course is designed to encourage you to work steadily at learning the material and demonstrating your new knowledge. There are no single points of failure, where you lose points that cannot be recovered. Also, you cannot cram anything one time and then forget it. The material will build and you have to demonstrate that you retained things.

- Earning a C in this class means you have a general understanding; you will know what all the terms mean and could follow along if in a meeting where others were discussing systems concepts.
- Earning a B means that you could apply the course concepts in other programming environments; you can solve basic common errors without looking much up.
- Earning an A means that you can use knowledge from this course to debug tricky scenarios and/or design aspects of systems; you can solve uncommon error while only looking up specific syntax, but you have an idea of where to start.

No Grade Zone

At the beginning of the course we will have a grade free zone where you practice with both course concepts and the tooling and assingment types to get used to expectations. You will get feedback on lots of work and begin your Know, Want to know, Learned (KWL) Chart in this period.

Grading Contract

In about the third week you will complete, from a provided template, a grading contract. In that you will state what grade you want to earn in the class and what work you are going to do to show that. If you complete all of that work to a satisfactory level, you will get that grade. The grade free zone is a chance for you to get used to the type of feedback in the course and the grading contract template will have example specifications to meet.

The finalized grading contract will include the specification that each piece of work has to adhere to.

All contracts will include maintaining a KWL Chart for the duration of the semester and consistent responses in class.

Notes

- Keep your deeper explorations and more practice task content in your KWL chart repository.
- · Link approved PRs to your grading contract for record keeping.

Grading Contract Instructions



this includes minor corrections relative to the readme in the template provided

Grading Policies

Late Work

You will get feedback on items at the next feedback period.

Regrading

Re-request a review on your Feedback Pull request.

For general questions, post on the conversation tab of your Feedback PR with your request.

For specific questions, reply to a specifc comment.

If you think we missed *where* you did something, add a comment on that line (on the code tab of the PR, click the plus (+) next to the line) and then post on the conversation tab with an overview of what you're requesting and tag @brownsarahm

Support

Academic Enhancement Center

Academic Enhancement Center (for undergraduate courses): Located in Roosevelt Hall, the AEC offers free face-to-face and web-based services to undergraduate students seeking academic support. Peer tutoring is available for STEM-related courses by appointment online and in-person. The Writing Center offers peer tutoring focused on supporting undergraduate writers at any stage of a writing assignment. The UCS160 course and academic skills consultations offer students strategies and activities aimed at improving their studying and test-taking skills. Complete details about each of these programs, up-to-date schedules, contact information and self-service study resources are all available on the AEC website.

- STEM Tutoring helps students navigate 100 and 200 level math, chemistry, physics, biology, and other select STEM courses. The STEM Tutoring program offers free online and limited in-person peer-tutoring this fall. Undergraduates in introductory STEM courses have a variety of small group times to choose from and can select occasional or weekly appointments. Appointments and locations will be visible in the TutorTrac system on September 14th, 2020. The TutorTrac application is available through URI Microsoft 365 single sign-on and by visiting aec.uri.edu. More detailed information and instructions can be found on the AEC tutoring.page.
- Academic Skills Development resources helps students plan work, manage time, and study more effectively. In Fall 2020, all Academic Skills and Strategies programming are offered both online and in-person. UCS160: Success in Higher Education is a one-credit course on developing a more effective approach to studying. Academic Consultations are 30-minute, 1 to 1 appointments that students can schedule on Starfish with Dr. David Hayes to address individual academic issues. Study Your Way to Success is a self-guided web portal connecting students to tips and strategies on studying and time management related topics. For more information on these programs, visit the Academic Skills Page or contact Dr. Hayes directly at davidhayes@uri.edu.
- The Undergraduate Writing Center provides free writing support to students in any class, at any stage of the writing process: from understanding an assignment and brainstorming ideas, to developing, organizing, and revising a draft. Fall 2020 services are offered through two online options:

 real-time synchronous appointments with a peer consultant (25- and 50-minute slots, available Sunday Friday), and 2) written asynchronous consultations with a 24-hour turn-around response time (available Monday Friday). Synchronous appointments are video-based, with audio, chat, document-sharing, and live captioning capabilities, to meet a range of accessibility needs. View the synchronous and asynchronous schedules and book online, visit uri.mywconline.com.

General URI Policies

Anti-Bias Statement:

We respect the rights and dignity of each individual and group. We reject prejudice and intolerance, and we work to understand differences. We believe that equity and inclusion are critical components for campus community members to thrive. If you are a target or a witness of a bias incident, you are encouraged to submit a report to the URI Bias Response Team at www.uri.edu/brt. There you will also find people and resources to help.

Disability Services for Students Statement:

Your access in this course is important. Please send me your Disability Services for Students (DSS) accommodation letter early in the semester so that we have adequate time to discuss and arrange your approved academic accommodations. If you have not yet established services through DSS, please contact them to engage in a confidential conversation about the process for requesting reasonable accommodations in the classroom. DSS can be reached by calling: 401-874-2098, visiting: web.uri.edu/disability, or emailing: dss@etal.uri.edu. We are available to meet with students enrolled in Kingston as well as Providence courses.

Academic Honesty

Students are expected to be honest in all academic work. A student's name on any written work, quiz or exam shall be regarded as assurance that the work is the result of the student's own independent thought and study. Work should be stated in the student's own words, properly attributed to its source. Students have an obligation to know how to quote, paraphrase, summarize, cite and reference the work of others with integrity. The following are examples of academic dishonesty.

- · Using material, directly or paraphrasing, from published sources (print or electronic) without appropriate citation
- · Claiming disproportionate credit for work not done independently
- · Unauthorized possession or access to exams
- · Unauthorized communication during exams
- Unauthorized use of another's work or preparing work for another student
- Taking an exam for another student
- · Altering or attempting to alter grades
- The use of notes or electronic devices to gain an unauthorized advantage during exams
- · Fabricating or falsifying facts, data or references
- · Facilitating or aiding another's academic dishonesty
- Submitting the same paper for more than one course without prior approval from the instructors

URI COVID-19 Statement

The University is committed to delivering its educational mission while protecting the health and safety of our community. While the university has worked to create a healthy learning environment for all, it is up to all of us to ensure our campus stays that way.

As members of the URI community, students are required to comply with standards of conduct and take precautions to keep themselves and others safe. Visit web.uri.edu/coronavirus/ for the latest information about the URI COVID-19 response.

- <u>Universal indoor masking</u> is required by all community members, on all campuses, regardless of vaccination status. If the universal mask mandate is discontinued during the semester, students who have an approved exemption and are not fully vaccinated will need to continue to wear a mask indoors and maintain physical distance.
- Students who are experiencing symptoms of illness should not come to class. Please stay in your home/room and notify URI Health Services via
 phone at 401-874-2246.
- If you are already on campus and start to feel ill, go home/back to your room and self-isolate. Notify URI Health Services via phone immediately at 401-874-2246.

If you are unable to attend class, please notify me at brownsarahm@uri.edu. We will work together to ensure that course instruction and work is completed for the semester.

Office Hours & Comms

Help Hours

TBA

/tmp/ipykernel_2179/2146052215.py:1: FutureWarning: this method is deprecated in favour of `Styler.hide(axis='index') help_df.style.hide_index()

Day	Time	Location	Host
Tuesday	4-5pm	online	Dr. Brown
Wednesday	1-2pm	online	Dr. Brown
Friday	11am-1pm	online	Mark

Online office hours locations are linked in the #help channel on slack

Tips

For assignment help

• send in advance, leave time for a response I check e-mail/github a small number of times per day, during work hours, almost exclusively. You might see me post to this site, post to BrightSpace, or comment on your assignments outside of my normal working hours, but I will not reliably see emails that arrive during those hours. This means that it is important to start assignments early.

Using issues

- use issues for content directly related to assignments. If you push your code to the repository and then open an issue, I can see your code and your question at the same time and download it to run it if I need to debug it
- use issues for questions about this syllabus or class notes. At the top right there's a GitHub logo 😱 that allows you to open a issue (for a question) or suggest an edit (eg if you think there's a typo or you find an additional helpful resource related to something)

For E-mail

- use e-mail for general inquiries or notifications
- Please include [csc392] in the subject line of your email along with the topic of your message. This is important, because your messages are important, but I also get a lot of e-mail. Consider these a cheat code to my inbox: I have setup a filter that will flag your e-mail if you include that in subject to ensure that I see it.

1. Introduction

1.1. What is a System?



Tip

You can contribute or fix things on this page (and anywhere else in this site) by clicking on "suggest an edit" under the GitHub menu in the top right.

1.2. What are we going to learn? and Editing on GitHub

We initialized your KWL Chart. You will keep this chart up to date over the course of the semester. Mostly it will be prompted when you should fill it in, but you can add to it whenever you would like.



GitHub itself provides pretty good documentation, full of screenshots for things in browser. editing a file pull request

1.3. For next class



This section will contain more detail, but a short list of what you need will always be in the schedule

- More practice with <u>GitHub terminology</u>. Accept this assignment, read through it, and follow the instructions at the end.
- · Review these notes, bring any questions you have to class
- Read the syllabus, explore this whole <u>website</u>. Bring questions about the course. Be prepared
 for a scavenger hunt that asks you not to recall every fact about the course, but to know where
 to find informatio.
- Think about one thing you've learned really well (computing or not) and how do you know that you know it? (bring your example)

1.4. Questions After Class

1.4.1. What physical code will we be writing this semester?

Shell scripts, tiny bits of C, small examples of python. Mostly, we'll be focused on the glue that connects the pieces of a regular code project more than developing a lot of code. We will not, for example, study any algorithms.

1.4.2. How would committing, pull requests, branches, etc work if you wanted to work on something on your computer?

We will learn how to work with git offline next week. You can use git (and GitHub) via a terminal, specialized desktop applications, or built into many IDEs.

1.4.3. Why does github seem so simple on a surface level? but to actually use it requires much deeper knowledge...

GitHub provides a user friendly wrapper around git, which is an open source version control tool that is designed to be very powerful for and primarily used by, experienced programmers with a good knowledge of files systems. Git is in fact a special file system. GitHub makes the most common actions easier so that more people can do them, but the underlying tool can do so many things, so it can be complicated.

1.4.4. Will I be able to view my answers on prismia chat for the future? Will it erase?

Yes, the prismia history will always be available. You can also download the transcript from each class.

1.4.5. What about the feedback page? How to merge it or not merge it at all?

We will specifically advise you on when you should merge the Feedback PR.

2. How does learning and knowledge work in computing?

2.1. Git review

• Make sure you get GitHub terminology down and use this "assignment" to practice.

2.2. Scavenger Hunt



The goal here is to make sure you know where to find basic things, not that you have memorized every bit of information about the course

Where can you find when office hours are?	~
Where can you find the detailed list of what to prepare for today's class?	~
Where is the regrading policy?	~
There's a term you don't recognize in an activity, where should you look?	~
Something went wrong in an assignment repo on GitHub, what should you check before asking for help?	~

2.3. Recall, Systems

"Systems" in computing often refers to all the parts that help make the "more exciting" algorithmic parts work. Systems is like the magic that helps you get things done in practice, so that you can shift your attention elsewhere.

In intro courses, we typically give you an environment to hide all the problems that could occur at the systems level.

Systems programming is how to look at the file system, the operating system, etc.

2.4. Mental Models and Learning

2.4.1. What is it like to know something really well?

When we know something well, it is easier to do, we can do it multple ways, it is easy to explain to others and we can explain it multiple ways. we can do the task almost automatically and combine and create things in new ways. This is true for all sorts of things.

a mental model is how you think about a concept and your way of relating it. Novices have sparse mental models, experts have connected mental models.

When we first learn new things, we first get the basic concepts down, but we may not know how they relate.





 $\textit{Fig. 2.1} \ \text{a novice mental model is disconnected and has few concepts}$

As we learn more, they become more connected.




Fig. 2.2 a compententmental model starts to have some connections, with relationships between the concepts.

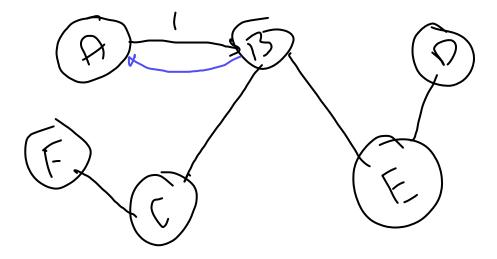


Fig. 2.3 an expert mentla model is densley connected and has more concepts in it.

We can visualize with concept maps. Which connect the ideas using relationships on the arrows.

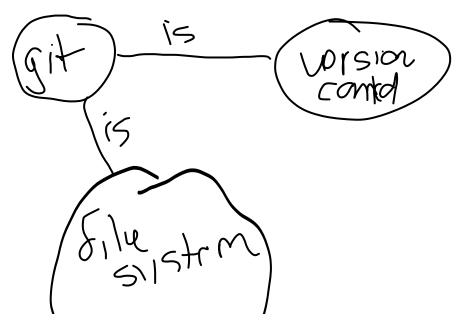


Fig. 2.4 a small concept map showing that git is an instance of both a file system and a version control system.

2.5. Why do we need this for computer systems?

Attention

This section contain points added here that were not discussed directly in class, but are important and will come back up

2.5.1. Systems are designed by programmers

Computer Science is not a natural science like biology or physics where we try to understand some aspect of the world that we live in. Computer Science as a discipline, like algorithms, mostly derives from Math.

Historically, Computer Science Departments were often initally formed by professors in math creating a new department or, sometimes, making a new degree programs without even creating a new department at first. In some places, CS degree programs also grew within or out of Electrical Engineering. At URI, CS grew out of math.

So, when we study computer science, while parts of it are limited by physics [1], most of it is essentially an imaginary world that is made by people. Understanding how people think, both generally, and common patterns within the community of programmers [2] understand how things work and why they are the way they are. The why can also make it easier to remember, or, it can help you know what things you can find alternatives for, or even where you might invent a whole new thing that is better in some way.



Fig. 2.5 An overview of the three cognitive processes that this book covers: STM, LTM, and working memory. The arrows labeled 1 represent information coming into your brain. The arrows labeled 2 indicate the information that proceeds into your STM. Arrow 3 represents information traveling from the STM into the working memory, where it's combined with information from the LTM (arrow 4). Working memory is where the information is processed while you think about it.

2.5.2. Context Matters

This context of how things were developed can influence how we understand it. We will also talk about the history of computing as we go through different topics in class so that we can build that context up.

2.5.3. Optimal is relative

The "best" way to do something is always relative to the context. "Best" is a vague term. It could be most computationally efficient theoretically, fastest to run on a particular type of hardware, or easiest for another programmer to read.

We will see how the best choice varies a lot as we investigate things at different levels of abstraction.

2.6. How I expect this to work

2.7. For next class

Note

This is what is required, before the next class and will be checked or if you don't do it you will have trouble participating in class

- 1. Review these notes, both rendered as html and the raw markdown in the repository.
- 2. find 2-3 examples of things in programming you have got working, but did not really understand. this could be errors you fixed, or something you just know you're supposed to do, but not why
- 3. map out your computing knowledge and add it to your kwl chart repo. this can be an image that you upload or a text-based outline.
- 4. Make sure you have a working environment for next week. Use slack to ask for help.
 - o check that you have Python installed with Jupyter, ideally with Anaconda
 - o install jupyter book
 - o install GitBash on windows (optional for others)
 - o make sure you have Xcode on MacOS
 - o install the GitHub CLI on all OSs

2.8. More Practice



Activities in this section are optional, but things that may help you prepare, or (in future classes) extend the idea.

- (optional) try mapping out using <u>mermaid</u> syntax, we'll be using other tools that will faciltate rendering later, or try getting it to render on your own.
- (optional) read chapter 1 the programmer's brain. Some of the ideas we talked about today
 are mentioned there, and it relates to where you're supposed to be looking for things that you
 have done, but didn't really understand.
- try adding something to this page or the glossary of the course site or link a glossary term to an occurence of it on the site.

🥊 Hint

terms on this page that could be added to the glossary include <u>filesystem</u> and <u>operating system</u>. The <u>jupyter book docs</u> show how to add to a glossary and link to the glossary from another page.

2.9. Questions After Class

2.9.1. How would I learn more about version control systems?

We will talk more about this in in the tools section of the course

2.9.2. How to use github to make more meaningful repositories, instead of just a mess of files that are not properly uploaded?

We will talk a bit about how git works to get some of this. Some of this will also be dependent on the *type* of code that you are working on. For example, organizing data science examples would be different than a data science library which would be different than a backend API, even if they were all in Python.

2.9.3. Are there any benefits to using git offline vs using it only in conjunction with github?

offline you can use more powerful code editing tools and run your code more frequently. Even offline, you can use it with GitHub.

Advantages to using git without GitHub, but with a different host could be privacy reasons- if you own your own server; that you want to track changes, but do not need a backup at all; that you want different hosting for their interface that provides different features; or that you don't trust

Microsoft(who bought GitHub). Some people also do not use GitHub because they have ICE as a customer.

2.9.4. When will we be establishing the grade contracts?

We will work on grading contracts in *approximately* the third week. They will be due on or after Feburary 13th. You will have at least one week from when you get the template to the first review.

2.9.5. How can I be better at communicating documentation

We are going to focus on the tools to produce documentation sites and for distributing documentation. To learn more about documentation, in terms of what to write and where, I have <u>an outline here</u>. I also learned a lot from <u>this tutorial</u>. In general, open source community resources tend to be where you can learn more about this. Also, most languages' official documentation will have information eg for <u>python</u>.

2.9.6. How often are we supposed to update our KWL Charts?

You will be prompted (either in class or as a class preparation) when I expect it at a minimum, but you can also add to it when you think of things.

2.9.7. Do we get a notification when you post the notes, or do we just check periodically?

The #siteupdates channel in slack shows when commits are pushed to the repository for the site, you can also create a more custom version of notification using either the <u>GitHub watch</u> or the GitHub bot in a slack DM to yourself, using /github help.

- [1] when we are *really* close to the hardware
- Of course, not *all* programmers think the same way, but when people spend time together and communicate, they start to share patterns in how they think. So, while you do **not** have to think the same way as these patterns, knowing what they are will help you reading code, and understanding things.

3. How do I use git offline

3.1. Todays Goals

- · just enough bash
- · offline git basics
- practice with issues as something to do while we work with git offline

3.2. Closing an Issue with a commit

We can close issues with commits, we'll first review making commits in browser to see how that works, then we will do it offline again.

Use the create a test repo for today's class it will have some issues it in upon creation.

Notice what happened:

- the file is added and the commit has the the message
- · the issue is closed
- · if we go look at the closed issues, we can see on the issue that it was linked to the commit
- from the issue, we can see what the changes were that made are supposed to relate to this

Note

we can still comment on an issue that is already closed.

1 Try it Yourself

We can also re-open issues. Try that out and then make a new commit to close it again. Why is this a useful feature for GitHub?

3.3. Getting Set up Locally

Opening different terminals

- default terminal on mac, ue the bash command to use bash (zsh will be mostly the same; it's derivative, but to ensure exactly the same as mine use bash)
- · use gitbash on Windows

To change directory

cd path/to/go/to

To make a directory (folder) for things in this course (or in my case for inclass time)

mkdir sysinclass

Then we have to cd into that new folder:

cd sysinclass/

To view where we are, we print working directory

pwd

View files

ls

It's empty for now, but we will change that soon.

3.4. Using Git and GitHub locally

3.4.1. Authenticating with GitHub

There are many ways to authenticate securely with GitHub and other git clients. We're going to use *easier* ones for today, but we'll come back to the third, which is a bit more secure and is a more general type of authentication.

1. GitHub CLI: enter the following and follow the prompts.

gh auth login

- 2. <u>personal access token</u>. This is a special one time password that you can use like a password, but it is limited in scope and will expire (as long as you choose settings well)
- 3. ssh keys

3.4.2. Cloning a repository

Cloning a repository makes a local copy of a remote git repository.

We can clone in two different ways, with git only or with the GitHub CLI tools.



My repository, like yours, is private so copying these lines directly will not work. You will have to replace my GitHub username with your own.

with the GitHub CLI:

```
gh repo clone introcompsys/github-in-class-brownsarahm
```

with git only:

git clone https://github.com/introcompsys/github-in-class-brownsarahm.git

Important

the git only version can be used with git repositories that are hosted anywhere, for example on <u>BitBucket</u> or <u>GitLab</u>

Either way we will see something like this:

```
Cloning into 'github-in-class-brownsarahm'...
remote: Enumerating objects: 15, done.
remote: Counting objects: 100% (15/15), done.
remote: Compressing objects: 100% (9/9), done.
remote: Total 15 (delta 2), reused 5 (delta 1), pack-reused 0
Receiving objects: 100% (15/15), done.
Resolving deltas: 100% (2/2), done.
```

Now we can check what happened using 1s

```
github-in-class-brownsarahm
```

When we clone a repository, it creates a new directory and downloads all of the contents and the repository information, including where it came from so that we can send our new changes back there.

3.4.3. Adding new files to a Repository Locally

We first go into that folder.

```
cd github-in-class-brownsarahm/
```

We can see what is there.

```
ls
```

```
README.md
touch about.md
```

ls

and then we see the list of files

```
README.md about.md
```

```
git status
```

which gives us the following output

```
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
    (use "git add <file>..." to include in what will be committed)
        about.md

nothing added to commit but untracked files present (use "git add" to track)
```

```
ls -a
. . .git README.md
.. .github about.md
```

```
git add .
```

again, we can check what git knows about

```
git status
```

and take note of the key differences from before.

```
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
    (use "git restore --staged <file>..." to unstage)
        new file: about.md

git commit -m 'create empty about'
[main b81cf15] create empty about
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 about.md
```

3.4.4. Text editing on the terminal

```
nano about.md
```

then we can edit the file, adding some content and then write out (to save) and then exit nano

3.4.5. Commiting Changes to a file

```
git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
(use "git push" to publish your local commits)

Changes not staged for commit:
(use "git add <file>..." to update what will be committed)
(use "git restore <file>..." to discard changes in working directory)
modified: about.md

no changes added to commit (use "git add" and/or "git commit -a")
```

```
git add about.md
```

```
git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
(use "git push" to publish your local commits)

Changes to be committed:
(use "git restore --staged <file>..." to unstage)
modified: about.md
```

```
git commit -m 'complete about closes #2
> '

[main 17320fc] complete about closes #2
1 file changed, 4 insertions(+)
```

```
git status
On branch main
Your branch is ahead of 'origin/main' by 2 commits.
(use "git push" to publish your local commits)
nothing to commit, working tree clean
```

3.4.6. Sending Changes to GitHub

```
git push
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 8 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (6/6), 535 bytes | 535.00 KiB/s, done.
Total 6 (delta 1), reused 1 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/introcompsys/github-in-class-brownsarahm.git
f707186..17320fc main -> main
```

Notice on GitHub that the issue is now closed, and the commit is referenced and shows the changes.

3.5. A third way to close an issue

See the classmate issue:

```
owner:
- [ ] give a class mate access to the repo
- [ ] assign this issue to them

classmate:
- [ ] add `classmate.md` with your name and expected graduation on a bracn `classmate`
- [ ] open a PR that will close this issue
```

- 1. Do the owner list in your repo (the on that ends with your user name)
- 2. Do the classmate actions in another person's repo
- 3. In your own repo, on the PR made by your class mate, tag @sp21instructors in a comment and then merge the PR.

3.5.1. Controlling Access


When you are a repository owner or organization level admin, you can change who has access to a repository on the settings tab.

Since the course repositories are in an organization, you get to choose the <u>role</u> for each collaborator or team. The <u>GitHub Docs</u> define the roles and permissions, so you can always refer t that to choose the right one.




I seeded these notes by using the Export text option from the mac terminal app. Other terminals have similar options and you can always get only the list of commands you have run with history

3.6. Prepare for next class

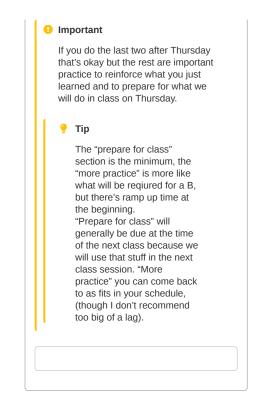

- 1. Complete the classmate issue in your in-class repository.
- 2. read the notes PR, add or comment on a tip, resource, a bit of history in a sidebar or additional end of class question
- 3. try using git in your IDE of choice, log any challenges you have on the practice repo (github-in-class-username), and tag @sp22instructors on GitHub. You can use either repo we have made in class, or one for an assignment in another course.
- using your terminal, download your KWL repo and update your 'learned' column on a new branch
- 5. answer the questions below in a new markdown file, gitoffline.md in your KWL on your new branch and push the changes to GitHub
- 6. Create a PR from your new branch to main do not merge this until instructed
- add your programming challenge(s) you have had as issues to <u>our private repo</u> or to the course website repo if you like. Put one 'challenge/question' per issue so that we can close them as addressed. See last class notes for prompt.
- 8. Create or comment on a discussion thread in the <u>private repo</u> about the part of CS/ type of programming you like best/what you want to do post graduation.



Questions:

Reflection


- 1. Describe the staging area (what happens after git add) in your own words. Can you think of an analogy for it? Is there anything similar in a hobby you have?
- 2. what step is the hardest for you to remember?
- 3. Compare and contrast using git on the terminal and through your IDE. when would each be better/worse?
- 4. Describe the commit that closed the `classmate` issue, who does it attribute the fix to?

3.7. More Practice

- Find the "Try it yourself" boxes in these notes, try them and add notes/ responses under a ##
 More Practice heading in your gitoffline.md file of your KWL repo.
- 2. Download the course site repo via terminal.
- Explore the difference between git add and git commit try committing and pushing without adding, then add and push without committing. Describe what happens in each case in your gitoffline.md

3.8. Questions After class

3.8.1. Can we push the file before commit? And if so, what will happen?

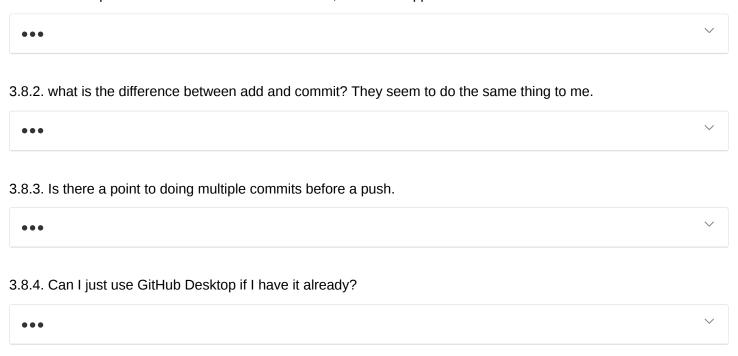

3.9. Resources:

What is Git?

Interactive Git Cheat Sheet

4. Why Do I Need to Use a terminal?

We will go back to the same repository we worked with on Tuesday, for me that was

cd Documents/teaching/sysinclass/github-in-class-brownsarahm/

We can use touch that we saw Tuesday to create many files at once:

touch abstract_base_class.py helper_functions.py important_classes.py alternative_classes.py README.md LICENSE.md CONTRIBUTING.md setup.py tests_abc.py test_help.py test_imp.py test_alt.py overview.md API.md _config.yml _toc.yml philosophy.md example.md Untitled.ipynb Untitled01.ipynb Untitled02.ipynb

we got an error from this:

-bash: _toc.yml: command not found

 $we can intermet this, bash thought \verb|_toc.yml| was a command. That means there was a hard to see accidental line break in the text above.$

If we didn't know what that meant, we could also investigate further using 1s to list.

ls

we see we have most of the files actually created,

API.md abstract_base_class.py test_alt.py CONTRIBUTING.md alternative_classes.py test_help.py LICENSE.md helper_functions.py test_imp.py README.md important_classes.py tests_abc.py _config.yml overview.md about.md setup.py

we can use the up arrow key to get back the last line.

```
_toc.yml philosophy.md example.md Untitled.ipynb Untitled01.ipynb Untitled02.ipynb
```

and add touch at the start of it to create those last few files.

```
touch _toc.yml philosophy.md example.md Untitled.ipynb Untitled01.ipynb Untitled02.ipynb
```

and confirm

ls

4.1. Scenario

Note

a few of you asked about learning how to organize projects. While our main focus in this class session is the bash commands to do it, the *task* that we are going to do is to organize a hypothetical python project

Now we have all of these files, named in abstract ways to signal hypothecial contents and suggest how to organize them.

```
API.md
                          _toc.yml
                                                    philosophy.md
CONTRIBUTING.md
                          about.md
                                                    setup.py
LICENSE.md
                          abstract_base_class.py
                                                    test_alt.py
\mathsf{README}.\mathsf{md}
                          alternative_classes.py
                                                    test_help.py
Untitled.ipynb
                          example.md
                                                    test imp.pv
                         helper_functions.py
Untitled01.ipynb
                                                    tests_abc.py
Untitled02.ipynb
                         important_classes.py
\_config.yml
                          overview.md
```

First we're goign to paste some contents (shared from prismia, view below) in to the readme with nano

```
nano README.md
```

We can view the contents of the file using cat to print the contents to the terminal output.

```
cat README.md
```

and we see:

```
# GitHub Practice
Name: sarah
 abstract\_base\_class.py \ | \ core \ abstract \ classes \ \textbf{for} \ the \ project
 helper_functions.py | utitly funtions that are called by many classes |
  \verb|important_classes.py| classes that inherit \textit{from the} abc
  alternative_classes.py | classes that inherit from the abc
 LICENSE.md | the info on how the code can be reused|
 CONTRIBUTING.md | instructions for how people can contribute to the project|
  setup.py | file with function with instructions for pip
  tests_abc.py | tests for constructors and methods in abstract_base_class.py|
  tests_helpers.py | tests for constructors and methods in helper_functions.py|
 tests_imp.py | tests for constructors and methods in important_classes.py|
  tests_alt.py | tests for constructors and methods in alternative_classes.py|
 API.md | jupyterbook file to generate api documentation |
  _config.yml | jupyterbook config for documentation
  _toc.yml | jupyter book toc file for documentation
 philosophy.md | overview of how the code is organized for docs |
  example.md | myst notebook example of using the code |
 Untitled*.ipynb | jupyter notebook from dev, not important to keep |
```

this explains each file a little bit more than the name of it does. We see there are sort of 5 groups of files:

- · about the project/repository
- · code that defines a python module
- · test code
- documentation
- · extra files that "we know" we can delete.

4.2. Making Directories

First we will make directories. We saw mkdir on Tuesday

```
mkdir docs/
```

This doesn't return anything, but we can see the effect with 1s

```
ls
```

```
APT.md
                         _toc.yml
                                                overview.md
CONTRIBUTING.md
                        about.md
                                                philosophy.md
LICENSE.md
                        abstract_base_class.py
                                                setup.py
README.md
                        alternative_classes.py
                                                test alt.pv
Untitled.ipynb
                        docs
                                                 test_help.py
Untitled01.ipynb
                        example.md
                                                 test_imp.py
Untitled02.ipynb
                        helper_functions.py
                                                 tests_abc.py
_config.yml
                        important_classes.py
```

We might not want to make them all one at a time. Like with touch we can pass multiple names to mkdir with spaces between to make multiple at once.

```
mkdir tests mymodule
```

and again use 1s to see the output

```
API.md
                        about.md
                                                 philosophy.md
CONTRIBUTING.md
                        abstract_base_class.py setup.py
LICENSE.md
                        alternative_classes.py test_alt.py
README.md
                        docs
                                                 test help.pv
Untitled.ipynb
                        example.md
                                                 test_imp.py
Untitled01.ipynb
                        helper_functions.py
Untitled02.ipynb
                        important_classes.py
                                                 tests_abc.py
_config.yml
                        mvmodule
_toc.yml
                        overview.md
```

4.3. Moving files

```
mv philosophy.md docs/
ls
```

```
API.md
                                                  mymodule
                         _toc.yml
CONTRIBUTING.md
                         about.md
                                                  overview.md
LICENSE.md
                         abstract base class.pv
                                                  setup.py
README.md
                         alternative_classes.py
                                                  test_alt.py
Untitled.ipynb
                         docs
                                                  test_help.py
Untitled01.ipynb
                         example.md
                                                  test_imp.py
Untitled02.ipynb
                         helper_functions.py
                                                  tests
                         {\tt important\_classes.py}
                                                  tests_abc.py
_config.yml
```

4.3.1. Getting help in bash

To learn more about the mv command, we can use the man(ual) file.

```
man mv
```

use enter/return or arrows to scroll and q to quit

If we type something wrong, the error message also provides some help

```
mv ls
usage: mv [-f | -i | -n] [-v] source target
mv [-f | -i | -n] [-v] source ... directory
```

We can use man on any bash command to see the options so we do not need to remember them all, or go to the internet every time we need help. We have high quality help for the details right in the shell, if we remember the basics.

```
man ls
```

```
ls -hl
```

```
total 16
-rw-r--r-- 1 brownsarahm staff
                                   0B Feb 3 12:51 API.md
-rw-r--r- 1 brownsarahm staff
                                   OB Feb 3 12:51 CONTRIBUTING.md
-rw-r--r--
           1 brownsarahm staff
                                   OB Feb 3 12:51 LICENSE.md
-rw-r--r-- 1 brownsarahm staff
                                 1.2K Feb 3 12:56 README.md
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:52 Untitled.ipynb
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:52 UntitledO1.ipynb
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:52 Untitled02.ipynb
                                   OB Feb 3 12:51 _config.yml
-rw-r--r-- 1 brownsarahm staff
-rw-r--r-- 1 brownsarahm staff
                                   0B Feb 3 12:52 _toc.yml
-rw-r--r-- 1 brownsarahm staff
                                  14B Feb 1 13:23 about.md
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:51 abstract_base_class.py
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:51 alternative_classes.py
drwxr-xr-x 3 brownsarahm staff
                                  96B Feb 3 13:04 docs
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:52 example.md
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:51 helper_functions.py
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:51 important_classes.py
drwxr-xr-x 2 brownsarahm staff
                                  64B Feb 3 13:01 mymodule
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:51 overview.md
-rw-r--r-- 1 brownsarahm staff
                                   0B Feb 3 12:51 setup.py
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:51 test_alt.py
-rw-r--r-- 1 brownsarahm staff
                                   OB Feb 3 12:51 test_help.py
-rw-r--r-- 1 brownsarahm staff
                                   0B Feb 3 12:51 test_imp.py
drwxr-xr-x 2 brownsarahm staff
                                  64B Feb
                                           3 13:01 tests
                                   OB Feb 3 12:51 tests_abc.py
-rw-r--r-- 1 brownsarahm staff
```

In some versions of bash we can use:

```
mv --help
```

4.3.2. Moving multiple files with patterns

let's look at the list of files again.

cat README.md

```
# GitHub Practice
Name: sarah
|file | contents |
 abstract_base_class.py | core abstract classes for the project |
  helper_functions.py | utitly funtions that are called by many classes |
 important_classes.py | classes that inherit from the abc
  alternative_classes.py | classes that inherit from the abc |
  LICENSE.md | the info on how the code can be reused|
 CONTRIBUTING.md | instructions for how people can contribute to the project|
  setup.py | file with function with instructions for pip |
 test_abc.py | tests for constructors and methods in abstract_base_class.py|
  test_helpers.py | tests for constructors and methods in helper_functions.py|
  test_imp.py | tests for constructors and methods in important_classes.py|
  tests\_alt.py \ | \ tests \ \textbf{for} \ constructors \ \textbf{and} \ methods \ \textbf{in} \ alternative\_classes.py |
  API.md | jupyterbook file to generate api documentation |
 \_\texttt{config.yml} \mid \texttt{jupyterbook} \ \texttt{config} \ \textbf{for} \ \texttt{documentation}
  _toc.yml | jupyter book toc file for documentation
  philosophy.md | overview of how the code is organized for docs |
  example.md | myst notebook example of using the code |
  scratch.ipynb | jupyter notebook from dev
```



this is why good file naming is important even if you have not organized the whole project yet, you can use the good conventions to help yourself later.

We see that the ones with similar purposes have similar names.

We can use * as a wildcard operator and then move will match files to that pattern and move them all. We'll start with the two yml (yaml) files that are both for the documentation.

```
mv *.yml docs/
```

4.3.3. Renaming a single file with mv

We see that most of the test files start with test_ but one starts with tests_. We could use the pattern test*.py to move them all without conflicting with the directory tests/ but we also want consistent names.

We can use mv to change the name as well. This is because "moving" a file and is really about changing its path, not actually copying it from one location to another and the file name is a part of the path.

```
mv tests_abc.py test_abc.py
ls
```

now that it's fixed

```
API.md
                          abstract base class.pv
                                                    setup.pv
CONTRIBUTING.md
                          alternative_classes.py
                                                     test_abc.py
LICENSE.md
                                                     test_alt.py
\mathsf{README}.\,\mathsf{md}
                          example.md
                                                     test_help.py
                          helper_functions.py
                                                     test_imp.py
Untitled.ipynb
Untitled01.ipynb
                          important_classes.py
                                                     tests
Untitled02.ipynb
                          mymodule
about.md
                          overview.md
```

We can use the pattern $test_*$ to move them all.

```
mv test_* tests/
ls
```

```
API.md
                        Untitled02.ipynb
                                                 helper_functions.py
CONTRIBUTING.md
                                                 important_classes.py
                        about.md
LICENSE.md
                        abstract_base_class.py
                                                 mymodule
README.md
                        alternative_classes.py
                                                 overview.md
Untitled.ipynb
                                                 setup.py
Untitled01.ipynb
                        example.md
                                                 tests
```

Now we can move all of the other .py files to the module

```
mv *.py mymodule/
ls

API.md Untitled01.ipynb mymodule
CONTRIBUTING.md Untitled02.ipynb overview.md
LICENSE.md about.md tests
README.md docs
Untitled.ipynb example.md
```

4.4. Working with relative paths

Let's review our info again

```
cat README.md
# GitHub Practice
Name: sarah
|file | contents |
 abstract_base_class.py | core abstract classes for the project |
  helper_functions.py | utitly funtions that are called by many classes |
  important_classes.py | classes that inherit from the abc
  alternative_classes.py | classes that inherit from the abc
  LICENSE.md | the info on how the code can be reused|
  CONTRIBUTING.md | instructions for how people can contribute to the project|
  setup.py | file with function with instructions for pip |
  tests_abc.py | tests for constructors and methods in abstract_base_class.py
  tests_helpers.py | tests for constructors and methods in helper_functions.py|
  tests\_imp.py \ | \ tests \ \textbf{for} \ constructors \ \textbf{and} \ methods \ \textbf{in} \ important\_classes.py
  tests\_alt.py \ | \ tests \ \textbf{for} \ constructors \ \textbf{and} \ methods \ \textbf{in} \ alternative\_classes.py |
  API.md | jupyterbook file to generate api documentation |
  _config.yml | jupyterbook config for documentation
   _toc.yml | jupyter book toc file for documentation
  philosophy.md \mid overview of how the code is organized for docs \mid
  example.md | myst notebook example of using the code |
 scratch.ipynb | jupyter notebook from dev
```

We've made a mistake, setup.py is actually instructions that need to be at the top level, not inside the module's sub directory.

We can get it back using the relative path to the file and then using . to move it to where we "are" sicne we are in the top level directory still.

```
mv mymodule/setup.py .
ls
API.md
                         Untitled01.ipynb
                                                  mymodule
CONTRIBUTING.md
                         Untitled02.ipynb
                                                  overview.md
LICENSE.md
                         about.md
                                                  setup.py
README.md
                         docs
                                                  tests
                         example.md
Untitled.ipynb
```

Or, if we put it back temporarily

```
mv setup.py mymodule/
```

We can cd to where we put it

```
cd mymodule/
ls
```

```
abstract_base_class.py helper_functions.py setup.py alternative_classes.py important_classes.py
```

and move it up a level using ...

```
mv setup.py ..
ls
```

```
abstract_base_class.py helper_functions.py alternative_classes.py important_classes.py
```

then the . . to go up a level gets us back to where we were.

```
cd ..
ls
```

API.md Untitled01.ipynb mymodule
CONTRIBUTING.md Untitled02.ipynb overview.md
LICENSE.md about.md setup.py
README.md docs tests
Untitled.ipynb example.md

Now we'll move the last few docs files.

```
mv API.md docs/
mv example.md docs/
mv overview.md docs/
ls
```

4.5. Removing files

We still have to deal with the untitled files that we know we don't need any more.

CONTRIBUTING.md Untitled01.ipynb mymodule
LICENSE.md Untitled02.ipynb setup.py
README.md about.md tests
Untitled.ipynb docs

we can delete them with rm and use * to delet them all.

```
rm Untitled*
```

1s

now we have a nice clean repository.

CONTRIBUTING.md README.md docs setup.py
LICENSE.md about.md mymodule tests

4.6. Copying

The typical contents of the README we would also want in the documentation website. We might add to the file later, but that's a good start. We can do that by copying.

When we copy we designate the file to copy and a path/name for the copy we want to make.

```
cp README.md docs/index.md
cd docs/
ls
```

API.md _toc.yml index.md philosophy.md _config.yml example.md overview.md

we can check the contents of the file too:

```
cat index.md
```

```
# GitHub Practice
Name: sarah
|file | contents |
  {\tt abstract\_base\_class.py} \ | \ {\tt core} \ {\tt abstract} \ {\tt classes} \ {\tt for} \ {\tt the} \ {\tt project} \ |
  \verb|helper_functions.py| utitly funtions that are called by many classes |
  important_classes.py | classes that inherit from the abc |
  alternative_classes.py | classes that inherit from the abc |
  LICENSE.md | the info on how the code can be reused|
  CONTRIBUTING.md | instructions for how people can contribute to the project|
  setup.py | file with function with instructions for pip |
  tests_abc.py | tests for constructors and methods in abstract_base_class.py|
  tests\_helpers.py \ | \ tests \ \textbf{for} \ constructors \ \textbf{and} \ methods \ \textbf{in} \ helper\_functions.py|
  tests_imp.py | tests for constructors and methods in important_classes.py|
  tests\_alt.py \ | \ tests \ \textbf{for} \ constructors \ \textbf{and} \ methods \ \textbf{in} \ alternative\_classes.py |
  API.md | jupyterbook file to generate api documentation |
  _config.yml | jupyterbook config for documentation
  _toc.yml | jupyter book toc file for documentation
  philosophy.md | overview of how the code is organized for docs |
  example.md | myst notebook example of using the code |
  scratch.ipynb | jupyter notebook from dev |
```

it matches.

4.7. More relative paths

We need a __init__.py in the mymodule directory but we are in the docs directory currently. No problem!

```
git status
```

note we have both changes and untracked files... but wherre is the docs folder?

we're in there so all of the files are listed relative to there, so it's the ./ line to say that we are currently in an untracked directory. Git status doesn't look inside directories it doens't know if it should track or not.

if we go back to the top level

```
cd ..
```

```
git status
```

🥊 Tip

Compare these two outputs carefully. Getting used to noticing these details will help you get yourself unstuck!

```
On branch main
Your branch is up to date with 'origin/main'.

Changes not staged for commit:
    (use "git add <file>..." to update what will be committed)
    (use "git restore <file>..." to discard changes in working directory)
    modified: README.md

Untracked files:
    (use "git add <file>..." to include in what will be committed)
        CONTRIBUTING.md
        LICENSE.md
        docs/
        mymodule/
        setup.py
        tests/

no changes added to commit (use "git add" and/or "git commit -a")
```

Then we can add the changes and push

```
git add .
git commit -m 'insclass 2-3'
```

```
[main c15cf43] insclass 2-3
20 files changed, 41 insertions(+)
create mode 100644 CONTRIBUTING.md
create mode 100644 LICENSE.md
create mode 100644 docs/API.md
create mode 100644 docs/_config.yml
create mode 100644 docs/_toc.yml
create mode 100644 docs/example.md
create mode 100644 docs/index.md
create mode 100644 docs/overview.md
create mode 100644 docs/philosophy.md
create mode 100644 mymodule/__init__.py
create mode 100644 mymodule/abstract_base_class.py
create mode 100644 mymodule/alternative_classes.py
create mode 100644 mymodule/helper_functions.py
create mode 100644 mymodule/important_classes.py
create mode 100644 setup.py
create mode 100644 tests/test_abc.py
create mode 100644 tests/test_alt.py
create mode 100644 tests/test_help.py
create mode 100644 tests/test_imp.py
```

```
git push
```

```
Enumerating objects: 9, done.

Counting objects: 100% (9/9), done.

Delta compression using up to 8 threads

Compressing objects: 100% (6/6), done.

Writing objects: 100% (7/7), 1.22 KiB | 1.22 MiB/s, done.

Total 7 (delta 0), reused 1 (delta 0), pack-reused 0

To https://github.com/introcompsys/github-in-class-brownsarahm.git

17320fc..c15cf43 main -> main
```

Important

if your push gets rejected, read the hints, it probably has the answer. We will come back to that error though

4.8. Git order of operations

above since we didn't make a branch we pushed to main.

```
git status
```

```
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
```

We could make the file changes first and then make the branch we want to commit them too as well. it's best to make the branch first so you don't forget, but it is an option

```
touch test_file.md
```

```
git status
```

```
git checkout -b test
```

```
git status
```

```
On branch test
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        test_file.md

nothing added to commit but untracked files present (use "git add" to track)
```

4.9. Recap

Why do I need a terminal

- 1. replication/automation
- 2. it's always there and doesn't change
- 3. it's faster one you know it (also see above)

So, is the shell the feature that interacts with the operating system and then the terminal is the gui that interacts with the shell?

This week we saw two really important tools. Next week we're going to take a sort of archealogical look at computer systems, first software then hardware to wrap up our overivew and exploration of what all these topics we're going to cover in class are and how they relate.

4.10. Prepare for the next class

- 1. Review the notes
- 2. Reorganize a folder on your computer (good candidate may be desktop or downloads folder), using only a terminal to make new directories, move files, check what's inside them, etc. Answer reflection questions (will be in notes) in a new file, terminal.md in your kwl repo.
- Add a glossary to the site to define a term or <u>cheatsheet</u> entry to describe a command that we have used so far.
- 4. Examine a large project you have done or by finding an open source project on GitHub. Answer the reflection questions in software.md in your kwl repo. (will be in notes)

4.10.1. Terminal File moving reflection

Start with a file explorer open, but then try to close it and use only command line tools to explore and make your choices

- 1. Did this get easier toward the end?
- 1. Use the history to see which commands you used and how many times each, make a table below.
- 1. Did you have to look up how to do anything we had not done in class?
- 1. When do you think that using the terminal will be better than using your GUI file explorer?
- 1. What questions/challenges/ relfections do you have after this?
- 1. What kinds of things might you want to write a bash script for given what you know in bash so far? come up with 1-2 scenarios

4.10.2. Software Reflection


- 1. link to public repo if applicable or title of your project
- 1. What types of files are there that are not code?
- 1. What different types of code files are in the project? Do they serve different goals?
- 1. Is it all in one language or are there multiple?
- 1. Try to figure out (remember) how the project works. What types of things, without running the code can you look at at a high level?

4.11. More Practice

- 1. Try to do as many things as possible on the terminal for a whole week.
- 2. Make yourself a bash cheatsheet (and/or contribute to one on the course site)
- 3. Read through part 1 of the programmer's brain and try the exercises, especially in chapter 4.

4.12. Questions at the end of class

4.12.1. what makes a file be able to stage? In other words, what does "staging" actually mean?

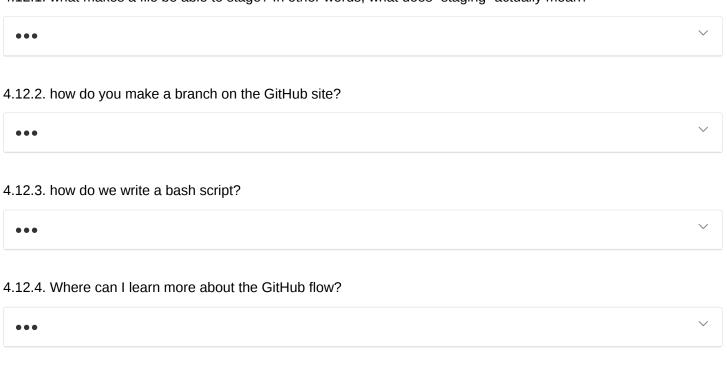

4.12.5. How do we link a project we already have made to a new git repository

•••

4.12.6. what can happen if I moved a file but I had another file pointing to the old address

•••

4.12.7. how in depth will our bash scripting go in this class? clearly it can be used for a lot of different things

••• ·

4.12.8. How might you go about re-instantiating a repo? I.e. starting back from whatever the origin is

•••

4.13. Resources

Bash Cheat Sheet

Alternative Shells

5. Review and Abstraction

5.1. Can I reset a Git repository?

- 1. Find the hash number for the first commit of your in-class repo.
- 2. On your terminal, navigate to that repo.
- 3. Check out that commit git checkout <paste hash here>
- 4. Look back at what happened, using 1s
- 5. Make a new branch called 'reset' and push that branch to GitHub.
- 6. Switch back to the current version of the repo
- 7. In browser, compare the two branches, visually.

5.2. Moving Files Requires Care

A question from last week was what happens if we move a file to an address where there already is one?

```
touch fa
echo "file one" > fa
cat fa

echo "file two" > fb
cat fb

mv fa fb
cat fb
```

5.3. Standard In, Out, and Error

We have been using bash to move files around and explore the system so far. In doing so we have also seen cat that we saw would display the contents of a file.

What it actually does is a little bit different. Let's try cat without putting a file name after it.

cat

It waits for us to type, if we type and then press enter, what we typed is displayed and it keeps waiting.

Use control/command + d to exit.

cat actually looks at standard input, a special file in our computer that gets the input from the keyboard if we don't tell it otherwise.

```
cat fa
```

is a shortcut basically for

```
cat < fa
```

which says explicitly, get ready to the contents of standard in to standard out and then put the contents of fa and put it on standard in. The arrow is called a redirect.

We used echo to write to a file above in the little experiment.

```
echo "some text" > a_file
cat a_file
```

and we get output as before

```
some text
```

That line has two new parts both echo and the < syntax. Let's try echo by itself.

```
echo "hello world"
```

and we see

```
hello world
```

Echo puts content on standard out, which is a special file that is by default linked to the display of the terminal. It could have been set elsewhere, and that's what the redirect does.

```
echo "some text" > a_file
cat a_file
```

This sends that text to standard out and redirects standard out to the file a_file

```
some text
```

if we use two arrows it will append instead of overwriting.

```
echo "some more text" >> a_file
cat a_file
```

```
some text
some more text
```

man echo

Name	File descriptor	Description	Abbreviation
Standard	0	The default data stream for input, for example in a command pipeline. In the terminal, this defaults to	stdin
input		keyboard input from the user.	Stuiri
Standard	1	The default data stream for output, for example when a command prints text. In the terminal, this defaults	stdout
output		to the user's screen.	Stubut
Standard	2	The default data stream for output that relates to an error occurring. In the terminal, this defaults to the	stderr
error		user's screen.	Stuerr

Important

GitBash does not support man the reasons athe developer does not want to are also visible. You can use the help option -help try the help command.

The help is slightly different from the man pages overall.

Alternatively, you can modify your environment further. Enabling the Windows subsystem for Linux is one option. So is booting into Linux for example ubuntu that is installed on a flash drive. This uses the flas drive as the hard drive for the operating system. This option creates 2 whole "computers" at the software level, that use the same hardware.

5.4. Layers of a Computer System

- 1. Application
- 2. Algorithm
- 3. Programming Language
- 4. Assembly Language
- 5. Machine Code
- 6. Instruction set Architecture
- 7. Micro Architecture
- 8. Gates/registers
- 9. Devices (transistors)
- 10. Physics


5.5. Prepare for Next Class

- 1. install h/w simulator
- Add a glossary, cheatsheet entry, or historical context/facts about the things we have learned to the site.
- 3. Review past classes prep/more practice and catchup if appropriate
- 4. Map out how you think about data moving through a small program using the levels of abstraction. Add this to a markdown table in your KWL chart repo called abstraction.md. If you prefer a different format than a table, that is okay, but put it in your KWL repo. It is okay if you are not sure, the goal is to think through this.

5.6. More Practice

- 1. Once your PRs in your KWL are merged so that main and feedback match, pull to updates your local copy. In a new terminal window, navigate there and then move the your KWL chart to a file called chart.md. Create a new README files with a list of all the files in your repo. Use history N (N is the number of past commands that history will return) and redirects to write the steps you took to reorg.md. Review that file to make sure it doesn't have extra steps in it and remove any if needed using nano then commit that file to your repo.
- 2. find a place where there is a comment in the course notes indicating content to add and submit a PR adding that content. This could be today's notes or a past day's.
- 3. Add a new file to your KWL repo called stdinouterr.md Try the following one at a time in your terminal and describe what happens and explain why or list questions for each in the file. What tips/reminders would you give a new user (or yourself) about using redirects and echo?

```
echo "hello world" > fa > fb
echo "a test" > fc fd
> fe echo "hi there"
echo "hello " > ff world
<ff echo hello</li>
fa < echo hello there</li>
cat
```



5.7. Questions After class

5.7.1. What happens if I don't meet the requirements for the grade I contract for?

You will be able to revise the contract if you choose to earn a different grade. The revision will also have to get approved, but it is an option. If you do not fulfill your contract in the form it is stated at the end of the semester, you will get an incomplete and then we will make a plan to change that to a letter.

5.7.2. When can we expect approved pull requests?

Feedback hours mostly, which are 5-6pm on Tuesday and 4-5pm on Thursday

5.7.3. Can you echo multiple files at the same time?

Echo sends only to stdout, we can redirect stdout to a different file, but echo specifically goes to the one place. The question then becomes can we redirect std out to two places at once, which we cannot do with redirects alone either. However, we can send output multiple places using a few more commands. We'll come back to this one next week. Also try the last exercise under more practice.

5.7.4. does this character "<" do something different than the redirect character ">"?

They are both <u>redirections</u> < is less common.

5.7.5. What's under the hood with >?

The official documentation for <u>redirections</u> describes some. We'll come back to it after we talk through the overview of hardware a bit more in the next class.

5.7.6. What level of understanding of the abstraction stack is typical for a programmer?

This is going to depend on their training. A person who programs after a short coding bootcamp or a scientist who codes in order to do their scientific research may only understnd the application and algorithm layers and be perfectly content and able to fulfill their goals. With a Computer Science degree we hope that by the end you have down to Assembly very strong and the basic ideas down to gates/ registers. Someone with a Computer Engineering degree will have more understanding at the lower levels but maybe less in programming languages and algorithms than a CS degree. Plus

anyone can go learn more and forget things they once knew. Also how much you actively use this knowledge is going to vary. Someone who writes firmware is going to be focused on a very different point in that stack that someone who develops new machine learning applications for example.

5.8. Why you would want to override the name/path of a file?

You probably would not want to do this very often, but for example, I do this when I download a newer version of a file and my browser names the new version something like file_name (1).ext I actually wanted to overwrite but it assumes that I do not, so I use mv file_name\ (1).ext file_name.ext to overwrite the new, updated content into the better file name (without the space and (1))

5.8.1. How does Authentication on GitHub work?

<u>GitHub</u> provides a whole page on that with advice and links. We will also come back to this in order to talk about ssh keys and ssh generally next week.

5.9. Resources

Interactive Git Cheat Sheet

6. Survey of Hardware

6.1. Where does assembly come from?

In order to watch what happens in hardware when a program runs, which is our goal today, we will execute a compiled program. It is written in assembly code. Typically, we do not write assembly, but instead it is produced by the compiler.

Technically assembly instructions and the values we operate on are represented in binary on hardware, but these more readable level instructions, though basic, are a useful abstraction. These instructions are also hardware nonspecific.

6.2. Using the simulator

On MacOS:

cd path/nand2tetris/tools
bash CPUEmulator.sh

On Windows: Double click on the CPUEmulator.bat file

We're going to use the test cases from the book's project 5:

- 1. Load Program
- 2. Navigate to nand2tetris/projects/05

We're not going to do project 5, which is to build a CPU, but instead to use the test.

For more on how the emulator works see the CPU Emulator Tutorial.

For much more detail about how this all works chapter 4 of the related text book has description of the machine code and assembly language.

6.3. Adding Constants

We'll use add.hack first.

This program adds constants, 2+3.

It is a program, assembly code that we are loading to the simulator's ROM, which is memory that gets read only by the CPU.

Run the simulator and watch what each line of the program does.

Notice the following:

- to compute with a constant, that number only exists in ROM in the instructions
- to write a value to memory the address register first has to be pointed to what where in the memory the value will go, then the value can be sent there



Write code in a high level language that would compile into this program. Try writing two different variations.

6.4. Using a variable

Next use the max.hack.

This one compares the values at two memory locations. In order to use it, you have to write values to the RAM 0 and RAM 1 manually.

It first takes the value from each location and passes the first value to D, then uses the ALU to assign the difference between the two values to D. Then, if the value is greater than 0, it jumps to line to line 10 in the ROM (of the instructions). Line 10, sets A to 0 and 11 sets D to the value from RAM 0. If, instead, the value is less than 0, A is set 1, then and D is set to that value. Then the program points A to 2 and writes the value from D there.

Try it yourself

Write code in a high level language that would compile into this program. Try writing multiple different versions.

What does this program assume has happened that it doesn't include in its body.

6.5. Using output

The rect.hack program writes to output, by using a specific memory location that is connected to the output.

Try it yourself

Try working through this program using the tools to understand what it does

6.6. Prepare for Next Class

- Read these notes and practice with the hardware simulator, try to understand its assembly and walk through what other steps happen. Make notes on what you want to remember most or had the most trouble with in hardwaresurvey.md
- Review and update your listing of how data moves through a program in your abstraction.md.Answer reflection questions below.
- 3. Review the commit history and git blame of a repo in browser- what must be in the .git directory for GitHub to render all of that information? (be prepared to discuss this in class)
- 4. Fill in the Know and Want to know columns for the new KWL chart rows below.
- 5. Begin your grading contract, bring questions to class Tuesday.

6.6.1. Abstraction reflection

- 1. Did you initially get stuck anywhere?
- 1. How does what we saw with the hardware simulators differ from how you had thought about it before?
- 1. Are there cases where what you previously thought was functional for what you were doing but not totally correct? Describe them.

6.6.2. New KWL chart rows

```
|file system | _ | _ | _ |
|bash | _ | _ | _ |
|abstraction | _ | _ | _ |
|programming languages | _ | _ | _ |
```

6.7. More Practice

- 1. Complete the Try it Yourself blocks above in your hardwaresurvey.md.
- 2. Expand on your update to abstraction.md: Can you reconcile different ways you have seen memory before?

6.8. Questions After Class

6.8.1. Is assembly then converted to binary and if so, why isn't the code translated straight to binary instead of from code to assembly to binary?

Yes, assembly is converted to binary in order to write it to the hardware. The Emulator that we used today showed the numbers in RAM and the instructions both in higher level representations than binary. The advantage to assembly is that it is hardware independent and human readable. It is low level and limited to what the hardware *can* do, but it is a version of that that can be run on different hardware.

6.8.2. What does A mean in CPU Emulator?

6.8.3. When the prepare for next class says things like "organize your thoughts on ..." is it expected that we make a .md file somewhere on GitHub to show this work?

For things I expect to review, the instructions will tell you where it goes. Other things, we will bring up in a future class, so you should have it handy, but you can put it in a repo or a private set of notes.

7. What actually is git?

7.1. Grading Contract Q & A

Grading contract information is added to the syllabus

and the FAQ section

7.2. Git is a File System with a Version Control user interface

git is fundamentally a content-addressable filesystem with a VCS user interface written on top of it.


Porcelain: the user friendly VCS

Plumbing: the internal workings- a toolkit for a VCS

We have so far used git as a version control system. A version control system, in general, will have operations like commit, push, pull, clone. These may work differently under the hood or be called different things, but those are what something needs to have in order to

7.3. Git is distributed

Git can have different workflows

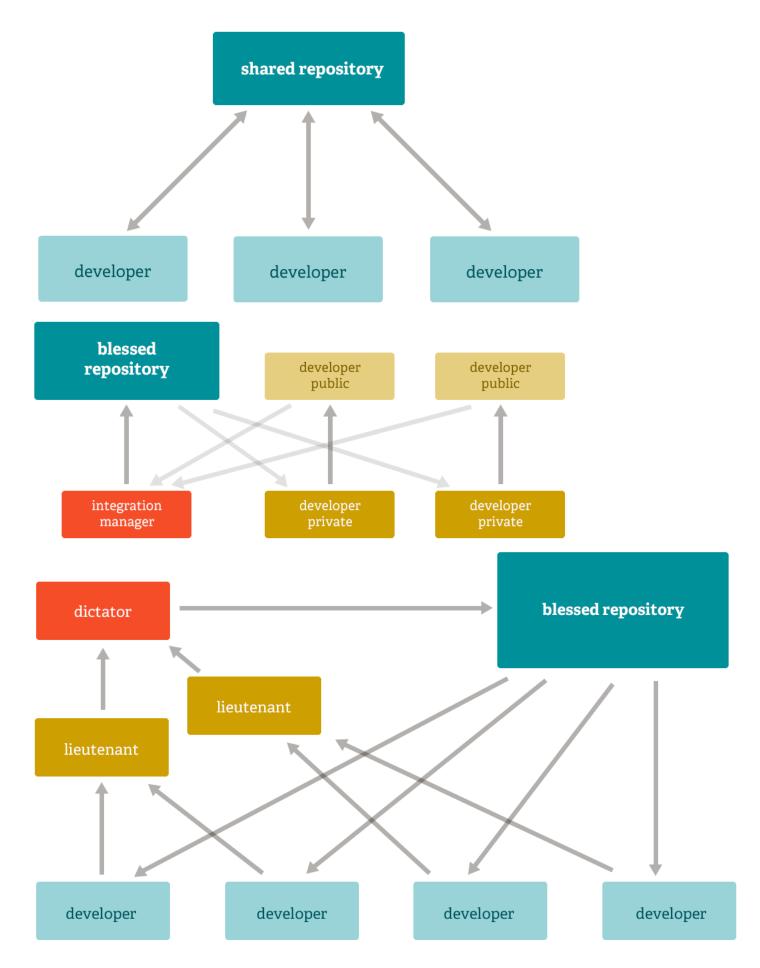

7.4. What are the parts of git?

```
cd path/to/sysinclass/github-in-class-brownsarahm/
ls -a
```

```
. . .github README.md b_file setup.py
.. .CONTRIBUTING.md a_file docs test_file.md
.git LICENSE.md about.md mymodule tests
```

We are going to look inside the git folder

```
cd .git
ls
```

|--|

The most important parts:

name	type	purpose
objects	directory	the content for your database
refs	directory	pointers into commit objects in that data (branches, tags, remotes and more)
HEAD	file	points to the branch you currently have checked out
index	file	stores your staging area information.

7.4.1. Git HEAD

We can look at the head file

```
cat HEAD
```

we see

```
ref: refs/heads/main
```

This tells us where in the git history the current status of the repository is.

This is what git uses when we call git status. It does more after reading that file, but that is the first thing it does.

```
cd ..
git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
    (use "git add <file>..." to include in what will be committed)
        a_file
        b_file
        test_file.md

nothing added to commit but untracked files present (use "git add" to track)
```

Note that the current branch is main and the HEAD file has a path to a file named main in the refs directory.

7.4.2. Git Refs

We can loook at that

```
cat .git/refs/heads/main
```

we see the most recent commit hash.

```
cea6a93d576ecd042823fca24553a58a6cd6565b
```

We can verify this with git log

when we run this it opens the log interactively, so we see something like:

```
commit cea6a93d576ecd042823fca24553a58a6cd6565b (HEAD -> main, origin/main, origin/HEAD)
Author: Sarah Brown <br/>
Date: Thu Feb 3 16:42:12 2022 -0500

try to prevernt repeated running
```

In parenthesis that is what branches are pointed to that commit. Use enter/return to scroll and press ${\bf q}$ to exit.

1 Try it Yourself

use git log to draw a map that shows where the different branches are relative to one another

```
cd ...
cd refs/

ls heads remotes tags

cd heads/
ls main reset test

this has one directory for each branch. we can confirm this with git branch at the top level.

cd ...
ls remotes/
```

origin

cd remotes/origin/
ls

HEAD main reset

```
(base) brownsarahm@origin $ cat HEAD
ref: refs/remotes/origin/main
(base) brownsarahm@origin $ cd main
-bash: cd: main: Not a directory
(base) brownsarahm@origin $ cat main
c15cf43b6807e172aaba7cf3b57adc7214b91082
(base) brownsarahm@origin $ cd
(base) brownsarahm@remotes $ cd ..
cat config
[core]
        repository format version = 0
        filemode = true
        bare = false
        logallrefupdates = true
        ignorecase = true
        precomposeunicode = true
[remote "origin"]
        url = https://github.com/introcompsys/github-in-class-brownsarahm.git
        fetch = +refs/heads/*:refs/remotes/origin/*
[branch "main"]
        remote = origin
        merge = refs/heads/main
[branch "reset"]
        remote = origin
        merge = refs/heads/reset
COMMIT_EDITMSG config
                                                 refs
FETCH_HEAD
                description
                                logs
HEAD
                                objects
                hooks
ORIG_HEAD
                index
                                packed-refs
cat ORIG_HEAD
c15cf43b6807e172aaba7cf3b57adc7214b91082
pwd
/Users/brownsarahm/Documents/sysinclass/github-in-class-brownsarahm/.git
cd ../../
pw
```

7.4.3. Git Config and branch naming

```
cd .git cat config
```

and we see

```
[core]
        repositoryformatversion = 0
        filemode = true
        bare = false
        logallrefupdates = true
        ignorecase = true
        precomposeunicode = true
[remote "origin"]
        url = https://github.com/introcompsys/github-in-class-brownsarahm.git
        fetch = +refs/heads/*:refs/remotes/origin/*
[branch "main"]
        remote = origin
        merge = refs/heads/main
[branch "reset"]
        remote = origin
        merge = refs/heads/reset
```

This file tracks the different relationships between your local copy and remots that it knows. This repository only knows one remote, named origin, with a url on GitHub. A git repo can have multiple remotes, each with its own name and url.

it also maps each local branch to its corresponding origin and the local place you would merge to when you pull from that remote branch.

A Warning

I remoeved looking at the index here, we're going to come back to it with more time to inspect it more carefully on Thursday

7.4.4. Git Objects

```
cd objects/
ls
```

```
0c 35 55 87 b6 c1 pack
17 45 79 b5 b8 info
```

7.5. Starting a Git Repository from Scratch

We'll create clear repo at the top levle of our inclass directory so that it is not inside another repo

```
cd ..
pwd
```

/path/to/Documents/sysinclass

then ceate the repo with

```
git init test
```



official statement on git branch naming

<u>GitHub</u> moved a little faster and used a <u>repo</u> to share info about their process <u>this change was complex and spurred a lot of discussion</u>

```
hint: Using 'master' as the name for the initial branch. This default branch name hint: is subject to change. To configure the initial branch name to use in all hint: of your new repositories, which will suppress this warning, call: hint: git config --global init.defaultBranch <name> hint: hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and hint: 'development'. The just-created branch can be renamed via this command: hint: git branch -m <name> Initialized empty Git repository in /Users/brownsarahm/Documents/sysinclass/test/.git/
```

```
git branch -m main fatal: not a git repository (or any of the parent directories): .git
```

```
cd test
git branch -m main
```

and we can confirm it works with

```
git status
```

to see that it is now on branch main.

```
On branch main

No commits yet

nothing to commit (create/copy files and use "git add" to track)

ls
```

7.6. Prepare for next Class

- 1. review the notes and ensure that you have a new, empty repository named test with its branch renamed to main from master.
- 2. Add the following to your kwl:

```
|git workflows | _ | _ | _ |
| git branches | _ | _ | _ |
| bash redirects | _ | _ | _ |
```

3. Practice with git log and redirects to write the commit history for your kwl chart to a file gitlog.txt and commit that file to your repo.

7.7. More Practice

- 1. Read about different workflows in git and add responses to the below in a workflows.md in your kwl repo. Git Book atlassian Docs
- Contribute either a glossary term, cheatsheet item, additional resource/reference, or history sidebar to the course website.

Workflow Reflection

- 1. What advantages might it provide that git can be used with different workflows?
- 1. Which workflow do you think you would like to work with best and why?
- 1. Describe a scenario that might make it better for the whole team to use a workflow other than the one you prefer.

7.8. Questions after class

7.8.1. when should the grading contract be turned in?

First draft is due Thursday, Feb 17 at 4pm as in the README

7.8.2. Can you create multiple remotes that have the same name?

no each remote has to have a different name, like each variable in a program has to be unique if you try to create a new remote with the same name it would overwrite the old one

7.8.3. what does it mean when a branch is both x commits ahead of main, but also y commits behind?

that means that there have been y commits to main that are not included on the other branch **and** that there are x commits to the other branch that are not on main.

7.8.4. Should we be working with Git entirely from the terminal for classwork or is it our preference?

In class, we will use the terminal because it is the most consistent and transparent. For other work, you can edit it however you like. You can work in browser, with the GitHub desktop client, using the GitHub CLI, or your favorite IDE's tools. I recommend giving the terminal a serious try because it will have all of the features of git and other tools may not, but your preference is fine. It could actually be really good for your general understanding to practice with git at least two ways.

7.8.5. Will we be using the github cli to publish our repo to github?

We are going to mostly use the base git CLI because it is more general and usable in more contexts (for example, your remote could be on GitLab or BitBucket or an internal private server)

7.8.6. Questions we will answer in the next couple of classes

1. What is the purpose of the index file?

- 2. How do you add your local repo to github?
- 3. What would happen if we would change this hexadecimal code which is in the files in .git?
- 4. Are any more efficient ways to navigate through repositories and git files

7.9. Resources

- git docs
- git book this includes other spoken languages as well if that is helpful for you.

8. How does git work?

8.1. Review

How can you write the history of a repo to a file?

We'll do this inside our in-class repo.

```
cd github-in-class-brownsarahm/
```

Recall, the git log command

```
git log
```

displays it in a text editor:

```
commit cea6a93d576ecd042823fca24553a58a6cd6565b (HEAD -> main, origin/main, origin/HEAD)
Author: Sarah Brown <br/> sarahm@uri.edu>
      Thu Feb 3 16:42:12 2022 -0500
   try to prevernt repeated running
commit c15cf43b6807e172aaba7cf3b57adc7214b91082 (test)
Author: Sarah M Brown <br/> srownsarahm@uri.edu>
       Thu Feb 3 13:38:42 2022 -0500
   insclass 2-3
commit 17320fc6f26806eb7d1ffc62c23b3bf1361b58b2
Author: Sarah M Brown <brownsarahm@uri.edu>
Date: Tue Feb 1 13:32:46 2022 -0500
   complete about closes #2
commit b81cf1525e96782e868e96a20eacf6eb26e882b7
Author: Sarah M Brown <br/> sarahm@uri.edu>
       Tue Feb 1 13:20:05 2022 -0500
Date:
```

use the q key to exit

We can use a redirect > to send that to a file instead of to where it normally goes.

```
git log > gitlog.txt
```

We can confirm this is the same as we saw before with cat

```
cat gitlog.txt
```

```
commit cea6a93d576ecd042823fca24553a58a6cd6565b
Author: Sarah Brown <br/> <br/> brownsarahm@uri.edu>
                  Thu Feb 3 16:42:12 2022 -0500
         try to prevernt repeated running
commit c15cf43b6807e172aaba7cf3b57adc7214b91082
Author: Sarah M Brown <br/> sarahm@uri.edu>
                   Thu Feb 3 13:38:42 2022 -0500
         insclass 2-3
commit 17320fc6f26806eb7d1ffc62c23b3bf1361b58b2
Author: Sarah M Brown <br/> srownsarahm@uri.edu>
Date: Tue Feb 1 13:32:46 2022 -0500
         complete about closes #2
commit b81cf1525e96782e868e96a20eacf6eb26e882b7
Author: Sarah M Brown <brownsarahm@uri.edu>
                 Tue Feb 1 13:20:05 2022 -0500
         create empty about
commit f707186cd978072d2888b0d2112023b5618b6414
Author: Sarah Brown <br/> sarahm@uri.edu>
                   Tue Feb 1 12:52:28 2022 -0500
         create readme closes #3
commit 611180dd89ffd8977dd9e5c502bcd4147c4980be
Author: github-classroom[bot] <66690702+github-classroom[bot]@users.noreply.github.com>
                   Tue Feb 1 17:45:49 2022 +0000
         Setting up GitHub Classroom Feedback
commit 3fbd9ee19ff64241b102fa61f279e9c4683d0e69
Author: github-classroom[bot] <66690702+github-classroom[bot]@users.noreply.github.com>
                   Tue Feb 1 17:45:49 2022 +0000
         GitHub Classroom Feedback
commit 270a43daebe1ba7bb719f141b327ca35e8e187ad
Author: github-classroom[bot] < 66690702 + github-classroom[bot] @ users.noreply.github.com > 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 10000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 1000 + 100
Date:
                    Tue Feb 1 17:45:47 2022 +0000
         Initial commit
```

8.2. Review: Anatomy of git

Recall that the HEAD file contains a pointer to the place in the git database that matches the current status of the directory


```
cat .git/HEAD
```

in this case it points to the head ref called main

```
ref: refs/heads/main
```

This is what git status uses, we can see that using our first git "plumbing" command \Box

```
git cat-file -p refs/heads/main
```



Before we look at the output of this, let's examine the command:

- git cat-file: displays git content
- -p (pretty print) option figure out the type of content and display it appropriately

This object has the hash for the tree that this commit is in, it also has the hash of the parent commit to this commit, then author information and the last commit message

8.3. Git Plumbing in a Fresh repo

Recall we used git init test to create a new repo on Tuesday, let's got back to that.

```
cd ../test/
```

We can use git status to confirm that it is completely blank

```
git status
On branch main

No commits yet

nothing to commit (create/copy files and use "git add" to track)
```

The directory is also empty

```
ls -a
```

Except for the .git database

```
. .. .git
```

And recall the different files.

```
ls .git/
HEAD description info refs
config hooks objects
```

Try it yourself

Try to remember what each of those files/directories does, make a table and try to write each one's role. After, check your answers using Tuesday's notes

8.4. Git Objects

we noted above that the git cat-file only works to git objects. Lets see what objects there are. Today we will see three types today:

- · blob objects: the content of your files (data)
- tree objects: stores file names and groups files together (organization)
- Commit Objects: stores information about the sha values of the snapshots

First, lets examine the objects directory. This time, instead of using 1s we'll use the bash command find. This pattern matches and looks for files or directories and lists the results

```
find .git/objects/
```

We see that it finds, the object directory itself and two subdirectories.

```
.git/objects/
.git/objects//pack
.git/objects//info
```

Let's look at another option of this command, the -type option filters the results and only returns the ones of the desired type. We'll look at only files using f

```
find .git/objects/ -type f
```

In this empty repository, there are no files.

8.4.1. Hashing

Let's create an object. We have mentioned breifely before that git stores data by hashing it, so the plumbing command git hash-object does exactly that.

```
echo 'text content' | git hash-object -w --stdin
```

Let's examine this command:

- git hash-object by default hashes the return the unique key to that particular content
- the -w option then tells git to alsow write that object to the database
- the --stdin option tells git hash-object to get the content to be processed from stdin instead of a file
- the | is called a pipe (what we saw before was a redirect) it pipes a process output into the next command
- echo would write to stdout, with the pipe it passes that to stdin for the ${\tt git}$ hash-object to use



the key is *unique* in that there is a one to one mapping from any particular content to a single key. However, as we saw in class, if we all do the same content, we all get the key same key back

and we see it returns the unique key to us:

```
c182a93374d6b18a87e1f1e8a9a18812639c58c8
```

We can then view the file that was added to the database with git cat-file again. Recall the -p option, uses information about the file type to display it in an appropriate manner.

```
git cat-file -p c182a93374d6b18a87e1f1e8a9a18812639c58c8 text content
```

So far, we added "text content" to the git database, but nothing in the directory:

ls

shows us that its an empty directory.

Lets create a file and add that to our git database. We will create the file with echo and a redirect:

```
echo 'version 1' > test.txt
```

then we can hash it and write to the database from the file this time.

```
git hash-object -w test.txt
83baae61804e65cc73a7201a7252750c76066a30
```

we can list the directory so and note that more directories have been made:

```
ls .git/objects/
83 c1 info pack
```

Even better, we can use the find command filtered by type that we saw earlier.

```
find .git/objects/ -type f
.git/objects//c1/82a93374d6b18a87e1f1e8a9a18812639c58c8
.git/objects//83/baae61804e65cc73a7201a7252750c76066a30
```

We see that this created an additional file for each of the two has objects that we have created.

Let's append more text to the file, recall two >> redirects to append instead of overwrite.

```
echo 'version 2' >> test.txt
```

We can confirm this worked as we expected:

```
cat test.txt
version 1
version 2
```

And then has the file

```
git hash-object -w test.txt
```

and view the hashed content using the key that was returned.

```
git cat-file -p 0c1e7391ca4e59584f8b773ecdbbb9467eba1547
version 1
version 2
```

So far, we have been adding a new hash of the whole file each time. We will see later that git *can* be more efficient than this because this would begin to take a lot of space very quickly.

8.4.2. Tree Objects

The next type of object to inspect is the tree, since the tree is a git object, we can use git cat-file again.

```
git cat-file -p main^{tree}
```

but this test repo that we are working with does not have a tree yet, so it

```
fatal: Not a valid object name main^{tree}
```

We can confirm this using git status

```
git status
```

```
On branch main

No commits yet

Untracked files:
    (use "git add <file>..." to include in what will be committed)
        test.txt

nothing added to commit but untracked files present (use "git add" to track)
```

Important

This syntax works in bash but has common problems in other shells:

- CMD on Windows: the ^ character is used for escaping, so you have to double it:git cat-file -p main^^{tree}.
- PowerShell: parameters using {} characters have to be quoted to parse correctly, so use: git cat-file -p 'master^{tree}'.
- ZSH: the ^ character is used for globbing, so enclose the whole expression in quotes: git cat-file -p "master^{tree}".

In a more complete repo, we can view the tree:

```
git cat-file -p main^{tree}
```

```
040000 tree c91892d93170077fea81f1d8009c4ccc91af1c29
                                                         .github
100644 blob e69de29bb2d1d6434b8b29ae775ad8c2e48c5391
                                                         CONTRIBUTING.md
100644 blob e69de29bb2d1d6434b8b29ae775ad8c2e48c5391
                                                         LICENSE.md
100644 blob 7987a001e70d28376129bfe0538f98f9aa281a55
                                                         README . md
100644 blob b5f4fcb8f875fe33781256ebf6fdde7547188d6f
                                                         about.md
040000 tree 55651ac0763db741988f02a45842aa020a77c14d
                                                         docs
040000 tree 3581dc38ca3929efcbbc6f7ce510ded2c7dd7309
                                                         mymodule
100644 blob e69de29bb2d1d6434b8b29ae775ad8c2e48c5391
                                                         setup.py
040000 tree 45fcb1dd311e5e45af759cb3627dca5f47f58f04
                                                         tests
```

We see a blob for each file and a tree for each directory. The blob objects refer to the last hashed version of the file added to this branch (main)

```
cat HEAD ref: refs/heads/main
```

8.5. Creating a Commit manually

A Warning

this is revised relative to in class

In class we tried to add directly to the commit tree:

```
echo 'first commit' | git commit-tree c182a9
```

but this failed:

```
fatal: c182a93374d6b18a87e1f1e8a9a18812639c58c8 is not a valid 'tree' object
```

because we had skipped a step. We need to create the tree first.

You use this command to artificially add the earlier version of the test.txt file to a new staging area.

```
git update-index --add --cacheinfo 100644 \
83baae61804e65cc73a7201a7252750c76066a30 test.txt
```

the \ allows us to continue typing on a second visual line in one long command. this command puts the hashed object 83baae with file named test.txt

- this the plumbing command git update-index updates (or in this case creates an index, the staging area of our repository)
- the --add option is because the file doesn't yet exist in your staging area (you don't even have a staging area set up yet)
- · --cacheinfo because the file you're adding isn't in your directory but is in your database. Then, you specify the mode, SHA-1, and filename

n this case, you're specifying a mode of 100644, which means it's a normal file.

```
git add test.txt
```

```
git status
On branch main

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file: test.txt
```

Note

We tried viewing the index but it did not work. the documentation shows the specification for the index, it is not readable

```
git commit -m 'first commit'
[main (root-commit) 2948028] first commit
1 file changed, 2 insertions(+)
create mode 100644 test.txt
```

```
find .git/objects/ -type f
.git/objects//0c/1e7391ca4e59584f8b773ecdbbb9467eba1547
.git/objects//c1/82a93374d6b18a87e1f1e8a9a18812639c58c8
.git/objects//29/480288d80e3850d6bf7ae170bd3bea5b3164c7
.git/objects//83/baae61804e65cc73a7201a7252750c76066a30
.git/objects//25/8231c1cee8048eef3a8057cfbdab76261277c6
```

```
git cat-file -p main^{tree}
100644 blob 0c1e7391ca4e59584f8b773ecdbbb9467eba1547 test.txt
```

```
git cat-file -p 2948028
tree 258231c1cee8048eef3a8057cfbdab76261277c6
author Sarah M Brown <brownsarahm@uri.edu> 1645121714 -0500
committer Sarah M Brown <brownsarahm@uri.edu> 1645121714 -0500
first commit
```

```
git cat-file -p 258231
100644 blob 0c1e7391ca4e59584f8b773ecdbbb9467eba1547 test.txt
```

8.6. How is git efficient?

```
git gc
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
```

```
ls
test.txt
```

```
find .git/objects -type f
.git/objects/c1/82a93374d6b18a87e1f1e8a9a18812639c58c8
.git/objects/pack/pack-07b0c08cc0268d55d02ea62ea880c61f810956d8.idx
.git/objects/pack/pack-07b0c08cc0268d55d02ea62ea880c61f810956d8.pack
.git/objects/info/commit-graph
.git/objects/info/packs
.git/objects/83/baae61804e65cc73a7201a7252750c76066a30
```

8.7. Why didn't git cat-file work on HEAD?

We tried:

```
git cat-file -p HEAD
```

and saw an error

```
fatal: Not a valid object name HEAD
```

To confirm what it was doing wrong, we checked another repository:

```
git init test2
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint: git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint: git branch -m <name>
Initialized empty Git repository in /Users/brownsarahm/Documents/sysinclass/test2/.git/
```

```
git cat-file -p HEAD
```

```
fatal: not a git repository (or any of the parent directories): .git
```

```
cd test2
```

```
git cat-file -p HEAD
```

```
fatal: Not a valid object name HEAD
```

We confirmed that this does not work.

This was because I made a mistake, the HEAD file does not need git cat-file it is a plain text file, not a git blob (type) object.

8.7.1. Could the lack of pushing be why?

```
cat .git/config
```

lets compare the results of this across two repos first for the small test repo:

```
[core]
    repositoryformatversion = 0
    filemode = true
    bare = false
    logallrefupdates = true
    ignorecase = true
    precomposeunicode = true
```

and for github-inclass:

```
[core]
    repositoryformatversion = 0
    filemode = true
    bare = false
    logallrefupdates = true
    ignorecase = true
    precomposeunicode = true
[remote "origin"]
    url = https://github.com/introcompsys/github-in-class-brownsarahm.git
    fetch = +refs/heads/*:refs/remotes/origin/*

[branch "main"]
    remote = origin
    merge = refs/heads/main
[branch "reset"]
    remote = origin
    merge = refs/heads/reset
```

This is all of the difference that is caused by the lack or configuring a remote.

We can view the heads by listing that directory

```
ls .git/refs/heads

main reset test
```

8.8. Prepare for next Class

- 1. Review the notes
- 2. For the core "Porcelain" git commands we have used (add, commit), make a table of which git plumbing commands they use in gitplumbing.md in your KWL repo
- 3. In a gitunderstanding.md list 3-5 items from the following categories (1) things you have had trouble with in git in the past and how they relate to your new understanding (b) things that your understanding has changed based on today's class (c) things about git you still have questions about
- 4. Make notes on *how* you use IDEs for the next week or so using the template idethoughts.md file in the course notes.

8.9. More Practice

- 1. Add to your gitplumbing.md file explanations of the main git operations we have seen (add, commit, push) in your own words in a way that will either help you remember or behow you would explain it to someone else at a high level. This might be analogies or explanations using other progrmaming concepts or concepts from a hobby. Add this under a subheading ## with a descriptive title (for example "Git In terms of ")
- 2. For one thing your understanding changed or an open question you, look up or experiment to find the answer



Further Reading

The goal of this exercise is to take an ethnographic approach to understanding the IDE(s) you use most often. We will combine this with a more formal study of them soon. Approaching a topic through multiple lenses can help you understand it better and presenting you, as a group, with multiple ways is a strategy of mine to help make sure that every one of you finds at least one way that works for you. More on ethnography in CS

```
# IDE Thoughts
## Actions Accomplished
<!-- list what things you do: run code/ edit code/ create new files/ etc; no need to comment on what the code you write does -
## Features Used
<!-- list features of it that you use, like a file explorer, debugger, etc -->
```

8.10. Questions After Class

8.10.1. when does the grade-free zone end?

It has ended, starting with the feedback given today, there will be grading implications, but remember there are flexibility systems with most of it.

8.10.2. Are there other uses for the hashes besides identifying git files in our repositories

for these particular hashes, no, they are the keys that mathc to values of items in our git database, but we can do other things with other hashes.

8.10.3. what does print pretty / -p mean?

this option of the git cat-file command displays the contents of a blob in a human readable format.

8.10.4. will we ever need to use the plumbing tools in a bind?

Some of them, yes! For example, today, it was helpful to use the plumbing command git update-ref to create a branch from a particular past commit. They could also help you to view a commit in greater detail and some other beyond what we saw today could help you edit a commit or alter the "history" of your repo if you need to.

The porcelain commands will get you through your day to day everything is going right and the most common mistakes.

8.10.5. Questions addressed above integrated into the narrative

- I am still confused about the idea of the objects and what they do exactly/their purpose
- so all of the plumbing commands we used today are all the parts that are wrapped up in the processes like adding/committing/pushing things to GitHub?

8.10.6. Questions to practice with

• What if we would change the file again (added 3rd line) and committed again. How many hash objects would be created? What connection would there be between the commits?

8.10.7. Questions we will come back to next

- · how are hash number formed?
- · From init, first commit, to first push, what is the exact sequence of events that happens under the hood of git?

low level git commands that allow the user to access the inner workings of git.

9. How do hashes work in git?

In this class we will cover:

- · what type of hashes are used in git
- · what a hash is
- · number systems

9.1. Git Plumbing Q&A

Plumbing commands work with the .git directory as a file system directly. Porcelain commands provide higher level interactions with git as a version control system.

9.2. What is a hash?

- a hash is a fixed size value that can be used to represent data of arbitrary sizes
- the *output* of a hashing function
- · often fixed to a hash table

A hasing function could be really simple, to read off a hash table, or it can be more complex.

For example:

Hash	content
0	Success
1	Failure

If we want to represent the status of a program running it has two possible outcomes: success or failure. We can use the following hash table and a function that takes in the content and returns the corresponding hash. Then we could pass around the 0 and 1 as a single bit of information that corresponds to the outcomes.

This lookup table hash works here.

In a more complex scenario, imagine trying to hash all of the new terms you learn in class. A table would be hard for this, because until you have seen them all, you do not know how many there will be. A more effective way to hash this, is to derive a *hashing function* that is a general strategy.

9.3. When does hashing occur in git?

In git we hash both the content directly to store it in the database (.git) directory and the commit information.

Recall, when we were working in our toy repo we created an empty repository and then added content directly, we all got the same hash, but when we used git commit our commits had different hashes because we have different names and made the commits at different seconds. We also saw that *two* entries were created in the .git directory for the commit.

In git, 40 characters that uniquely represent either the content or a commit.

Mostly, a shorter version of the commit is sufficient to be unique, so we can use those to refer to commits by just a few characters:

- minimum 4
- · must be unique

Note

You can view commits shorter with options to git log

git log --abbrev-commit --pretty=oneline

Important

git commits only need to be unique is **per repository** the git program is not searching all git repositories when we run commands that use commits, it is looking only in the local .git directory. You could even have two different projects on your computer with an identical hash and that would not be a conflict because git only looks within the current directory.

9.4. What hashing function does git use?

Git uses SHA-1. See a generator

This is a Secure Hashing Algorithm that is derived from cryptography. Because it is secure, no set of mathematical options can directly decrypt an SHA-1 hash. It is designed so that any possible content that we put in it returns a unique key. It uses a combination of bit level operations on the content to produce the unique values.

The SHA-1 Algorithm hashes content into a fixed length of 160 bits. This means it can produce \(2^160\) different hashes. Which makes the probability of a collision very low.

The number of randomly hashed objects needed to ensure a 50% probability of a single collision is about (2^{80}) (the formula for determining collision probability is $p = (n(n-1)/2) * (1/2^{160})$. \ (2^{80}) is 1.2×1024 or 1 million billion billion. That's 1,200 times the number of grains of sand on the earth.

—A SHORT NOTE

ABOUT SHA-1 in the Git

Documentation

This output, 160 bits (a bit is a unit of information in base 2; a 0 or 1) can be interpreted as a number and represented in diffrent ways. Since 160 characters is really long, git represents it as 40 characters in hexadecimal.

However, SHA-1 is subjec to collision attacks.

We have broken SHA-1 in practice.

٠..

It is now practically possible to craft two colliding PDF files and obtain a SHA-1 digital signature on the first PDF file which can also be abused as a valid signature on the second PDF file.

٠.

GIT strongly relies on SHA-1 for the identification and integrity checking of all file objects and commits. It is essentially possible to create two GIT repositories with the same head commit hash and different contents, say a benign source code and a backdoored one. An attacker could potentially selectively serve either repository to targeted users. This will require attackers to compute their own collision. — shattered it

Git switched to hardended SHA-1 in response to a collision

In that case it adjusts the SHA-1 computation to result in a safe hash. This means that it will compute the regular SHA-1 hash for files without a collision attack, but produce a special hash for files with a collision attack, where both files will have a different unpredictable hash. from

and they will change again soon

9.5. What is a number?

a mathematical object used to count, meaure and label

a mathematical object used to count, meaure and label

What types of numbers are you familiar with?

9.6. Number Representation

Numbers are a cultural artifact: We use a base 10 system most commonly because we count with our hands and have 10 fingers. Computers use base 2 because they are digital:on & off. The current representation system we use (0,1, 2, 3, 4,5,6,7,8,9) is called hindu-arabic.

9.6.1. Decimal

To represent larger numbers than we have digits on we have a base (10) and then.

we have the ones (\(10^0\) place, tens (\)10^1\() place, hundreds (\)10^2) place etc.

9.6.2. Binary

uses base 2, but the same characters. So the place values are the ones($((2^0))$), the twos($((2^1))$), the fours($((2^2))$), the eights($((2^3))$), etc.

\[10 => 2*1 + 1*0 = 2\]

so this 10 in binary is 2 in decimal

\[1001 => 8*1 + 4*0 + 2*0 + 1*1 = 9\]

Binary numbers have been discovered in ancient egyptian, chinese and Indian texts.

9.6.3. Octal

uses base 8, but the same characters. So the place values are the ones(\(8^0\)), the eights(\(8^1\)), the 64s (\(8^2\)), etc.

so 10 in octal is 8 in decimal

This numbering system was popular in 6 bit and 12 bit computers, but is has origins before that. Native Americans using the Yuki Language (based in what is now California)used an octal system because they count using the spaces between fingers and speakers of the Pamean languages in Mexico count on knuckles in a closed fist. Europeans debated using decimal vs octal in the 1600-1800s for various reasons because 8 is better for math mostly. It is also found in Chinese texts dating to 1000BC.

9.6.4. Hexadecimal

uses base 16, but the same characters plus letters A-F. The letters fill in for the numbers aft 9 so A is 10, B is 11, etc. So the place values are the ones(\(16^0\)), the sixteens(\(16^1\)), the two hundred fifty sixes(\(16^2\)), etc.

```
\[ 10 = > 16*1 + 1*0 = 16\]
so 10 in hex is 16 in decimal
\[ E => 1*14 = 14\]
\( CD => 16*12 + 1*13 = 205\)\$
```

There was debate a number of different proposals for how the characters beyond 9 should be represented.

9.6.5. Roman numerals

Use different representation completely. It doesn't have places the same way. But it is still a way to represent numbers.

```
I = 1, V = 5, X = 10, L = 50, C = 100, D = 500, M = 1000
```

This repesentation concatenates symbols and adds them if they are in desceding order and if a smaller digit before a larger then it is subtracted.

- III = 1 + 1 + 1 = 3
- IX = 10 -1 = 9
- XL = 50 10 = 40



1 Learn more

Learning more about other number systems or the history of these number systems is a good topic for a deeper exploration.

9.7. Prepare for next Class

- 1. review the past two classes of notes
- 2. find 3 more examples of using other number systems, list them in $\mathsf{numbers}\,.\mathsf{md}$
- 3. Read about hexpeak from Wikipedia for an overview and one additional source. In your kwl repo in hexspeak.md summarize it in your own words, one interesting fact from your additional source and link to the source you found. Come up with a word or two on your own.
- 4. (priority) Bring to class a scenario where you think git could help, but we haven't covered yet how to do it. (be prepared to post it to Prismia at the start of class)

9.8. More Practice

- 1. Read more about git's change from SHA-1 to SHA-256 and reflect on what you learned (questions provided)
- 2. (priority) In a language of your choice or pseudocode, write a short program to convert, without using libraries, between all pairs of (binary, decimal, hexidecimal) in numbers.md. Test your code, but include in the markdown file enclosed in three backticks so that it is a "code block" write the name of the language after the ticks like:

```
```python
python code
```

#### 9.8.1. transition questions

- 1. Why is the switch important?
- 2. Summarize one vulnerability of SHA-1.
- 3. What impact will the swith have on how git works?
- 4. If you have scripts that operate on git repos, what might you do to future proof them so that the switch won't break your code.

### 9.9. Questions After Class

#### 9.9.1. Why did git use SHA-1 isntead of SHA 256 from the start?

The shorter the hash the more efficient the system is and git was 12 years old when SHA-1 was determined to be meaningfully vulnerable to collsion attack.

# 9.9.2. If there is ever a class cancellation or any kind of issue with the notes again, will that be emailed to us or only sent through Slack?

It will be announced on slack, but with an @channel mention, you can set your <u>notification preferences</u> so that you get e-mails for direct messages and @ mentions and the @channel counts as an @ mention for all members of the slack workspace (in this case our class). You could also opt for mobile notifications if you prefer. The goal with slack is to make it so that you all can better customize how you are notified and I can post to one place.

#### 9.9.3. Are both git and github switchig from sha1

GitHub uses git, it is not an alternative implementation or a fork, so yes it will switch too. The developers at GitHub an other git hosts are among the most impacted by the change since they write code that directly interacts with git objects.

#### 9.9.4. Are octal numbers ever used in computing?

We will see it when we talk about file permissions in unix systems.

More broadly, this would be a good topic for a deeper exploration report.

#### 9.9.5. Questions left as an exercise



these are for you to look up/hypothesize about and then we will discuss with you in your KWL repo

What are the possible dangers of git switching to a better encryption scheme immediately?

## 10. How can git help me?

So far we have seen git add a bunch of steps to a workflow and worked to understand what it is doing. I've *told* you tracks versions and can help you out because keeping track of versions is good.

Today I will show you how it can help.

we are going to work in out github-inclass repo today. Let's reveiw its status.

```
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:

(use "git add <file>..." to include in what will be committed)

a_file
b_file
gitlog.txt
test_file.md

nothing added to commit but untracked files present (use "git add" to track)
```

In mine, I have these extra files I don't need from testing things. How can I get rid of them since I do not want to keep them?

We see that they are in the files along with the other files that we planned to be here. Remember the "scenario" of this repo is that it has a number of mostly empty files to represent a python project.

```
ls
CONTRIBUTING.md README.md about.md docs mymodule test_file.md
LICENSE.md a_file b_file gitlog.txt setup.py tests
```

Could it be git pull?

```
git pull

Already up to date.
```

No git pull, gets, from the origin, the most up to date version of the git database (.git directory) from the origin (in this case github). It does not, however do anything to untracked files.

We can remove them:

```
rm *_file
rm gitlog.txt
rm test_file.md
```

Then we can confirm the git status of the repo.

```
git status
On branch main
Your branch is up to date with 'origin/main'.
nothing to commit, working tree clean
```

#### 10.1. What if I make a file that I don't want to commit?

Imagine we made a configuration file that contained some text (for example a personal key of some sort) that we need in the directory to make our code work locally, but that we do not want to push to GitHub?

```
echo "secrets" >> config.txt
```

The way to do that is to not put it into git at all, so that when we push it will not go.

As usual, before we do anything with git, we check the status

```
git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
 (use "git add <file>..." to include in what will be committed)
 config.txt

nothing added to commit but untracked files present (use "git add" to track)
```

In this case, we see that git has the file here, but it is untracked.

Recall, git status has the git program check the HEAD file to determine what in the databases to look at and then compares the current directory status to what the corresponding last hash contained.

Git provides a special file that it will check when we add, and then not add any files that match the files in.

```
nano .gitignore
```

We will add the following to the file:

```
config.*
```

Then write and exit from nano.

Now our status has changed:

```
git status
```

We see the config file is not in the untracked anymore (that means it will not be added if we do git add) but the gitignore file is.

We want to commit this file becuase we would want collaborators to share the same ignored patterns.

```
git add .
```

```
git commit -m 'ignore configs'
[main 3c46e01] ignore configs
1 file changed, 1 insertion(+)
create mode 100644 .gitignore
```

Now, what is the advantage of using the pattern?

If we make another file that starts with "config"

```
echo "more secrets" >> config.yml
```

and then check the status

```
git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
(use "git push" to publish your local commits)
nothing to commit, working tree clean
```

git does not see it at all.

we can see though that the files are boht there in our directory on disk.

```
ls
```

```
CONTRIBUTING.md README.md config.txt docs setup.py
LICENSE.md about.md config.yml mymodule tests
```

What happens if we try to explicitly add it?

```
git add config.txt
```

Let's see:

```
The following paths are ignored by one of your .gitignore files:
config.txt
hint: Use -f if you really want to add them.
hint: Turn this message off by running
hint: "git config advice.addIgnoredFile false"
```

git tries to warn us.

#### Important

In general, if something you are trying to do requires -f or -hard in git or bash (or others) do not do it unless you are **very** confident that it is the right thing to do.

These options are generally only required for things are either hard or impossible to undo.

## 10.2. What if I break my code and commit the bad code?

Let's imagine we wrote some code that does not actually work

```
echo "bad code" >> mymodule/important_classes.py
```

but we forgot to test it, so we add

```
git add .
```

and commit it:

```
git commit -m 'best feature ever'
```

now it is in our repository

```
[main 2c1c3e2] best feature ever
1 file changed, 1 insertion(+)
```

Now we test the code, find out that it does not work. but we remember that it worked before this code we just added. We can view the commit history to get the hash of the last commit that worked.

```
git log
commit 2c1c3e2d7bebdbd238e517e07142151cdf5256f4 (HEAD -> main)
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:00:50 2022 -0500
 best feature ever
commit 3c46e01c5b29ffa2ed9a76ff4e8c8f334c0c1bf2
Author: Sarah M Brown
 srownsarahm@uri.edu>
Date: Thu Feb 24 12:54:45 2022 -0500
 ignore configs
commit cea6a93d576ecd042823fca24553a58a6cd6565b (origin/main, origin/HEAD)
Author: Sarah Brown <brownsarahm@uri.edu>
 Thu Feb 3 16:42:12 2022 -0500
Date:
 try to prevernt repeated running
commit c15cf43b6807e172aaba7cf3b57adc7214b91082 (test)
Author: Sarah M Brown
 srownsarahm@uri.edu>
Date:
 Thu Feb 3 13:38:42 2022 -0500
 insclass 2-3
commit 17320fc6f26806eb7d1ffc62c23b3bf1361b58b2
Author: Sarah M Brown <brownsarahm@uri.edu>
 Tue Feb 1 13:32:46 2022 -0500
```

and then we can look at the difference between that version of important\_classes.py and the current version:

```
git diff 3c46e0 important_classes.py
```

Git diff is what GitHub uses on the PR files changed tab. it takes the commit reference first and then the file to look at just the one files changes.

```
diff --git a/mymodule/important_classes.py b/mymodule/important_classes.py
index e69de29..90baf46 100644
--- a/mymodule/important_classes.py
+++ b/mymodule/important_classes.py
@@ -0,0 +1 @@
+bad code
```

From this, we can confirm that the only change in the most recent commit is the bad code, there is not any other good code we want to keep.

We can look back our git log above to get the hash for that last commit and we can use git revert to "undo" it.

```
git revert 2c1c3e
```

Then git asks us to confirm a commit message, and we get output like this, which looks like after a commit.

```
[main 8bb2df9] Revert "best feature ever"
1 file changed, 1 deletion(-)
```

To see how git revert works lets look at our commit history again.

```
git log
```

```
commit 8bb2df91d371ab3f9245d49aee5bd0e5f95a9294 (HEAD -> main)
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:09:56 2022 -0500
Date:
 Revert "best feature ever"
 This reverts commit 2c1c3e2d7bebdbd238e517e07142151cdf5256f4.
commit 2c1c3e2d7bebdbd238e517e07142151cdf5256f4
Author: Sarah M Brown <brownsarahm@uri.edu>
 Thu Feb 24 13:00:50 2022 -0500
Date:
 best feature ever
commit 3c46e01c5b29ffa2ed9a76ff4e8c8f334c0c1bf2
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 12:54:45 2022 -0500
Date:
 ignore configs
commit cea6a93d576ecd042823fca24553a58a6cd6565b (origin/main, origin/HEAD)
Author: Sarah Brown <brownsarahm@uri.edu>
Date: Thu Feb 3 16:42:12 2022 -0500
 try to prevernt repeated running
commit c15cf43b6807e172aaba7cf3b57adc7214b91082 (test)
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 3 13:38:42 2022 -0500
 insclass 2-3
```

git did not go back in history in this case, it looked at what changes were applied in the commit we were reverting, applied the inverse of them to the current place the head points and added a new commit for that.

To illustrate this more clearly, lets make two commits. First we'll commit some code we will later realize is not good of helper functions and then something good to alternative classes.

```
echo "heleper code" >> helper_functions.py
git add .
git commit -m 'bad code'
```

we see the message for that

```
[main e9c132f] bad code
1 file changed, 1 insertion(+)
```

and the second change

```
echo "something good" >> alternative_classes.py
git add .
git commit -m 'some code'
```

```
[main a224c42] some code
1 file changed, 1 insertion(+)
```

Now we view the commit history again and the code we want to change is one commit back.

```
git log
commit a224c42a9fd5ba19b55d1e5e4f34c411c8d519f3 (HEAD -> main)
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:12:47 2022 -0500
 some code
commit e9c132f6922a4bfae5b21793a9982fe837db6643
Author: Sarah M Brown
 srownsarahm@uri.edu>
Date: Thu Feb 24 13:12:17 2022 -0500
 bad code
commit 8bb2df91d371ab3f9245d49aee5bd0e5f95a9294
Author: Sarah M Brown
 sarahm@uri.edu>
Date: Thu Feb 24 13:09:56 2022 -0500
 Revert "best feature ever"
 This reverts commit 2c1c3e2d7bebdbd238e517e07142151cdf5256f4.
commit 2c1c3e2d7bebdbd238e517e07142151cdf5256f4
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:00:50 2022 -0500
 best feature ever
commit 3c46e01c5b29ffa2ed9a76ff4e8c8f334c0c1bf2
Author: Sarah M Brown

Srownsarahm@uri.edu>
Date: Thu Feb 24 12:54:45 2022 -0500
 ignore configs
```

We can use revert again

```
git revert e9c132
```

it behaves just as before, having us write a commit message and then commiting the "new" changes

```
[main b6437b4] Revert "bad code"
1 file changed, 1 deletion(-)
```

Now when we view the commit history we see the bad code, the commit we wanted to keep after it and hten the reverted bad code.

```
git log
commit b6437b4174f69d79e769e296c5e0db5f38c78a55 (HEAD -> main)
Author: Sarah M Brown <brownsarahm@uri.edu>
 Thu Feb 24 13:14:58 2022 -0500
 Revert "bad code"
 This reverts commit e9c132f6922a4bfae5b21793a9982fe837db6643.
commit a224c42a9fd5ba19b55d1e5e4f34c411c8d519f3
Author: Sarah M Brown <brownsarahm@uri.edu>
Date:
 Thu Feb 24 13:12:47 2022 -0500
commit e9c132f6922a4bfae5b21793a9982fe837db6643
Author: Sarah M Brown
 sarahm@uri.edu>
 Thu Feb 24 13:12:17 2022 -0500
 bad code
commit 8bb2df91d371ab3f9245d49aee5bd0e5f95a9294
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:09:56 2022 -0500
 Revert "best feature ever"
 This reverts commit 2c1c3e2d7bebdbd238e517e07142151cdf5256f4.
commit 2c1c3e2d7bebdbd238e517e07142151cdf5256f4
Author: Sarah M Brown <brownsarahm@uri.edu>
 Thu Feb 24 13:00:50 2022 -0500
```

#### Important

What does this functionality tell us about how we should commit?

we want to commit:

- for each "thought" that is cohesive and is a unit we might want to undo
- · we want to use descriptive commit messages so that we can use them to pick out what to undo

## 10.3. What if I try a bunch of stuff and it doesn't work, but I notice before I commit?

Imagine, you tried out a new idea:

```
echo "test idea" >> mymodule/important_classes.py
```

and then you test and it does not work. You want to put your working directory back to match the last commit in order to start from scratch with a new idea.

```
git status
```

We can see that our new file is not staged for commit and the git status tells us how to put it back.

```
On branch main

Your branch is ahead of 'origin/main' by 6 commits.

(use "git push" to publish your local commits)

Changes not staged for commit:

(use "git add <file>..." to update what will be committed)

(use "git restore <file>..." to discard changes in working directory)

modified: mymodule/important_classes.py

no changes added to commit (use "git add" and/or "git commit -a")
```

```
git restore mymodule/important_classes.py
```

Now if we try something new again

```
echo "test idea again" >> mymodule/important_classes.py
```

### 10.4. How can git help me remember what I'm working on?

Imagine you worked some then walked away and forget what you were working on.

A diff can help you see what changes you have made since your las commit.

```
git diff mymodule/important_classes.py
diff --git a/mymodule/important_classes.py b/mymodule/important_classes.py
index e69de29..a8343bc 100644
--- a/mymodule/important_classes.py
+++ b/mymodule/important_classes.py
@@ -0,0 +1 @@
+test idea again
```

Now if we add the file, to commit.

```
git add .
```

If you are about to commit and forget what work you are about to commit or have trouble thinking of what to write as your commit message, you can use git diff --staged to see exactly what changes you are about to add.

```
git diff --staged
```

this outputs a diff between the index and the last commit.

```
diff --git a/mymodule/important_classes.py b/mymodule/important_classes.py
index e69de29..a8343bc 100644
--- a/mymodule/important_classes.py
+++ b/mymodule/important_classes.py
@@ -0,0 +1 @@
+test idea again
```

Note that it shows you what you are comparing e69de29 to a8343b and lists the files and both a summary @@ -0,0 +1 @@

and the actual line by line changes.

This can be more useful after we ahve made more changes after we staged some.

```
echo "doc new feature" >> README.md
```

and check the diff again

```
git diff --staged
```

we get the same output

```
diff --git a/mymodule/important_classes.py b/mymodule/important_classes.py
index e69de29..a8343bc 100644
--- a/mymodule/important_classes.py
+++ b/mymodule/important_classes.py
@@ -0,0 +1 @@
+test idea again
```

Thisis the same becaase it comares the staging area to the last commit, not the current directory to the last commit.

```
git status
```

This shows that only the important\_classes file is staged, not the readme chagnes.

```
On branch main
Your branch is ahead of 'origin/main' by 6 commits.

(use "git push" to publish your local commits)

Changes to be committed:

(use "git restore --staged <file>..." to unstage)

modified: mymodule/important_classes.py

Changes not staged for commit:

(use "git add <file>..." to update what will be committed)

(use "git restore <file>..." to discard changes in working directory)

modified: README.md
```

# 10.5. How can update my feature branch when main gets updated?

Imagine you are working on a new feature for a the project, so you create a new branch

```
git checkout -b new_feature
Switched to a new branch 'new_feature'
```

and add your work.

```
echo "new feature" >> mymodule/important_classes.py
```

```
git status
On branch new_feature
Changes to be committed:
 (use "git restore --staged <file>..." to unstage)
 modified: mymodule/important_classes.py

Changes not staged for commit:
 (use "git add <file>..." to update what will be committed)
 (use "git restore <file>..." to discard changes in working directory)
 modified: README.md
 modified: mymodule/important_classes.py
```

and we will commit the code here.

```
git add mymodule/important_classes.py
git commit -m 'new feature'
```

```
[new_feature e7a92d2] new feature
1 file changed, 2 insertions(+)
```

Then you remember you had done work on the README that was supposed to be on main already, so we go back there and commit that file. Imagine this work is a bug fix that is unrelated to new feature and you want users and your co-workers to have before you finish the new feature.

```
git checkout main

M README.md

Switched to branch 'main'

Your branch is ahead of 'origin/main' by 6 commits.

(use "git push" to publish your local commits)
```

```
git status
On branch main
Your branch is ahead of 'origin/main' by 6 commits.
(use "git push" to publish your local commits)

Changes not staged for commit:
(use "git add <file>..." to update what will be committed)
(use "git restore <file>..." to discard changes in working directory)
modified: README.md

no changes added to commit (use "git add" and/or "git commit -a")
```

and commit the readme here.

```
git add .
```

```
git commit -m 'update readme'
[main 07dbc9e] update readme
1 file changed, 1 insertion(+)
```

We can view commit history to see that these two branches have similar, but not the same history.

```
git log
commit 07dbc9e484b92cdbc7b055883fb5e1bfaee645f1 (HEAD -> main)
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:27:33 2022 -0500
 update readme
commit b6437b4174f69d79e769e296c5e0db5f38c78a55
Author: Sarah M Brown <brownsarahm@uri.edu>
Date: Thu Feb 24 13:14:58 2022 -0500
 Revert "good code"
 This reverts commit e9c132f6922a4bfae5b21793a9982fe837db6643.
\verb|commit|| a 224 c 42 a 9 f d 5 b a 19 b 55 d 1 e 5 e 4 f 3 4 c 4 11 c 8 d 5 19 f 3
Author: Sarah M Brown <brownsarahm@uri.edu>
Date: Thu Feb 24 13:12:47 2022 -0500
 some code
commit e9c132f6922a4bfae5b21793a9982fe837db6643
Author: Sarah M Brown
 srownsarahm@uri.edu>
Date: Thu Feb 24 13:12:17 2022 -0500
 good code
commit 8bb2df91d371ab3f9245d49aee5bd0e5f95a9294
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:09:56 2022 -0500
Date:
 Revert "best feature ever"
```

then to the other branch

```
git checkout new_feature
```

```
Switched to branch 'new_feature'
```

and commit history again

```
git log
```

```
commit e7a92d24de2d70c6122e28b55cd9066b504ae8c8 (HEAD -> new_feature)
Author: Sarah M Brown
 sarahm@uri.edu>
 Thu Feb 24 13:26:40 2022 -0500
Date:
 new feature
commit b6437b4174f69d79e769e296c5e0db5f38c78a55
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:14:58 2022 -0500
 Revert "good code"
 This reverts commit e9c132f6922a4bfae5b21793a9982fe837db6643.
commit a224c42a9fd5ba19b55d1e5e4f34c411c8d519f3
Author: Sarah M Brown <brownsarahm@uri.edu>
Date:
 Thu Feb 24 13:12:47 2022 -0500
 some code
commit e9c132f6922a4bfae5b21793a9982fe837db6643
Author: Sarah M Brown <brownsarahm@uri.edu>
 Thu Feb 24 13:12:17 2022 -0500
 good code
commit 8bb2df91d371ab3f9245d49aee5bd0e5f95a9294
Author: Sarah M Brown
 srownsarahm@uri.edu>
 Thu Feb 24 13:09:56 2022 -0500
 Revert "best feature ever"
```

Now we want to get the changes from main into the new feature branch because those fixes impact our ability to test the new feature to see if it works right.

We can update the new\_feature branch with rebase.

```
git rebase main
Successfully rebased and updated refs/heads/new_feature.
```

Rebase gets the current status of the main branch (which has a mostly shared commit history with new\_feature and then applies all of the commits that are on new\_feature but not main on top of the most recent version of main.

We can see than now the history of new\_feature is everything on main +1 one commit, where before they had shared except the last commit, where each one had a different most recent commit.

Now, if we're done with the new feature and it works, we can merge it into main.

```
git checkout main
Switched to branch 'main'
Your branch is ahead of 'origin/main' by 7 commits.
(use "git push" to publish your local commits)
```

On main we have no current thigns to commit:

```
git status
On branch main
Your branch is ahead of 'origin/main' by 7 commits.
(use "git push" to publish your local commits)
nothing to commit, working tree clean
```

Git merge allows us to apply the commits from new feature to main.

```
git merge new_feature
Updating 07dbc9e..19d30d1
Fast-forward
mymodule/important_classes.py | 2 ++
1 file changed, 2 insertions(+)
```

This applies the commits to new feature that are not on main to the end of main.

```
git status
On branch main
Your branch is ahead of 'origin/main' by 8 commits.
(use "git push" to publish your local commits)
nothing to commit, working tree clean
```

# 10.6. What if the content diverges

Let's make a new branch

```
git checkout -b hotfix
Switched to a new branch 'hotfix'
```

Then switch back to main

```
git checkout main
Switched to branch 'main'
```

and add more content to our main branch

```
echo "bold commit to main" >> mymodule/important_classes.py
echo "slow thoughtful fix" >> mymodule/important_classes.py
```

We can look at the version of the file we have here

```
cat mymodule/important_classes.py
```

we have the old content and our new two lines

```
test idea again
new feature
bold commit to main
slower more thoughtful fix
```

and commit.

```
git add .
git commit -m "working project"
[main b832b2a] working project
1 file changed, 2 insertions(+)
```

Now we'll go back to the feature branch

```
git checkout -b hotfix
Switched to branch 'hotfix'
```

and look at what's there.

```
cat mymodule/important_classes.py
```

we don't have those two new lines.

```
test idea again
new feature
```

Now we fix the old bug that's not the new things. (maybe this was a different person working on this branch)

```
echo "fix older bug" >> mymodule/important_classes.py
```

and commit that

```
git add .
```

```
git commit -m 'fix other bug"
> '
[hotfix 3664aa0] fix other bug"
1 file changed, 1 insertion(+)
```

Now we can compare the two versions.

```
cat mymodule/important_classes.py
```

we have 3 lines on the hotfix branch

```
test idea again
new feature
fix older bug
```

git checkout main

```
Switched to branch 'main'
Your branch is ahead of 'origin/main' by 9 commits.
(use "git push" to publish your local commits)
```

```
cat mymodule/important_classes.py
```

and 4 on the main branch and the 3rd line is different on each.

```
test idea again
new feature
bold commit to main
slower more thoughtful fix
```

Now, we want to have all of those so we try to merge.

```
git merge hotfix
Auto-merging mymodule/important_classes.py
CONFLICT (content): Merge conflict in mymodule/important_classes.py
Automatic merge failed; fix conflicts and then commit the result.
```

but we see an error

```
nano mymodule/important_classes.py
```

in nano now we see the file looks different

```
test idea again
new feature
>>>>> HEAD
bold commit to main
slower more thoughtful fix
======
fix older bug
<<<<<< hotelength>house
house
fix older bug
```

Git did not know how to merge the two files together, so it maked the part it did not know how to handle. There's the part from the HEAD (the branch we have checked out, in this case main)

to resolve the merge conflict, we edit the file to be what we want. In this casewe want both sets of changes. SO we edit to look as follows:

```
test idea again
new feature
bold commit to main
slower more thoughtful fix
fix older bug
```

Now git tells us that we need to fix the conflicts and commit ecause we have unmerged paths.

```
git commit -m "keep all changes"

U mymodule/important_classes.py
error: Committing is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.
```

We have to add as usual

```
git add .
```

then we can commit.

```
git commit -m "keep all changes"
```

```
[main 62b943f] keep all changes
```

# 10.7. Prepare for next Class

- 1. Check that jupyter book is installed on your computer and the windows advice
- 2. Fix any open PRs you have that need to be rebased.
- 3. In your github in class repo, create a series of commits that tell as story of how you might have made a mistake and fixed it. Use git log and redirects to write that log to a file, gitstory.md in your KWL repo and then annotate your story to add in any narrative that didn't fit in the commit messages. This could be that you made a mistake in your code and used git to recover or that you got your git database to an undesirable state and got it back on track.

#### 10.8. More Practice

- Find an open source repository and look at the .gitignore file. In donotcommit .md reflect on what types of content typically get ignored and why you think they are ignored. If you can't figure out why, try to look it up.
- Create a second git story for the other type form your first (code mistake or git mistake) in gitstory2.md
- 3. add something to the glossary, cheatsheet or a history sidebar to the notes.

# 11. How do we build Documentation?

# 11.1. Review from getting unstuck with git

#### 11.1.1. Add a results folder and prevent its content from being committed.

Recall, this is our GitHub inclass repo:

```
cd github-in-class-brownsarahm ls
```

```
CONTRIBUTING.md README.md config.txt docs setup.py
LICENSE.md about.md config.yml mymodule tests
```

We saw last week to use the .gitignore file to ignore files that match a pattern.

```
cat .gitignore
```

we used a very simple pattern

```
config.*
```

to ignore any config file in this repository.

If we push

git push



and view online, we can see that the two config files we have locally are not pushed, becuase they were not added to the .git

# Important

This is another example of how git push does not push the files in the directory, but instead the .git directory (compressed) and then GitHub (and other git hosts) use git operations to show us the contents of the files based on the repository database.

Now, back to our task we first create the directory and then append a new line to it.

```
mkdir results
echo "results/" >> .gitignore
```

Note that the two > is needed, not one so tht we append instead of erase.

#### 1 Try it yourself

What could you do if you had used only one and overwritten the .gitignore file instead of appending to it?

How can we tell that worked? As usual, git status is a good place to start.

When we do git status, we see that we changed the .gitignore file but this does not show us that what we put in there actually matches the directory we want to ignore yet.

#### Important

git does not track empty directories.

🥊 Tip

If we want to track an "empty" directory a common practice is to add an hidden, often empty file (.gitkeep is also hidden) so that it is not really empty anymore, but is empty-looking when we use, eg 1s

If we create another empty directory we can see that this is also not showing as an untracked file.

```
mkdir res2
```

```
git status
On branch main
Your branch is up to date with 'origin/main'.

Changes not staged for commit:
 (use "git add <file>..." to update what will be committed)
 (use "git restore <file>..." to discard changes in working directory)
 modified: .gitignore

no changes added to commit (use "git add" and/or "git commit -a")
```

We can add an empty file to test that our ignore actually worked.

```
touch results/test1
```

and compare to what hapens if we add an empty file to the directory that does not match our pattern.

```
touch res2/test1
```

```
git status
On branch main
Your branch is up to date with 'origin/main'.

Changes not staged for commit:
 (use "git add <file>..." to update what will be committed)
 (use "git restore <file>..." to discard changes in working directory)
 modified: .gitignore

Untracked files:
 (use "git add <file>..." to include in what will be committed)
 res2/

no changes added to commit (use "git add" and/or "git commit -a")
```

#### Note

a directory where all files are untracked stays as just the directory no matter how many files it is, until you add at least one.

```
touch res2/test2
```

```
git status
On branch main
Your branch is up to date with 'origin/main'.

Changes not staged for commit:
 (use "git add <file>..." to update what will be committed)
 (use "git restore <file>..." to discard changes in working directory)
 modified: .gitignore

Untracked files:
 (use "git add <file>..." to include in what will be committed)
 res2/

no changes added to commit (use "git add" and/or "git commit -a")
```

#### Note

merge conflict file explanation to be added later

#### 11.2. What does it mean to build documentation?

Note

For now, see the prismia transcript for an outline here

#### 11.2.1. What is a build?

#### 11.2.2. Why is documentation so important?

documentation types table

ethnography of docuemtnation data science

# 11.3. Building Documentation with Jupyter book

There are many **Documenation Tools** because we (programmers) don't like

linux kernel uses sphinx

why and how it works

Jupyterbook wraps sphinx and uses markdown instead of restructured text

#### 11.3.1. Creating a Jupyterbook from the template

We'll naviate out of the github in class repo

```
cd ..
```

and use jupyterbook to create a new book from the template

```
jupyter-book create tiny-book
```

We see this

```
Your book template can be found at tiny-book/
```

and that it created a new directory

```
ls
```

```
github-in-class-brownsarahm test tiny-book nand2tetris test2
```

If we navigate to that directory we can create a new repo here as well

```
cd tiny-book/
git init .
```

```
hint: Using 'master' as the name for the initial branch. This default branch name hint: is subject to change. To configure the initial branch name to use in all hint: of your new repositories, which will suppress this warning, call: hint: hint: git config --global init.defaultBranch <name> hint: hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and hint: 'development'. The just-created branch can be renamed via this command: hint: hint: git branch -m <name> Initialized empty Git repository in /Users/brownsarahm/Documents/sysinclass/tiny-book/.git/
```

and again we'll change our default branch to main

```
git branch -m main
```

```
git status
On branch main

No commits yet

Untracked files:
 (use "git add <file>..." to include in what will be committed)
 _config.yml
 _toc.yml
 intro.md
 logo.png
 markdown.md
 notebooks.ipynb
 references.bib
 requirements.txt

nothing added to commit but untracked files present (use "git add" to track)
```

and we will commit the template.

```
git commit -m 'empty template'
[main (root-commit) a8a489e] empty template
8 files changed, 362 insertions(+)
create mode 100644 _config.yml
create mode 100644 _toc.yml
create mode 100644 intro.md
create mode 100644 logo.png
create mode 100644 markdown.md
create mode 100644 notebooks.ipynb
create mode 100644 references.bib
create mode 100644 requirements.txt
```

#### 11.3.2. Strucutre of a Jupyter book

```
ls
_config.yml intro.md markdown.md references.bib
_toc.yml logo.png notebooks.ipynb requirements.txt
```

A jupyter book has two required files (\_config.yml and \_toc.yml)

- config defaults
- toc file formatting rules

the extention (.yml) is yaml, which stands for "YAML Ain't Markup Language". It consists of key, value pairs and is deigned to be a human-friendly way to encode data for use in any programming language.

```
cat _config.yml
```

The configuration file, tells it basic iformation about the book, it provides all of the settings that jupyterbook and sphinx need to render the content as whatever output format we want.

```
Book settings
Learn more at https://jupyterbook.org/customize/config.html
title: My sample book
author: The Jupyter Book Community
logo: logo.png
Force re-execution of notebooks on each build.
See https://jupyterbook.org/content/execute.html
execute:
 execute_notebooks: force
Define the name of the latex output file for PDF builds
 latex documents:
 targetname: book.tex
Add a bibtex file so that we can create citations
bibtex_bibfiles:

 references.bib

Information about where the book exists on the web
repository:
 url: https://github.com/executablebooks/jupyter-book # Online location of your book
 path_to_book: docs # Optional path to your book, relative to the repository root
 branch: master # Which branch of the repository should be used when creating links (optional)
Add GitHub buttons to your book
See https://jupyterbook.org/customize/config.html#add-a-link-to-your-repository
html:
 use_issues_button: true
 use_repository_button: true
```

The table of contents file describe how to put the other files in order.

```
Table of contents
Learn more at https://jupyterbook.org/customize/toc.html

format: jb-book
root: intro
chapters:
- file: markdown
- file: notebooks
```

#### 1 Try it yourself

Which files created by the template are not included in the rendered output? How could you tell?

The other files are optional, but common. Requirements.txt is the format for pip to install python depndencies. There are different standards in other languages for how

```
cat requirements.txt
jupyter-book
matplotlib
numpy
```

the .bib file allows you to put structured data in bibtex format and then jupyterbook can write a bibliography for you.

#### 11.3.3. How do I get output?

```
jupyter-book build .
```

```
Running Jupyter-Book v0.11.1
Source Folder: /Users/brownsarahm/Documents/sysinclass/tiny-book
Config Path: /Users/brownsarahm/Documents/sysinclass/tiny-book/_config.yml
Output Path: /Users/brownsarahm/Documents/sysinclass/tiny-book/_build/html
Running Sphinx v3.2.1
making output directory... done
[etoc] Changing master_doc to 'intro'
checking for /Users/brownsarahm/Documents/sysinclass/tiny-book/references.bib in bibtex cache... not found
parsing bibtex file /Users/brownsarahm/Documents/sysinclass/tiny-book/references.bib... parsed 5 entries
myst v0.13.7: MdParserConfig(renderer='sphinx', commonmark_only=False, dmath_allow_labels=True, dmath_allow_space=True, dmath_allow_digits=True, update_mathjax=True, enable_extensions=['colon_fence', 'dollarmath', 'linkify', 'substitution'],
disable_syntax=[], url_schemes=['mailto', 'http', 'https'], heading_anchors=None, html_meta=[], footnote_transition=True, substitutions=[], sub_delimiters=['{', '}'])
building [mo]: targets for 0 po files that are out of date
building [html]: targets for 3 source files that are out of date
updating environment: [new config] 3 added, 0 changed, 0 removed
Executing: notebooks in: /Users/brownsarahm/Documents/sysinclass/tiny-book
looking for now-outdated files... none found
pickling environment... done
checking consistency... done
preparing documents... done
writing output... [100%] notebooks
generating indices... genindexdone
writing additional pages... searchdone
copying images... [100%] _build/jupyter_execute/notebooks_2_0.png
copying static files... done
copying extra files... done
dumping search index in English (code: en)... done
dumping object inventory... done
build succeeded.
The HTML pages are in _build/html.
[etoc] missing index.html written as redirect to 'intro.html'

Finished generating HTML for book.
Your book's HTML pages are here:
 build/html/
You can look at your book by opening this file in a browser:
 _build/html/index.html
Or paste this line directly into your browser bar:
 file:///Users/brownsarahm/Documents/sysinclass/tiny-book/_build/html/index.html

```

Then we can see in browser what the output looks like.

we can also see that a \_build directory was created and examine that

```
cd _build/
ls
```

it has some cache (jupyter execute) and our output (html). Building to html is the default, but there are many types of buils output

```
html jupyter_execute
```

We can see in the html folder

```
cd html/
ls
```

that there are html files for each input file, plus some extra (genindex) and ther is javascript for searching the site

```
_images _sources genindex.html intro.html notebooks.html search.html _panels_static _static index.html markdown.html objects.inv searchindex.js
```

the static folder contains the rest of the formatting

```
ls _static/
```

```
_init__
 _.py
 pycache
basic.css
clipboard.min.js
copy-button.svg
copybutton.css
copybutton.js
copybutton_funcs.js
CSS
doctools.js
documentation_options.js
file.png
images
jquery-3.5.1.js
jquery.js
is
language_data.js
logo.png
minus.png
mvstnb.css
panels-main.c949a650a448cc0ae9fd3441c0e17fb0.css
panels-variables.06eb56fa6e07937060861dad626602ad.css
plus.png
pygments.css
searchtools. is
sphinx-book-theme.12a9622fbb08dcb3a2a40b2c02b83a57.js
sphinx-book-theme.acff12b8f9c144ce68a297486a2fa670.css
sphinx-book-theme.css
sphinx-thebe.css
sphinx-thebe.js
togglebutton.css
togglebutton.js
underscore-1.3.1.js
underscore. \verb"js"
vendor
webpack-macros.html
```

We didn't have to write any html and we got a responsive site!

If you wanted to change the styling with sphinx you can use built in <u>themes</u> which tell sphinx to put different files in the <u>\_static</u> folder when it builds your site, but you don't have to change any of your content! If you like working on front end things (which is great! it's just not always the goal) you can even build <u>your own theme</u> that can work with sphinx.

Jupyterbook is pretty opinionated on the styling, but for more general documenation websites the options are good

```
cd ../../
```

```
ls
_build intro.md notebooks.ipynb
_config.yml logo.png references.bib
_toc.yml markdown.md requirements.txt
```

We're going to ignore the built files and use this later to automatically build them on GitHub.

```
echo "_build/" > .gitignore

git status
On branch main
Untracked files:
```

and then add and commit

```
git add .
```

```
git commit -m 'ignroe build'
[main 3e249ce] ignroe build
1 file changed, 1 insertion(+)
create mode 100644 .gitignore
```

# 11.4. How do I push a repo that I made locally to GitHub

For today, create an empty github repo shared with me.

More generally, you can create a repo

That default page for an empty repo if you do not initiate it with any files will give you the instructions for what remote to add.

THen we add the remote

```
git remote add origin https://github.com/introcompsys/tiny-book-brownsarahm.git
```

and push to origin main.

```
git push -u origin main
\Enumerating objects: 13, done.

Counting objects: 100% (13/13), done.

Delta compression using up to 8 threads

Compressing objects: 100% (11/11), done.

Writing objects: 100% (13/13), 16.07 KiB | 8.03 MiB/s, done.

Total 13 (delta 1), reused 0 (delta 0), pack-reused 0

remote: Resolving deltas: 100% (1/1), done.

To https://github.com/introcompsys/tiny-book-brownsarahm.git

* [new branch] main -> main

Branch 'main' set up to track remote branch 'main' from 'origin'.

(base) brownsarahm@tiny-book $
```

# 11.5. Prepare for next Class

- 1. review the notes
- 2. (priority) Convert your KWL repo to a jupyter book. Ignore the builds from your reposiotry. Use the documenation to choose your settings: link it to your repo, do not serve it publicly on github. Be sure that it can build and if you encounter problems, create a jupyterbooktroubleshooting.md file and log them with solutions if you find them.
- 3. complete Feedback survey if you have not alredy.

#### 11.6. More Practice

- 1. build your kwl repo to a pdf or one other format locally.
- 2. Add templating.md to your KWL repo and explain templating in your own words using other programming concepts you have learned so far. Include in a markdown (same as HTML <!--comment -->) comment the list of CSC courses you have taken for context while we give you feedback.
- 3. Learn about the documentation ecosystem in another language that you know. In docs.md include a summary of your findings and compare and contrast it to jupyter book/sphinx.

# 11.7. Questions after class

#### 11.7.1. Could I use jupyterbook to put a resume online?

In theory, yes. However there are other tools that work similar in the sense of separating content from HTML/CSS/javascript in order to generate a website. Sphinx is more customizable, as noted above, but also, <u>Static site generators</u> are a whole category of software tools.

GitHub <u>pages</u> is free hosting, which by default uses <u>jekyll</u> however, that is no longer very active, due to the <u>death of one of the core maintainers</u>.

Some are centered on blog type sites (like jekyll) others are not. There are even ways to use a javascript slide tool to write in markdown but render for the web.

# 12. Shell Scripting

#### 12.1. Feedback

# 12.2. Request: posted videos

- videos are a lot of work for them to be high quality and accessible
- even just a basic zoom is one more thing to manage
- the notes have a complete transcript of every action on the terminal
- I will pilot using <u>webcaptioner</u> to produce a transcript of more detail. I will then use these to fill in the notes and/or post them on slack (in a dedicated channel)

#### 12.2.1. Reguest: more clear instructions

- Sorry, I'm adapting based on how far we get, so I don't have time to get iterative feedback on them.
- I will try to expand on them and add examples, also some patterns will emerge so you'll get used to the type of thing that's expected.
- also always feel free to ask more questions (slack or github issue to class repo)
- you always can revise your work, so it's also okay, espeically for more practice to put in the place of a response a question or try re-interpreting the
  instructions to check if they're correct.
- · recent updates commit

#### 12.2.2. Slack can be annoying

- · check your notification settings!!
- · use e-mail notifications if you prefer

#### 12.2.3. Installations are hard

- this is sort of generally true, sorry
- · the download part makes them not good for in class
- · always ask in slack
- we might be done with most for a while
- I will try to link to more detaled instructions if i can find them.

#### 12.2.4. Request: More direction for extensions

- · instructions on site
- Will start to add notes with a marker

#### 12.2.5. Multiple repositories is hard to manage

- try to think of them as separate directories and have an offline copy of each. We sort files often.
- The reason for multiple is because that's actually somewhat more realistic, partially and partially becuase of how templates work

#### 12.2.6. This should be a 200 level course/ required

• the goal is for it to eventually be required and for most students to take it at the same time as 212. I'm glad (and other faculty will be too!) that you seem to agree

#### 12.2.7. Some things only work on mac

- I think everything essential can be done on any OS, but there are different ways.
- I try to check everything and we are through the most tricky parts.
- · If i miss something

#### 12.2.8. More lecture/slides would be helpful

- I probably shouldn't have offered "slides" I will use prismia so that I can stay adaptive and swap the order in response
- I will try to prepare diagrams for topics in advance and/or use the prismia drawing tool,
- feel free to ask me to draw or explain either by raising your hand or on prismia during class

## 12.3. Jupyter Book

To make your KWL repo a jupyterbook, you need to:

- add the required files (\_toc.yml and \_config.yml)
- add your files to \_toc.yml
- customize meta-data and settings in \_config.yml

To add images, you add the file to the repository and mention it in a markdown file using the following syntax.

```
![mandatory alt text](relative/path/to/image)
```

also, myst cheatsheet from jupyterbook docs

# 12.4. Bash has programming language features

Bash includes most common basic programming language features:

- · conditional expressions and constructs
- loops
- variables and builtin varialbes
- comments #

## 12.4.1. Variables

```
echo $SHELL

/bin/bash
```

#### 12.4.2. Loops

The syntax for a loop is:

```
for name [[in [words ...]] ;] do commands; done
```

or, with more spacing for readability

```
for item in [LIST]
do
 [COMMANDS]
done
```

Note in this syntax, we do not need a counter variable. In each iteration through the loop the next item from [LIST] becomes the value of item.

In our case, we can use this like

```
for file in README.md gitoffline.md terminal.md software.md abstraction.md chart.md reorg.md stdinouterr.md hardwaresurvey.md
gitlog.txt workflows.md gitplumbing.md gitunderstanding.md idethoughts.md numbers.md hexspeak.md gitstory.md gitstory2.md
donotcommit.md jupyterbooktroubleshooting.md templating.md docs.md
> do
> echo $file
> done
```

To send all of the file names to STDOUT:

```
README.md
gitoffline.md
terminal.md
software.md
abstraction.md
chart.md
reorg.md
stdinouterr.md
hardwaresurvey.md
gitlog.txt
workflows.md
gitplumbing.md
gitunderstanding.md
idethoughts.md
numbers.md
hexspeak.md
gitstory.md
gitstory2.md
donotcommit.md
jupyterbooktroubleshooting.md
templating.md
docs.md
```

#### 12.4.3. Conditionals

```
for file in README.md gitoffline.md terminal.md software.md abstraction.md chart.md reorg.md stdinouterr.md hardwaresurvey.md
gitlog.txt workflows.md gitplumbing.md gitunderstanding.md idethoughts.md numbers.md hexspeak.md gitstory.md gitstory2.md
donotcommit.md jupyterbooktroubleshooting.md templating.md docs.md
> do
> if test -f $file; then
> echo $file
> fi
> done
```

# 12.5. Shell Scripts

So, now we have checked your repository, but for you to use this on a regular basis there are two challenges.

- 1. You would have to type (or copy paste) those lines every time
- 2. the list of files will expand but the list in that will not update.

We will address the first with a bash script. Bash scripts allow you to make programs, including small utilties that help you with little tasks.

```
nano checker.sh
```

And we can paste this into the file:

```
for file in README.md gitoffline.md terminal.md software.md abstraction.md chart.md reorg.md stdinouterr.md hardwaresurvey.md
gitlog.txt workflows.md gitplumbing.md gitunderstanding.md idethoughts.md numbers.md hexspeak.md gitstory.md gitstory2.md
donotcommit.md jupyterbooktroubleshooting.md templating.md docs.md
> do
> if ! test -f $file; then
> echo $file
> fi
> done
```

We have used programs that we installed from their installation tools. Today we will use a small program I wrote for class, that we install from source.

```
git clone https://github.com/introcompsys/courseutils
```

```
Cloning into 'courseutils'...
remote: Enumerating objects: 16, done.
remote: Counting objects: 100% (16/16), done.
remote: Compressing objects: 100% (13/13), done.
remote: Total 16 (delta 5), reused 6 (delta 2), pack-reused 0
Receiving objects: 100% (16/16), 4.03 KiB | 4.03 MiB/s, done.
Resolving deltas: 100% (5/5), done.
```

First we can look at what this contains.

```
cd courseutils/
ls
```

It is very lightweight:

```
LICENSE README.md kwltracking.py setup.py
```

Let's review the purpose of each

- This repo is public, so it has a license to describe how it is pertmitted to be used
- . The README is information about the repository; currently it has the documentation
- kwltracking.py is the actual code of the program
- setup.py is instructions for python's pip on how to install the program.

```
pip install .
```



If it works, there will be along output that ends like:

```
Successfully installed syscourseutils-0.1.0
```

After you install, you will need to open a new terminal window (or otherwise restart bash, which varies on a lot of parameters)

Making it installable changes how we can run and use the program. In particular, it makes it a bash command.

So, on the terminal, we can use it like:

```
kwlfilecheck
```

This program scrapes the course website and echos to stdout the list of files expected in the KWL chart repo.

README gitoffline.md terminal.md software.md abstraction.md chart.md reorg.md stdinouterr.md hardwaresurvey.md gitlog.txt workflows.md gitplumbing.md gitunderstanding.md idethoughts.md numbers.md hexspeak.md gitstory.md gitstory2.md donotcommit.md jupyterbooktroubleshooting.md templating.md docs.md

Now, back in your KWL repo, we want to change our script to use this.

```
cd ..
```

We can edit the script, with nano

```
nano checker.sh
```

We can edit it so that it calls that process, assigns its output to a variable, and then uses that variable as our list output like this:


```
for file in $(kwlfilechecker)
do
if ! test -f $file; then
echo $file
fi
done
```

Now you can use:

```
bash checker.sh
```

To see what, if any files you are missing.

# 12.7. Prepare for next class



- 1. Review the notes (to reinforce ideas and improve your memory of them)
- 2. Update your KWL to include all rows listed on the KWL page of the course site. (because tracking your learning deepens your learning)
- 3. **priority** Make an issue on your grading contract repo that includes: a self-assessment of your progress on your contract so far and a plan going forward. Tag @sp22instructors so that we can help you meet your goals. (so that you get the grade you want)
- 4. priority On Windows, install Putty ( we will use this Monday)
- 5. Write a bash script that checks only if the number of files in your kwl meets or exceeds the minimum (number from list + 2 for toc and config) OR that does something else of your choosing. Add it to your KWL repo in a utils directory. Include Comments. (to practice so that you remember)

#### 12.8. More Practice

priority add or link a glossary or cheatsheet, OR add a box with some historical context or extra
reading links to the notes from any past class (in order to practice git/github and using jupyter
book features, which are similar to other documentation tools, so even if you do not work in a
python centric environment the concepts will translate)



#### 12.9. Extension Ideas

- 1. document or add course scripts to the courseutils repo
- 2. write a similar util for another context and document it
- 3. turn your bash script above (if not the toy counting one) into a longer tutorial that explains its components piece by piece, how they work together.
- 4. use the jupyter book <u>api referencing capability</u> to document a side project or code from a different course, eg 110 (keep it in a separate private repo so as to not put solutions to a course on the public internet)

## 12.10. Questions after class

#### 12.10.1. Will we create bash programs from scratch?

At least small ones, we probably will not write large programs though.


#### 12.10.2. What are some applications of bash scripting?

We will see its use in HPC in the next class, but also for small utilities like this.

# 13. How can I work on a remote server?

Today we will connect to a remote server, use an HPC system with scheduler, and learn new bash commands for working with the content of files.

# 13.1. What are remote servers and HPC systems?

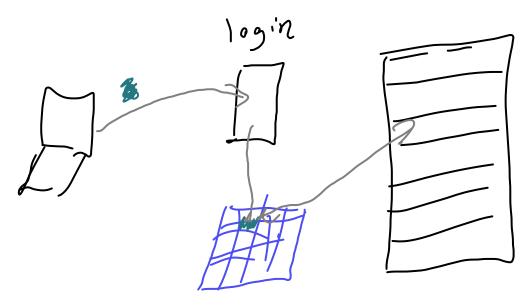

# 13.2. Connecting to Seawulf

We connect with secure shell or ssh from our terminal (GitBash or Putty on windows) to URI's teaching High Performance Computing (HPC) Cluster Seawulf.



This cluster is for course related purposes at URI, if you want to use a HPC system of some sort for a side project, consider Amazon Web Services, Google Cloud, or Microsoft Azul services, you can get some allocation for free a a student. If you are doing research supervised by a URI professor, there are other servers on campus and URI participates in a regional HPC resource as well.

```
ssh -l brownsarahm seawulf.uri.edu
```

When it logs in it looks like this and requires you to change your password. They configure it with a default and with it past expired.

```
The authenticity of host 'seawulf.uri.edu (131.128.217.210)' can't be established.
ECDSA key fingerprint is SHA256:RwhTUyjWLqwohXiRw+tYlTiJEbqX2n/drCpkIwQVCro.
Are you sure you want to continue connecting (yes/no/[fingerprint])? y
Please type 'yes', 'no' or the fingerprint: yes
Warning: Permanently added 'seawulf.uri.edu,131.128.217.210' (ECDSA) to the list of known hosts.
brownsarahm@seawulf.uri.edu's password:
You are required to change your password immediately (root enforced)
WARNING: Your password has expired.
You must change your password now and login again!
Changing password for user brownsarahm.
Changing password for brownsarahm.
(current) UNIX password:
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
Connection to seawulf.uri.edu closed.
```

after you give it a new password, then it logs you out and you have to log back in.

```
brownsarahm@seawulf.uri.edu's password:
Last login: Tue Mar 8 12:52:38 2022 from 172.20.133.152
```

We have logged into our home directory which is empty

brownsarahm@~ \$ ssh -l brownsarahm seawulf.uri.edu

```
[brownsarahm@seawulf ~]$ ls

[brownsarahm@seawulf ~]$ pwd
/home/brownsarahm
```

```
[brownsarahm@seawulf ~]$ whoami
brownsarahm
```

Notice that the prompt says uriusername@seawulf to indicate that you are logged into the server, not working locally.

# 13.3. Downloading files

```
[brownsarahm@seawulf ~]$ ls bash-lesson.tar.gz
```

```
[brownsarahm@seawulf ~]$ tar -xvf bash-lesson.tar.gz
dmel-all-r6.19.gtf
dmel_unique_protein_isoforms_fb_2016_01.tsv
gene_association.fb
SRR307023_1.fastq
SRR307023 2.fastq
SRR307024_1.fastq
SRR307024_2.fastq
SRR307025_1.fastq
SRR307025_2.fastq
SRR307026 1.fastq
SRR307026_2.fastq
SRR307027_1.fastq
SRR307027_2.fastq
SRR307028 1.fastq
SRR307028 2.fastq
SRR307029_1.fastq
SRR307029_2.fastq
SRR307030_1.fastq
SRR307030_2.fastq
```

```
[brownsarahm@seawulf ~]$ ls
bash-lesson.tar.gz
 SRR307026_1.fastq
dmel-all-r6.19.gtf
 SRR307026_2.fastq
 SRR307027 1.fastq
dmel_unique_protein_isoforms_fb_2016_01.tsv
gene_association.fb
 SRR307027_2.fastq
SRR307023_1.fastq
 SRR307028_1.fastq
SRR307023_2.fastq
 SRR307028_2.fastq
SRR307024_1.fastq
 SRR307029_1.fastq
SRR307024_2.fastq
 SRR307029_2.fastq
SRR307025_1.fastq
 SRR307030_1.fastq
SRR307025_2.fastq
 SRR307030_2.fastq
```

# 13.4. Working with large files

One of these files, contains the entire genome for the common fruitfly, let's take a look at it: \

```
[brownsarahm@seawulf ~]$ cat dmel-all-r6.19.gtf
```

```
X FlyBase gene 19961297 19969323 . + . gene_id "FBgn0031081"; gene_symbol "Nep3"; 2L FlyBase 3UTR 782825 782885 . + . gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id "FBtr0331651"; transcript_symbol "Gr21a-RB";
```

#### **A** Warning

this output is truncated for display purposes

We see that this actually take a long time to output and is way too mmuch information to actually read. In fact, in order to make the website work, I had to cut that content using command line tools, my text editor couldn't open the file and GitHub was unhappy when I pushed it.

For a file like this, we don't really want to read the whole file but we do need to know what it's strucutred like in order to design programs to work with it.

head lets us look at the first 10 lines.

```
[brownsarahm@seawulf ~]$ head dmel-all-r6.19.gtf
```

```
Χ
 FlyBase gene
 19961297
 19969323
 gene_id "FBgn0031081"; gene_symbol "Nep3";
 gene_id "FBgn0031081"; gene_symbol "Nep3";
Χ
 FlyBase mRNA
 19961689
 19968479
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
 19961689
 19961845
 gene_id "FBgn0031081"; gene_symbol "Nep3";
 FlyBase 5UTR
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
 gene_id "FBgn0031081"; gene_symbol "Nep3";
 FlyBase exon
 19961689
 19961845
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
 FlyBase exon
 19963955
 19964071
 gene_id "FBgn0031081"; gene_symbol "Nep3";
Χ
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
 19964782
 19964944
 gene_id "FBgn0031081"; gene_symbol "Nep3";
 FlvBase exon
Х
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
 gene_id "FBgn0031081"; gene_symbol "Nep3";
Χ
 FlyBase exon
 19965006
 19965126
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
 gene_id "FBgn0031081"; gene_symbol "Nep3";
 FlyBase exon
 19965197
 19965511
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
 gene_id "FBgn0031081"; gene_symbol "Nep3";
 FlyBase exon
 19965577
 19966071
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
 19966183
 19967012
 gene_id "FBgn0031081"; gene_symbol "Nep3";
 FlyBase exon
transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA";
```

We can use the -n parameter to change the number.

And, tails shows the last few.

```
[brownsarahm@seawulf ~]$ tail dmel-all-r6.19.gtf
```

which in this case looks mostly the same

```
FlyBase exon
 782124 782181
 gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id
"FBtr0331651"; transcript_symbol "Gr21a-RB";
 gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id
21
 782238 782441
 FlyBase exon
"FBtr0331651"; transcript_symbol "Gr21a-RB";
 FlyBase exon
 782495 782885
 gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id
"FBtr0331651"; transcript_symbol "Gr21a-RB";
2L
 781297 781299
 gene_id "FBgn0041250"; gene_symbol "Gr21a";
 FlvBase start codon
transcript_id "FBtr0331651"; transcript_symbol
 "Gr21a-RB";
 FlyBase CDS
 781297 782048
 gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id
 0
"FBtr0331651"; transcript_symbol "Gr21a-RB";
 782124 782181
 gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id
2L
 FlyBase CDS
 1
"FBtr
 0331651"; transcript_symbol "Gr21a-RB";
 gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id
21
 FlyBase CDS
 782238 782441
 0
"FBtr0331651"; transcript_symbol "Gr21a-RB";
 782495 782821
 gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id
 FlyBase CDS
"FBtr0331651"; transcript_symbol "Gr21a-RB";
 gene_id "FBgn0041250"; gene_symbol "Gr21a";
 782822 782824
2L
 FlyBase stop_codon
transcript_id "FBtr0331651"; transcript_symbol "Gr21a-RB";
 FlyBase 3UTR
 782825 782885
 gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id
"FBtr0331651"; transcript_symbol "Gr21a-RB";
```

We can also see how much content is in the file wc give a word count and with its -1 parameter gives us the number of lines.

```
[brownsarahm@seawulf ~]$ wc -l dmel-all-r6.19.gtf
```

```
542048 dmel-all-r6.19.gtf
```

Over five hundred forty thousand lines is a lot.

How can we get the number of lines in each of the .fastq files?

```
[brownsarahm@seawulf ~]$ wc -l *.fastw wc: *.fastw: No such file or directory
```

note that in my typo, it tells me no files matched my pattern.

```
[brownsarahm@seawulf ~]$ wc -1 *.fastq
 20000 SRR307023_1.fastq
 20000 SRR307023_2.fastq
 20000 SRR307024_1.fastq
 20000 SRR307024_2.fastq
 20000 SRR307025_1.fastq
 20000 SRR307025_2.fastq
 20000 SRR307026_1.fastq
 20000 SRR307026_2.fastq
 20000 SRR307027_1.fastq
 20000 SRR307027_2.fastq
 20000 SRR307028_1.fastq
 20000 SRR307028_2.fastq
 20000 SRR307029_1.fastq
 20000 SRR307029 2.fastq
 20000 SRR307030_1.fastq
 20000 SRR307030_2.fastq
 320000 total
```

when it does work, we also get the total.

We can use redirects as before to save these to a file:

```
[brownsarahm@seawulf ~]$ wc -1 *.fastq > linecounts.txt
```

```
[brownsarahm@seawulf ~]$ cat linecounts.txt
 20000 SRR307023_1.fastq
 20000 SRR307023_2.fastq
 20000 SRR307024_1.fastq
 20000 SRR307024 2.fastq
 20000 SRR307025_1.fastq
 20000 SRR307025_2.fastq
 20000 SRR307026_1.fastq
 20000 SRR307026_2.fastq
 20000 SRR307027 1.fastq
 20000 SRR307027_2.fastq
 20000 SRR307028_1.fastq
 20000 SRR307028_2.fastq
 20000 SRR307029_1.fastq
 20000 SRR307029_2.fastq
 20000 SRR307030_1.fastq
 20000 SRR307030_2.fastq
 320000 total
```

We can also search files, without loading them all into memory or displaying them, with grep:

```
[brownsarahm@seawulf ~]$ grep Act5c dmel-all-r6.19.gtf
```

```
[brownsarahm@seawulf ~]$ grep mRNA dmel-all-r6.19.gtf
```

this output a lot, so the output is truncated here

```
X FlyBase mRNA 19961689 19968479 . + . gene_id "FBgn0031081"; gene_symbol "Nep3"; transcript_id "FBtr0070000"; transcript_symbol "Nep3-RA"; 2L FlyBase mRNA 781276 782885 . + . gene_id "FBgn0041250"; gene_symbol "Gr21a"; transcript_id "FBtr0331651"; transcript_symbol "Gr21a-RB";
```

and we can combine grep with wc to count occurences.

```
[brownsarahm@seawulf ~]$ grep mRNA dmel-all-r6.19.gtf | wc -l 34025
```

# 13.5. File permissions

Let's make a small script, recalling what we have learned so far:

```
[brownsarahm@seawulf ~]$ echo "echo 'script works'" >> demo.sh
```

We can confirm that the script looks like a we expected

```
[brownsarahm@seawulf ~]$ cat demo.sh echo 'script works'
```

One thing we could do is to run the script using ./

```
[brownsarahm@seawulf ~]$./demo.sh
```

but we get a permission denied error

```
-bash: ./demo.sh: Permission denied
```

By default, files have different types of permissions: read, write, and execute for different users that can access them. To view the permissions, we can use the -1 option of 1s.

```
[brownsarahm@seawulf ~]$ ls -1
total 138452
-rw-r--r-. 1 brownsarahm spring2022-csc392 12534006 Apr 18 2021 bash-lesson.tar.gz
-rw-r--r-. 1 brownsarahm spring2022-csc392
 20 Mar 8 13:12 demo.sh
-rw-r--r-. 1 brownsarahm spring2022-csc392 77426528 Jan 16 2018 dmel-all-r6.19.gtf
-rw-r--r-. 1 brownsarahm spring2022-csc392
 721242 Jan 25
 2016 dmel_unique_protein_isoforms_fb_2016_01.tsv
-rw-r--r-. 1 brownsarahm spring2022-csc392 25056938 Jan 25
 2016 gene_association.fb
-rw-r--r-. 1 brownsarahm spring2022-csc392
 447 Mar 8 13:07 linecounts.txt
 2016 SRR307023 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625262 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625262 Jan 25
 2016 SRR307023 2.fastq
-rw-r--r--. 1 brownsarahm spring2022-csc392 1625376 Jan 25
 2016 SRR307024_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625376 Jan 25
 2016 SRR307024_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625286 Jan 25
 2016 SRR307025 1.fastq
-rw-r--r. 1 brownsarahm spring2022-csc392 1625286 Jan 25
 2016 SRR307025_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625302 Jan 25
 2016 SRR307026_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625302 Jan 25
 2016 SRR307026 2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625312 Jan 25
 2016 SRR307027_1.fastq
-rw-r--r--. 1 brownsarahm spring2022-csc392 1625312 Jan 25
 2016 SRR307027 2.fastq
-rw-r--r. 1 brownsarahm spring2022-csc392 1625338 Jan 25
 2016 SRR307028 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625338 Jan 25
 2016 SRR307028_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625390 Jan 25
 2016 SRR307029 1.fastq
 1625390 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 2016 SRR307029 2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625318 Jan 25
 2016 SRR307030 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625318 Jan 25
 2016 SRR307030_2.fastq
```

For each file we get 10 characters in the first column that describe the permissions. The 3rd column is the username of the owner, the fourth is the group, then size date revised and the file name.

We are most interested in the 10 character permissions. The fist column indicates if any are directories with a d or a - for files. We have no directories, but we can create one to see this.

```
[brownsarahm@seawulf ~]$ mkdir results
```

```
[brownsarahm@seawulf ~]$ ls -1
total 138452
-rw-r--r-. 1 brownsarahm spring2022-csc392 12534006 Apr 18 2021 bash-lesson.tar.gz
-rw-r--r-. 1 brownsarahm spring2022-csc392
 20 Mar 8 13:12 demo.sh
-rw-r--r-. 1 brownsarahm spring2022-csc392 77426528 Jan 16 2018 dmel-all-r6.19.gtf
-rw-r--r-. 1 brownsarahm spring2022-csc392
 721242 Jan 25
 2016 dmel_unique_protein_isoforms_fb_2016_01.tsv
-rw-r--r-- 1 brownsarahm spring2022-csc392 25056938 Jan 25 2016 gene_association.fb
-rw-r--r-. 1 brownsarahm spring2022-csc392
 447 Mar 8 13:07 linecounts.txt
**drwxr-xr-x. 2 brownsarahm spring2022-csc392
 10 Mar 8 13:16 results*
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625262 Jan 25 2016 SRR307023_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625262 Jan 25
 2016 SRR307023_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625376 Jan 25
 2016 SRR307024 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625376 Jan 25
 2016 SRR307024_2.fastq
 1625286 Jan 25
 2016 SRR307025_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625286 Jan 25
 2016 SRR307025_2.fastq
 1625302 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 2016 SRR307026 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625302 Jan 25
 2016 SRR307026 2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625312 Jan 25
 2016 SRR307027_1.fastq
 1625312 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 2016 SRR307027 2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625338 Jan 25
 2016 SRR307028_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625338 Jan 25
 2016 SRR307028 2.fastq
 2016 SRR307029 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625390 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625390 Jan 25
 2016 SRR307029_2.fastq
 1625318 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 2016 SRR307030 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625318 Jan 25
 2016 SRR307030_2.fastq
```

We can see in the bold line, that the first character is a d.

The next nine characters indicate permission to **R**ead, **W**rite, and e**X**ecute a file. With either the letter or a - for permissions not granted, they appear in three groups of three, three characters each for owner, group, anyone with access.

If we want to run the file, we can instead use bash directly, but this is limited relative to calling our script in other ways.

```
[brownsarahm@seawulf ~]$ bash demo.sh script works
```

Instead, to add execute permission, we can use chmod

```
[brownsarahm@seawulf ~]$ chmod +x demo.sh
```

```
[brownsarahm@seawulf ~]$ ls -1
total 138452
-rw-r--r-. 1 brownsarahm spring2022-csc392 12534006 Apr 18 2021 bash-lesson.tar.gz
-rwxr-xr-x. 1 brownsarahm spring2022-csc392
 20 Mar 8 13:12 demo.sh
-rw-r--r-. 1 brownsarahm spring2022-csc392 77426528 Jan 16 2018 dmel-all-r6.19.gtf
-rw-r--r-. 1 brownsarahm spring2022-csc392
 721242 Jan 25
 2016 dmel_unique_protein_isoforms_fb_2016_01.tsv
-rw-r--r-- 1 brownsarahm spring2022-csc392 25056938 Jan 25 2016 gene_association.fb
-rw-r--r-. 1 brownsarahm spring2022-csc392
 447 Mar 8 13:07 linecounts.txt
drwxr-xr-x. 2 brownsarahm spring2022-csc392
 10 Mar 8 13:16 results
-rw-r--r. 1 brownsarahm spring2022-csc392 1625262 Jan 25 2016 SRR307023_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 2016 SRR307023 2.fastq
 1625262 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625376 Jan 25
 2016 SRR307024 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625376 Jan 25
 2016 SRR307024_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625286 Jan 25
 2016 SRR307025_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625286 Jan 25
 2016 SRR307025 2.fastq
 2016 SRR307026_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625302 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625302 Jan 25
 2016 SRR307026_2.fastq
 2016 SRR307027_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625312 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625312 Jan 25
 2016 SRR307027_2.fastq
 2016 SRR307028_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625338 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 2016 SRR307028_2.fastq
 1625338 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625390 Jan 25
 2016 SRR307029_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625390 Jan 25
 2016 SRR307029 2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625318 Jan 25
 2016 SRR307030_1.fastq
-rw-r--r. 1 brownsarahm spring2022-csc392 1625318 Jan 25
 2016 SRR307030 2.fastq
```

```
[brownsarahm@seawulf ~]$./demo.sh
script works
```

```
[brownsarahm@seawulf ~]$ nano demo.sh
```

We can add a bit more to our script to make it more interesting

```
for VAR in *.gz
do
echo $VAR
done

echo 'script works'
```

and note that tht does not change the permission.

```
[brownsarahm@seawulf ~]$ ls -1
total 138452
-rw-r--r-. 1 brownsarahm spring2022-csc392 12534006 Apr 18 2021 bash-lesson.tar.gz
-rwxr-xr-x. 1 brownsarahm spring2022-csc392
 60 Mar 8 13:27 demo.sh
-rw-r--r-. 1 brownsarahm spring2022-csc392 77426528 Jan 16 2018 dmel-all-r6.19.gtf
-rw-r--r-. 1 brownsarahm spring2022-csc392
 721242 Jan 25
 2016 dmel_unique_protein_isoforms_fb_2016_01.tsv
-rw-r--r-. 1 brownsarahm spring2022-csc392 25056938 Jan 25 2016 gene_association.fb
-rw-r--r-. 1 brownsarahm spring2022-csc392
 447 Mar 8 13:07 linecounts.txt
drwxr-xr-x. 2 brownsarahm spring2022-csc392
 10 Mar 8 13:16 results
-rw-r--r. 1 brownsarahm spring2022-csc392 1625262 Jan 25 2016 SRR307023_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625262 Jan 25
 2016 SRR307023 2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625376 Jan 25
 2016 SRR307024 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625376 Jan 25
 2016 SRR307024_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625286 Jan 25
 2016 SRR307025_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625286 Jan 25
 2016 SRR307025 2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625302 Jan 25
 2016 SRR307026 1.fastq
 2016 SRR307026_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625302 Jan 25
 1625312 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 2016 SRR307027_1.fastq
 1625312 Jan 25
-rw-r--r-. 1 brownsarahm spring2022-csc392
 2016 SRR307027_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625338 Jan 25
 2016 SRR307028 1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625338 Jan 25
 2016 SRR307028_2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392
 1625390 Jan 25
 2016 SRR307029_1.fastq
-rw-r--r--. 1 brownsarahm spring2022-csc392 1625390 Jan 25
 2016 SRR307029 2.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625318 Jan 25
 2016 SRR307030_1.fastq
-rw-r--r-. 1 brownsarahm spring2022-csc392 1625318 Jan 25
 2016 SRR307030 2.fastq
```

# 13.6. Making a batch file

```
[brownsarahm@seawulf ~]$ nano my_job.sh

[brownsarahm@seawulf ~]$ sbatch my_job.sh
Submitted batch job 23950

[brownsarahm@seawulf ~]$ squeue --job 23950

JOBID PARTITION NAME USER ST TIME NODES NODELIST(REASON)
```

#### 13.7. Interactive mode

So far we have worked on the login node which has very little computational power and submitted a job to a compute node through the scheduler for it to run asynchronously. We can also use a compute node interactively if we have a computationally intensive task that we need to work with in real time, instead of it being fully automated.

We'll talk after the break about how this might look, but for example if our grep commands needed more power where we need the result back right away in order to then decide what the next calculation could be.

We can request a node to be allocated to our user and have a direct ssh connection to compute node using interactive. Interactive by default calls a specific script that is configured by the system administrators for the particular cluster that you are logged into.

For seawulf, interactive opens a default of 8 hgours, but you can use parameters to request more or less time.

```
[brownsarahm@seawulf ~]$ interactive
```

When we run this interactive submits a "job" to the schedule, but instead of then passing a script to the compute node it connects us to that node via ssh

```
salloc: Granted job allocation 23963
salloc: Waiting for resource configuration
salloc: Nodes n005 are ready for job
/usr/bin/id: cannot find name for user ID 1168
/usr/bin/id: cannot find name for group ID 1111
/usr/bin/id: cannot find name for user ID 1168
```

We can see that we are connected to a system with more resources using this:

```
[I have no name!@n005 ~]$ lshw
WARNING: you should run this program as super-user.
configuration: driver=system
WARNING: output may be incomplete or inaccurate, you should run this program as super-user.
```

I truncataed the long output.

We can then exit the compute node and go back to the login node with exit

[I have no name!@n005 ~]\$ exit

logout

salloc: Relinquishing job allocation 23963

Note tht it says the job has ended.

# 13.8. Logging off

You can log off with exit it is important to do so to not use resources you do not need. However, note tht if your laptop loses internet connection your session will also be disconnected. This is another advantage of the scheduler, you don't need to maintain a connection for it to run your code.

[brownsarahm@seawulf ~]\$ exit

logout

Connection to seawulf.uri.edu closed.

Note that when you are back to your computer the prompt changes. And that using the up arrow, the last command your computer's shell knows is the ssh line.

brownsarahm@~ \$ ssh -1 brownsarahm seawulf.uri.edu

# 13.9. Prepare for next class



The text in () in these sections is an explanation of why that task is assigned

- 1. Review the notes (to reinforce ideas and improve your memory of them)
- 2. priority add a ## summary section to your IDE notes where you summarize what you observed in your IDE usage and what questions or what features (we will work with this after break and I want you to prepare before break)
- 3. Modify the sbatch job we made in class so that you get files back for any errors and output from the script. see the options (to review/practice what we did)

#### 13.10. More Practice



1 Try it Yourself

use scp to download the files generated to your local computer and add them to your kwl chart. (a possible extenstion idea to practice reading the official documentation to learn a new tool that is similar to ones you have seen before)

- priority write a script that outputs the first 3 lines of each .fastq line and sbatch script that runs
  it and saves the output to files and e-mails you when it is done. Submit the job. (to reinforce
  /practice what we saw in class)
- 2. File permissions are represented numerically often in octal, by transforming the permissions for each level (owner, group, all) as binary into a number. Add octal.md to your KWL repo and answer the following. Try to think through it on your own, but you may look up the answers, as long as you link to (or ideally cite using jupyterbook citations) a high quality source.
  - 1. Transform the permissions [`r--`, `rw-`, `rwx`] to octal, by treating it as three bits.
  - 1. Transform the permission we changed our script to `rwxr-xr-x` to octal.
  - 1. Which of the following would prevent a file from being edited by other people 777 or 755?
- 3. Answer the following in hpc.md of your KWL repo: (to think about how the design of the system we used in class impacts programming and connect it to other ideas taught in CS)
  - 1. What kinds of things would your code need to do if you were going to run it on an HPC system?
  - 1. What Sbatch options seem the most helpful?
  - 1. How might you go about setting the time limits for a script? How could you estimate how long it will take?

# 13.11. Questions After Class

#### 13.11.1. When is sbatch used?

Sbatch is one type of scheduler, that manages the resource of a high performance computing system

# 13.11.2. will sbatch kick out your job after a certain amount of time? what if your job was indefinite like hosting a website.

High performance computing systems, like the cluster that we logged into in class are ued for computationally expensive programs that might require more RAM and/or more CPUs in order to run and/or to run for a longer time than your laptop makes sense to leave it in one place.

For example, this is often used in research data analysis, like the genomics data we used today or for training machine learning models.

HPCs are a specific type of remote resource, for indefinite jobs, we use different types of servers. However, ssh can still be used to log into those sytems.

# 14. How does ssh really work? how can I be more secure?

# 14.1. Using ssh keys to authenticated

- 1. generate a key pair
- 2. store the public key on the server
- 3. Request to login, tell server your public key, get back a session ID from the server
- 4. if it has that public key, then it generates a random string, encrypts it with your public key and sends it back to your computer
- 5. On your computer, it decrypts the message + the session ID with your private key then hashes the message and sends it back
- 6. the server then hashes its copy of the message and session ID and if the hash received and calculated match, then you are loggied in

a toy example



# ssh-copy-id

This script installs your

SSH key on a host (overssH)

\$ ssh-copy-id user@host
(puts it in .ssh/authorized.keys
etc)

installing a SSH key

is surprisingly finicky
so this script is helpfur!

# \* port forwarding \*

ssh user@host.com -NfL
3333:localhost:8888

tocal port remote port
Lets you view a remote server
that's not on the internet
in your browser.

# just run 1 command \$ ssh user@host.uname-a

ssh user@host<u>uname-a</u> runs this command dexits

# ssh-agent

remembers your SSH key passphrase so you don't have to keep typing it

#### $\sim$ .

<Enter> ~ . closes the SSH
connection. Useful if it's
hanging!

#### mosh

ssh alternative: keeps the connection open if you disconnect+reconnect later

# .ssh/config

Lets you set, per host:

- username to use
- SSH key to use
- -an alias !

so you can type \$ ssh ALIAS instead of ssh user Every long domain.com

#### from wizardzines

Lots more networking detals in the full zine available for purchase or I have a copy if you want to borrow it.

this free zine describes networks at a lower level full zine but does not include ssh

# 14.2. Generating a Key Pair

We can use ssh-keygen to create a keys.

```
ssh-keygen -f ~/.ssh/seawulf -t rsa -b 4096
```

The -f option allows us to specify the file name of the keys.

```
Generating public/private rsa key pair.
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /Users/brownsarahm/.ssh/seawulf.
Your public key has been saved in /Users/brownsarahm/.ssh/seawulf.pub.
The key fingerprint is:
SHA256:e1g1ZJA3nlIvMs0mpFG8Sca9z9DQl02N14/Z6Y9Xj70 brownsarahm@152.133.20.172.s.wireless.uri.edu
The key's randomart image is:
+---[RSA 4096]----+
| +0+0.0 0*|
| . B0* 0.*|
| * 00B *0|
| . B.X.=.0|
| S .* = .|
| + 0..|
| 0 . ++|
| . 0 =|
| E.|
+----[SHA256]----+
```

# 14.3. Sending the public key to a server

```
ssh-copy-id -i ~/.ssh/seawulf brownsarahm@seawulf.uri.edu
```

and we see it working:

```
/usr/bin/ssh-copy-id: INFO: Source of key(s) to be installed: "/Users/brownsarahm/.ssh/seawulf.pub"
/usr/bin/ssh-copy-id: INFO: attempting to log in with the new key(s), to filter out any that are already installed
/usr/bin/ssh-copy-id: INFO: 1 key(s) remain to be installed -- if you are prompted now it is to install the new keys
```

Then you have to authenticate with your password, because that is what was set up before.

```
Number of key(s) added:

Now try logging into the machine, with: "ssh 'brownsarahm@seawulf.uri.edu'"
and check to make sure that only the key(s) you wanted were added.
```

To login without usng a password you have to tell ssh which key to use:

```
ssh -i ~/.ssh/seawulf brownsarahm@seawulf.uri.edu
```

Or you can add the following to your ~/.ssh/config file

```
Host seawulf
Hostname seawulf.uri.edu
Username brownsarahm
IdentityFile ~/.ssh/seawulf
```

and then use

```
ssh seawulf
```

# 14.4. Review: Undoing half a commit

We can undo a commit using revert, but that applies the opposite of all changes made with that commit. What can we do to undo one of the changes, but not the others?

We need a new commit that has only the changes we actually want to revert.

We can checkout the new commit and then reset the head. Then we have the changes in question in the staging area ready for commit. Now we can commit only the one we want to do in a new commit.

Then we can checkout the main branch, and use git revert to appy the opposite of the thing we want to undo.

# 14.5. Review: Grep, head, and tail to keep excerpts of a file

```
git add .
git commit -m 'export'
```

```
[nots38 3831319] export
g 1 file changed, 579569 insertions(+)
create mode 100644 notes/2022-03-08.md
```

When I pushed it though, is where I realized my problem:

```
$ git push --set-upstream origin nots38
```

It looked normal at first

```
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 8 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 4.43 MiB | 4.17 MiB/s, done.
Total 4 (delta 2), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
remote: warning: See http://git.io/iEPt8g for more information.
remote: warning: File notes/2022-03-08.md is 78.68 MB; this is larger than GitHub's recommended maximum file size of 50.00 MB
remote: warning: GH001: Large files detected. You may want to try Git Large File Storage - https://git-lfs.github.com.
remote:
remote: Create a pull request for 'nots38' on GitHub by visiting:
remote:
 https://github.com/introcompsys/spring2022/pull/new/nots38
remote:
To https://github.com/introcompsys/spring2022.git
 [new branch]
 nots38 -> nots38
Branch 'nots38' set up to track remote branch 'nots38' from 'origin'.
```

but the message reminds me that I added a very large file and it took longer than normal. That file is 78.68 MB and GitHub prefers that you not track files larger than 50MB.

However, I knew that the large output was caused by a specific command, so I used grep to find what line of the file that occured.

```
grep -n "cat dmel-all-r6.19.gtf" notes/2022-03-08.md
```

```
76:[brownsarahm@seawulf ~]$ cat dmel-all-r6.19.gtf
```

So then I used head to take the lines above that plus one below it into a new file

```
head -n 77 notes/2022-03-08.md >> notes/2022-03-08-1.md
```

Then I found the first time we used head in class because I knew that was next

```
grep -n "head" notes/2022-03-08.md
```

```
542125:[brownsarahm@seawulf ~]$ head dmel-all-r6.19.gtf 542194:[brownsarahm@seawulf ~]$ head dmel-all-r6.19.gtf
```

ANd used tail to write the file from that line to the end to a new file.

```
tail -n +542124 notes/2022-03-08.md >> notes/2022-03-08-tail.md
```

the -n parameter allows you to say how manny lines, but if you put a + before the number it starts *from* that line to end instead of specifying how many lines.

Then I knew that the next long thing was when we used grep on mRNA, so I found that line:

```
grep -n "grep" notes/2022-03-08-tail.md
```

Since I didn't use mrna in the grep, I got three results:

```
70:[brownsarahm@seawulf ~]$ grep Act5c dmel-all-r6.19.gtf
82:[brownsarahm@seawulf ~]$ grep mRNA dmel-all-r6.19.gtf
34108:[brownsarahm@seawulf ~]$ grep mRNA dmel-all-r6.19.gtf | wc -l
```

And again I cna take the head of the file and write it to a new file.

```
head -n 83 notes/2022-03-08-tail.md > notes/2022-03-08-2.md
```

From that same last grep I also knew what the new end of file was:

```
tail -n +34107 notes/2022-03-08-tail.md > notes/2022-03-08-t2.md
```

I thought this might be done, but I checked:

```
wc -1 notes/2022-03-08-t2.md
3340 notes/2022-03-08-t2.md
```

that was still a lot of lines, and then I remembered we had a lot of output from 1shw

```
grep -n lshw notes/2022-03-08-t2.md
```

which gave one result

```
152:[I have no name!@n005 ~]$ lshw
```

that told me the third section f the file I wanted:

```
head -n 153 notes/2022-03-08-t2.md > notes/2022-03-08-3.md
```

And I knew after 1shw we exited the compute node:

```
grep -n exit notes/2022-03-08-t2.md

3323:[T have no namel@n005 ~1$ exit
```

```
3323:[I have no name!@n005 ~]$ exit
3337:[brownsarahm@seawulf ~]$ exit
```

Which allowed me to create the fourth section that I needed:

```
tail -n +3321 notes/2022-03-08-t2.md > notes/2022-03-08-4.md
```

Next I removed the original file from git without deleting it locally

```
git reset --mixed HEAD~1
git status
```

git rm did not work because that left the file hashed into the git directory and I wanted to fully remove it. SO I reset the head back on setup, to undo the last commit. --mixed makes it delete from the repo for real, but not delete locally.

Now I see that it doesn't know anything about that file.

```
On branch nots38
Your branch is behind 'origin/nots38' by 1 commit, and can be fast-forwarded.

(use "git pull" to update your local branch)

Untracked files:

(use "git add <file>..." to include in what will be committed)

notes/2022-03-08-1.md

notes/2022-03-08-2.md

notes/2022-03-08-3.md

notes/2022-03-08-4.md

notes/2022-03-08-4.md

notes/2022-03-08-tail.md

notes/2022-03-08.md

notes/2022-03-08.md

notes/2022-03-08.md

notes/2022-03-08.md
```

Then I renamed the original file:

```
mv notes/2022-03-08.md notes/2022-03-08-all.md
```

I tried combinging them with echo:

```
echo notes/2022-03-08-1.md >> notes/2022-03-08.md
echo notes/2022-03-08-2.md >> notes/2022-03-08.md
echo notes/2022-03-08-3.md >> notes/2022-03-08.md
echo notes/2022-03-08-4.md >> notes/2022-03-08.md
```

And confirmed the number of lines in the combined file

```
wc -1 notes/2022-03-08.md
```

Which is how I learned that did not works

```
4 notes/2022-03-08.md
```

Then I remembered to use cat

```
cat notes/2022-03-08-1.md >> notes/2022-03-08.md cat notes/2022-03-08-2.md >> notes/2022-03-08.md cat notes/2022-03-08-3.md >> notes/2022-03-08.md cat notes/2022-03-08-4.md >> notes/2022-03-08.md
```

Again checking the number of lines to show that it worked:

```
wc -1 notes/2022-03-08.md

333 notes/2022-03-08.md
```

and for rference comapred to the original


```
wc -1 notes/2022-03-08-all.md
```

and we see the original length

```
579569 notes/2022-03-08-all.md
```

Then I looked at the compiled file and deleted the others once I was sure I had what I needed.

# 14.6. Prepare for next class



- Do what you need to do to finish the semester well: eg rest, catchup on work, both (breaks are important)
- Review your IDE thoughts right before class on Tuesday March 22 (so you're ready for the activity in class)

#### 14.7. More Practice

 optional Configure ssh keys to your <u>GitHub account</u> (this is actually GitHub's preferred terminal authentication method)

# 14.8. Questions after class

# 15. What happens when I build code in C?

We came across the term build before.


We sometimes say that compiling takes code from source to executable, but this process is actually multiple stages and compiling is one of those steps.

We will focus on what has to happen more than how it all happens.

CSC301, 402, 501, 502 go into greater detail on how languages work.

Our goal is to:

- (where applicable) give you a preview
- get enough understanding of what happens to know where to look when debugging

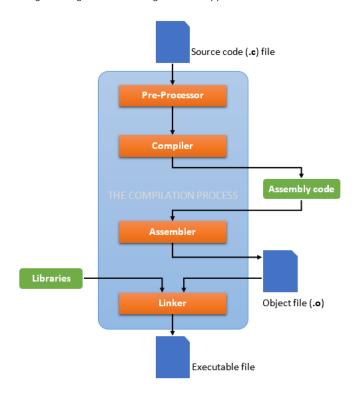

source

# 15.1. Setup

Let's setup by creating an empty folder

```
cd Documents/sysinclass/
mkdir compilec
cd compilec/
```

and then create a small program in C.

```
nano hello.c
```

and then we can look at the file

```
cat hello.c
```

```
#include <stdio.h>

void main () {
 printf("Hello world\n");
}
```

# 15.2. Preprocessing

First we handle the preprocessing which pulls in headers that are included. We will use the compiler gcc

```
gcc -E hello.c -o hello.i
```

If it succeeds, we see no output, but we can check the folder

ls		
now we have a new file		

cat hello.i

This gives us a version with the header file's contents literally pasted in to replace the original #include statement

hello.c hello.i

```
1 "hello.c"
1 "<built-in>" 1
1 "<built-in>" 3
366 "<built-in>" 3
1 "<command line>" 1
1 "<built-in>" 2
1 "hello.c" 2
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 1 3 4
64 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 1 3 4
68 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 3 4
\# 1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/cdefs.h" 1 3 4
630 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/cdefs.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_symbol_aliasing.h" 1 3 4
631 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/cdefs.h" 2 3 4
696 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/cdefs.h" 3 4
{\tt \#~1~"/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_posix_availability.h"~1~3~4~}
697 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/cdefs.h" 2 3 4
69 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/Availability.h" 1 3 4
259 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/Availability.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/AvailabilityInternal.h" 1 3 4
260 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/Availability.h" 2 3 4
70 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_types.h" 1 3 4
27 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_types.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types.h" 1 3 4
33 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/machine/_types.h" 1 3 4
32 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/machine/_types.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/_types.h" 1 3 4
37 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/_types.h" 3 4
typedef signed char __int8_t;
typedef unsigned char __uint8_t;
typedef short __int16_t;
typedef unsigned short __uint16_t;
typedef int __int32_t;
typedef unsigned int __uint32_t;
typedef long long __int64_t;
typedef unsigned long long __uint64_t;
typedef long __darwin_intptr_t;
typedef unsigned int __darwin_natural_t;
70 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/_types.h" 3 4
typedef int __darwin_ct_rune_t;
typedef union {
char __mbstate8[128];
long long _mbstateL;
} __mbstate_t;
typedef __mbstate_t __darwin_mbstate_t;
typedef long int __darwin_ptrdiff_t;
typedef long unsigned int __darwin_size_t;
typedef __builtin_va_list __darwin_va_list;
typedef int __darwin_wchar_t;
```

```
typedef __darwin_wchar_t __darwin_rune_t;
typedef int __darwin_wint_t;
typedef unsigned long __darwin_clock_t;
typedef __uint32_t __darwin_socklen_t;
typedef long __darwin_ssize_t;
typedef long __darwin_time_t;
33 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/machine/_types.h" 2 3 4
34 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types.h" 2 3 4
55 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types.h" 3 4
typedef __int64_t __darwin_blkcnt_t;
typedef __int32_t __darwin_blksize_t;
typedef __int32_t __darwin_dev_t;
typedef unsigned int __darwin_fsblkcnt_t;
typedef unsigned int __darwin_fsfilcnt_t;
typedef __uint32_t __darwin_gid_t;
typedef __uint32_t __darwin_id_t;
typedef __uint64_t __darwin_ino64_t;
typedef __darwin_ino64_t __darwin_ino_t;
typedef __darwin_natural_t __darwin_mach_port_name_t;
typedef __darwin_mach_port_name_t __darwin_mach_port_t;
typedef __uint16_t __darwin_mode_t;
typedef __int64_t __darwin_off_t;
typedef __int32_t __darwin_pid_t;
typedef __uint32_t __darwin_sigset_t;
typedef __int32_t __darwin_suseconds_t;
typedef __uint32_t __darwin_uid_t;
typedef
 __uint32_t __darwin_useconds_t;
typedef unsigned char __darwin_uuid_t[16];
typedef char __darwin_uuid_string_t[37];
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_pthread/_pthread_types.h" 1 3 4
57 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_pthread/_pthread_types.h" 3 4
struct __darwin_pthread_handler_rec {
void (*__routine)(void *);
void *__arg;
 struct __darwin_pthread_handler_rec *__next;
};
struct _opaque_pthread_attr_t {
 long __sig;
 char __opaque[56];
};
struct _opaque_pthread_cond_t {
long __sig;
char __opaque[40];
};
struct _opaque_pthread_condattr_t \ \{
 long __sig;
 char __opaque[8];
};
struct _opaque_pthread_mutex_t {
long __sig;
 char __opaque[56];
};
struct _opaque_pthread_mutexattr_t {
long __sig;
 char __opaque[8];
};
struct _opaque_pthread_once_t {
 long __sig;
 char __opaque[8];
};
struct _opaque_pthread_rwlock_t {
 long __sig;
 char __opaque[192];
};
struct _opaque_pthread_rwlockattr_t {
 long __sig;
 char __opaque[16];
```

```
struct _opaque_pthread_t {
long __sig;
 struct __darwin_pthread_handler_rec *__cleanup_stack;
 char __opaque[8176];
typedef struct _opaque_pthread_attr_t __darwin_pthread_attr_t;
typedef struct _opaque_pthread_cond_t __darwin_pthread_cond_t;
typedef\ struct\ _opaque_pthread_condattr_t\ __darwin_pthread_condattr_t;
typedef unsigned long __darwin_pthread_key_t;
typedef struct _opaque_pthread_mutex_t __darwin_pthread_mutex_t;
typedef struct _opaque_pthread_mutexattr_t __darwin_pthread_mutexattr_t;
typedef struct _opaque_pthread_once_t __darwin_pthread_once_t;
typedef struct opaque_pthread_rwlock_t __darwin_pthread_rwlock_t;
typedef struct _opaque_pthread_rwlockattr_t __darwin_pthread_rwlockattr_t;
typedef struct _opaque_pthread_t *__darwin_pthread_t;
81 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types.h" 2 3 4
28 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_types.h" 2 3 4
40 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_types.h" 3 4
typedef int __darwin_nl_item;
typedef int __darwin_wctrans_t;
typedef __uint32_t __darwin_wctype_t;
72 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/ stdio.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/ types/ va list.h" 1 3 4
31 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_va_list.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/machine/types.h" 1 3 4
35 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/machine/types.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 1 3 4
76 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_int8_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_int8_t.h" 3 4
typedef signed char int8_t;
77 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_int16_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_int16_t.h" 3 4
typedef short int16_t;
78 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_int32_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_int32_t.h" 3 4
typedef int int32_t;
79 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_int64_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_int64_t.h" 3 4
typedef long long int64_t;
80 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_u_int8_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_u_int8_t.h" 3 4
typedef unsigned char u_int8_t;
82 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_u_int16_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/ types/ u int16 t.h" 3 4
typedef unsigned short u_int16_t;
83 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_u_int32_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_u_int32_t.h" 3 4
typedef unsigned int u int32 t:
84 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_u_int64_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_u_int64_t.h" 3 4
typedef unsigned long long u_int64_t;
85 "/Library/Develper/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
typedef int64_t register_t;
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/ types/ intptr t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_intptr_t.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/machine/types.h" 1 3 4
31 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_intptr_t.h" 2 3 4
typedef __darwin_intptr_t intptr_t;
93 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_uintptr_t.h" 1 3 4
30 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_uintptr_t.h" 3 4
typedef unsigned long uintptr_t;
94 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/i386/types.h" 2 3 4
```

};

```
typedef u_int64_t user_addr_t;
typedef u_int64_t user_size_t;
typedef int64_t user_ssize_t;
typedef int64_t user_long_t;
typedef u_int64_t user_ulong_t;
typedef int64_t user_time_t;
typedef int64_t user_off_t;
typedef u_int64_t syscall_arg_t;
36 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/machine/types.h" 2 3 4
32 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_va_list.h" 2 3 4
typedef __darwin_va_list va_list;
76 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_size_t.h" 1 3 4
31 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_size_t.h" 3 4
typedef darwin size t size t:
77 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 2 3 4
 \verb| # 1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_null.h" 1 3 4 \\
78 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 2 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/stdio.h" 1 3 4
 \verb|# 39 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/stdio.h" 3 4 \\
int renameat(int, const char *, int, const char *) __attribute__((availability(macosx,introduced=10.10)));
int renamex_np(const char *, const char *, unsigned int) __attribute__((availability(macosx,introduced=10.12)))
__attribute__((availability(ios,introduced=10.0))) __attribute__((availability(tvos,introduced=10.0)))
 _attribute__((availability(watchos,introduced=3.0)));
int renameatx_np(int, const char *, int, const char *, unsigned int) __attribute__((availability(macosx,introduced=10.12)))
__attribute__((availability(ios,introduced=10.0))) __attribute__((availability(tvos,introduced=10.0)))
 _attribute__((availability(watchos,introduced=3.0)));
80 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 2 3 4
typedef __darwin_off_t fpos_t;
92 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/ stdio.h" 3 4
struct __sbuf {
 unsigned char *_base;
 int _size;
};
struct
 sFILEX;
126 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_stdio.h" 3 4
typedef struct __sFILE {
 unsigned char *_p;
 int _r;
 int _w;
 short _flags;
 short _file;
 struct __sbuf _bf;
 int _lbfsize;
 void *_cookie;
 int (* _Nullable _close)(void *);
int (* _Nullable _read) (void *, char *, int);
fpos_t (* _Nullable _seek) (void *, fpos_t, int);
 int (* _Nullable _write)(void *, const char *, int);
 struct __sbuf _ub;
struct __sFILEX *_extra;
 int _ur;
 unsigned char _ubuf[3];
 unsigned char _nbuf[1];
 struct __sbuf _lb;
 int _blksize;
 fpos_t _offset;
```

```
} FILE:
65 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 2 3 4
extern FILE *__stdinp;
extern FILE *__stdoutp;
extern FILE *__stderrp;
142 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
void clearerr(FILE *);
int fclose(FILE *);
int feof(FILE *);
int ferror(FILE *);
int fflush(FILE *);
int fgetc(FILE *);
int fgetpos(FILE * restrict, fpos_t *);
char *fgets(char * restrict, int, FILE *);
FILE *fopen(const char * restrict __filename, const char * restrict __mode) __asm("_" "fopen");
int fprintf(FILE * restrict, const char * restrict, ...) __attribute__((__format__ (__printf__, 2, 3)));
int fputc(int, FILE *);
int fputs(const char * restrict, FILE * restrict) __asm("_" "fputs");
size_t fread(void * restrict _ptr, size_t _size, size_t _nitems, FILE * restrict _stream);
FILE *freopen(const char * restrict, const char * restrict,

FILE * restrict) _asm("_" "freopen");
int fscanf(FILE * restrict, const char * restrict, ...) __attribute__((__format__ (__scanf__, 2, 3)));
int fseek(FILE *, long, int);
int fsetpos(FILE *, const fpos_t *);
long ftell(FILE *);
size_t fwrite(const void * restrict __ptr, size_t __size, size_t __nitems, FILE * restrict __stream) __asm("_" "fwrite");
int getc(FILE *);
int getchar(void);
char *gets(char *);
void perror(const char *) __attribute__((__cold__));
int printf(const char * restrict, ...) __attribute__((__format__ (__printf__, 1, 2)));
int putc(int, FILE *);
int putchar(int);
int puts(const char *);
int remove(const char *);
int rename (const char *__old, const char *__new);
void rewind(FILE *);
int scanf(const char * restrict, ...) _attribute_((_format__ (_scanf__, 1, 2)));
void setbuf(FILE * restrict, char * restrict);
int setvbuf(FILE * restrict, char * restrict, int, size_t);
int sscanf(const char * restrict, const char * restrict, ...) _attribute_((_format__ (_scanf__, 2, 3)));
FILE *tmpfile(void);
__attribute__((__availability__(swift, unavailable, message="Use mkstemp(3) instead.")))
 _attribute__((__deprecated__("This function is provided for compatibility reasons only. Due to security concerns inherent in
the design of tmpnam(3), it is highly recommended that you use mkstemp(3) instead.")))
char *tmpnam(char *);
int ungetc(int, FILE *);
int vfprintf(FILE * restrict, const char * restrict, va_list) __attribute__((__format__ (__printf__, 2, 0)));
int vprintf(const char * restrict, va_list) __attribute_((__format__ (__printf__, 1, 0)));
int vsprintf(char * restrict, const char * restrict, va_list) __attribute__((__format__ (__printf__, 2, 0)))
 attribute((__availability__(swift, unavailable, message="Use vsnprintf instead.")));
205 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_ctermid.h" 1 3 4
26 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/_ctermid.h" 3 4
char *ctermid(char *);
206 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 2 3 4
FILE *fdopen(int, const char *) __asm("_" "fdopen");
int fileno(FILE *);
228 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
int pclose(FILE *) __attribute__((__availability__(swift, unavailable, message="Use posix_spawn APIs or NSTask instead.")));
FILE *popen(const char *, const char *) _asm("_" "popen") _attribute__((_availability__(swift, unavailable, message="Use
posix_spawn APIs or NSTask instead.")));
249 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
int __srget(FILE *);
int __svfscanf(FILE *, const char *, va_list) __attribute__((__format__ (__scanf__, 2, 0)));
 _swbuf(int, FILE *);
260 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
inline __attribute__ ((__always_inline__)) int __sputc(int _c, FILE *_p) {
```

```
if (--_p->_w >= 0 \mid \mid (_p->_w >= _p->_lbfsize && (char)_c != '\n'))
 return (*_p->_p++ = _c);
 else
 return (__swbuf(_c, _p));
286 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
void flockfile(FILE *);
int ftrylockfile(FILE *);
void funlockfile(FILE *);
int getc_unlocked(FILE *);
int getchar_unlocked(void);
int putc_unlocked(int, FILE *);
int putchar_unlocked(int);
int getw(FILE *);
int putw(int, FILE *);
__attribute__((__availability__(swift, unavailable, message="Use mkstemp(3) instead.")))
 _attribute__((__deprecated__("This function is provided for compatibility reasons only. Due to security concerns inherent in
the design of tempnam(3), it is highly recommended that you use mkstemp(3) instead.")))
char *tempnam(const char *__dir, const char *__prefix) __asm("_" "tempnam");
324 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_off_t.h" 1 3 4
31 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_off_t.h" 3 4
typedef darwin off t off t:
325 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 2 3 4
int fseeko(FILE * __stream, off_t __offset, int __whence);
off_t ftello(FILE * __stream);
int snprintf(char * restrict __str, size_t __size, const char * restrict __format, ...) __attribute__((__format__ (__printf__,
int vfscanf(FILE * restrict __stream, const char * restrict __format, va_list) __attribute__((__format__ (__scanf__, 2, 0)));
int vscanf(const char * restrict __format, va_list) __attribute__((__format__ (__scanf__, 1, 0)));
int vsnprintf(char * restrict __str, size_t __size, const char * restrict __format, va_list) __attribute__((__format__
(__printf__, 3, 0)));
int vsscanf(const char * restrict __str, const char * restrict __format, va_list) __attribute__((__format__ (__scanf__, 2,
0)));
349 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_ssize_t.h" 1 3 4
31 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/sys/_types/_ssize_t.h" 3 4
typedef __darwin_ssize_t ssize_t;
350 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 2 3 4
int dprintf(int, const char * restrict, ...) _attribute_((__format__ (__printf__, 2, 3)))
__attribute__((availability(macosx,introduced=10.7)));
int vdprintf(int, const char * restrict, va_list) _attribute_((__format__ (__printf__, 2, 0)))
 _attribute__((availability(macosx,introduced=10.7)));
ssize_t getdelim(char ** restrict __linep, size_t * restrict __linecapp, int __delimiter, FILE * restrict __stream)
__attribute__((availability(macosx,introduced=10.7)));
ssize_t getline(char ** restrict __linep, size_t * restrict __linecapp, FILE * restrict __stream)
 _attribute__((availability(macosx,introduced=10.7)));
FILE *fmemopen(void * restrict __buf, size_t __size, const char * restrict __mode)
__attribute__((availability(macos,introduced=10.13))) __attribute__((availability(ios,introduced=11.0)))
__attribute__((availability(tvos,introduced=11.0))) __attribute__((availability(watchos,introduced=4.0)));
FILE *open_memstream(char **_bufp, size_t *_sizep) __attribute__((availability(macos,introduced=10.13)))
__attribute__((availability(ios,introduced=11.0))) __attribute__((availability(tvos,introduced=11.0)))
__attribute__((availability(watchos,introduced=4.0)));
367 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
extern const int sys_nerr;
extern const char *const sys_errlist[];
int asprintf(char ** restrict, const char * restrict, ...) __attribute__((__format__ (__printf__, 2, 3)));
char *ctermid_r(char *);
char *fgetln(FILE *, size_t *);
const char *fmtcheck(const char *, const char *);
int fpurge(FILE *);
void setbuffer(FILE *, char *, int);
int setlinebuf(FILE *);
int vasprintf(char ** restrict, const char * restrict, va_list) __attribute__((__format__ (__printf__, 2, 0)));
FILE *zopen(const char *, const char *, int);
```

```
FILE *funopen(const void *,
 int (* _Nullable)(void *, char *, int),
int (* _Nullable)(void *, const char *, int),
fpos_t (* _Nullable)(void *, fpos_t, int),
 int (* _Nullable)(void *));
407 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/secure/_stdio.h" 1 3 4
31 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/secure/_stdio.h" 3 4
1 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/secure/_common.h" 1 3 4
32 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/secure/_stdio.h" 2 3 4
42 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/secure/_stdio.h" 3 4
extern int __sprintf_chk (char * restrict, int, size_t,
 const char * restrict, ...);
52 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/secure/_stdio.h" 3 4
extern int __snprintf_chk (char * restrict, size_t, int, size_t,
 const char * restrict, ...);
extern int __vsprintf_chk (char * restrict, int, size_t,
 const char * restrict, va_list);
extern int __vsnprintf_chk (char * restrict, size_t, int, size_t,
 const char * restrict, va_list);
 \verb| # 408 "/Library/Developer/CommandLineTools/SDKs/MacOSX.sdk/usr/include/stdio.h" 2 3 4 \\
2 "hello.c" 2
void main () {
printf("Hello world\n");
```

At the bottom of the file, we see the orignal code with an extra bit of information that helps the compiler write better error messages, by saying where contents came from.

# 15.3. Compiling

Next we take our preprocessed file and compile it to get assembly code.

```
ls
hello.c hello.i hello.s
```

```
cat hello.s
 .section
 _TEXT, __text, regular, pure_instructions
 .build_version macos, 10, 15, 6 sdk_version 10, 15, 6 \,
 .globl _main
 ## -- Begin function main
 .p2align
_main:
 ## @main
 .\mathtt{cfi}_{\mathtt{startproc}}
%bb.0:
 pushq %rbp
 .cfi_def_cfa_offset 16
 .cfi_offset %rbp, -16
 movq
 %rsp, %rbp
 .cfi_def_cfa_register %rbp
 L_.str(%rip), %rdi
 leaq
 $0, %al
 movb
 _{\rm printf}
 callq
 popq
 %rbp
 retq
 .cfi_endproc
 ## -- End function
 . {\it section}
 __TEXT, __cstring, cstring_literals
L_.str:
 ## @.str
 .asciz "Hello world\n"
.subsections_via_symbols
```

# 15.4. Assembling

```
gcc -c hello.s -o hello.o
```

now we see a new file, the .o

```
hello.c hello.i hello.o hello.s
```

let's look at it

```
cat hello.o
```

This is not machine readable, though

MacOS tried to help a little but it's still not very readable.

# 15.5. Linking

Now we can link it all together; in this program there are not a lot of other depdencies, but this fills in anything from libraries and outputs an executble

```
gcc -o hello hello.o -lm
```

the -o flag specifie the name for output and -lm tells it t link from the.o file.

again we can look at the directory

```
1s
```

we have a new executable file

```
hello hello.c hello.i hello.o hello.s
```

Finally we can run our program

```
./hello
```

and see that it works!

```
Hello world
```

# 15.6. Putting it all together

We can also do all of it at once, to see how it's different let's clean up the directory:

```
rm hello.i hello.s hello.o
```

and now we can tell it to compile and link

```
gcc -Wall -g -o hello hello.c -lm
```

```
ls
hello hello.c hello.dSYM
```

# 15.7. Working with multiple files

```
nano main.c
```

```
nano help.c
```

```
cat main.c
```

```
/* Used to illustrate separate compilation.
Created: Joe Zachary, October 22, 1992
Modified:

*/
#include <stdio.h>

void main () {
 int n;
 printf("Please enter a small positive integer: ");
 scanf("%d", &n);
 printf("The sum of the first n integers is %d\n", sum(n));
 printf("The product of the first n integers is %d\n", product(n));
}
```

```
cat help.c
```

```
/* Used to illustrate separate compilation
Created: Joe Zachary, October 22, 1992
Modified:
/* Requires that "n" be positive. Returns the sum of the
 first "n" integers. */
int sum (int n) {
 int i;
 int total = 0;
 for (i = 1; i <= n; i++)</pre>
 total += i;
 return(total);
/* Requires that "n" be positive. Returns the product of the
 first "n" integers. */
int product (int n) {
 int i;
 int total = 1;
 for (i = 1; i <= n; i++)
total *= i;</pre>
 return(total);
}
```

We can first compile to object the helper functions:

```
gcc -Wall -g -c help.c
```

and then main

```
gcc -Wall -g -c main.c
```

but here we get an error:

We can get around this, by telling main about the functions by adding

```
int sum(int n);
int product (int n);
```

to the main.c

```
nano main.c
cat main.c
```

to Review what we added, we can look at it

```
/* Used to illustrate separate compilation.
Created: Joe Zachary, October 22, 1992
Modified:

*/
#include <stdio.h>
int sum(int n);
int product (int n);

void main () {
 int n;
 printf("Please enter a small positive integer: ");
 scanf("%d", &n);
 printf("The sum of the first n integers is %d\n", sum(n));
 printf("The product of the first n integers is %d\n", product(n));
}
```

Now that we have added those lines, we can build again:

```
gcc -Wall -g main.c
```

As before we get the warning, but we also get an error.

Since the we got a linker error, but we didn't intend to link, we know that we ran the command incorrectly by adding the -c option we can get it to compile and produce the object file.

```
gcc -Wall -g -c main.c
```

we now get only the warning as before

We can again see what happened

```
ls
```

Now we have the .o file for main

```
hello hello.dSYM help.o main.o
hello.c help.c main.c
```

We can link everythng togther, finally by passing it both object files.

```
gcc -o demo main.o help.o -lm
```

Now we see what is there

```
ls
```

and we see tht there is a new file, the executable named demo

```
demo hello.c help.c main.c hello hello.dSYM help.o main.o
```

Now we can run our program


```
./demo
```

and we see:

```
Please enter a small positive integer: 4
The sum of the first n integers is 10
The product of the first n integers is 24
```

it works!

# 15.8. Prepare for next class



- 1. Practice using gcc. Repeat steps we did in class, change the order of parameters. Then in gcctips.md summarize what you learned as a list of tips and reminders on what the parameters do/why/when you would need them (or not). (to reinforce what we learned)
- 2. Create operators.md and make some notes about what you know about operators. What kinds of operators are you familiar with? Which have you seen in programming? math?
- 3. Add the following to your kwl chart

```
|compiling | _ | _ | _ |
| linking | _ | _ | _ |
| building | _ | _ | _ |
| machine representation | _ | _ | _ |
| integers | _ | _ | _ |
| floating point | _ | _ | _ |
```

# 15.9. More Practice

- 1. (priority) Write two short programs that do the same thing in different ways and compile them both to assembly (eg using a for vs while loop to sum numbers up to a number). Check the assembly to see if they produce the same thing or if it's different.
- 2. Add (or link) a glossary term, cheatsheet tip, or historical context to note on the course website.

# 15.10. Questions After Class

### 15.10.1. In the .o files, how does the computer interpret the gibberish? What does it actually do?

This is machine code, it is binary that is designed for your hardware to interpret as instructions.

When we display it to the terminal, your computer tries to interpret that binary as text, so it ends up as weird characters mostly.

### 15.10.2. what flags are order sensitive when compiling in C?

This is a practice task to try out.

### 15.10.3. how does the -g flag work for all debuggers

the -g option leaves additional information in the object file as informtion for the debugger to use.

# 15.10.4. When would there be a time where you would have to look in a lower-level file (for instance, maybe something can be fixed only by going into the assembly or object code?)

The object file is specifically not human readable, you would never really look at it. The advantage of having it is so that you can only re-compile some parts of the code when you make small changes.

You might need to look at the assembly if you are working on very low level code, like a driver that helps a peripheral talk to the computer.

### 15.10.5. Why does Apple try to make the object file make sense?

Have not yet found this answer

# 16. Why is the object file not human readable?

The object file displays as random weird characters because it is written to disk in a different format than our terminal reads it in. It is the specific instructions (from the assembly) and memory addresses written to a file in binary. Our terminal reads it one byte (8bits) at a time and interprets those as characters.

Today, we will see how characters are represented as integers, then binary, and read and write files in binary of strings we know to see how it what happens and mimic something like how that object file happened by writing as binary and then reading it as characters.

### 16.1. Prelude: REPL

name

'sarah'

and then it prints the value

One way we can use many interpreted languages, including Python is to treat the interpreter like an application and then interact with it in the terminal.

This is called the Read, Execute, Print Loop or REPL.

We can execute simple expressions like mathemeatical expressions:
4+5
and it will print the result
9
We can create variables
<pre>name = 'sarah'</pre>
but assignment does not return anything, so nothing is printed.
We can see the value of a variable, by typing its name

# 16.2. Characters to Integers

Python provides a builtin function ord to find the Unicode key for that character.



← Tip

This structure, the [] is called a list comprehension. It executes a for loop in order to build a list. In the REPL, it will then print out the list.

```
[ord(char) for char in name]
```

We get the integer representtion for each one.

```
[115, 97, 114, 97, 104]
```

Note that it's important to try multiple things if you aren't sure the format you are getting back or to check the official documents, as Denno found by testing this with his name in lowercase.

```
[ord(char) for char in 'denno']
```

Coincidentally, the letters in his name all fall into the hundreds and only require 0 and 1 in decimal, so it looks like they could be 3 bit binary numbers.

```
[100, 101, 110, 110, 111]
```

Python also allows us to change content into a byte array:

```
bytearray(34)
```

It does not display in the 0 and 1 like a string that we migth expect, but it does change the type.

00\x00\x00\x00\x00\x00')

We can then write this to a file, by getting the actual byes of each item. First, we will save our list in a variable.

We will use the Python with keyword to open the file so that we do not to need to separately open and close the file. in the open function, the first parameter is the file name and the second is the mode. In this case, we want to write ('w') in binary ('b'). f is the filestream.

```
name_ints = [ord(char) for char in name]
with open("name.txt", 'wb') as f:
 f.write(bytes(bytearray(name_ints)))
```

it returns 5 in this case, because it wrote out 5 bytes, one per character.

```
5
```

If we exit python we can look at the file and see how it is interpreted.

```
exit()
```

Remember we wrote, as binary, the numbers, 115, 97, 114, 97, 104 to the file

```
cat name.txt
```

but it is interpretted as the string by the terminal.

```
sarah
```

python

```
Python 3.8.6 (v3.8.6:db455296be, Sep 23 2020, 13:31:39) [Clang 6.0 (clang-600.0.57)] on darwin Type "help", "copyright", "credits" or "license" for more information.
```

Back in Python, we can read the file as binary

```
with open("name.txt",'rb') as f:
 print(f.read())
```

This is binary, but the python interpreter also *prints* it as a string, the b indicates the object is actually binary type.

```
b'sarah'
```

If we read it not as binary, it returns as the string

```
with open("name.txt",'r') as f:
 print(f.read())
```

```
sarah
```

We can also confirm the type

```
with open("name.txt",'rb') as f:
 content = f.read()
```

```
type(content)
<class 'bytes'>
```

The with keyword is alternative to:

```
f = open("name.txt",'rb')
f.read()
f.close()
```

Practice exercise

```
msg = [68, 114, 46, 32, 66, 114, 111, 119, 110,10]
```

```
bytes(bytearray(msg))
b'Dr. Brown\n'
```

# 16.3. Bit level Operations

We can operate on integers bit by bit.

If we shift 3 one to the right we transform from 11 to 1, we can use the >> operator to do this.

```
3 >> 1
```

We can shift it the other way too: 11 to 110 so we get from 3 to 6

```
3 << 1
 6
We can also use logical operators
 1 & 0
 0
They operate bit by bit so 11 and 01 ends at 01
 3 & 1
 1
The inputs to these operators must be integers.
 type(3)
 <class 'int'>
 3.4 & 4.5
 Traceback (most recent call last):
 File "<stdin>", line 1, in <module>
 TypeError: unsupported operand type(s) for &: 'float' and 'float'
And Xor
 3 ^ 3
 0
and or
 3 | 1
 3
```

# 16.4. Not and Negative numbers in binary

We can also invert the bits, which flips all of bits.

```
~3
```

the output is

```
-4
```

We started with 00000011 When we flip all of the bits, we get 11111100. To see how this translates to decimal, we then have to think about how negative numbers are calulated.

There are two common ways, but the one in practice here is called two's complement. The two's complement is calculated by adding one to the one's complement, so we will calculate that first.

One's complement is to invert the bits, so in one's complement 11111100 is -3.

If we add one to that, we get the two's compliment, 11111101 so in two's compliment, that is -3.

If we calculate the two's compliment of 4:

in binary 4 is 00000100, then we do the on'es complement, 11111011 and then add one, 11111100, which is the what we got above by flipping the bits of 3.

note remember the first bit is the sign. 1 is for negative numbers and 0 is for positive. We used 8bit above to save visual space, but if represented as 16, 32, or 64 bit integer it would be the same.

```
We can also check the minimum number of bits for a number
 (54).bit_length()
 6
We can also get the binary representation for an integer with the builtin bin
 bin(3)
 '0b11'
This case it write the sign before the letter b, instead of using two's complement or ones complement.
 bin(-5)
```

we can also write numbers in that format and get the integer back.

'-0b101'

```
0b11
3
```

and we can do the bitwise operations on binary numbers directly as well.

```
0b111 & 0b0111
7
0b111 & 0b0100
4
bin(0b111 & 0b0100)
```

'0b100'

bin(0b1111 & 0b0100)


'0b100'

```
bin(0b1111 ^ 0b0100)
'0b1011'

bin(0b1111 - 0b0100)
'0b1011'

exit()
```

# 16.5. Prepare for next class



1. Add bitwise.md to your kwl and write the bitwise operations required for the following transformations:

```
4 -> 128
12493 - > -12494
127 -> 15
7 -> 56
4 -> -5
```

2. For the following figure out the bitwise operator:

```
45 (_) 37 = 37
45 (_) 37 = 45
3 (_) 5 = 7
6 (_) 8 = 0
10 (_) 5 = 15
```

3. Create readingbytes.md and answer the following:

Read about integer overflow and in overflow.md describe what it is, use an example assuming an 8 bit system.

# 16.6. More Practice

- 1. (priority) Add to overflow.md how integer overflow is handled in Python, C, Javascript, and one other language of your choice.
- 2. Add to readingbytes.md and exmaple of how machine code that was a 3 bit instruction followed by an 8 bit address might render.
- 3. Add a box to the notes for any class that includes historical context of something covered in class or a related topic. Use the tempalte below:

```
```{admonition} Historical Context
```

16.7. Questions After Class

Class Response Summary:

16.7.1. When is the cutoff for getting work approved for the class?

Our assigned final exam time is: May 10

So, until then you can get feedback and revise. At that time, my assessment of your work will be final, and I'll evaluate your contract. You can also change you contract up until that point.

16.7.2. Will the fact that we didn't have class the other week effect the amount of work we have to complete for our contracts?

I will announce in class how many you can reduce the required number of more practice/deeper exploration you can do.

what are some programing implementations of this arithmetic

16.7.3. Is there a low-level interface to actually make using bits as flags useful in python?

You could possibly

16.7.4. Whats the likelihood of me using bit operations in high level languages?

16.7.5. When would we use those binary operation (like in a job / research)?

We may not use them directly very often, but they are important building blocks to understanding hardware and understanding these representations, how the hardware works, and these operators, help you understand edge cases. Understanding these operations, provides the component knowledge to understand overflow and approximation issues, for example, that we will see more in the next class.

16.7.6. When using the bitwise operators (the &, |, etc.) what are the inputs?

In Python, bit level operators are defined only for integers, whether you pass them as integers or represented as binary.

16.7.7. how often (if ever) do you find yourself working in a python shell like we did today?

I use the shell directly very limited, to do quick calculations or to plan things. Mostly if I need to try to remember something or do a quick one time operation, for example, i have a file that I want to transform.

16.7.8. Questions to be answered later

. I have seen XOR gate used to solve certain programming problems efficiently, but I am curious about how to actually implement it

17. How do represent non integer numbers?

- · mini coverage of notebooks
- · floating point
- · IEEE double format

17.1. When would you use the REPL with Python?

Additional context relative to class

I added here some additional context for using the notebook that I did not mention explicitly in class.

One of the questions from <u>Tuesday</u> was why would we ever use python in the terminal instead of by making .py files. A Juptyer notebook aims to balance the advantages of a file and working in the interpreter.

We work in our browser, and there are cells, some are Markdown.

```
name = 'sarah'

name

cat checker.sh
```

17.2. What about a fixed point?

Let's experiment with an 8 bit representation with 1 bit for sign and then the next 4 used for the part of the number greater than 0 and the last 3 for the fractional part.

so then the number:

```
01000001
```

would be

```
0-1000-001
```

positive, 8.1

in this then we can represent the numbers 0-8 for the right hand side and 0-15 on the left hand side so we get

```
import itertools
num_list = [str(n+f) for n,f in itertools.product(range(16),[i/10 for i in range(10)])]
', '.join(num_list) + ', '.join(['-'+ n for n in num_list])
```

```
len(num_list)*2
```

This is far fewer different values than we could represent with 1 bit for sign and 7 bits to represent intergers

```
(2**7)*2
```

Another way we could represent numbers with a fixed point, is to use base two fractions: $\(\frac{1}{2}), \(\frac{1}{4}), \(\frac{1}{4}),$

In this fixed point we would have, for example: 0101.1010 would be $(0^2^3 + 1^2^2 + 0^2^2 + 1^2^0 + 1^2^2 + 0^2^2 + 1^2^0 + 1^2^2 + 1^2 + 1^2^2 + 1^2$

In this case we still have a small range of numbers, but it's a different set of possible numbers.

17.3. Floating Point Notation

We can write numbers in many different forms. We have written integers through many different bases so far.

For example in scientific contexts, we often write numbers (in base 10) like:

```
[ 3.45 \times 10^2 = 345 ]
```

We can use a similiar form to represent numbers in binary. Using base 2 instead of base 10.

17.4. Floating point numbers are not all exact

Let's look at an example, we add .1 together 3 times, and we get the expected result.

```
.1 + .1 + .1
```

However, if we check what it's equal to, it does not equal .3

```
.1 + .1 + .1 == .3
```

This is because the floating point representation is an *approximation* and there are multiple full numbers that are close to any given number that cannot be expressed exactly. However, the display truncates since usually we want only a few significant digits.

Even rounding does not make it work.

```
round(.1,1) + round(.1,1) + round(.1,1) == round(.3,1)

round(.1 + .1 + .1 ,1)

.1

num = .1
```

17.5. Floating point IEEE standard

Now, lets see how these numbers are actually represented.

<u>IEEE Floating Point</u> is what basically everyone uses, but it is technically a choice hardware manufacturers can techically make.

- Initially in 1985
- Reviesd in 2008 after 7 year process that expanded
- · revised in 2019 after 4 year process that mostly clarified


IBM mainframes use their own representiton based on Hex

Next revision is projected to 2028.

this is a double precision float or binary64 inthe current standard.

it was called double in the original, offiically, so it is commonly called that.

In this case we will 1 bit for sign, 11 for exponent and 52 for the fraction part



17.5.1. How do we read a number like this?

if the sign bit is \(s\) and the number represented by the exponent bits is \(e\) and the 52 bits are number from right most is 0 and the last one is 52. \[(-1)s + \left(1 + \sum_{i=1}^{52} b_{52-i} 2^{-i} \right) \times 2^{e-1023} \]

Note that this is (2^{-1}) so we are working with *fractions* instead of integers in the sum.

So if we had:

it would represent:

or

it would represent: $((-1)^0 + \left(1 + 0\cdot 2^{-0} + 1\cdot 2^{-1} + \cdot 2^{-1} + \cdot 2^{-51}) + 0\cdot 2^{-52}\right) = 0 + (1 + \frac{1}{2}) \times 2^{-51} + 0 \times 2^{-52}$

0b0111111111

float.hex(1.5)

0b01111111000-1023

17.5.2. How do we get numbers into this form?

Now, let's return to our example of .1.

First we take the sign of the number for the sign bit, but then to get the exponent and fraction, we have more work to do.

Let's take the equation we had from the standard:

\[\left(1 + \sum_{i=1}^{52} b_{52-i} 2^{-i}\right) \times 2^{e-1023}\]

If we think about the fraction and how we add fractions, by reaching a common denominator. Since they're all powers of two, we can use the last one.

Now with a common denominator:

 $$$ \left(\frac{2^{52}}{2^{52}} + \frac{2^{52}} + \frac{$

So then this becomes a binary number with 53 bits (the 52 + 1) and a denominator of \((2^{52}\)), let's call that number J.

\[\frac{J}{2^{52}}\times 2^{e-{1023}}\]

we can then combine the powers of 2.

 $[\frac{J}{2^{52-e+1023}}]$

So i order to return to our .1 that we want to represent, we can represent it as a fraction and then estimate it in the form above.

 $\frac{1}{10} \frac{1}{10} \frac{1}{10} \frac{1}{10}$

Since we want to use exactly 53 bits to represent (J), we want $(\frac{2^N}{10})$ to be greater than or equalt to (2^{52}) and less than (2^{53}) .

\[2^{52} <= \frac{2^N }{10} < 2^{53} \]

 $[2^{N-4} < \frac{2^N}{10} < 2^{N-3}]$

so if we want:

\[2^{52} <= \frac{2^N }{10} < 2^{53} \]

then best $\(N\)$ is 56, but we can check it.

```
2**52 <= 2**56 //10 < 2**53
```

Now we can get the number we will use for \(J\). We want to get as close to .1 with our fraction as possible, so

```
q,r = divmod(2**56,10)
```

Then we check the remainder to decide if we should round up by 1 or not.

r

 $(6 > 5 = \frac{10}{2})$ so we round up

We need (52-e+1023 = 56) so

```
52-56+1023
```

Python doesn't provide a binary reprsentation of floats, but it does provide a hex representation.

```
float.hex(.1)
```

```
(q+1)/2**56 == .1
```

this confirms that the approximation we found is the same as the float representation of .1.

```
format(.1, '.17f')
```

We can also use built in classes to get at the needed quantitites

```
from decimal import Decimal from fractions import Fraction
```

Fraction.from_float(.1)

bin(3602879701896397)

bin(55)

float.hex(.1)

q/2

2**55

Decimal.from_float(.1)

Decimal.from_float(.1 + .1 + .1)

Decimal.from_float(.3)

Decimal.from_float(.4)

Decimal.from_float(.1 + .1 + .1 + .1)

17.6. Prepare for next class



The text in () in these sections is an explanation of *why* that task is assigned



If you have jupytext installed, you can make the file, floatexpt.md a runnable notebook when you open it through the jupyter notebook interface and a plain text file that is easily readable on github, by pairing or by manually creating it as a <u>jupytext markdown</u> notebook in any text editor (including the IDE of your choice) and then the code will execute to show the outputs when you build your KWL repo as a jupyterbook. Jupyter book will be able to run it even if you don't separately install jupytext, but you need the jupytext to generate it automatically.

- 1. Write a C program to compare values as doubles and as float (single precision/32bit) to see that this comparison issue is related to the IEEE standard and is not language specific. Make notes and comparison around its behavior and include it in a code cell in cdouble.md(to practice)
- 2. (priority) confirm that you can run the hardware simulator HardwareSimulator not CPUEmulator that we used before (we will use this in class)

17.7. More Practice

- 1. In floatexpt.md design an experiment using the fractions.Fraction class in python that
 shows helps illustrate how .1*3 == .3 evaluates to False but .1*4 == .4 evaluates to True.
 (practice/review)
- 2. Add a github action to build your jupyter book, using the course site as an example. GitHub actions live in a hidden folder .github. (apply scripting knowledge, practice with git, and make it render as a book automatically)

18. How can we use logical operations?

18.1. Admin

18.1.1. Grading Contract Updates

- You can reduce your more practice days completed by 2.
- You can reduce the number of deeper exploration by 1.

Important

Review your grading contract and either submit that PR, or an issue noting if you need another update.

18.1.2. Deadlines

- Things submitted by May 5 you can revise again.
- I will hold office hours for your last chance to do final touches during our exam time May 10, 11:30-1:30.
- I will do final grading starting May 11 in the afternoon; all work must be submitted by noon May 11 to guarantee grading.
- · I will post additional office hours and feedback hours during finals week soon.

18.2. Review

- git revert applies a new commit that does the opposite of the reverted commit. review
- A file with permissions 644 is rw-r-r-, so only the owner, not other members of the group, can write to the file. review

19. Why do we need to think about bitwise operations?

Understanding them is prereq to what we will see today and that will help you understand hardware overall.

You of course will not need every single thing we teach you in every single class.

- Seeing topics once at least is the only way you can make an informed decision to study a topic deeper or not.
- Seeing a topic in more detail than you will use all the time actually helps you build intuition, or deep understanding, of the topic overall, and help you remember what you need to remember

19.1. Bitwise operators

- &: and
- |: or
- ^: xor
- ~: not

```
• : shift right
```

<<: shift left

Let's review truth tables for and, or, and xor.

а	b	output
0	0	0
0	1	0
1	0	0
1	1	1

Table 19.1 AND

a	b	output
0	0	0
0	1	1
1	0	1
1	1	1

Table 19.2 OR

а	b	output
0	0	0
0	1	1
1	0	1
1	1	0

Table 19.3 XOR

In order to implement more complex calculations, using gates, we can use these tables as building blocks compared to the required output.

There are more gate operations; you can see a simulation for $\underline{\text{16 gates}}$

19.2. Adding with gates

Let's review adding binary numbers

- · add the two bits
- · carry the next place like in adding multi-digit numbers otherwise

\[101 + 100 = 1001 \]

We first add the ones place and get a 1, then the two's place and get a zero then the 4's place and get 0 with a carried one.

\[010 + 011 = 101 \]

In this case in the ones place we add 0 + 1 to get one, the two ones add to 0 with carry then 1 + 0 + 0 gives another 1.

let's make a truth table for adding two bits.

а	b	out 2's	out 1's
0	0	0	0
0	1	0	1
1	0	0	1
1	1	1	0

Table 19.4 Add

Now, what gate can we use to get the output 1's place bit and what gate can we use to get the output 2's place bit by comparing to the truth tables above.

It turns out the one's place is an xor gate, and the two's place is an and gate.

This makes up the half adder, try one out at this simulator.

So this lets us as two bits, but what about adding a number with more bits?

We can put multiple together, but there's one more wrinkle: the carry.

That's what makes a full adder different. It adds three single bits, or a carry and two bits and outputs the result as a sum bit and a carry bit.


Then we can link many of those together to get an 8 bit ripple adder.

Alternatively, we can "lookahead" with the carry bit, passing it forward multiple places all at once, as shown in this 4 bit carry lookahead adder.

19.3. How can we choose between things?

A mux (multiplexer) is a component (like a gate is a component) that allows us to select one operation out of a circuit.

19.4. Prepare for next class



- 1. Compare the 2 bit multiplier to the full adder in multiplication.md. Use that to explain how it works, relative to the fact that multiplication can be thought of like repeated addition.
- 2. Study the <u>8 bit ALU</u>. Try it out and be prepared to answer questions about how it works on Thursday.
- 3. Read gates out of anything

- 1. In addertypes.md compare ripple adders and lookahead adders.
 - 1. Give a synopsis of each adder type
 - 1. Compare them in terms of time (assume that each gate requires one unite of time)
 - 1. Compare them ${\bf in}$ terms of space/cost by counting the total number of gates required.
- 2. (priority) While we saw many types of gates today, but we actually could get all of the operations needed using only NAND gates. Work out how to use NAND gates to implement a half adder.

19.6. Questions After Class

19.6.1. How do we know to use the selector in a mux?

This comes from the instruction itself.

19.6.2. What other mediums besides water could these be implemented with?


We will talk more about different ways to physically create gates in the next few classes

KWL Chart

Working with this repo



- Treat your main branch as what will "published" if you choose to use this as a portoflio of sorts.
- The feedback branch should only contain material that has been reviewed and approved by the instructors.



You may mix these workflows as long as feedback only contains work that has been reviewed and approved.

Workflow 1

- 1. When you are working on things that are not ready for feedback make a new branch to work on them.
- 2. If you are working on things that you want feedback on right away you can work directly on main.
- 3. When work is ready for feedback merge it into main
- 4. Create a pull request from main into feedback.
- 5. When PRs are approved, merge them into feedback

Workflow 2

- 1. work on a specific branch
- 2. when it is ready for review, create a PR from the item-specifc branch to feedback.
- 3. when it is approved, merge into feedback, then merge feedback into main.



After your KWL repo is a jupyterbook, you may want to move your chart into a <u>chart.md</u> from the README. You could then put content from this section in the README to have an in-place reminder.

Minimum Rows

```
# KWL Chart

<!-- replace the _ in the table or add new rows as needed -->

| Topic | Know | Want to Know | Learned |
|----| ----- | ----- | |
| Git | _ | _ | _ |
| Git | _ | _ | _ |
| SitHub | _ | _ | _ |
| Terminal | _ | _ | _ |
| text editors | _ | _ | _ |
| text editors | _ | _ | _ |
| text editors | _ | _ | _ |
| tabstraction | _ | _ | _ |
| git workflows | _ | _ | _ |
| git workflows | _ | _ | _ |
| git branches | _ | _ | _ |
| unmber systems | _ | _ | _ |
| merge conflicts | _ | _ | _ |
| documentation | _ | _ | _ |
| templating | _ | _ | _ |
| developer tools | _ | _ | _ |
| ssh keys | _ | _ | _ |
```

Added Files

READMEthe chart, (or usage)defaultallgitoffline.mdreflection (extra exercises, add & commit out of order)prepare (and practice)grade freeterminal.mdreflectionpreparegrade freesoftware.mdexamine a software projectpreparegrade freeabstraction.mdhow you think about abstraction and updates (and reconcilation)prepare (practice)grade freechart.mdyour chart (from README)practicegrade freereorg.mdntoes/troubleshootingpracticegrade freestdinouterr.mdecho and redirect practiceprepare and (practice)grade freehardwaresurvey.mdchallenges & reminders (more exercises) reflectionprepare and (practice)grade freegitlog.txtgitlog outputpreparepreparegradedworkflows.mdcompare.git workflowspreparepreparegraded	
terminal.md reflection prepare (and practice) grade free software.md examine a software project prepare grade free how you think about abstraction and updates (and reconcilation) prepare (practice) grade free chart.md your chart (from README) practice grade free reorg.md ntoes/troubleshooting practice grade free stdinouterr.md echo and redirect practice prepare and (practice) grade free challenges & reminders (more exercises) reflection prepare and (practice) grade free grade free	
software.md examine a software project prepare grade free abstraction.md how you think about abstraction and updates (and reconcilation) prepare (practice) grade free chart.md your chart (from README) practice grade free reorg.md ntoes/troubleshooting practice grade free stdinouterr.md echo and redirect practice practice grade free hardwaresurvey.md challenges & reminders (more exercises) reflection prepare and (practice) grade free gitlog.txt git log output prepare graded	
abstraction.md how you think about abstraction and updates (and reconcilation) prepare (practice) grade free chart.md your chart (from README) practice grade free reorg.md ntoes/troubleshooting practice grade free stdinouterr.md echo and redirect practice practice grade free hardwaresurvey.md challenges & reminders (more exercises) reflection prepare and (practice) grade free gitlog.txt git log output prepare graded	
abstraction.md updates (and reconcilation) chart.md your chart (from README) practice grade free reorg.md ntoes/troubleshooting practice grade free stdinouterr.md echo and redirect practice practice practice practice practice grade free challenges & reminders (more exercises) reflection gitlog.txt git log output prepare (practice) practice grade free grade free prepare and (practice) grade free	
reorg.md ntoes/troubleshooting practice grade free stdinouterr.md echo and redirect practice practice grade free hardwaresurvey.md challenges & reminders (more exercises) reflection prepare and (practice) grade free gitlog.txt git log output prepare graded	
stdinouterr.md echo and redirect practice practice grade free hardwaresurvey.md challenges & reminders (more exercises) reflection prepare and (practice) grade free gitlog.txt git log output prepare graded	
hardwaresurvey.md challenges & reminders (more exercises) reflection prepare and (practice) grade free gitlog.txt git log output prepare graded	
gitlog.txt git log output prepare and (practice) grade free graded	
workflows.md compare git workflows practice graded	
gitplumbing.md map plumbing to porcelain (and prepare (and practice) graded	
gitunderstanding.md how your undersanding has prepare graded	
<u>idethoughts.md</u> <u>notes on ide usage</u> prepare graded	
numbers.md usage of nondecimal number prepare graded systems (and number conversions)	
<u>hexspeak.md</u> <u>summarize & generate</u> prepare graded	
gitstory.md tutorial of using git for a challenge prepare graded	
gitstory2.md tutorial of using git for a challenge practice graded	
donotcommit.md tutorial of using_git for a challenge practice graded	
jupyterbooktroubleshooting.md problems with jupyterbook prepare graded	
<u>templating.md</u> <u>how template based engines work</u> prepare graded	
docs.md documentation ecosystem of a prepare graded	
shell_scripting.md Basic Shell Scripting prepare graded	
remote_server.md How to access and work on a prepare graded remote server	
octal.md pracitce with octal numbers in file practice graded	
<u>hpc.md.md</u> <u>reflect on HPC systems</u> practice graded	
ssh_basics.md Creating ssh keys and using them prepare graded	
gcctips.md <u>c compilation notes</u> prepare graded	
operators.md operators in programming and math prepare graded	
bitwise.md <u>practice with bitwise operations</u> prepare graded	
readingbytes.md review how reading bytes works prepare graded	
overflow.md <u>compare integer overflow</u> prepare graded	
cdouble.md <u>c program with double comparison</u> prepare graded	
overflow.md <u>compare integer overflow</u> practice graded	
readingbytes.md <u>c program with double comparison</u> practice graded	
floatexp.md <u>c_program with double comparison</u> practice graded	

Prepare for the next class

▲ Warning

these are listed by the date they were posted (eg the content here under Feb 1, was posted Feb 1, and should be done before the Feb 3 class)

below refers to following in the notes

```
import os
from IPython.display import Markdown, display
prep_file_list = sorted(os.listdir('../_prepare/'))
```

```
for prep_file in prep_file_list:
    date_str = prep_file[:-3]
    date_link = '[' + date_str + '](../notes/' + date_str + ')'
    display(Markdown(date_link))
    display(Markdown('../_prepare/' + prep_file))
```

2022-01-25

- More practice with <u>GitHub terminology</u>. Accept this assignment, read through it, and follow the instructions at the end.
- · Review these notes, bring any questions you have to class
- Read the syllabus, explore this whole <u>website</u>. Bring questions about the course. Be prepared
 for a scavenger hunt that asks you not to recall every fact about the course, but to know where
 to find informatio.
- Think about one thing you've learned really well (computing or not) and how do you know that you know it? (bring your example)

2022-01-27

- 1. Review these notes, both rendered as html and the raw markdown in the repository.
- 2. find 2-3 examples of things in programming you have got working, but did not really understand. this could be errors you fixed, or something you just know you're supposed to do, but not why
- 3. map out your computing knowledge and add it to your kwl chart repo. this can be an image that you upload or a text-based outline.
- 4. Make sure you have a working environment for next week. Use slack to ask for help.
 - o check that you have Python installed with Jupyter, ideally with Anaconda
 - install <u>jupyter book</u>
 - o install GitBash on windows (optional for others)
 - o make sure you have Xcode on MacOS
 - o install the GitHub CLI on all OSs

2022-02-01

- 1. Complete the classmate issue in your in-class repository.
- read the notes PR, add or comment on a tip, resource, a bit of history in a sidebar or additional end of class question
- 3. try using git in your IDE of choice, log any challenges you have on the practice repo (github-in-class-username), and tag @sp22instructors on GitHub. You can use either repo we have made in class, or one for an assignment in another course.
- using your terminal, download your KWL repo and update your 'learned' column on a new branch
- 5. answer the questions below in a new markdown file, gitoffline.md in your KWL on your new branch and push the changes to GitHub
- 6. Create a PR from your new branch to main do not merge this until instructed
- 7. add your programming challenge(s) you have had as issues to <u>our private repo</u> or to the course website repo if you like. Put one 'challenge/question' per issue so that we can close them as addressed. See last class notes for prompt.
- 8. Create or comment on a discussion thread in the <u>private repo</u> about the part of CS/ type of programming you like best/what you want to do post graduation.

2022-02-03

- 1. Review the notes
- 2. Reorganize a folder on your computer (good candidate may be desktop or downloads folder), using only a terminal to make new directories, move files, check what's inside them, etc. Answer reflection questions (will be in notes) in a new file, terminal.md in your kwl repo.
- Add a glossary to the site to define a term or <u>cheatsheet</u> entry to describe a command that we have used so far.
- 4. Examine a large project you have done or by finding an open source project on GitHub. Answer the reflection questions in software.md in your kwl repo. (will be in notes)

2022-02-08

- 1. install h/w simulator
- Add a glossary, cheatsheet entry, or historical context/facts about the things we have learned to the site.

- 3. Review past classes prep/more practice and catchup if appropriate
- 4. Map out how you think about data moving through a small program using the levels of abstraction. Add this to a markdown table in your KWL chart repo called abstraction.md. If you prefer a different format than a table, that is okay, but put it in your KWL repo. It is okay if you are not sure, the goal is to think through this.

2022-02-10

- Read these notes and practice with the hardware simulator, try to understand its assembly and walk through what other steps happen. Make notes on what you want to remember most or had the most trouble with in hardwaresurvey.md
- 2. Review and update your listing of how data moves through a program in your abstraction.md. Answer reflection questions below.
- 3. Review the commit history and git blame of a repo in browser- what must be in the .git directory for GitHub to render all of that information? (be prepared to discuss this in class)
- 4. Fill in the Know and Want to know columns for the new KWL chart rows below.
- 5. Begin your grading contract, bring questions to class Tuesday.

2022-02-15

- 1. review the notes and ensure that you have a new, empty repository named test with its branch renamed to main from master.
- 2. Add the following to your kwl:

```
|git workflows | _ | _ | _ |
| git branches | _ | _ | _ |
| bash redirects | _ | _ | _
```

3. Practice with git log and redirects to write the commit history for your kwl chart to a file gitlog.txt and commit that file to your repo.

2022-02-17

- 1. Review the notes
- 2. For the core "Porcelain" git commands we have used (add, commit), make a table of which git plumbing commands they use in gitplumbing.md in your KWL repo
- 3. In a gitunderstanding.md list 3-5 items from the following categories (1) things you have had trouble with in git in the past and how they relate to your new understanding (b) things that your understanding has changed based on today's class (c) things about git you still have questions about
- 4. Make notes on *how* you use IDEs for the next week or so using the template idethoughts.md file in the course notes.

2022-02-22

- 1. review the past two classes of notes
- 2. find 3 more examples of using other number systems, list them in numbers.md
- 3. Read about <u>hexpeak</u> from Wikipedia for an overview and one additional source. In your kwl repo in hexspeak.md summarize it in your own words, one interesting fact from your additional source and link to the source you found. Come up with a word or two on your own.
- 4. (priority) Bring to class a scenario where you think git could help, but we haven't covered yet how to do it. (be prepared to post it to Prismia at the start of class)

2022-02-24

- 1. Check that jupyter book is installed on your computer and the windows advice
- 2. Fix any open PRs you have that need to be rebased.
- 3. In your github in class repo, create a series of commits that tell as story of how you might have made a mistake and fixed it. Use git log and redirects to write that log to a file, gitstory.md in your KWL repo and then annotate your story to add in any narrative that didn't fit in the commit

messages. This could be that you made a mistake in your code and used git to recover or that you got your git database to an undesirable state and got it back on track.

2022-03-01

- 1. review the notes
- (priority) Convert your KWL repo to a jupyter book. Ignore the builds from your reposiotry. Use the documenation to choose your settings: link it to your repo, do not serve it publicly on github. Be sure that it can build and if you encounter problems, create a
- jupyterbooktroubleshooting.md file and log them with solutions if you find them.
- 3. complete Feedback survey if you have not alredy.

2022-03-03

- 1. Review the notes (to reinforce ideas and improve your memory of them)
- 2. Update your KWL to include all rows listed on the KWL page of the course site. (because tracking your learning deepens your learning)
- 3. **priority** Make an issue on your grading contract repo that includes: a self-assessment of your progress on your contract so far and a plan going forward. Tag @sp22instructors so that we can help you meet your goals. (so that you get the grade you want)
- 4. priority On Windows, install Putty (we will use this Monday)
- 5. Write a bash script that checks only if the number of files in your kwl meets or exceeds the minimum (number from list + 2 for toc and config) OR that does something else of your choosing. Add it to your KWL repo in a utils directory. Include Comments. (to practice so that you remember)

2022-03-08

- 1. Review the notes (to reinforce ideas and improve your memory of them)
- priority add a ## summary section to your IDE notes where you summarize what you observed
 in your IDE usage and what questions or what features (we will work with this after break and I
 want you to prepare before break)
- 3. Modify the sbatch job we made in class so that you get files back for any errors and output from the script. see the options (to review/practice what we did)

2022-03-10

- 1. Do what you need to do to finish the semester well: eg rest, catchup on work, both (breaks are important)
- Review your IDE thoughts right before class on Tuesday March 22 (so you're ready for the activity in class)

2022-03-28

- For 2 languages from the loved vs dreaded list (one top 5; one bottom 5) read 2-3 posts about why people love/hate that language and summaries the key points on each side. Add this to your kwl repo in language_love_dread.md
- 2. Make sure that you have a C compiler installed on your computer. ideally gcc

2022-03-31

- 1. Practice using gcc. Repeat steps we did in class, change the order of parameters. Then in gcctips.md summarize what you learned as a list of tips and reminders on what the parameters do/why/when you would need them (or not). (to reinforce what we learned)
- 2. Create operators.md and make some notes about what you know about operators. What kinds of operators are you familiar with? Which have you seen in programming? math?
- 3. Add the following to your kwl chart

```
|compiling | _ | _ | _ |
| linking | _ | _ | _ |
| building | _ | _ | _ |
| machine representation | _ | _ | _ |
| integers | _ | _ | _ |
| floating point | _ | _ | _ |
```

2022-04-05

 Add bitwise.md to your kwl and write the bitwise operations required for the following transformations:

```
4 -> 128
12493 - > -12494
127 -> 15
7 -> 56
4 -> -5
```

2. For the following figure out the bitwise operator:

```
45 (_) 37 = 37
45 (_) 37 = 45
3 (_) 5 = 7
6 (_) 8 = 0
10 (_) 5 = 15
```

3. Create readingbytes.md and answer the following:

Read about integer overflow and in overflow.md describe what it is, use an example assuming an 8 bit system.

2022-04-07

- 1. Write a C program to compare values as doubles and as float (single precision/32bit) to see that this comparison issue is related to the IEEE standard and is not language specific. Make notes and comparison around its behavior and include it in a code cell in cdouble.md(to practice)
- 2. (priority) confirm that you can run the hardware simulator HardwareSimulator not CPUEmulator that we used before (we will use this in class)

2022-04-12

- 1. Compare the 2 bit multiplier to the full adder in multiplication.md. Use that to explain how it works, relative to the fact that multiplication can be thought of like repeated addition.
- Study the <u>8 bit ALU</u>. Try it out and be prepared to answer questions about how it works on Thursday.
- 3. Read gates out of anything

More Practice

Note

these are listed by the date they were posted

```
import os
from IPython.display import Markdown, display
prep_file_list = sorted(os.listdir('../_practice/'))
```

```
for prep_file in prep_file_list:
    date_str = prep_file[:-3]
    date_link = '[' + date_str + '](../notes/' + date_str + ')'
    display(Markdown(date_link))
    display(Markdown('../_practice/' + prep_file))
```

2022-01-27

- (optional) try mapping out using <u>mermaid</u> syntax, we'll be using other tools that will faciltate rendering later, or try getting it to render on your own.
- (optional) read chapter 1 the programmmer's brain. Some of the ideas we talked about today are mentioned there, and it relates to where you're supposed to be looking for things that you have done, but didn't really understand.
- try adding something to this page or the glossary of the course site or link a glossary term to an
 occurrence of it on the site.

2022-02-01

- 1. Find the "Try it yourself" boxes in these notes, try them and add notes/ responses under a ##

 More Practice heading in your gitoffline.md file of your KWL repo.
- 2. Download the course site repo via terminal.
- Explore the difference between git add and git committing and pushing without adding, then add and push without committing. Describe what happens in each case in your gitoffline.md

2022-02-03

- 1. Try to do as many things as possible on the terminal for a whole week.
- 2. Make yourself a bash cheatsheet (and/or contribute to one on the course site)
- 3. Read through part 1 of the programmer's brain and try the exercises, especially in chapter 4.

2022-02-08

- 1. Once your PRs in your KWL are merged so that main and feedback match, pull to updates your local copy. In a new terminal window, navigate there and then move the your KWL chart to a file called chart.md. Create a new README files with a list of all the files in your repo. Use history N (N is the number of past commands that history will return) and redirects to write the steps you took to reorg.md. Review that file to make sure it doesn't have extra steps in it and remove any if needed using nano then commit that file to your repo.
- 2. find a place where there is a comment in the course notes indicating content to add and submit a PR adding that content. This could be today's notes or a past day's.
- 3. Add a new file to your KWL repo called stdinouterr.md Try the following one at a time in your terminal and describe what happens and explain why or list questions for each in the file. What tips/reminders would you give a new user (or yourself) about using redirects and echo?

```
echo "hello world" > fa > fb
echo "a test" > fc fd
> fe echo "hi there"
echo "hello " > ff world
<ff echo hello</li>
fa < echo hello there</li>
cat
```

2022-02-10

- 1. Complete the Try it Yourself blocks above in your hardwaresurvey.md.
- 2. Expand on your update to abstraction.md: Can you reconcile different ways you have seen memory before?

2022-02-15

- 1. Read about different workflows in git and add responses to the below in a workflows.md in your kwl repo. Git Book atlassian Docs
- 2. Contribute either a glossary term, cheatsheet item, additional resource/reference, or history sidebar to the course website.

- ${\bf 1.} \ \ {\bf What} \ \ {\bf advantages} \ \ {\bf might} \ \ {\bf it} \ \ {\bf provide} \ \ {\bf that} \ \ {\bf git} \ \ {\bf can} \ \ {\bf be} \ \ {\bf used} \ \ {\bf with} \ \ {\bf different} \ \ {\bf workflows?}$
- 1. Which workflow do you think you would like to work with best and why?
- 1. Describe a scenario that might make it better for the whole team to use a workflow other than the one you prefer.

2022-02-17

- 1. Add to your gitplumbing.md file explanations of the main git operations we have seen (add, commit, push) in your own words in a way that will either help you remember or behow you would explain it to someone else at a high level. This might be analogies or explanations using other programming concepts or concepts from a hobby. Add this under a subheading ## with a descriptive title (for example "Git In terms of")
- 2. For one thing your understanding changed or an open question you, look up or experiment to find the answer

2022-02-22

- Read more about git's change from SHA-1 to SHA-256 and reflect on what you learned (questions provided)
- 2. (priority) In a language of your choice or pseudocode, write a short program to convert, without using libraries, between all pairs of (binary, decimal, hexidecimal) in numbers.md. Test your code, but include in the markdown file enclosed in three backticks so that it is a "code block" write the name of the language after the ticks like:

```
```python
python code
```

#### 2022-02-24

- Find an open source repository and look at the .gitignore file. In donotcommit.md reflect on what types of content typically get ignored and why you think they are ignored. If you can't figure out why, try to look it up.
- Create a second git story for the other type form your first (code mistake or git mistake) in gitstory2.md
- 3. add something to the glossary, cheatsheet or a history sidebar to the notes.

#### 2022-03-01

- 1. build your kwl repo to a pdf or one other format locally.
- 2. Add templating.md to your KWL repo and explain templating in your own words using other programming concepts you have learned so far. Include in a markdown (same as HTML <!--comment -->) comment the list of CSC courses you have taken for context while we give you feedback.
- 3. Learn about the documentation ecosystem in another language that you know. In docs.md include a summary of your findings and compare and contrast it to jupyter book/sphinx.

#### 2022-03-03

priority add or link a glossary or cheatsheet, OR add a box with some historical context or extra
reading links to the notes from any past class (in order to practice git/github and using jupyter
book features, which are similar to other documentation tools, so even if you do not work in a
python centric environment the concepts will translate)

#### 2022-03-08

priority write a script that outputs the first 3 lines of each .fastq line and sbatch script that runs
it and saves the output to files and e-mails you when it is done. Submit the job. (to reinforce
/practice what we saw in class)

- 2. File permissions are represented numerically often in octal, by transforming the permissions for each level (owner, group, all) as binary into a number. Add octal.md to your KWL repo and answer the following. Try to think through it on your own, but you may look up the answers, as long as you link to (or ideally cite using jupyterbook citations) a high quality source.
  - 1. Transform the permissions [`r--`, `rw-`, `rwx`] to octal, by treating it as three bits.
  - 1. Transform the permission we changed our script to `rwxr-xr-x` to octal.
  - 1. Which of the following would prevent a file from being edited by other people 777 or 755?
- 3. Answer the following in hpc.md of your KWL repo: (to think about how the design of the system we used in class impacts programming and connect it to other ideas taught in CS)
  - 1. What kinds of things would your code need to do if you were going to run it on an HPC system?
  - 1. What Sbatch options seem the most helpful?
  - 1. How might you go about setting the time limits for a script? How could you estimate how long it will take?

#### 2022-03-10

 optional Configure ssh keys to your <u>GitHub account</u> (this is actually GitHub's preferred terminal authentication method)

#### 2022-03-31

- (priority) Write two short programs that do the same thing in different ways and compile them both to assembly (eg using a for vs while loop to sum numbers up to a number). Check the assembly to see if they produce the same thing or if it's different.
- 2. Add (or link) a glossary term, cheatsheet tip, or historical context to note on the course website.

#### 2022-04-05

- 1. (priority) Add to overflow.md how integer overflow is handled in Python, C, Javascript, and one other language of your choice.
- 2. Add to readingbytes.md and exmaple of how machine code that was a 3 bit instruction followed by an 8 bit address might render.
- Add a box to the notes for any class that includes historical context of something covered in class or a related topic. Use the tempalte below:

```
```{admonition} Historical Context
```

2022-04-07

- 1. In floatexpt.md design an experiment using the fractions.Fraction class in python that shows helps illustrate how .1*3 == .3 evaluates to False but .1*4 == .4 evaluates to True. (practice/review)
- Add a github action to build your jupyter book, using the course site as an example. GitHub
 actions live in a hidden folder .github. (apply scripting knowledge, practice with git, and make it
 render as a book automatically)

2022-04-12

- 1. In addertypes.md compare ripple adders and lookahead adders.
 - 1. Give a synopsis of each adder type
 - 1. Compare them ${\bf in}$ terms of time (assume that each gate requires one unite of time)
 - 1. Compare them ${\bf in}$ terms of space/cost by counting the total number of gates required.
- 2. (priority) While we saw many types of gates today, but we actually could get all of the operations needed using only NAND gates. Work out how to use NAND gates to implement a half adder.

Deeper Explorations

If your contract includes that you will complete deeper explorations, this page includes guidance for what is expected.

Deeper explorations can take different forms so the sections below outline some options, it is not a cumulative list of requirements.

Where to put the work?

- If you extend a more practice exercise, you can add to the markdown file that the exercise instructs you to create.
- If its a question of your own, add a new file to your KWL repo.

How to get it reviewed?

Follow the workflows for your kwl repo and tag the instructors for a review.

What should the work look like?

It should look like a blog post or written tutorial. It will likely contain some code excerpts the way the notes do. Style-wise it can be casual, like how you may talk through a concept with a friend or a more formal, academic tone. What is important is that it clearly demonstrates that you understand the material.

For special formatting, use jupyter book's documentation.

Project Information

Proposal Template

If you have selected to do a project, please use the following template to add a section to the end of your contract.md

```
## < Project Tite >
<!-- insert a I sentence summary -->
### Objectives
<!-- in this section describe the overall goals in terms of what you will learn and the problem you will solve. this should be
2-5 sentences, it can be bullet points/numbered or a paragraph -->
### method
<!-- describe what you will do , will it be research, write & present? will there be something you build? will you do
experiments?-->
### deliverables
<!-- list what your project will produce with target deadlines for each-->
```

The deliverables will depend on what your method is, which depend on your goals. It must be approved and the final submitted will have to meet what is approved. Some guidance:

- any code or text should be managed with git (can be GitHub or elsewhere)
- if you write any code it should have documentation
- if you do experiments the results should be summrized
- if you are researching something, a report should be 2-4 pages in the 2 column ACM format.

This guidance is generative, not limiting, it is to give ideas, but not restrict what you can do.

Updates and work in Progress

These can be whatever form is appropriate to your specific project. Your proposal should indicate what form those will take.

Summary Report

This summary report will be added to the grading contract repo as a new file project_report_title.md where title is the title from the project proposal.

This summary report have the following sections.

- 1. **Abstract** a one paragraph "abstract" type overview of what your project consists of. This should be written for a general audience, something that anyone who has taken up to 211 could understand. It should follow guidance of a scientific abstract.
- 2. Reflection a one paragraph reflection that summarizes challenges faced and what you learned doing your project
- 3. **Artifacts** links to other materials required for assessing the project. This can be a public facing web resource, a private repository, or a shared file on URI google Drive.

Syllabus and Grading FAQ

How much does activity x weigh in my grade?

There is no specific weight for any activities, because your grade is based on fulfilling your contract. If all items are completed to a satisfactory level, then you earn that grade, if not, then you will be prompted to revise the contract to signal that you are aware you have completed fewer items.

Can I submit this assignment late if ...?

In this class, there are feedback hours instead of deadlines for specific assignments. If your work is not in by the feedback hours, you will get feedback at the next hours. If your grading contract has dated milestones, (eg for a project) post an issue in your contract repo with title late milestone:
<name of milestone> and in the body proposes when it will be in instead and how this delay will not affect your future work. If you need more dramatic shift, propose a revision to your contract.

I don't understand the feedback on this assignment

If you have questions about your grade, the best place to get feedback is to reply on the Feedback PR. Either reply directly to one of the inline comments, or the summary.

Be specific about what you think is wrong so that we can expand more.

What should a Deeper exploration look like and where do I put it?

It should be a tutorial or blog style piece of writing, likely with code excerpts or screenshots embedded in it.

an example that uses mostly screenshots

an example of heavily annotated code

They should be markdown files in your KWL repo. I recommend myst markdown.

Git and GitHub

I can't push to my repository, I get an error that updates were rejected

If your error looks like this...

```
! [rejected] main -> main (fetch first)
error: failed to push some refs to <repository name>
hint: Updates were rejected because the remote contains work that you do
hint: not have locally. This is usually caused by another repository pushing
hint: to the same ref. You may want to first integrate the remote changes
hint: (e.g., 'git pull ...') before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
```

Your local version and github version are out of sync, you need to pull the changes from github to your local computer before you can push new changes there.

After you run

```
git pull
```

You'll probably have to resolve a merge conflict

My command line says I cannot use a password


GitHub has <u>strong rules</u> about authentication You need to use SSH with a <u>public/private</u> key; HTTPS with a <u>Personal Access Token</u> or use the <u>GitHub CLI auth</u>

Help! I accidentally merged the Feedback Pull Request before my assignment was graded

That's ok. You can fix it.

You'll have to work offline and use GitHub in your browser together for this fix. The following instructions will work in terminal on Mac or Linux or in GitBash for Windows. (see <u>Programming Environment section on the tools page</u>).

First get the url to clone your repository (unless you already have it cloned then skip ahead): on the main page for your repository, click the green "Code" button, then copy the url that's show

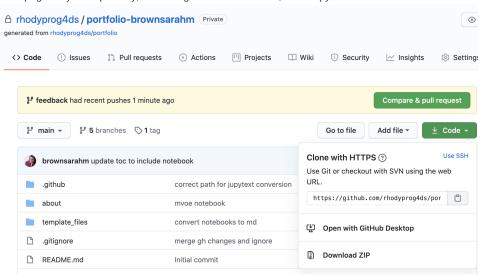

Next open a terminal or GitBash and type the following.

```
git clone
```


then past your url that you copied. It will look something like this, but the last part will be the current assignment repo and your username.

git clone https://github.com/rhodyprog4ds/portfolio-brownsarahm.git


When you merged the Feedback pull request you advanced the feedback branch, so we need to hard reset it back to before you did any work. To do this, first check it out, by navigating into the folder for your repository (created when you cloned above) and then checking it out, and making sure it's up to date with the remote (the copy on GitHub)

```
cd portfolio-brownsarahm
git checkout feedback
git pull
```

Now, you have to figure out what commit to revert to, so go back to GitHub in your browser, and swithc to the feedback branch there. Click on where it says main on the top right next to the branch icon and choose feedback from the list.

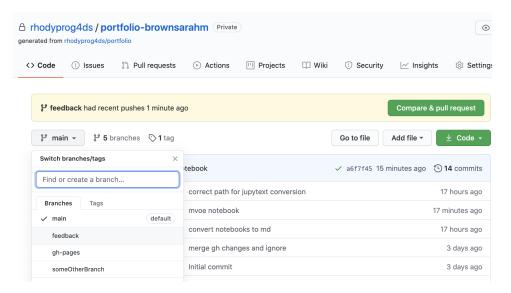

Now view the list of all of the commits to this branch, by clicking on the clock icon with a number of commits

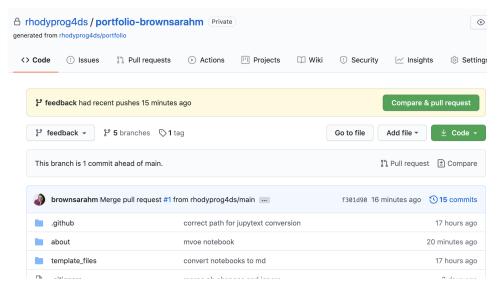

On the commits page scroll down and find the commit titled "Setting up GitHub Classroom Feedback" and copy its hash, by clicking on the clipboard icon next to the short version.

more examples			
brownsarahm committed 3 days ago			9427c1
convert notebooks to md			e2f5b7
Update jupytext_ipynb_md.yml	Verified		7bd76c
solution			fbe661
Setting up GitHub Classroom Feedback brownsarahm committed 3 days ago ×		Ů	822cfe
GitHub Classroom Feedback brownsarahm committed 3 days ago ×			f3e029
Initial commit			66c21c

Now, back on your terminal, type the following

```
git reset --hard
```

then paste the commit hash you copied, it will look something like the following, but your hash will be different.

```
git reset --hard 822cfe51a70d356d448bcaede5b15282838a5028
```

If it works, your terminal will say something like

```
HEAD is now at 822cfe5 Setting up GitHub Classroom Feedback
```

but the number on yours will be different.

Now your local copy of the feedback branch is reverted back as if you had not merged the pull request and what's left to do is to push those changes to GitHub. By default, GitHub won't let you push changes unless you have all of the changes that have been made on their side, so we have to tell Git to force GitHub to do this.

Since we're about to do something with forcing, we should first check that we're doing the right thing.

```
git status
```

and it should show something like

```
On branch feedback
Your branch is behind 'origin/feedback' by 12 commits, and can be fast-forwarded.

(use "git pull" to update your local branch)
```

Your number of commits will probably be different but the important things to see here is that it says on branch feedback so that you know you're not deleting the main copy of your work and Your branch is behind origin/feedback to know that reverting worked.

Now to make GitHub match your reverted local copy.


```
git push origin -f
```

and you'll get something like this to know that it worked


```
Total 0 (delta 0), reused 0 (delta 0)
To https://github.com/rhodyprog4ds/portfolio-brownsarahm.git
+ f301d90...822cfe5 feedback -> feedback (forced update)
```

Again, the numbers will be different and it will be your url, not mine.


Now back on GitHub, in your browser, click on the code tab. It should look something like this now. Notice that it says, "This branch is 11 commits behind main" your number will be different but it should be 1 less than the number you had when you checked git status. This is because we reverted the changes you made to main (11 for me) and the 1 commit for merging main into feedback. Also the last commit (at the top, should say "Setting up GitHub Classroom Feedback").

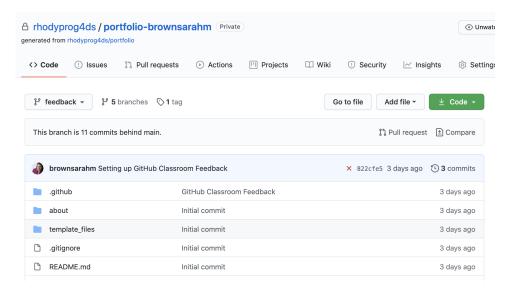

Now, you need to recreate your Pull Request, click where it says pull request.

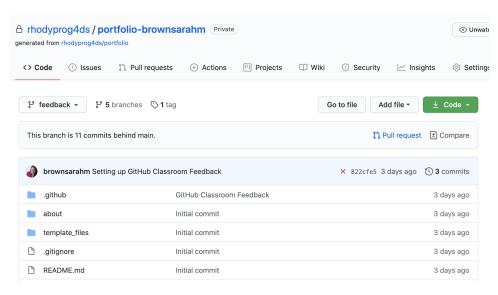

It will say there isn't anything to compare, but this is because it's trying to use feedback to update main. We want to use main to update feedback for this PR. So we have to swap them. Change base from main to feedback by clicking on it and choosing feedback from the list.

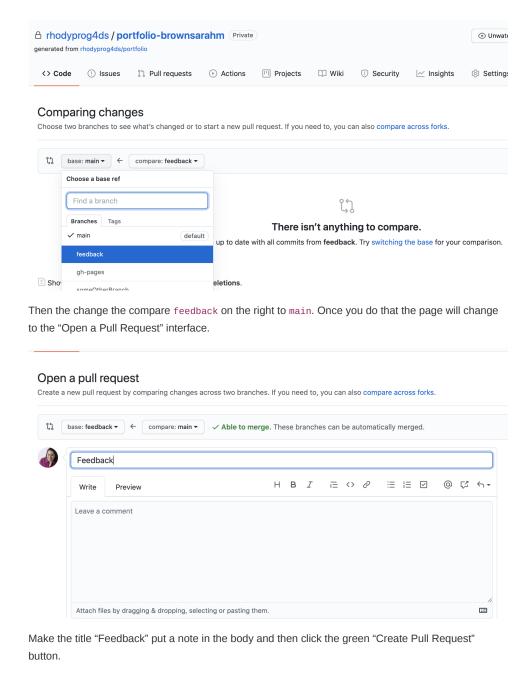

Now you're done!

If you have trouble, create an issue and tag @@rhodyprog4ds/fall20instructors for help.

For an Assignment, should we make a new branch for every assignment or do everything in one branch?

Doing each new assignment in its own branch is best practice. In a typical software development flow once the codebase is stable a new branch would be created for each new feature or patch. This analogy should help you build intuition for this GitHub flow and using branches. Also, pull requests are the best way for us to give you feedback. Also, if you create a branch when you do not need it, you can easily merge them after you are done, but it is hard to isolate things onto a branch if it's on main already.

Glossary

We will build a glossary as the semester goes on. When you encounter a term you do not know, create an issue to ask for help, or contribute a PR after you find the answer.

add (new files in a repository)

the step that stages/prepares files to be committed to a repository from a local branch

bitwise operator

an operation that happens on a bit string (sequence of 1s and 0s). They are typically faster than operations on whole integers.

git

a version control tool; it's a fully open source and always free tool, that can be hosted by anyone or used without a host, locally only.

GitHub

a hosting service for git repositories

Git Plumbing commands

low level git commands that allow the user to access the inner workings of git.

Git Workflow

a recipe or recommendation for how to use Git to accomplish work in a consistent and productive manner

git init name_of_repo

used to create a git repo in a directory (which can then be uploaded to github or another online directory

push (changes to a repository)

to put whatever you were working on from your local machine onto a remote copy of the repository in a version control system.

pull (changes from a repository)

download changes from a remote repository and update the local repository with these changes.

repository

a project folder with tracking information in it in the form of a .git file

shell

a command line interface; allows for access to an operating system

terminal

a program that makes shell visible for us and allows for interactions with it

ROM (Read-Only Memory)

Memory that only gets read by the CPU and is used for instructions

directory

a collection of files typically created for organizational purposes

.gitignore

a file in a git repo that will not add the files that are included in this .gitignore file. Used to prevent files from being unnecessarily committed.

templating

templating is the idea of changing the input or output of a system. For instance, the Jupyter book, instead of outputting the markdown files as markdown files, displays them as HTML pages (with the contents of the markdown file).

ssh keygen

allows computers to safely connect to networks (such as when we used an ssh key to clone our github repos)

hashing

putting an input through a function and getting a different output for every input (the output is called a hash; used in hash tables and when git hashes commits).

hash function

the actual function that does the hashing of the input (a key, an object, etc.)

SHA 1

the hashing function that git uses to hash its functions (found to have very serious collisions (two different inputs have same hashes), so a lot of software is switching to SHA 256)

git objects

something (a file, directory) that is used in git; has a hash associated with it

tree objects

type of git object in git that helps store multiple files with their hashes (similar to directories in a file system)

HEAD

the branch that is currently being checked out (think of the current branch)

merge

putting two branches together so that you can access files in another branch that are not available in yours

Compiled Code

code that is put through a compiler to turn it into lower level assembly language before it is executed. must be compiled and re-executed everytime you make a change.

interpreted code

code that is directly executed from a high level language. more expensive computationally because it cannot be optimized and therefore can be slower.

integreated development environment

also known as an IDE, puts together all of the tools a developer would need to produce code (source code editor, debugger, ability to run code) into one application so that everything can be done in one place. can also have extra features such as showing your file tree and connecting to git and/or github.

bitwise operator

an operation that happens on a bit string (sequence of 1s and 0s). They are typically faster than operations on whole integers.

floating point number

the concept that the decimal can move within the number (ex. scientific notation; you move the decimal based on the exponent on the 10). can represent more numbers than a fixed point number.

fixed point number

the concept that the decimal point does not move in the number (the example in the notes where if we split up a bit in the middle and one half was for the decimal and the other half was for the whole number. Cannot represent as many numbers as a floating point number.

Language Specific References

Python

• Python

Cheatsheet

Patterns and examples of how to accomplish frequent tasks. We will build up this section together over the course of the semester.

Basic Bash file operations

'		
Move one folder up:		
cd		
Move at the top of your directory:		
cd		
Move to the specified directory:		
cd directory		
Create a file:		

Text editor:

touch file_name.ext

nano file_name.ext

Display content:

cat file_name.ext

Create a new folder:

mkdir new_folder_name

Move a file:

mv file_name.ext folder_name_file_is_going_moved_to

Move multiple files:

mv file_name1.ext file_name2.ext file_name3.ext folder_name_files_are_going_moved_to

List files in the current directory:

```
ls
ls -hl //displays rw-r-r
ls -G - //folders are colorized
ls -hlG //displays rw-r-r and folders are colorized
```

Show your currect directory:

pwd

Remove a file:

rm file_name.ext

Copy a file:

cp file_name.ext copied_file_name.ext

Note

- 1. In every command you can add your directory/ location (ex. docs/file_name.ext).
- 2. "." dot symbolizes our current location and "..." two dots, one level up in the directory tree.
- 3. "" represents any number of unknown characters; creates a pattern (ex. rm pyt.py removes all files that start on 'pyt' and end with extension py).

Delete an empty directory:

rmdir directory

Since you can't delete a directory with files in it you need to recursively delete the folder and its contents. The -R is a recursive declaration which tells the terminal to delete the folder, the files within the folder, subfolders, files in the subfolder etc. <u>Source</u>

Delete everything in a directory without confirmation:

rm -R directory

The -i is a flag that prompts you if you want to remove each separate file in the directory.

Delete everything in a directory with confirmation:

```
rm -iR directory
```

List the contents of the directory:

```
ls
```

Git status displays the current state of the repository relative to the working directory. Shows the differences between the index file and the current directory.

```
git status
```

Redirect Output: to overwrite an existing file or a create a new file with the given file name: echo "send output to file.txt" > file.txt to append the output to already existing file or create a new file with the given file name:

```
echo "append output to file.txt >> file.txt
```

Git log allows you to see all of the hashes of your previous commits in your branch:

```
git log
```

Wildcard / Kleene star

The wildcard character in bash * works by expanding in place to separate arguments that match whatever pattern you're writing.

Example, given a directory stuff/:

```
stuff/
a.py
b.py
c.py
other.txt
another.md
nested_folder/
```

If we were to run ls *.py while in the stuff/ directory, the command actually run by the computer is ls a.py b.py c.py. This also works for commands like mv. l.e. mv *.py nested_folder/ runs mv a.py b.py c.py nested_folder/

This is video explains what a half-adder is

General Tips and Resources

This section is for materials that are not specific to this course, but are likely useful. They are not generally required readings or installs, but are options or advice I provide frequently.

on email

• how to e-mail professors

How to Study in this class

In this page, I break down how I expect learning to work for this class.

I hope that with this advice, you never feel like this while working on assignments for this class.



Why this way?

A new book that might be of interest if you find programming classes hard is the Programmers Brain As of 2021-09-07, it is available for free by clicking on chapters at that linked table of contents section.

Learning requires iterative practice. It does not require memorizing all of the specific commands, but instead learning the basic patterns. Using reference materials frequently is a built in part of programming, most languages have built in help as a part of the language for this reason. This course is designed to have you not only learn the material, but also to build skill in learning to program. Following these guidelines will help you build habits to not only be successful in this class, but also in future programming.

Learning in class



Important

My goal is to use class time so that you can be successful with minimal frustration while working outside of class time.

Programming requires both practical skills and abstract concepts. During class time, we will cover the practical aspects and introduce the basic concepts. You will get to see the basic practical details and real examples of debugging during class sessions. Learning to debug something you've never encountered before and setting up your programming environment, for example, are high frustration activities, when you're learning, because you don't know what you don't know. On the other hand, diving deeper into options and more complex applications of what you have already seen in class, while challenging, is something I'm confident that you can all be successful at with minimal frustration once you've seen basic ideas in class. My goal is that you can repeat the patterns and processes we use in class outside of class to complete assignments, while acknowledging that you will definitely have to look things up and read documentation outside of class.

Each class will open with some time to review what was covered in the last session before adding new material.

To get the most out of class sessions, you should have a laptop with you. During class you should be following along with Dr. Brown. You'll answer questions on Prismia chat, and when appropriate you should try running necessary code to answer those questions. If you encounter errors, share them via Prismia chat so that we can see and help you.

After class

After class, you should practice with the concepts introduced.

This means reviewing the notes: both yours from class and the annotated notes posted to the course website.

When you review the notes, you should be adding comments on tricky aspects of the code and narrative text between code blocks in markdown cells. While you review your notes and the annotated course notes, you should also read the documentation for new modules, libraries, or functions introduced in that class. We will collaboratively annotate notes for this course. Dr. Brown will post a basic outline of what was covered in class and we will all fill in explanations, tips, and challenge questions. Responsibility for the main annotation will rotate.

If you find anything hard to understand or unclear, write it down to bring to class the next day or post an issue on the course website.

Getting Help with Programming

This class will help you get better at reading errors and understanding what they might be trying to tell you. In addition here are some more general resources.

Asking Questions



One of my favorite resources that describes how to ask good questions is this blog post by Julia Evans, a developer who writes comics about the things she learns in the course of her work and publisher of wizard zines.

Describing what you have so far



Stackoverflow is a common place for programmers to post and answer questions.

As such, they have written a good guide on creating a minimal, reproducible example.

Creating a minimal reproducible example may even help you debug your own code, but if it does not, it will definitely make it easier for another person to understand what you have, what your goal is, and what's working.

Getting Organized for class

The only required things are in the Tools section of the syllabus, but this organizational structure will help keep you on top of what is going on.

Your username will be appended to the end of of the repository name for each of your assignments in class.

File structure

I recommend the following organization structure for the course:

CSC392

- notes
- |- kwl-char-username
- |- spring2022
- . . .

This is one top level folder will all materials in it. A folder inside that for in class notes, and one folder per repository that you work on.

Finding repositories on github

Each assignment repository will be created on GitHub with the introcompsys organization as the owner, not your personal acount. Since your account is not the owner, they do not show on your profile.

Your assignment repositories are all private during the semester. At the end, you may take ownership of your portfolio[^pttrans] if you would like.

If you go to the main page of the organization you can search by your username (or the first few characters of it) and see only your repositories.

▲ Warning

Don't try to work on a repository that does not end in your username; those are the template repositories for the course and you don't have edit permission on them.

By Professor Sarah M Brown

© Copyright 2021.