

LOURDES MATHA

COLLEGE OF SCIENCE AND TECHNOLOGY

Bureau Veritas Certified ISO 9001-2015 Institution

Managed by Archdiocese of Changanacherry



NETWORKING AND SYSTEM ADMINISTRATION LAB (20MCA136)

Name :

University Reg No: LMC21MCA-.....

Class: ...MCA.....Semester.....S2.....

Year:2021-2023.....

From Page No:1.....To.....

Certified Bonafide Record of Work Done By

.....

External Examiner

Head of the Department Prof.

Faculty-in-Charge

BISMI K CHARLEYS

Prof. Archa A T

Place: Kuttichal

Date:


INDEX

SL NO.	NAME OF THE EXPERIMENT	DATE	PAGE NO.
1	INTRODUCTION TO COMPUTER HARDWARE	18/03/2022	4
2	INSTALLATION OF OPERATING SYSTEM IN OUR DESKTOP OR LAPTOP	23/03/2022	7
2.1	INSTALLATION OF WINDOWS OS	23/03/2022	9
2.2	INSTALLATION OF LINUX OS	23/03/2022	10
3	VIRTUALBOX INSTALLATION	25/03/2022	11
4	INSTALLATION AND CONFIGURATION OF LAMP STACK. DEPLOY AN OPEN-SOURCE APPLICATION SUCH AS phpMyAdmin AND WordPress.	06/04/2022	20
5	INSTALLATION AND CONFIGURATION OF COMMON SOFTWARE FRAME WORKS SUCH AS LARAVEL.	08/04/2022	23
6	STUDY OF A TERMINAL-BASED TEXT EDITOR SUCH AS VIM.	12/04/2022	27
7	BASIC LINUX COMMANDS	20/04/2022	29
8	SHELL SCRIPTING:	22/04/2022	38
8.1	SHELL PROGRAM TO ADD TWO NUMBERS	22/04/2022	42
8.2	SHELL PROGRAM TO FIND THE FACTORIAL OF A NUMBER	22/04/2022	43
8.3	SHELL PROGRAM TO FIND THE LARGEST AMONG THREE NUMBERS	27/04/2022	44
8.4	SHELL PROGRAM TO DEVELOP CALCULATOR	27/04/2022	45

8.5	SHELL PROGRAM TO CHECK WHETHER THE GIVEN NUMBER IS ODD OR EVEN	27/04/2022	47
8.6	SHELL PROGRAM TO COUNT THE NUMBER OF FILES IN A DIRECTORY	11/05/2022	48
8.7	SHELL PROGRAM TO REVERSE A STRING AND CHECK WHETHER THE STRING IS PALINDROME OR NOT.	11/05/2022	49
8.8	SHELL PROGRAM TO SHOW VARIOUS SYSTEM CONFIGURATIONS.	13/05/2022	50
8.9	SHELL PROGRAM TO CREATE A DIRECTORY	18/05/2022	52
8.10	SHELL PROGRAM TO PERFORM FILE OPERATIONS.	18/05/2022	53
8.11	SHELL PROGRAM TO FIND THE SUBSTRING OF A STRING.	25/05/2022	55
8.12	SHELL PROGRAM TO FIND THE AREA OF RECTANGLE USING FUNCTIONS.	25/05/2022	56
8.13	SHELL PROGRAM TO CREATE A FILE IN VI EDITOR AND REPLACE ONE STRING WITH ANOTHER, TRANSLATE THE LINE OF TEXT WITH CAPITAL LETTER.	25/05/2022	57
9	BASIC NETWORK COMMANDS	01/06/2022	60
10	ANALYSING NETWORK PACKET STREAM USING tcpdump AND Wireshark	08/06/2022	62

1. INTRODUCTION TO COMPUTER HARDWARE


Computer hardware refers to the physical parts or components of a computer such as the monitor, mouse, keyboard, computer data storage, hard drive disk (HDD), system unit (graphic cards, sound cards, memory, motherboard and chips), etc. all of which are physical objects that can be touched.

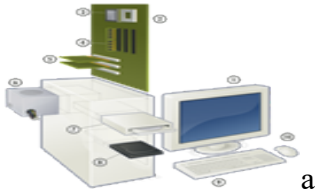

MOTHERBOARD

The official motherboard definition is that it's the main printed circuit board within a computer, which means it's the primary piece of circuitry that all of the other pieces plug into to create a cohesive whole.

The motherboard is the backbone that ties the computer's components together at one spot and allows them to talk to each other. Without it, none of the computer pieces, such as the CPU, GPU, or hard drive, could interact. Total motherboard functionality is necessary for a computer to work well. If your motherboard is on the fritz, expect some big problems.

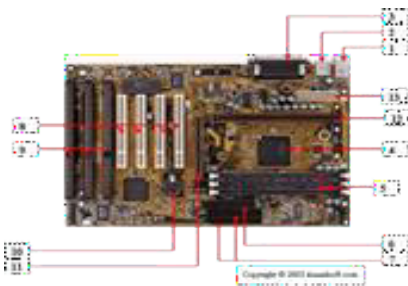

Some computer hardware's are:

- | | | | |
|---------------------|----------------------|------------------|---|
| 1. Mouse & keyboard | 5. RAM slots | 9. ISA slot | 13. Power supply plug in <u>PROCESSOR</u> |
| 2. USB | 6. Floppy controller | 10. CMOS Battery | |
| 3. Parallel port | 7. IDE controller | 11. AGP slot | |
| 4. CPU Chip | 8. PCI slot | 12. CPU slot | |

A processor (CPU) is the logic circuitry that responds to and processes the basic instructions that drive a computer. The CPU is seen as the main and most crucial integrated circuitry (IC) chip in a computer, as it is responsible for interpreting most of computer's commands. CPUs will perform most basic arithmetic, logic and I/O operations, as well as allocate commands for other chips and components running in a computer.



DAUGHTER CARDS

Daughterboard (or daughter board, daughter card, or daughtercard) is a circuit board that plugs into and extends the circuitry of another circuit board. The other circuit board may be the computer's main board (its motherboard) or it may be another board or card that is already in the computer, often a sound card. The term is commonly used by manufacturers of wavetable daughterboards that attach to existing sound cards. A mezzanine card is a kind of daughterboard that is installed in the same plane as but on a second level above the motherboard.



RAM

Random Access Memory (RAM) is a high-speed component in devices that temporarily stores all information a device needs for the present and future. It's a type of computer memory, that can be randomly accessed, meaning any byte of memory can be accessed without touching the preceding bytes. RAM is found in servers, PCs, tablets, smartphones, backup drives and other devices. In today's technology, RAM takes the form of integrated circuit chips with metal-oxide- semiconductor (MOS) memory cells. The speed and performance of a system is directly correlated with the amount of RAM installed. RAM stores the information a computer is actively using so that it can be accessed quickly. It allows computers to perform everyday tasks such as loading applications, browsing the internet, editing a spreadsheet, and switching quickly among all these tasks.



ROM

ROM stands for Read Only Memory. The memory from which we can only read but cannot write on it. This type of memory is non-volatile. The information is stored permanently in such memories during manufacture. A ROM stores such instructions that are required to start a computer. This operation is referred to as bootstrap.



BUS SLOTS (Expansion slot)

Alternatively known as a bus slot or expansion port, an expansion slot is a connection or port inside a computer on the motherboard or riser card. It provides an installation point for a hardware expansion card to be connected. For example, if you wanted to install a new video card in the computer, you'd purchase a video expansion card and install that card into the compatible expansion slot.



The address bus, a one-way pathway that allows information to pass in one direction only, carries information about where data is stored in memory.

The data bus is a two-way pathway carrying the actual data (information) to and from the main memory.

The control bus holds the control and timing signals needed to coordinate all of the computer's activities.

HDD/SSD

An HDD is a data storage device that lives inside the computer. It has spinning disks inside where data is stored magnetically. The HDD has an arm with several "heads" (transducers) that read and write data on the disk. It is similar to how a turntable record player works, with an LP record (hard disk) and a needle on an arm (transducers). The arm moves the heads across the surface of the disk to access different data.

SSDs got their name—solid state—because they have no moving parts. In an SSD, all data is stored in integrated circuits. This difference from HDDs has a lot of implications, especially in size and performance. Without the need for a spinning disk, SSDs can go down to the shape and size of a stick of gum or even as small as a postage stamp. Their capacity—or how much data they can hold—varies, making them flexible for smaller devices, such as slim laptops, convertibles, or 2 in 1s. And SSDs dramatically reduce access time since users don't have to wait for platter rotation to start up.



SMPS

The full form of SMPS is Switched Mode Power Supply also known as Switching Mode Power Supply. SMPS is an electronic power supply system that makes use of a switching regulator to transfer electrical power effectively. It is a PSU (power supply unit) and is usually used in computers to change the voltage to the appropriate range for the computer. An SMPS adjusts output voltage and current between different electrical configurations by switching the basics of typically lossless storage such as capacitors and inductors. Ideal switching concepts determined by transistors controlled outside of their active state that have no resistance when 'on' and carry no current when 'off.' It is the idea why switches with an ideal function will operate with 100 per cent output, that is, all input energy is provided to the load; no power is wasted as dissipated heating. In fact, such ideal systems do not exist, which is why a switching power source cannot be 100 per cent proficient, but it is still a vital improvement in effectiveness over a linear regulator.



2. INSTALLATION OF OPERATING SYSTEM IN OUR DESKTOP OR LAPTOP

An operating system, or "OS," is software that communicates with the hardware and allows other programs to run. They also allow you to install and run programs written for the operating system. Windows and Linux can be installed on standard PC hardware, while OS X is designed to run on Apple systems.

INSTALLATION PROCEDURE OF OPERATING SYSTEM

The following is an overview of the procedures that are needed to install a new operating system (OS).

1. Set up the display environment.

If you are not using the local DVD drive and monitor for the Tools and Drivers CD or OS installation CD, you have two options for your display environment.

View system output serially, through the Embedded Lights Out Manager (LOM) service processor (SP) SSH or through the physical port.

Use the remote KVMs Over IP feature of the Embedded LOM

2. Erase the primary boot disk.

If you have an operating system preinstalled on the server, you will need to remove it before installing a new operating system.

3. Set up the BIOS.

You need to make sure that the BIOS is set up for the operating system that you plan to install.

4. Install the operating system.

5. Configure your server for RAID.

If you plan to configure your server for RAID operation, you will need to perform some setup tasks before installing the operating system.

6. Install the operating system, update the drivers, and run operating system updates, as necessary.

Choosing an Operating System Installation Method

The following is an overview of the possible methods of installation for the operating system that you plan to install.

CD-ROM or DVD, Network Installation (PXE/Jumpstart/RIS), Remote KVMs Over IP With Virtual CD-ROM, Serial Redirection

1. CD-ROM or DVD

This method includes installing the operating system directly onto the server, using the server's onboard DVD, a USB connected drive, and a VGA monitor attached the the system. For more details on CD/DVD installation for your specific operating system, refer to the instructions included in your installation software or the online documentation referenced in the specific operating system

2. Network Installation (PXE/Jumpstart/RIS)

This method includes setting up an installation on a host server, and then installing the operating system over the network. Network installation methods include AutoYast for SUS, Kickstart for RedHat, Jumpstart for Solaris, and Remote Installation Services (RIS) for Windows. Due to missing network interface card (NIC) drivers in some operating systems, the following is recommended for network installations:

Solaris - Use the Broadcom NICs connectors labelled 0 and 1

Red Hat Enterprise Linux - Use the Broadcom NIC connectors labelled 0 and 1 SUSE Linux Enterprise Server-Use either NVIDIA NIC connector labelled 2&3 Windows - Any of the Broadcom or NVIDIA NIC connectors.

3. Remote KVMs Over IP With Virtual CD-ROM

This method includes using a remote networked system to install the operating system onto the Sun Fire X2100 M2 server. The CD or DVD drive of the remote system (virtual cdrom) is used to access the operating system media.

HOW TO SELECT APPROPRIATE OPERATING SYSTEM FOR YOUR SYSTEM

Step 1: Check the system requirements:

If you have decided to install a new OS firstly you need to figure out which OS you want to use. Operating systems have different system requirements, so if you own an older computer, make sure that your computer can handle a newer version of operating system.

Step 2: Deciding whether to download or purchase:

If you want to install Windows on to your computer you need to purchase license. Each windows license comes up with an activation key which is good for one installation.

Step 3: Research about your software compatibility:

Make sure that the OS which you want to install on your computer supports all the programs that you want to use. If you want to use Microsoft Office, then you won't be able to install that application on a Linux machine.

Step 4: Get your new operating system:

If you have purchased a copy of Windows from any store, you should be given an installation disc along with your windows activation code. If you don't have the installation disc, but have a valid code, then you can download a copy of the installation disc online.

Step 5: Backup your data:

When you are installing a new OS, you are most likely going to wipe the hard drive in this process. This mean that you are going to lose all your files, until and unless you backup them

INSTALLATION OF SERVER SYSTEM

A Server Core installation provides a minimal environment for running specific server roles, which reduces the maintenance and management requirements and the attack surface for those server roles. A server running a Server Core installation supports the following server roles:

Active Directory Domain Services (AD DS), Active Directory Lightweight Directory Services (AD LDS), DHCP Server, DNS Server, File Services, Print Services, Streaming Media Services, Web Server (IIS)

STEPS TAKE PART IN INSTALLATION

Phase 1: Collecting Information

In the first installation phase, the setup program asks for the preliminary information that it needs to begin the installation. A setup wizard prompts you for the following information:

Language: Select your language, time-zone, and keyboard type.

Product Key: Enter the 25-character product key that came with the installation media. If setup says you entered an invalid product key, double-check it carefully. You probably just typed the key incorrectly.

Operating System Type: The setup program lets you select Windows Server 2008 Standard Edition or Core. Choose Standard Edition to install the full server operating system; choose Core if you want to install the new text-only version.

License Agreement: The official license agreement is displayed. You have to agree to its terms in order to proceed.

Install Type: Choose an Upgrade or Clean Install type.

Disk Location: Choose the partition in which you want to install Windows.

Upgrade to NTFS: If you want to upgrade a FAT32 system to NTFS, you'll need to say so now.

Phase 2: Installing Windows

In this phase, Windows setup begins the actual process of installing Windows. The following steps are performed in sequence:

Copying Files: Compressed versions of the installation files are copied to the server computer.

Expanding Files: The compressed installation files are expanded. Installing Features: Windows server features are installed.

Installing Updates: The setup program checks Microsoft's website and downloads any critical updates to the operating system.

Completing Installation: When the updates are installed, the setup program reboots so it can complete the installation.

Configuring Your Server

After you've installed Windows Server 2008, the computer automatically reboots, and you're presented with the Initial Configuration Tasks Wizard. This wizard guides you through the most important initial tasks for configuring your new server. The following list describes the server configuration settings available from this wizard:

Set the Administrator Password: The very first thing you should do after installing Windows is set a secure administrator password.

Set the Time Zone: This is necessary only if the indicated time zone is incorrect.

Configure Networking: The default network settings are usually appropriate, but you can use this option to change the defaults if you wish.

Provide Computer Name and Domain: This option lets you change the server's computer name and join a domain.

Enable Automatic Updating: Use this option if you want to let the server automatically check for operating system updates.

Download and Install Updates: Use this option to check for critical operating system updates.

Add Roles: This option launches the Add Roles Wizard, which lets you configure important roles for your server.

Add Features: This option lets you add more operating system features.

Enable Remote Desktop: Use this option to enable the Remote Desktop feature, which lets you administer this server from another computer.

Configure Windows Firewall: If you want to use the built-in Windows firewall.

OS INSTALLATION (Ubuntu OS v20.04 64bit)

Step 1: By selecting the virtual machine click start.

Step 2: Select folder icon and choose the .iso file of the intended OS to be installed (folder icon->Add->Browse to .iso file location->open->choose iso) and click start to install.

Step 3: Here after loading click install Ubuntu.

Step 4: Choose Appropriate Keyboard layout and choose continue likewise choose normal installation and you can choose updates and third-party software for installation. Remember, for updates and third-party software installation active internet connection is required.

Step 5: Choose installation type something else and continue.

Step 6: Select new partition table and select continue.

Step 7: Now we can see the allotted space of 10GB (On 3.4.iv) is available so right click on it and choose add. After choosing a pop-up box appears.

Step 8: Choose Mount point as / then click OK and we can see the 10GB space is taken for installing the OS. Select Install Now.

Step 9: Select continue and set Time Zone and select continue.

Step 10: Fill the System name and login credentials then press continue and login options is your preference.

Step 11: Wait for installation process to complete it takes few minutes.

Step 12: After installation popup box popes out and click Restart Now and press enter key.

Step 13: Now Ubuntu OS v20.04 64bit is installed and ready to use.

3. VIRTUALBOX INSTALLATION

PRE-REQUIREMENTS

1. System with Windows OS 7 or later.
2. Minimum 10GB of free storage space to allocate.
3. Minimum 1GB of memory space to allocate.
4. .iso file for OS installation. Choose according to system compatibility. Here we are using Ubuntu 20.04 OS 64bit.
5. Processor of either Intel i3 or later or AMD Ryzen 3 or later.

HOW TO PICK OS FOR VM INSTALLATION?

1. Check minimum requirements specified by the OS.
2. Check processor version support i.e., 32bit or 64bit.
3. If you want specific OS version in Ubuntu
 - Open any browser.
 - Search Ubuntu Old versions.
 - Open Index of/releases.
 - Choose appropriate OS and support version.

THINGS TO KNOW BEFORE VM INSTALLATION

1. Choose Virtual Box according to your system specifications.
2. Follow the steps as mentioned below correctly.
3. Install only one OS at a time otherwise system may crash.
4. Install only those OS which is compactable to parent system.
5. This guide is only for Ubuntu installation so different OS differ in steps for OS installation.

VIRTUALBOX INSTALLATION IN UBUNTU

VirtualBox is a general-purpose virtualization tool for x86 and x86-64 hardware, targeted at server, desktop, and embedded use, that allows users and administrators to easily run multiple guest operating systems on a single host.

Step 1: Open a terminal, and enter the following to update the repository: `sudo apt-get update`

Step 2: Download and install VirtualBox by running: `sudo apt-get install virtualbox`

Step 3: Next, install the VirtualBox Extension Pack: `sudo apt-get install virtualbox-ext-pack`


OUTPUT:

```
1.22/Oracle_VM_VirtualBox_Extension_Pack-6.1.22.vbox-extpack
The file will be downloaded into /usr/share/virtualbox-ext-pack
License accepted.
0%...10%...20%...30%...40%...50%...60%...70%...80%...90%...100%
Successfully installed "Oracle VM VirtualBox Extension Pack".
```


VIRTUALBOX INSTALLATION IN WINDOWS

1) DOWNLOAD THE VIRTUAL BOX

Step 1: Open any browser say Google Chrome and search for 'virtual box' to download the latest version. If your system supports only certain criteria like 32-bit OS or Windows old version search with specific criteria like 'virtual box for 32bit windows 7' like that.

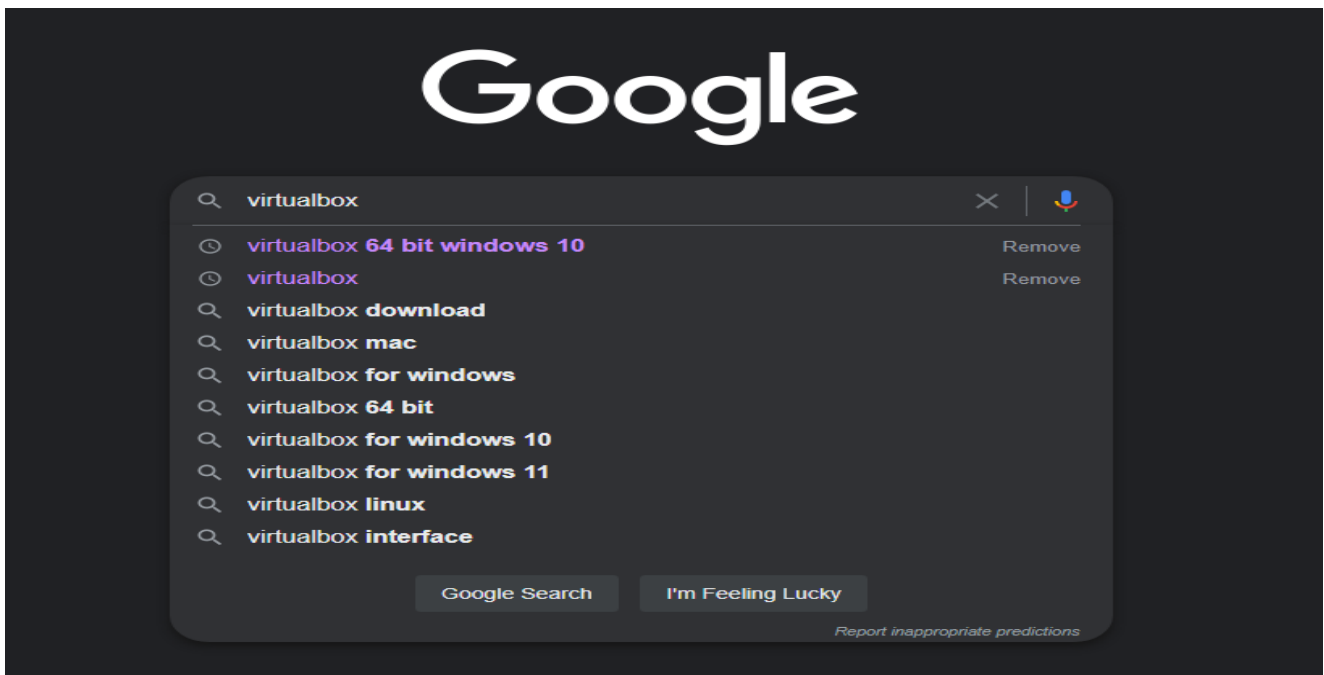

Step 2: Search and choose the first option.

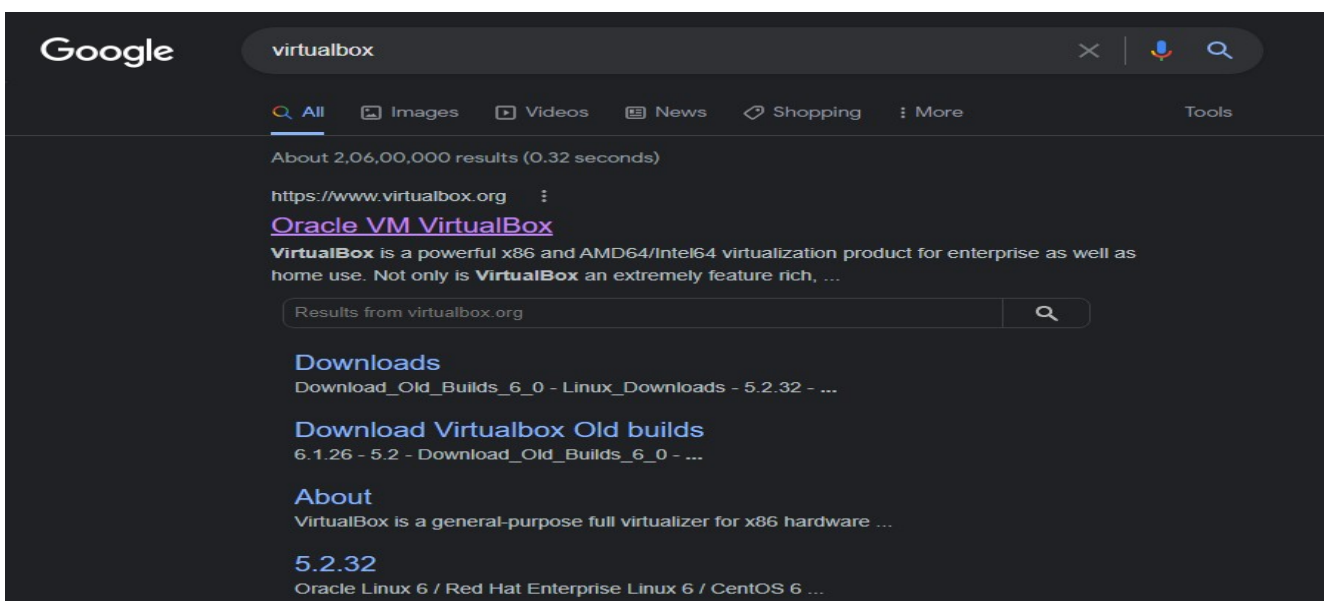

Step 3: Choose download virtual box with version number (Here, Download VirtualBox 6.1).



Step 4: Choose Windows Hosts for windows and download gets started automatically.

VirtualBox binaries


By downloading, you agree to the terms and conditions.

If you're looking for the latest VirtualBox 6.0 packages

If you're looking for the latest VirtualBox 5.2 packages


VirtualBox 6.1.34 platform packages

- [Windows hosts](#)
- [OS X hosts](#)
- [Linux distributions](#)
- [Solaris hosts](#)
- [Solaris 11 IPS hosts](#)

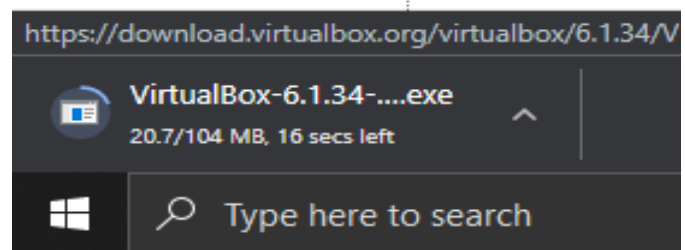


2) INSTALL THE VIRTUAL BOX


Step 1: Open Virtual Box from downloads.

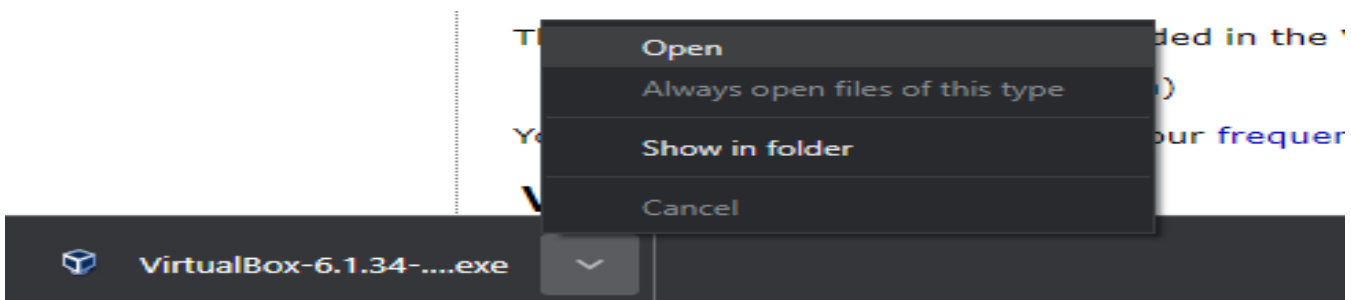


Step 2: First click next. If you wish to change location, you can change it.

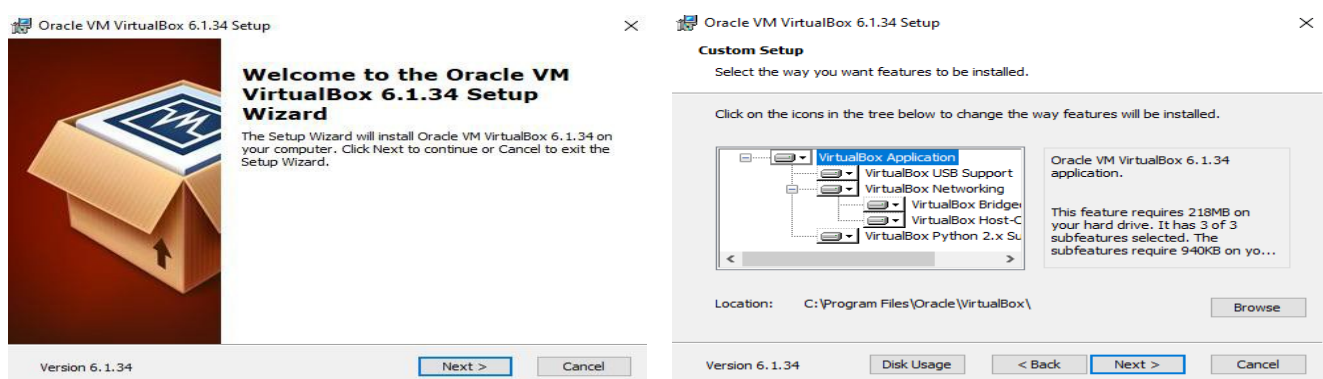

Step 3: Then select all options and choose next. Then, press yes for installation.

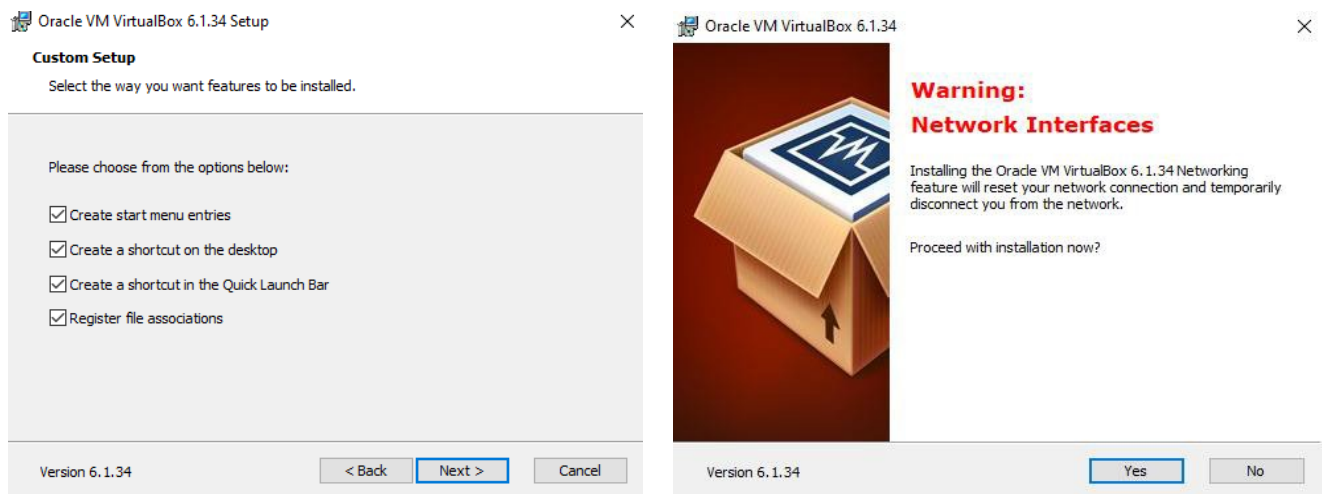


Step 4: Then select install for Virtual box and device. Then, click finish after installation.

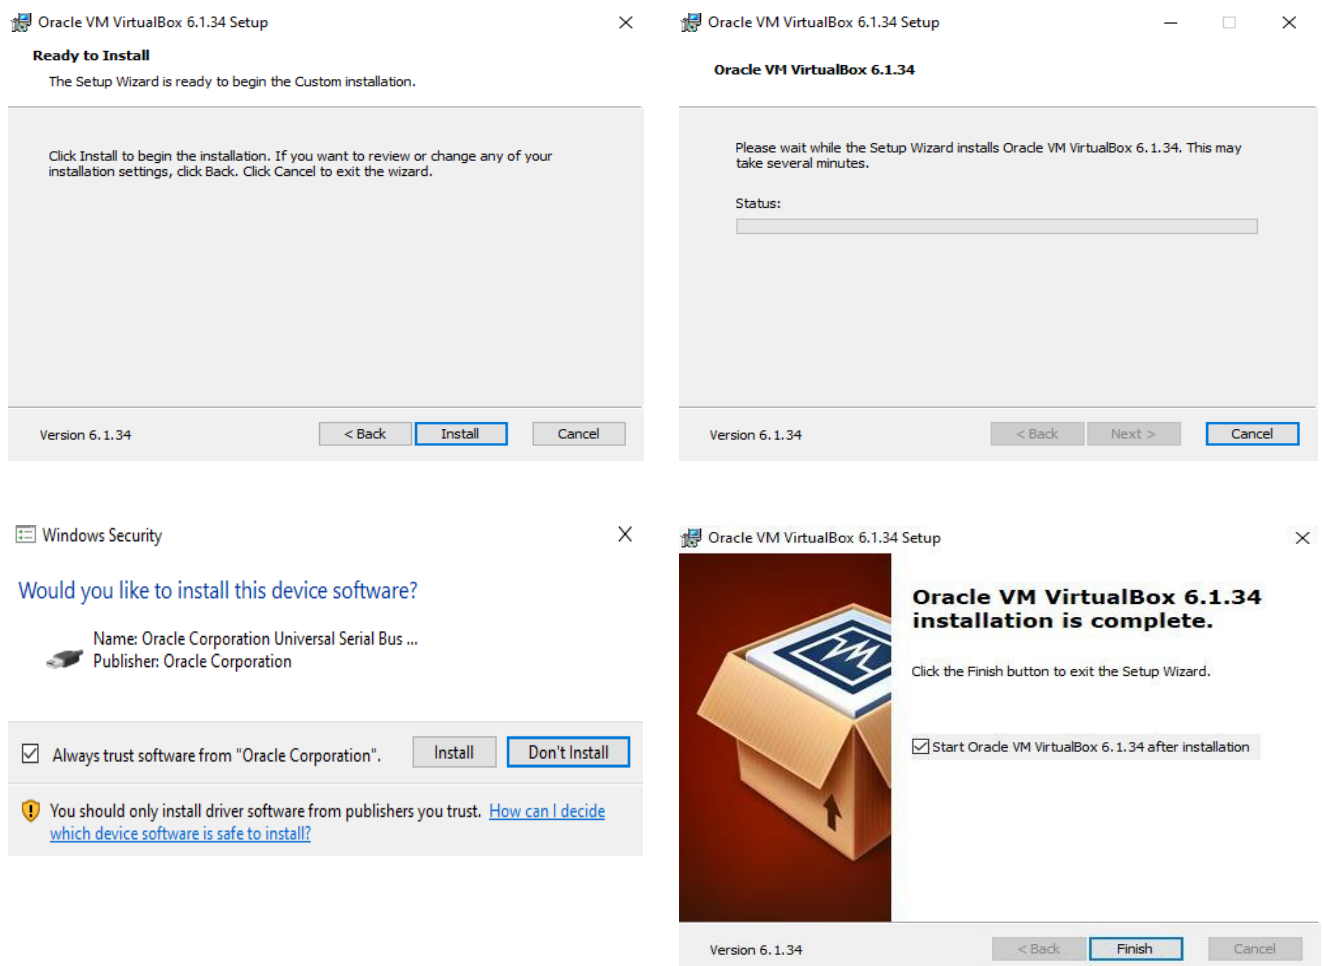


3) ASSIGN PARTITION ON VIRTUAL BOX FOR INSTALLING OS

Step 1: Open Virtual Box and choose New or simply Ctrl+N.

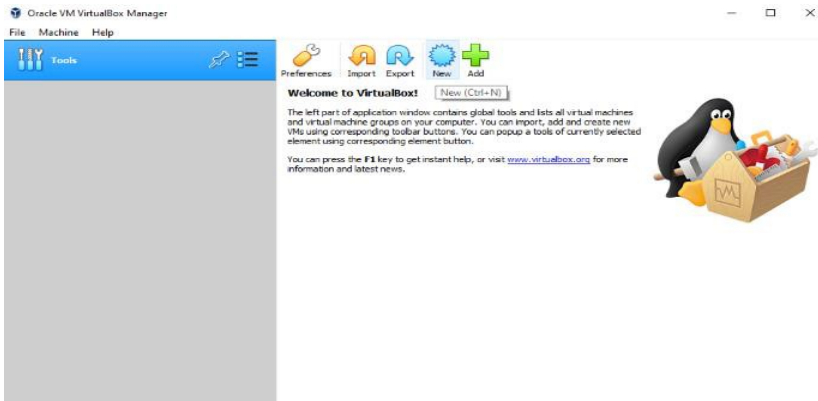


Step 2: After choosing New a popup box appears and you can choose name, folder where OS to be installed (Machine Folder) then type and version of the OS. Here, I am Choosing **Ubuntu OS of 64bit**. Then, click next.

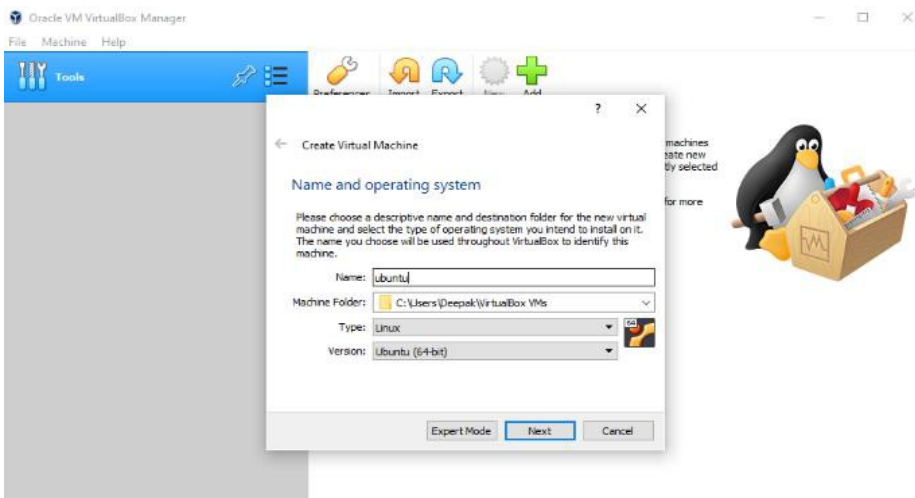

Notes: Remember, choose only those OS which meets with the minimum requirements specified and choose only the version which supports your device's processor else it leads to software crashes and installation failures.

Step 3: Choose appropriate memory size minimum recommended is 1GB(1024MB).

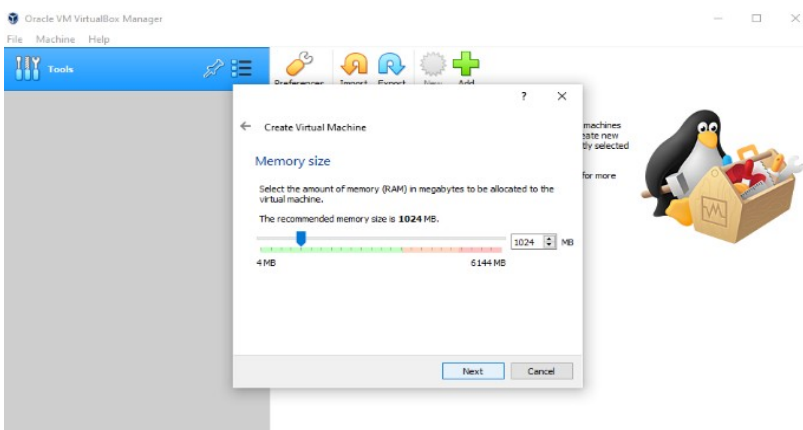


Notes: Remember, choose memory size by looking forward the needs of both parent and child OS. Some OS may differ in minimum recommended memory size. So, choose wisely.

Step 4: You can either choose create virtual hard drive (recommended) or use an existing virtual hard drive file. Choose VirtualBox Disc Image(VDI).

You can choose either dynamically allocated or fixed size according to your needs.


You can change file location to run your OS if needed and choose the hard drive space wisely according to OS specification and your needs. Here, minimum is 10.00GB

After all the above configuration a partition or we can say a virtual machine space is allocated for installing an OS.






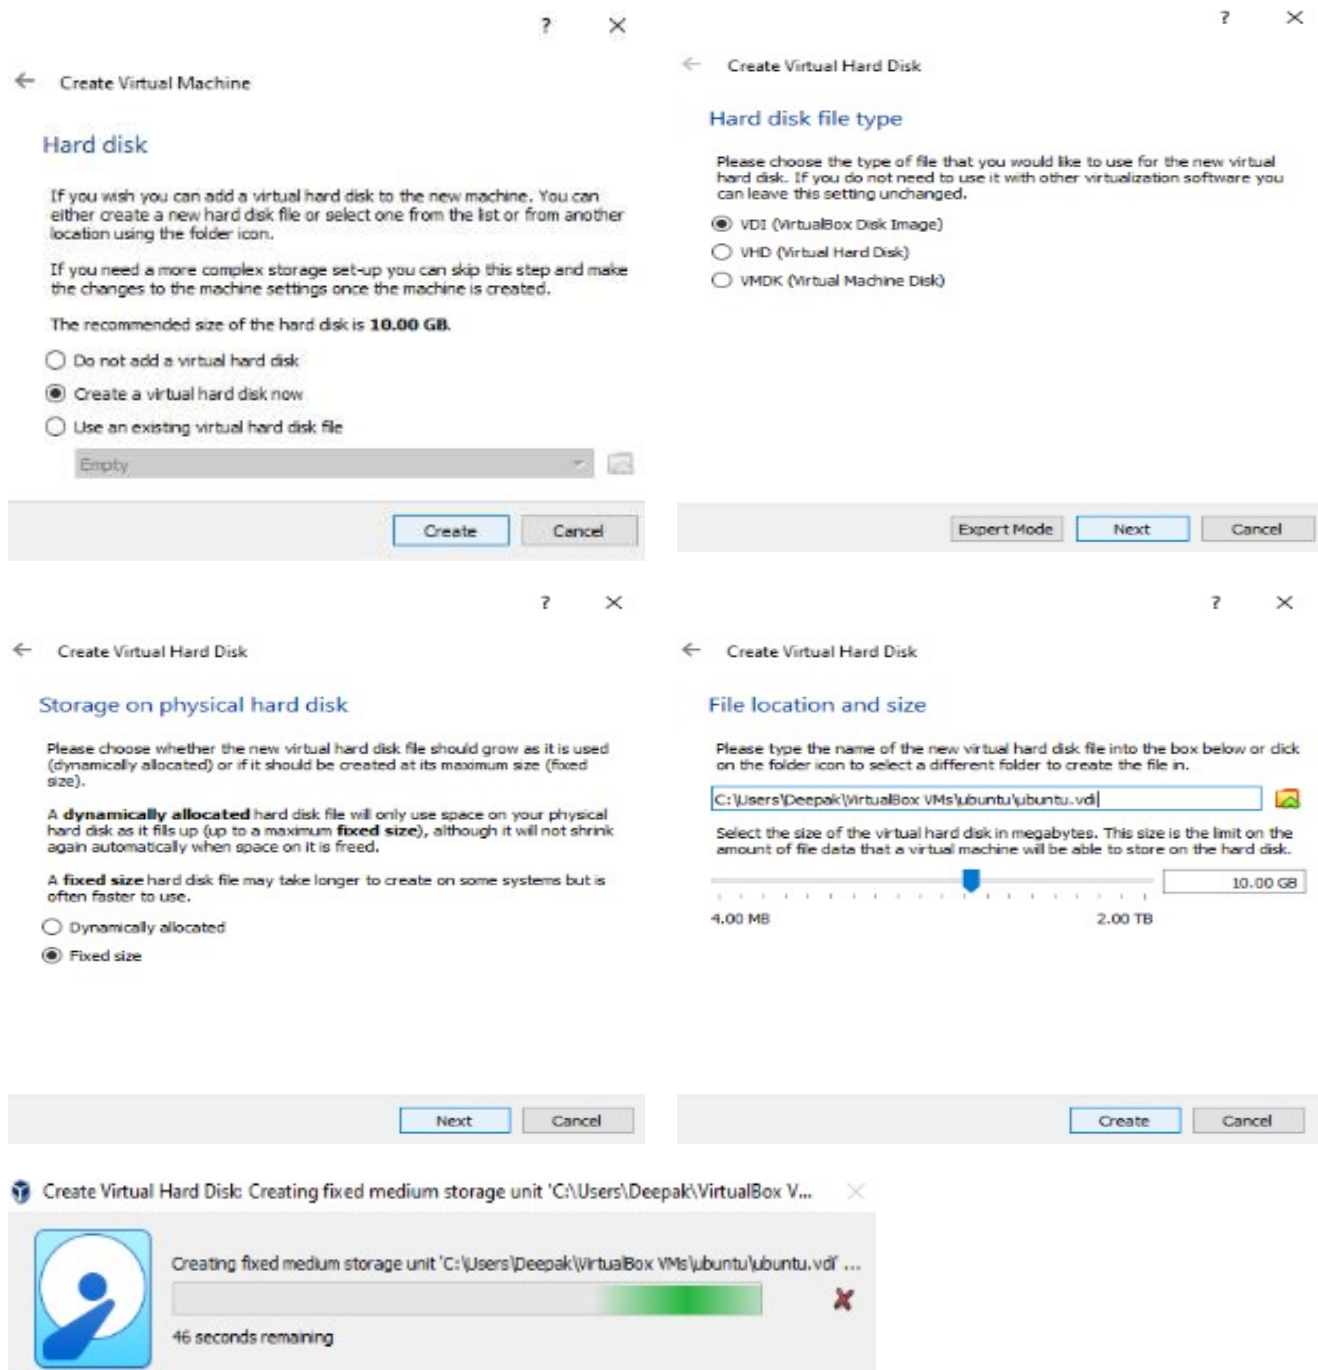


OS INSTALLATION (Ubuntu OS v20.04 64bit)



Step 1: By selecting the virtual machine click start.

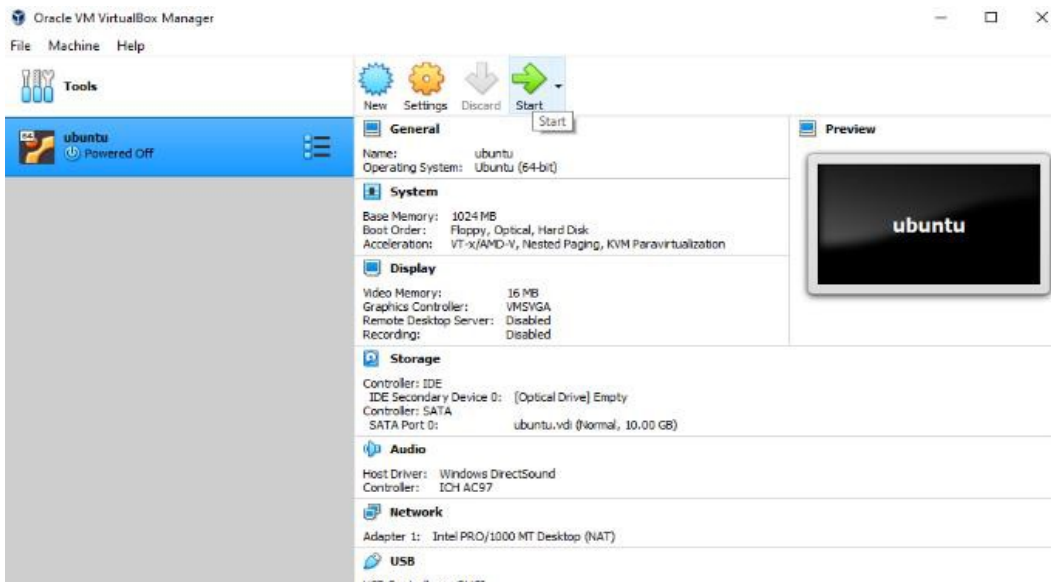

Step 2: Select folder icon and choose the .iso file of the intended OS to be installed (folder icon->Add->Browse to .iso file location->open->choose iso) and click start to install.

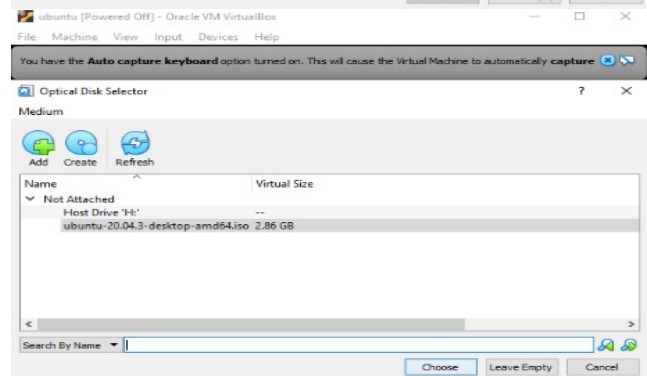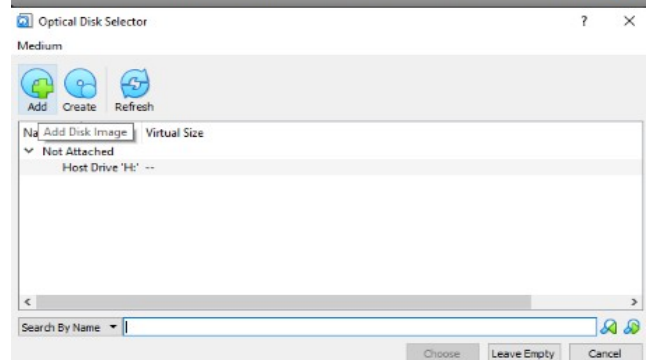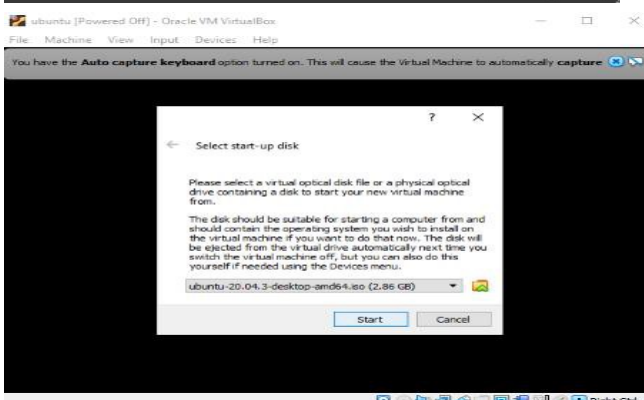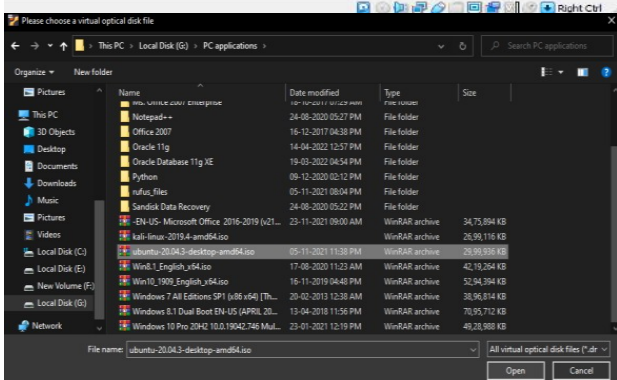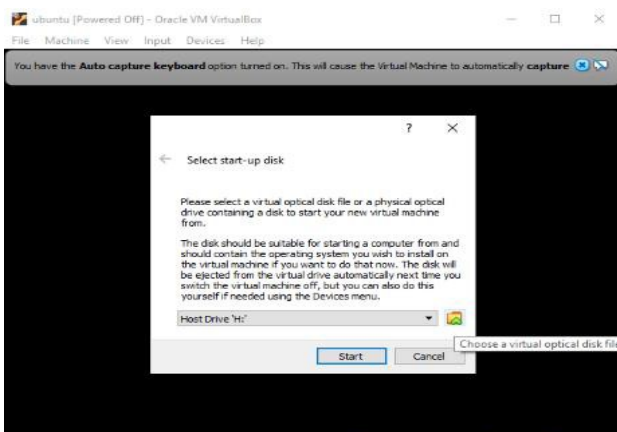

Step 3: Here after loading click install Ubuntu.

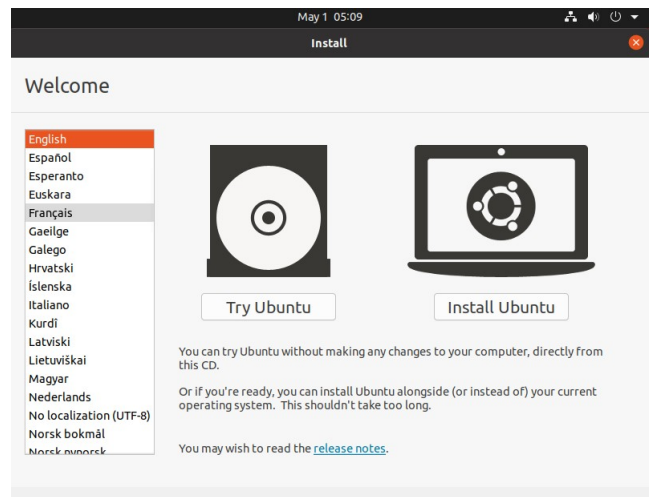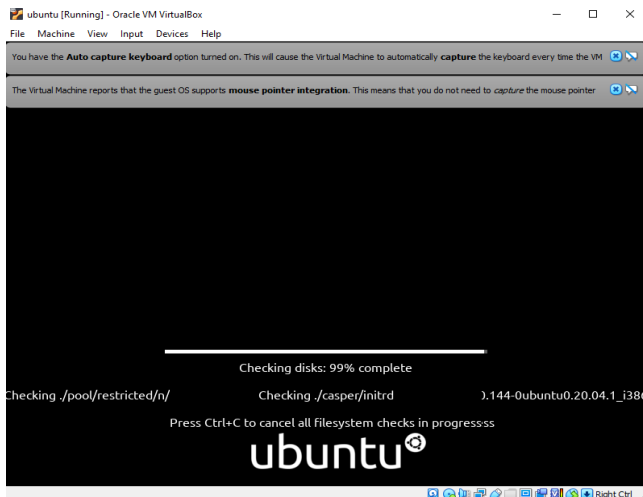

Step 4: Choose Appropriate Keyboard layout and choose continue likewise choose normal installation and you can choose updates and third-party software for installation. Remember, for updates and third-party software installation active internet connection is required.

Step 5: Choose installation type something else and continue.

Step 6: Select new partition table and select continue.

Step 7: Now we can see the allotted space of 10GB (On 3.4.iv) is available so right click on it and choose add. After choosing a pop-up box appears.

Step 8: Choose Mount point as / then click OK and we can see the 10GB space is taken for installing the OS. Select Install Now.


Step 9: Select continue and set Time Zone and select continue.

Step 10: Fill the System name and login credentials then press continue and login options is your preference.

Step 11: Wait for installation process to complete it takes few minutes.


Step 12: After installation popup box popes out and click Restart Now and press enter key.

Step 13: Now Ubuntu OS v20.04 64bit is installed and ready to use.

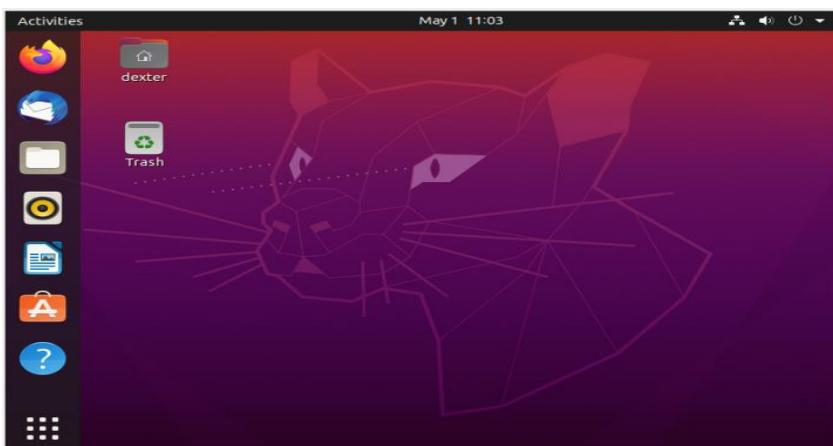


REMOVE VIRTUAL MACHINE

Step 1: Right click on Virtual Machine(VM) you want to remove and choose remove option.

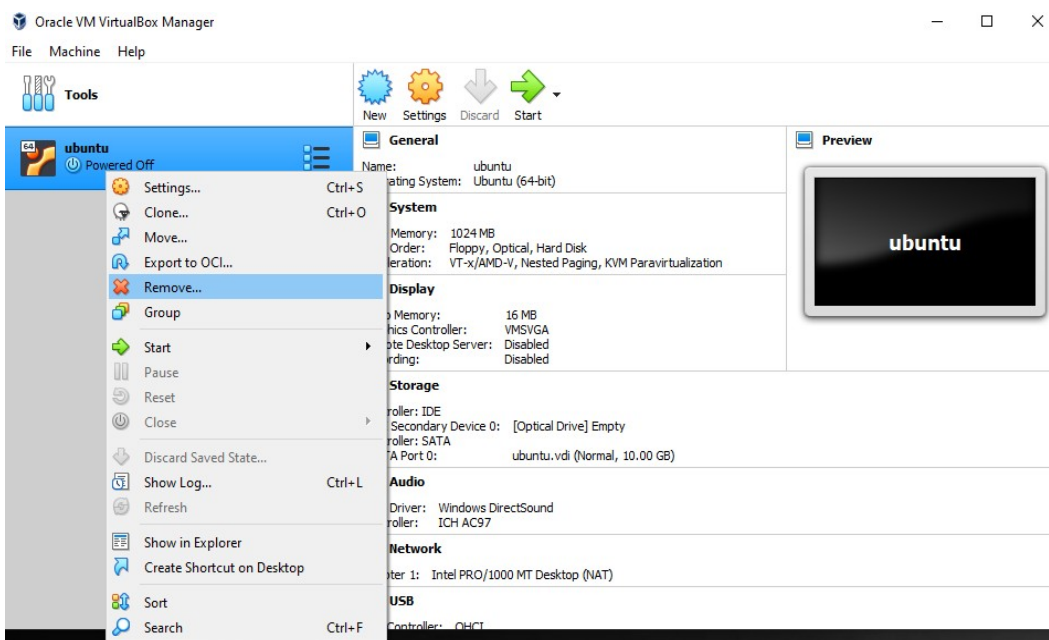

Step 2: Choose Delete all files for delete OS, partition etc...; Remove only just removes the OS. Choose according to your choice.

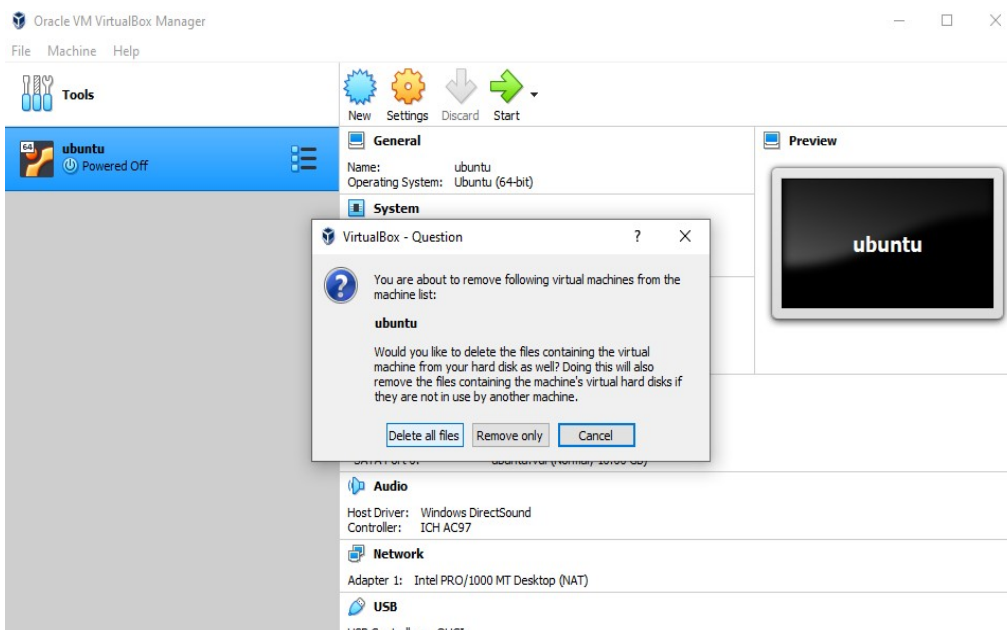

4. INSTALLATION AND CONFIGURATION OF LAMP STACK. DEPLOY AN OPEN-SOURCE APPLICATION SUCH AS **phpmyadmin** and **WordPress**.

INSTALLING LAMP Procedure:

<p><u>Step 1: Update your system</u></p> <pre>sudo apt update</pre> <pre>sudo apt upgrade</pre>	<p><u>Step 2: Install Apache</u></p> <pre>sudo apt install apache2 -y</pre> <p>To check whether installed or not: Open web browser and search localhost in address bar then apache2 default page is displayed .Successfully installed.</p>
<p><u>Step 3: Firewall setting</u></p> <pre>sudo ufw status</pre> <p>if inactive the sudo ufw enable</p> <pre>sudo ufw app list</pre> <pre>sudo ufw allow in "Apache Full"</pre> <pre>clear</pre>	<p><u>Step 4: Installing MySQL</u></p> <pre>sudo apt install mysql-server -y</pre> <p>or</p> <pre>sudo apt install mariadb-server mariadb-client</pre> <p>Check installation:</p> <pre>sudo systemctl status mysql</pre> <pre>sudo mysql_secure_installation</pre> <pre>sudo mysql</pre> <pre>show databases;</pre> <pre>create database name;</pre>
<p><u>Step 5: Installing php</u></p> <pre>sudo apt install php -y</pre> <p>php version :</p> <pre>php -v</pre> <pre>cd /var/www/html</pre> <pre>sudo gedit filename.php</pre> <p>Open web browser and search localhost/filename.php in address bar</p>	<p><u>Step 6: Install phpMyAdmin</u></p> <pre>sudo apt install php-mbstring php-zip php-gd php-curl php-json</pre> <pre>sudo apt install phpmyadmin -y</pre> <p>Press space and enter</p> <p>Set password</p> <pre>sudo systemctl restart apache2</pre> <p>Open browser and type localhost/phpmyadmin Type username phpadmin and password</p>
<p><u>Step 7: Host WORDPRESS</u></p> <ol style="list-style-type: none"> Open browser and go to https://wordpress.org/latest.zip Copy the link address and open terminal Install wget (if not installed) -> <code>sudo apt install wget</code> wget (paste the copied link address) Install unzip (if not installed) -> <code>sudo apt install unzip</code> Go to wordpress directory 	

```
cd wordpress/
```

- f) Copy all the files in wordpress recursively `sudo cp -r * /var/www/html`
`cd /var/www/html`
- g) Remove one file name “index.html”
`sudo rm -rf index.html`
- h) Change permission(ownership) of the files
`sudo chmod -R www-data:www-data /var/www/`
- i) Open browser and type localhost
- j) WordPress window will be opened -> successful installation
- k) Select English Language and continue
- l) Set database Connection details :
- m) Open terminal
`sudo mysql -u root -p` (Enter password of database)

- create database [databasename];
- create user “[username]” identified by “[password]”;
- grant all privileges on [databasename].* to “[username]”;
- exit

Database Name : [databasename]


Username : [username]

Password : [password]

Database Host : localhost

Table Prefix : wp_

OUTPUT

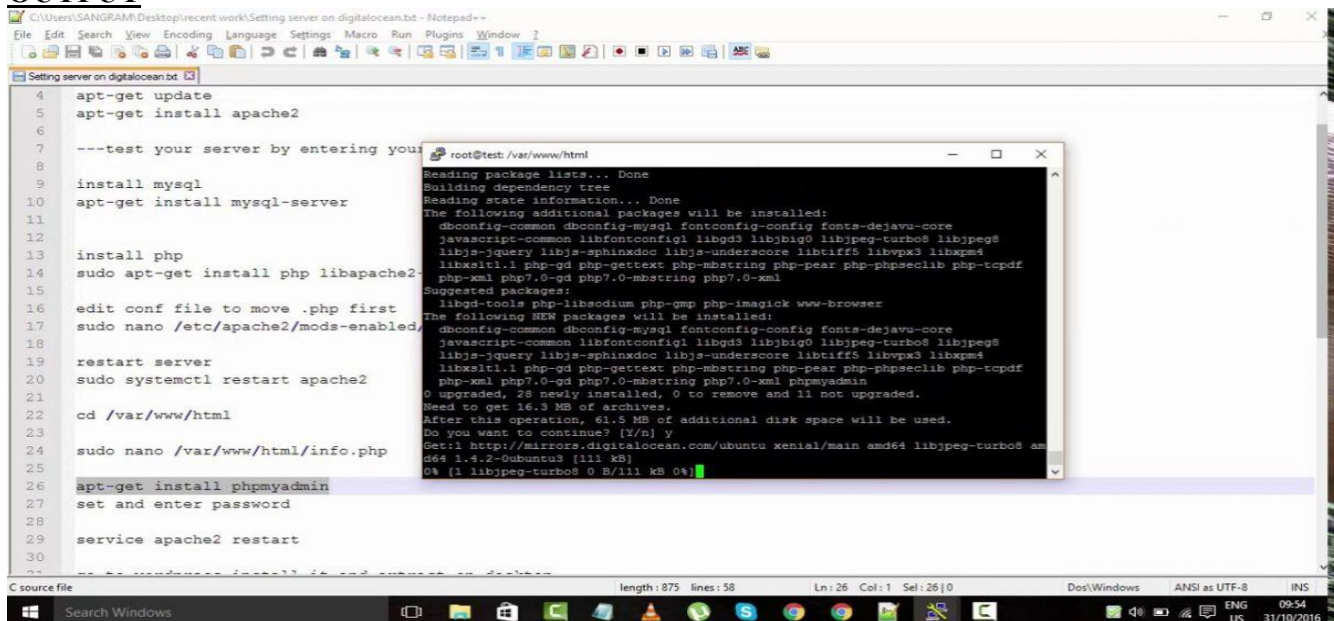


```
4 apt-get update
5 apt-get install apache2
6
7 ---test your server by entering your browser address at http://localhost/
8
9 install mysql
10 apt-get install mysql-server
11
12 install php
13 sudo apt-get install php libapache2
14
15 edit conf file to move .php first
16 sudo nano /etc/apache2/mods-enabled
17
18 restart server
19 sudo systemctl restart apache2
20
21 cd /var/www/html
22
23 sudo nano /var/www/html/info.php
24
25 apt-get install phpmyadmin
26 set and enter password
27
28 service apache2 restart
29
30
```

PHPMYADMIN

phpinfo()

10.1.1.4/phpinfo.php

PHP Version 7.1.11-0ubuntu2



System	Linux ubuntu 4.13.0-25-generic #29-Ubuntu SMP Mon Jan 8 21:14:41 UTC 2018 x86_64
Build Date	Nov 7 2017 09:01:09
Server API	Apache 2.0 Handler
Virtual Directory Support	disabled
Configuration File (php.ini) Path	/etc/php/7.1/apache2
Loaded Configuration File	/etc/php/7.1/apache2/php.ini
Scan this dir for additional .ini files	/etc/php/7.1/apache2/conf.d
Additional .ini files parsed	/etc/php/7.1/apache2/conf.d/10-mysqld.ini, /etc/php/7.1/apache2/conf.d/10-opcache.ini, /etc/php/7.1/apache2/conf.d/10-pdo.ini, /etc/php/7.1/apache2/conf.d/20-calendar.ini, /etc/php/7.1/apache2/conf.d/20-ctype.ini, /etc/php/7.1/apache2/conf.d/20-exif.ini, /etc/php/7.1/apache2/conf.d/20-fileinfo.ini, /etc/php/7.1/apache2/conf.d/20-ftp.ini, /etc/php/7.1/apache2/conf.d/20-gettext.ini, /etc/php/7.1/apache2/conf.d/20-iconv.ini, /etc/php/7.1/apache2/conf.d/20-json.ini, /etc/php/7.1/apache2/conf.d/20-mysqli.ini, /etc/php/7.1/apache2/conf.d/20-pdo_mysql.ini, /etc/php/7.1/apache2/conf.d/20-phar.ini, /etc/php/7.1/apache2/conf.d/20-posix.ini, /etc/php/7.1/apache2/conf.d/20-readline.ini, /etc/php/7.1/apache2/conf.d/20-shmop.ini, /etc/php/7.1/apache2/conf.d/20-sockets.ini, /etc/php/7.1/apache2/conf.d/20-sysvmsg.ini, /etc/php/7.1/apache2/conf.d/20-sysvsem.ini, /etc/php/7.1/apache2/conf.d/20-sysvshm.ini, /etc/php/7.1/apache2/conf.d/20-tokenizer.ini
PHP API	20160303
PHP Extension	20160303
Zend Extension	320160303
Zend Extension Build	API320160303,NTS
PHP Extension Build	API20160303,NTS
Debug Build	no
Thread Safety	disabled
Zend Signal Handling	enabled
Zend Memory Manager	enabled
Zend Multibyte Support	disabled
IPv6 Support	enabled
DTrace Support	available, disabled
Registered PHP Streams	https, ftps, compress.zlib, php, file, glob, data, http, ftp, phar
Registered Stream Socket Transports	tcp, udp, unix, udg, ssl, tls, tlsv1.0, tlsv1.1, tlsv1.2
Registered Stream Filters	zlib.*, string.rot13, string.toupper, string.tolower, string.strip_tags, convert.*, consumed, dechunk, convert.iconv.*

5. INSTALLATION AND CONFIGURATION OF COMMON SOFTWARE FRAMEWORKS SUCH AS LARAVEL.

Installing Laravel Procedure:

<p><u>Step 1: Install Apache web server</u></p> <p>To install apache2, type: <code>sudo apt install apache2</code></p> <p>Once installed, Apache should be running. If it's not, for whatever reason, start it: <code>sudo systemctl start apache2</code></p> <p>Then enable it to start on boot time. <code>sudo systemctl enable apache2</code></p> <p>To verify the status of Apache, execute: <code>sudo systemctl status apache2</code></p>	<p><u>Step 2: Install PHP and additional PHP extensions</u></p> <p>Laravel 8 requires PHP 7.3 or above.</p> <p>PHP 7.4 is available in Ubuntu repositories. So, install PHP and the following PHP extensions.</p> <p><code>sudo apt install php libapache2-mod-php php-mbstring php-cli php-bcmath php-json php-xml php-</code></p> <p>When the installation is complete, verify the PHP version. <code>php -v</code></p>
<p><u>Step 3: Create Database for Laravel Application</u></p> <p>Next up, we will create a database for the Laravel application. But first, we need to install a database server. Laravel supported database systems are MariaDB, MySQL, SQLite, Postgres, or SQL Server.</p> <p>We will go with the MariaDB database engine. <code>sudo apt install mariadb-server</code></p> <p>Once the database server is installed, log into the MariaDB prompt: <code>sudo mysql -u root -p</code></p> <p>Once logged in create the database, database user, and grant all privileges to the database user.</p> <pre>CREATE DATABASE laravel_db;CREATE USER 'laravel_user'@'localhost' IDENTIFIED BY 'secretpassword';GRANT ALL ON laravel_db.* TO 'laravel_user'@'localhost';FLUSH PRIVILEGES;QUIT;</pre>	<p><u>Step 4: Install Composer</u></p> <p>Composer is a dependency package manager for PHP. It provides a framework for managing libraries and dependencies and required dependencies. To use Laravel, first install composer.</p> <p>To download Composer, invoke the command shown. <code>curl -sS https://getcomposer.org/installer php</code></p> <p>Next, move the composer file to the /usr/local/bin path. <code>sudo mv composer.phar /usr/local/bin/composer</code></p> <p>Assign execute permission: <code>sudo chmod +x /usr/local/bin/composer</code></p> <p>Verify the Composer version installed: <code>composer --version</code></p> <p>Composer version 2.1.3 is installed.</p>
<p><u>Step 5: Install Laravel 8 on Ubuntu</u></p> <p>With Composer installed, the next course of action is to install Laravel.</p> <p>Navigate to the webroot directory, type: <code>cd /var/www/html</code></p>	<p><u>Step 6: Configure Apache to serve Laravel site</u></p> <p>Lastly, we need to set up the Apache webserver to host the Laravel site. For that to happen, we need to create a virtual host file.</p> <p><code>sudo vim /etc/apache2/sites-available/laravel.conf</code></p>

Now, install Laravel using the composer command, type: `sudo composer create-project laravel/laravel laravelapp`

The command creates a new directory called laravelapp and installs all the files and directories for Laravel.

Step 7: Access Laravel from a browser

`sudo apt Laravel`

OUTPUT

Laravel

[DOCUMENTATION](#)[LARACASTS](#)[NEWS](#)[NOVA](#)[FORGE](#)[GITHUB](#)

PHPMYADMIN

PHP Version 7.2.15-0ubuntu0.18.04.1



System	Linux virtual 4.15.0-43-generic #46-Ubuntu SMP Thu Dec 6 14:45:28 UTC 2018 x86_64
Build Date	Feb 8 2019 14:54:22
Server API	Apache 2.0 Handler
Virtual Directory Support	disabled
Configuration File (php.ini) Path	/etc/php/7.2/apache2
Loaded Configuration File	/etc/php/7.2/apache2/php.ini
Scan this dir for additional .ini files	/etc/php/7.2/apache2/conf.d
Additional .ini files parsed	/etc/php/7.2/apache2/conf.d/10-opcache.ini, /etc/php/7.2/apache2/conf.d/10-pdo.ini, /etc/php/7.2/apache2/conf.d/15-xml.ini, /etc/php/7.2/apache2/conf.d/20-bcmath.ini, /etc/php/7.2/apache2/conf.d/20-calendar.ini, /etc/php/7.2/apache2/conf.d/20-ctype.ini, /etc/php/7.2/apache2/conf.d/20-dom.ini, /etc/php/7.2/apache2/conf.d/20-exif.ini, /etc/php/7.2/apache2/conf.d/20-fileinfo.ini, /etc/php/7.2/apache2/conf.d/20-ftp.ini, /etc/php/7.2/apache2/conf.d/20-gettext.ini, /etc/php/7.2/apache2/conf.d/20-iconv.ini, /etc/php/7.2/apache2/conf.d/20-json.ini, /etc/php/7.2/apache2/conf.d/20-mbstring.ini, /etc/php/7.2/apache2/conf.d/20-phar.ini, /etc/php/7.2/apache2/conf.d/20-posix.ini, /etc/php/7.2/apache2/conf.d/20-readline.ini, /etc/php/7.2/apache2/conf.d/20-shmop.ini, /etc/php/7.2/apache2/conf.d/20-simplexml.ini, /etc/php/7.2/apache2/conf.d/20-soap.ini, /etc/php/7.2/apache2/conf.d/20-sockets.ini, /etc/php/7.2/apache2/conf.d/20-sysvmsg.ini, /etc/php/7.2/apache2/conf.d/20-sysvsem.ini, /etc/php/7.2/apache2/conf.d/20-sysvshm.ini, /etc/php/7.2/apache2/conf.d/20-tokenizer.ini, /etc/php/7.2/apache2/conf.d/20-wddx.ini, /etc/php/7.2/apache2/conf.d/20-xmlreader.ini, /etc/php/7.2/apache2/conf.d/20-xmlrpc.ini, /etc/php/7.2/apache2/conf.d/20-xmlwriter.ini, /etc/php/7.2/apache2/conf.d/20-xsl.ini, /etc/php/7.2/apache2/conf.d/20-zip.ini
PHP API	20170718
PHP Extension	20170718
Zend Extension	320170718
Zend Extension Build	API320170718,NTS
PHP Extension Build	API20170718,NTS
Debug Build	no
Thread Safety	disabled
Zend Signal Handling	enabled

BUILD AND INSTALL SOFTWARE FROM SOURCE CODE, FAMILIARITY WITH MAKE AND CMAKE UTILITIES EXPECTED.

Procedure:

<p>Step 1: Set Up the Repository</p> <pre>sudo apt install cmake</pre>	<p>Step 2: Install following packages</p> <pre>sudo apt install \ clang-tools lld llvm-dev libclang-dev liblld-10-dev \ libpng-dev libjpeg-dev libgl-dev \ python3-dev python3-numpy python3-scipy python3-imageio python3-pybind11 libopenblas-dev libeigen3-dev libatlas-base-dev \ doxygen ninja-build</pre>
<p>Step 3: Building halide with cmake</p> <pre>Halide\$ cmake -G Ninja - DCMAKE_BUILD_TYPE=Release -S . -B build dev@host:~/Halide\$ cmake --build ./build</pre>	<p>Step 4: CMake Presets</p> <p>If you are using CMake 3.19+, we provide several presets to make the above commands more convenient. The following CMake preset commands correspond to the longer ones above.</p> <ul style="list-style-type: none"> ➤ <code>cmake --preset=msvc-release # Ninja generator, MSVC compiler, Release build</code> ➤ <code>cmake --preset=win64 # VS 2019 generator, 64-bit build</code> ➤ <code>cmake --preset=win32 # VS 2019 generator, 32-bit build</code> <p><code>\$ cmake --preset=gcc-release # Ninja generator, GCC compiler, Release build</code></p> <p><code>\$ cmake --list-presets # Get full list of presets.</code></p>
<p>Step 5: Installing</p> <p>Once built, Halide will need to be installed somewhere before using it in a separate project. On any platform, this means running the <code>cmake --install</code> command in one of two ways. For a single-configuration generator (like Ninja), run either:</p> <pre>dev@host:~/Halide\$ cmake --install ./build --prefix /path/to/Halide-install</pre> <ul style="list-style-type: none"> ➤ <code>cmake --install .\build --prefix X:\path\to\Halide-install</code> <p>For a multi-configuration generator (like Visual Studio) run:</p> <pre>dev@host:~/Halide\$ cmake --install ./build --prefix /path/to/Halide-install -- config Release</pre>	

```
cmake --install .\build --prefix X:\path\to\Halide-install --config Release
```

OUTPUT

```
root@ubuntu: ~/cmake-2.8.3
2017-05-03 17:48:25 (39.1 KB/s) - 'cmake-2.8.3.tar.gz' saved [5436543/5436543]

root@ubuntu:~# tar xzf cmake-2.8.3.tar.gz
root@ubuntu:~# cd cmake-2.8.3
root@ubuntu:~/cmake-2.8.3# ./configure --help

Usage: /root/cmake-2.8.3/bootstrap [options]
Options: [defaults in brackets after descriptions]
Configuration:
  --help                print this message
  --version             only print version information
  --verbose             display more information
  --parallel=n         bootstrap cmake in parallel, where n is
                      number of nodes [1]
  --init=FILE           use FILE for cmake initialization
  --system-libs         use system-installed third-party libraries
                      (for use only by package maintainers)
  --no-system-libs     use cmake-provided third-party libraries
                      (default)
  --qt-gui             build the Qt-based GUI (requires Qt >= 4.2)
  --no-qt-gui          do not build the Qt-based GUI (default)
  --qt-qmake=<qmake>   use <qmake> as the qmake executable to find Qt

Directory and file names:
  --prefix=PREFIX      install files in tree rooted at PREFIX
                      [${cmake_default_prefix}]
  --datadir=DIR         install data files in PREFIX/DIR
                      [/share/CMake]
  --docdir=DIR         install documentation files in PREFIX/DIR
                      [/doc/CMake]
  --mandir=DIR         install man pages files in PREFIX/DIR/manN
                      [/man]

root@ubuntu:~/cmake-2.8.3# ./configure --prefix=/opt/cmake
-----
CMake 2.8.3, Copyright 2000-2009 Kitware, Inc.
```

6. STUDY OF THE TERMINAL-BASED TEXT EDITOR SUCH AS VIM OR EMACS.

Create new file

Perform below steps to create and save new file:


1. Execute following command to open Vim \$ vim	2. Type following command in Vim :edit message.txt It will reload file if, it exist already
3. Switch to insert mode i	4. Enter some text
5. Switch back to command mode Esc	6. Save changes to file :w Now message.txt file will be created.
7. Quit Vim :q	

Open file in read-only mode

Use `-R` option to open file in read-only mode

```
$ vim -R message.txt
```

In below image bottom left corner shows read-only mode:

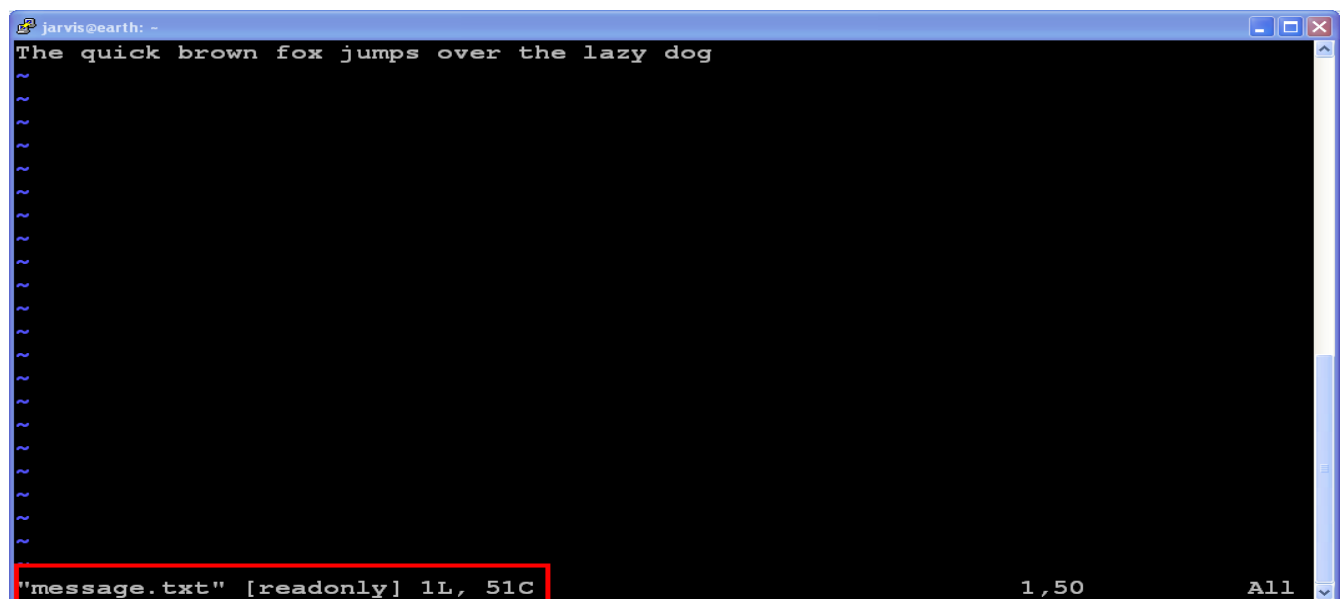

Alternatively, you can use `view` command to achieve same result.

```
$ view message.txt
```

Edit existing file

Perform below steps to edit existing file:

1. Open file using Vim \$ vim message.txt	2. Switch to insert mode and enter some text there. i
3. Quit editor without saving changes :q! OR Save changes and quit editor using following command: :wq	

7. . BASIC LINUX COMMANDS, FAMILIARITY WITH FOLLOWING COMMANDS/OPERATIONS EXPECTED.

Here discussing some basic Linux commands.

1) man

The man stands for manual. The man command displays the user manual of any command that we run on the terminal. It displays the command details such as NAME, SYNOPSIS, OPTIONS, DESCRIPTION, EXIT STATUS, RETURN VALUES, FILE, ERRORS, VERSIONS, AUTHORS, EXAMPLES.

Eg: man ls

Display the manual page for the item (program) ls.

2) ls, echo, read

ls

The ls command is used to view the contents of a directory. By default, this command will display the contents of your current working directory. If you want to see the content of other directories, type ls and then the directory's path. For example, enter ls /home/username/Documents to view the content of Documents.

echo

This command is used to move some data into a file. Eg: If you want to add the text, "Hello, my name is John" into a file called name.txt, you would type echo Hello, my name is John >> name.txt

read

read command in Linux system is used to read from a file descriptor. Basically, this command read up the total number of bytes from the specified file descriptor into the buffer. If the number or count is zero then this command may detect the errors. But on success, it returns the number of bytes read. Zero indicates the end of the file. If some errors found then it returns -1. Syntax: read

3) more, less, cat more

As 'cat' command displays the file content. Same way 'more' command also displays the content of a file. Only difference is that, in case of larger files, 'cat' command output will scroll off your screen while 'more' command displays output one screenful at a time. Syntax: more <filename>

less

The 'less' command is same as 'more' command but include some more features. It automatically adjusts with the width and height of the terminal window, while 'more' command cuts the content as the width of the terminal window get shorter. Syntax: less <filename>

cat

cat (short for concatenate) is one of the most frequently used commands in Linux. It is used to list the contents of a file on the standard output stdout. To run this command, type cat followed by the file's name and its extension. Eg: cat file.txt. cat -> filename creates a new file.

4) **cd, mkdir, pwd, find**

cd

To navigate through the Linux files and directories, use the cd. It requires either the full path or the name of the directory, depending on the current working directory that you're in.

cd .. (With two dots) to move one directory up

mkdir

Use mkdir command to make a new directory Eg: If you type mkdir Music it will create a directory called Music.

pwd

Use the pwd command to find out the path of the current working directory (folder) you're in. The command will return an absolute (full) path, which is basically a path of all the directories that starts with a forward slash (/). An example of an absolute path is /home/username.

find

Find searches for files and directories. The difference is, you use the find command to locate files within a given directory. Eg: find /home/ -name notes.txt command will search for a file called notes.txt within the home directory and its subdirectories.

5) **mv, cp, rm, tar**

mv

The primary use of the mv command is to move files, although it can also be used to rename files. The arguments in mv are similar to the cp command. You need to type mv, the file's name, and the destination's directory. Eg: mv file.txt /home/username/Documents.

To rename files, the Linux is mv oldname.ext newname.ext

cp

Use the cp command to copy files from the current directory to a different directory. For instance, the command cp scenery.jpg /home/username/Pictures would create a copy of scenery.jpg (from your current directory) into the Pictures directory.

cp -i : will ask for user's consent in case of a potential file overwrite.

rm

The rm command is used to delete directories and the contents within them. Eg: rm Music, will delete the directory named Music.

tar

The tar command is the most used command to archive multiple files into a tarball a common Linux file format that is similar to zip format, with compression being optional.

6) **wc, cut, paste**

wc

wc command helps in counting the lines, words, and characters in a file. It displays the number of lines, number of characters, and the number of words in a file. Mostly, it is used with pipes for counting operation.

Syntax: wc [OPTION]... [FILE]...
wc [OPTION]... --files0-from=F

cut

cut command is useful for selecting a specific column of a file. It is used to cut a specific sections by byte position, character, and field and writes them to standard output. It cuts a line and extracts the text data. It is necessary to pass an argument with it; otherwise, it will throw an error message. Syntax: cut OPTION... [FILE]..

paste

Paste command is one of the useful commands in Unix or Linux operating system. It is used to join files horizontally (parallel merging) by outputting lines consisting of lines from each file specified, separated by **tab** as delimiter, to the standard output. When no file is specified, or put dash (“-”) instead of file name, paste reads from standard input and gives output as it is until an interrupt command [**Ctrl-c**] is given. Syntax: paste [OPTION]... [FILES]...

7) head, tail, grep, expr

head

The head command is used to view the first lines of any text file. By default, it will show the first ten lines, but you can change this number to your liking. For example, if you only want to show the first five lines, type head -n 5 filename.ext.

tail

This one has a similar function to the head command, but instead of showing the first lines, the tail command will display the last ten lines of a text file. For example, tail -n filename.ext.

grep

Another basic Linux command that is undoubtedly helpful for everyday use is grep. It lets you search through all the text in a given file. Eg: grep blue notepad.txt will search for the word blue in the notepad file. Lines that contain the searched word will be displayed fully. Usually output of a previous command is piped into the grep command.

For example: ls -l | grep “kernel”

expr

The expr command is used to evaluate a given expression and display its standard output. Each separated expression is considered as an argument. These expressions could be integer and string expressions, including regular expressions. If expressions are not passed properly, it will prevent the execution of the command. Syntax: expr expression

8) chmod, chown

chmod

Linux chmod command is used to change the access permissions of files and directories. It stands for change mode. It cannot change the permission of symbolic links. Even, it ignores the symbolic links come across recursive directory traversal. Syntax: chmod <options> <permissions> <file name>

chown

Linux chown command is used to change a file's ownership, directory, or symbolic link for a user or group. The chown stands for change owner. In Linux, each file is associated with a corresponding owner or group. The Linux system may have multiple users. Every user has a unique name and user ID. If only a user is available in the system, the user will be the owner of each file. Syntax: chown [OPTION]... [OWNER] [: [GROUP]] FILE...

9) Redirections & Piping

Redirection is a technique that essentially allows commands to either read data from a text file, or save the output to text files. In other words, it lets you redirect a command's standard output to a file rather than displaying it on the screen.

Eg: file1

```
$ cat file1
apple
102
cakes
drinks
bananas
500
301
```

After sorting: file2

```
$ sort file2
102
301
500
apple
bananas
cakes
drinks
```

Piping is a technique that lets you use Linux commands as building blocks to build your own custom commands.

Eg:

```
$ ls -l
total 0
-rw-r--r--. 1 root root 0 Oct 20 19:22 file1
-rw-r--r--. 1 root root 0 Oct 20 19:22 file2
-rw-r--r--. 1 root root 0 Oct 20 19:22 file3
drwxr-xr-x. 2 root root 6 Oct 20 19:22 folder1
drwxr-xr-x. 2 root root 6 Oct 20 19:22 folder2
drwxr-xr-x. 2 root root 6 Oct 20 19:22 folder3
```

After piping:

```
$ ls -l | grep "^-"
-rw-r--r--. 1 root root 0 Oct 20 19:22 file1
-rw-r--r--. 1 root root 0 Oct 20 19:22 file2
-rw-r--r--. 1 root root 0 Oct 20 19:22 file3
```

10) useradd, usermod, userdel, passwd

useradd

useradd is used to create a new user, while passwd is adding a password to that user's account. To add a new person named John type, useradd John and then to add his password type, passwd 12345678

usermod

usermod command or modify user is a command in Linux that is used to change the properties of a user

in Linux through the command line. After creating a user, we have to sometimes change their attributes like password or login directory etc. so in order to do that we use the Usermod command.

Eg: `sudo usermod -c "This is test user" test_user`

userdel

userdel is to remove a user is very similar to adding a new user. To delete the users account type, Syntax: `userdel UserName`

passwd

passwd command in Linux is used to change the user account passwords. The root user reserves the privilege to change the password for any user on the system, while a normal user can only change the account password for his or her own account. Syntax: `passwd [options] [username]` Eg: Command: `passwd`

11) df, top, ps

df

Use df command to get a report on the system's disk space usage, shown in percentage and KBs. If you want to see the report in megabytes, type `df -m`.

top

As a terminal equivalent to Task Manager in Windows, the top command will display a list of running processes and how much CPU each process uses. It's very useful to monitor system resource usage, especially knowing which process needs to be terminated because it consumes too many resources.

ps

Ps command will display all current processes along with their process ids (PID). Read manuals for various options.

12) ssh, scp, ssh-keygen, ssh-copy-id

ssh

In Linux, ssh is a protocol, which stands for Secure Shell or Secure Socket Shell. The secure shell is useful for security while connecting to a remote server. The

ssh command uses a ssh protocol, which is a secure protocol, as the data transfer between the client and the host takes place in encrypted form. It transfers the input through the client to the host and returns the output transferred by the host. It executes through TCP/IP port 22. The encrypted connection is also used to run the commands on a Linux server, port forwarding, tunnelling, and more.

Syntax: `ssh user_name@host(IP/Domain_name)`

scp

scp (secure copy) command in Linux system is used to copy file(s) between servers in a secure way. The SCP command or secure copy allows secure transferring of files in between the local host and the remote host or between two remote hosts. It uses the same authentication and security as it is used in the Secure Shell (SSH) protocol. SCP is known for its simplicity, security and pre- installed availability.

Syntax: scp [-346BCpqrTv] [-c cipher] [-F ssh_config] [-i identity_file] [-l limit] [-o ssh_option] [-P port] [-S program] [[user@]host1:]file1 ... [[user@]host2:]file2

ssh-keygen

SSH or Secure Shell is a useful encrypted protocol to secure connections between the client and the server for different administrative tasks. It supports various types of authentication systems. Public key-based authentication and password-based authentication are mostly used. Key-based authentication is more secure than password-based authentication. Authentication key pairs for the SSH are generated by the ssh-keygen tool that can be used for different purposes such as authenticating the host, automating login, etc.

```
fahmida@fahmida-VirtualBox:~$ ssh-keygen
Generating public/private rsa key pair.
Enter file in which to save the key (/home/fahmida/.ssh/id_rsa):
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /home/fahmida/.ssh/id_rsa
Your public key has been saved in /home/fahmida/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:t6fQ9kVRmyF0en/TWldkVsNHewjLrudX41H4dXkPrWI fahmida@fahmida-VirtualBox
The key's randomart image is:
+---[RSA 3072]-----+
|      .o.*X|
|      *BB|
|      +.B=|
|      *oX|
|S . . .=%|
|      o .E.o=B|
|      . +..o+ +|
|      o +....|
|      . .o..|
+-----[SHA256]-----+
fahmida@fahmida-VirtualBox:~$
```

ssh-copy-id

The ssh-copy-id command is a simple tool that allows you to install an SSH key on a remote server's authorized keys. This command facilitates SSH key login, which removes the need for a password for each login, thus ensuring a password-less, automatic login process. The ssh-copy-id command is part of OpenSSH, a tool for performing remote system administrations using encrypted SSH connections.

Eg: sudo apt-get update && sudo apt-get install openssh-client

OUTPUT

\$ssh-copy-id

Usage: /usr/bin/ssh-copy-id [-h|-?|-f|-n] [-i [identity_file]] [-p port] [[-o <ssh -o options>] ...]
[user@]hostname -f: force mode -- copy keys without trying to check if they are already installed -n: dry
run -- no keys are actually copied -h|-

?: print this help

FILE SYSTEM HIERARCHY IN A COMMON LINUX DISTRIBUTION, FILE AND DEVICE PERMISSIONS, STUDY OF SYSTEM CONFIGURATION FILES IN /ETC, FAMILIARIZING LOG FILES FOR SYSTEM EVENTS, USER ACTIVITY, NETWORK EVENTS.

File System Hierarchy

The Linux File Hierarchy Structure or the Filesystem Hierarchy Standard (FHS) defines the directory structure and directory contents in Unix-like operating systems. It is maintained by the Linux Foundation.

- In the FHS, all files and directories appear under the root directory /even if they are stored on different physical or virtual devices.
- Some of these directories only exist on a particular system if certain subsystems, such as the X Window System, are installed.
- Most of these directories exist in all UNIX operating systems and are generally used in much the same way; however, the descriptions here are those used specifically for the FHS and are not considered authoritative for platforms other than Linux.

/ (Root): Primary hierarchy root and root directory of the entire file system hierarchy.

- Every single file and directory start from the root directory
- The only root user has the right to write under this directory
- /root is the root user's home directory, which is not the same as /

/bin: Essential command binaries that need to be available in single-user mode; for all users, e.g., cat, ls, cp.

- Contains binary executables
- Common Linux commands you need to use in single-user modes are located under this directory.
- Commands used by all the users of the system are located here e.g., ps, ls, ping, grep, cp

/boot : Boot loader files, e.g., kernels, initrd.

- Kernel initrd, vmlinuz, grub files are located under /boot
- Example: initrd.img-2.6.32-24-generic, vmlinuz-2.6.32-24-generic

/dev : Essential device files, e.g., /dev/null.

- These include terminal devices, usb, or any device attached to the system.
- Example: /dev/tty1, /dev/usbmon0

/etc : Host-specific system-wide configuration files.

- Contains configuration files required by all programs.
- This also contains startup and shutdown shell scripts used to start/stop individual programs.
- Example: /etc/resolv.conf, /etc/logrotate.conf.

/home : Users' home directories, containing saved files, personal settings, etc.

- Home directories for all users to store their personal files.
- example: /home/kishlay, /home/kv

/lib : Libraries essential for the binaries in /bin/ and /sbin/.

- Library filenames are either ld* or lib*.so.*
- Example: ld-2.11.1.so, libncurses.so.5.7

/media : Mount points for removable media such as CD-ROMs (appeared in FHS-2.3).

- Temporary mount directory for removable devices.
- Examples, /media/cdrom for CD-ROM; /media/floppy for floppy drives; /media/cdrecorder for CD writer

/mnt : Temporarily mounted filesystems.

- Temporary mount directory where sysadmins can mount filesystems.

/opt : Optional application software packages.

- Contains add-on applications from individual vendors.
- Add-on applications should be installed under either /opt/ or /opt/ sub-directory.

/sbin : Essential system binaries, e.g., fsck, init, route.

- Just like /bin, /sbin also contains binary executables.
- The Linux commands located under this directory are used typically by system administrator, for system maintenance purpose.
- Example: iptables, reboot, fdisk, ifconfig, swapon

/srv : Site-specific data served by this system, such as data and scripts for web servers, data offered by FTP servers, and repositories for version control systems.

- srv stands for service.
- Contains server specific services related data.
- Example, /srv/cvs contains CVS related data.

/tmp : Temporary files. Often not preserved between system reboots, and may be severely size restricted.

- Directory that contains temporary files created by system and users.
- Files under this directory are deleted when system is rebooted.

/usr : Secondary hierarchy for read-only user data; contains the majority of (multi-)user utilities and applications.

- Contains binaries, libraries, documentation, and source-code for second level programs.
- /usr/bin contains binary files for user programs. If you can't find a user binary under /bin, look under /usr/bin. For example: at, awk, cc, less, scp

/proc : Virtual filesystem providing process and kernel information as files. In Linux, corresponds to a procfs mount. Generally, automatically generated and populated by the system, on the fly.

- Contains information about system process.
- This is a pseudo filesystem contains information about running process. For example: /proc/{pid} directory contains information about the process with that particular pid.
- This is a virtual filesystem with text information about system resources. For example: /proc/uptime

File permissions in Linux - Every file and directory in Linux have the following three permissions for all the three kinds of owners:

Permissions for files

- Read – Can view or copy file contents
- Write – Can modify file content
- Execute – Can run the file (if its executable)

Permissions for directories

- Read – Can list all files and copy the files from directory
- Write – Can add or delete files into directory (needs execute permission as well)
- Execute – Can enter the directory.

Each letter denotes a particular permission:

- r: Read permission
- w: Write permission
- x: Execute permission
- -: No permission set

Device Permissions on Linux - When using ykman on Linux, you may find that the tool is sometimes unable to access your YubiKey for some of the commands. This is often due to USB device permissions, and can be tested by running the same ykman command as root.

The YubiKey is accessed in several different ways, depending on which command is invoked.

Smart Card Access - For smart card-based applications, or when accessing a YubiKey over NFC, the access is done via pcscd, the PC/SC Smart Card Daemon. It's usually enough to have pcscd installed and running for this to work. Smart card access is required for the piv, oath, and openpgp commands, as well as for any command issued over NFC.

Keyboard Access - The Yubico OTP application is accessed via the USB keyboard interface. Permission is typically granted using udev, via a rules file. You can find an example udev rules file which grants access to the keyboard interface [here](#). Keyboard access is required for the otp command.

FIDO Access - The FIDO protocols are accessed via a USB HID interface. As with keyboard access, permission is granted through udev. You can find an example udev rules file which grants access to a large number (not just YubiKeys) of FIDO devices [here](#). FIDO access is required for the fido command.

8. SHELL SCRIPTING: bash syntax, environment variables, variables, control constructs such as if, for and while, aliases and functions, accessing command line arguments passed to shell scripts. Startup scripts, login and logout scripts, familiarity with system and system 5 init scripts is expected.

1) Creating a shell script

Create a new directory bash_scripts where you will run the shell scripting exercises.

```
mkdir bash_scripts
cd bash_scripts
```

Note: It is recommended to create a new script file for every exercise; make them executable; give them names with extension .sh – it is just a convention rather than a must. The first line of a bash script starts with

All non-executable comments in a script are prepended with #,
For example, we list all the files in the current director ls -la ls -l /etc # Comment. Here, we list files in /etc directory.

Script scr1.sh is like a calculator:

```
#!/bin/bash echo "I will work out X*Y"
echo "Enter X"
read X
echo "Enter Y"
read Y
echo "X*Y = $X*$Y = [$X*Y]"
Make the script executable and run
chmod 755 scr1.sh
./scr1.sh
```

2) if and case statements

a. #!/bin/bash

```
X=10
Y=5
if [ "$X" -gt "$Y" ]; then
echo "$X is greater than $Y"
elif [ "$X" -lt "$Y"]; then
echo "$X is less than $Y"
else
echo "$X is equal to $Y"
fi
```

b. #!/bin/bash

```
case $1 in
--test|-t)
echo "you used the --test option"
exit 0 ;;
--help|-h)
echo "Usage:"
echo " myprog.sh
[--test|--help|--version]"
exit 0 ;;
--version|-v)
echo "myprog.sh version 0.0.1"
exit 0 ;;
*)
echo "No such option $1"
echo "Usage:"
echo " myprog.sh
[--test|--help|--version]"
exit 1 ;;
esac
```

echo "You typed \"\$1\" on the command-line"
Note: always watch for correct syntax of case statement.

c. case string

```
in
regex1)
commands1 ;;
regex2)
commands2 ;;
.....
esac
```

Where regex is a regular expression to match the string. To catch all remaining strings, use *) at the end.

3) Looping with while and until statements

a. Script scr2.sh:

```
N=1
while [ "$N" -le "10" ]
do
echo "Number $N"
N=$((N+1))
done
```

b. Script scr3.sh

```
N=1
until [ "$N" -gt "10" ]
do
echo "Number $N"; N=$((N+1))
done
```

Note: common mistakes in shell scripting are usually due to incorrect syntax. For example, there should be no spaces before and after operator “=” .

```
N=1 # correct
N =1 # error
N= 1 # error
N=$((N+1)) # correct
N ==$((N+1)) # error
N= $((N+1)) # error
```

4) Looping with for statement

a. Script scr4.sh

```
for i in red white blue
do
echo "$i is a color"
done
```

b. Script backup-lots.sh

```
for i in 0 1 2 3 4 5 6 7 8 9 ;do
cp $1 $1.BAK-$i
done
Now create a file important_data with some numbers in it and then run
./backup-lots.sh important_data
which will copy the file 10 times with 10 different extensions. As you can see, the variable $1 has a special meaning – it is the first argument on the command-line.
Note: watch for correct syntax: for i in 0 1 2 3 4 5 6 7 8 9 do.....done
The continue statement is useful for terminating the current iteration of the loop.
```

c. #!/bin/bash

```
for i in 0 1 2 3 4 5 6 7 8 9 ; do
```

```

NEW_FILE=$1.BAK-$i
if [ -e $NEW_FILE ] ; then
echo "backup-lots.sh: **warning** $NEW_FILE"
echo " already exists - skipping"
continue
fi
cp $1 $NEW_FILE
done

```

5) Functions

Function definitions provide a way to group statement blocks into one.

a. #!/bin/bash

```

function usage ()
{
echo "Usage:"
echo " myprog.sh [--test|--help|--version]"
}
case $1 in
--test|-t)
echo "you used the --test option"
exit 0 ;;
--help|-h)
Usage ;;
--version|-v)
echo "myprog.sh version 0.0.2"
exit 0 ;;
-*)
echo "Error: no such option $1" usage
exit 1 ;;
esac
echo "You typed \"$1\" on the command-line"
Note: watch for syntax:

```

b.

```

function usage ()
{
command1 command2; command3
.....
}

```

The word function in a function is optional. That is, the following will work as well:

```

usage ()
{
command1 command2; command3
.....
}

```

6) Using quotes

Single forward quotes ' protect the enclosed text from the shell.

1) echo 'error \$?' echo 'shell name \$0' Double quotes " allow all shell interpretations to take place inside them.	2) echo "error \$?" #gives the error code of the last command echo "shell name \$0" #gives the current shell name Command substitution	3) X=`expr 100 + 50 '*' 3` echo \$X Assigning command output to a variable:
4) FSIZE=`wc -l /etc/profile` same as	5) FSIZE=\$(wc -l /etc/profile)	

7) Introduction to awk

The basic function of awk is to search files for lines or other text units containing one or more patterns. When a line matches one of the patterns, special actions are performed on that line. Display user names from /etc/passwd (field 1):

<p>1)</p> <pre>awk -F: '{ print \$1 }' /etc/passwd</pre> <p>Where F is the field separator in the passwd file. The fields are separated by : Default field separator is a blank space. Awk scans the input file and splits each input line into fields.</p>	<p>2)</p> <pre>cat /etc/passwd awk -F: '{ print \$1 }'</pre> <p>Display user names home directories and login shell (fields 1 and 7), and store them in a separate file, users.txt</p>
<p>3)</p> <pre>awk -F: '{ print \$1, \$6, \$7 }' /etc/passwd > users.txt or cat /etc/passwd awk -F: '{ print \$1, \$6, \$7 }' > users.txt `</pre> <p>Default field separator is empty space. To print users (field 1) from just created file users.txt: <code>awk '{ print \$1 }' users.txt</code></p>	

8) Introduction to sed

String editor, sed, is used for editing lines in a file or a stream; output is going to the standard output and can be re-directed to a new file.

Syntax: sed [options] 'command1' [files]

sed [options] -e 'command1' [-e command2 ...] [files] sed [options] -f script [files]

Delete lines from 3 through 5 in file list.txt: sed '3,5d' list.txt

Delete lines that contain “O” at the beginning of the line: sed '/^O/d' list.txt

Translate capital C,R,O into small c,r,o: sed 'y/CRO/cro/' list.txt

Delete empty lines: sed '/^\$/d' list.txt

Replace string Oop with Wee for the first occurrence on a line: sed 's/Oop/Wee/' list.txt

Remove ss string (replace with empty entry) for the first occurrence on a line: sed 's/ss//' list.txt

Remove ss string for all occurrences on a line: sed 's/ss//g' list.txt

Substitute a single space for any number of spaces wherever they occur on the line: sed 's/ */ /g' list.txt

Substitute underscore for any number of spaces wherever they occur on the line: sed 's/ */_/g' list.txt

PROGRAM NUMBER: 01

DATE: 22/04/2022

AIM: Write a Shell program to add two numbers.

PROGRAM

```
echo "Enter two values space separated"
```

```
read a b
```

```
add=$(( $a + $b ))
```

```
echo "Addition of $a and $b is $add"
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 1.sh
```

```
Enter two values space separated
```

```
5 10
```

```
Addition of 5 and 10 is 15
```

AIM: Write a Shell program to find the factorial of a number.

PROGRAM

```
echo "Enter the number"

read n

fact=1

counter=0

while(($n!= $counter))
do

        counter=$((counter+1))

        fact=$((fact*counter))

done

echo "Factorial is $fact"
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 2.sh
Enter the number
5
Factorial is 120
```

AIM: Write a Shell program to find the largest among three numbers.

PROGRAM

```
echo "Enter the 3 numbers"

read a b c

if (($a<$b))

    then

        echo "The largest number is $b"

elif (($a<$c))

    then

        echo "The largest number is $c"

else

        echo "The largest number is $a"

fi
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ chmod 755 3.sh
richuantony38@Richu_Antony:~/Network_lab Record$ ./3.sh
Enter the 3 numbers
-10 123 52
The largest number is 123
```

AIM: Write a Shell program to develop calculator.

PROGRAM

```
clear
sum=0
i="y"
while [ $i="y" ]
do
    echo -n "Enter the 1st number: "
    read n1
    echo -n "Enter the 2nd number: "
    read n2

    echo "*****"
    echo "1.Addition"
    echo "2.Substraction"
    echo "3.Multiplication"
    echo "4.Division"
    echo "*****"
    echo -n "Enter your choice: "
    read ch

    case $ch in
        1)sum=$((n1+n2))
            echo "Sum = $sum";;
        2)sum=$((n1-n2))
            echo "Difference = $sum";;
        3)sum=$((n1*n2))
            echo "Product = $sum";;
        4)sum=$((n1/n2))
            echo "Answer = $sum";;
        *)echo "Invalid Input";;
    esac

    echo "Do you want to continue[y/n] "
    echo
    read i
    if [ $i != "y" ]
    then
        exit
    fi
done
```

OUTPUT

Enter the 1st number: 1

Enter the 2nd number: 2

1.Addition

2.Substraction

3.Multiplication

4.Division

Enter your choice: 1

Sum = 3

Do you want to continue[y/n]

y

Enter the 1st number: 5

Enter the 2nd number: 10

1.Addition

2.Substraction

3.Multiplication

4.Division

Enter your choice: 2

Difference = -5

Do you want to continue[y/n]

y

Enter the 1st number: 6

Enter the 2nd number: 6

1.Addition

2.Substraction

3.Multiplication

4.Division

Enter your choice: 3

Product = 36

Do you want to continue[y/n]

y

Enter the 1st number: 12

Enter the 2nd number: 2

1.Addition

2.Substraction

3.Multiplication

4.Division

Enter your choice: 4

Answer = 6

Do you want to continue[y/n]

n

AIM: Write a Shell program to check whether the given number is odd or even.

PROGRAM

```
echo "Enter the value: "  
  
read n  
  
if (( $n%2 != 0 ))  
then  
    echo "$n is odd "  
else  
    echo "$n is even "  
fi
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 5.sh  
Enter the value:  
12  
12 is even
```

AIM: Write a Shell program to count the number of files in a directory.

PROGRAM

```
echo "No. of files is $(find "$@" -type f | wc -l)"
```

```
echo "No. of directories is $(find "$@" -type d | wc -l)"
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 6.sh
```

```
No. of files is 16
```

```
No. of directories is 2
```


AIM: Write a Shell program to reverse a string and check whether the string is palindrome or not.

PROGRAM

```
echo -n "Enter a string: "

read input

reverse=""

len=${#input}

for (( i=$len-1; i>=0; i-- ))
do
    reverse="$reverse${input:$i:1}"
done

if [ $input == $reverse ]
then
    echo "$input is palindrome"
else
    echo "$input is not palindrome"
fi

echo "Reverse of $input : $reverse"
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 7.sh
Enter a string: malayalam
malayalam is palindrome
Reverse of malayalam : malayalam
```

AIM: Write a Shell program to show various system configurations such as currently logged users, operating system type, current shell, home directory, no. of logged in users.

PROGRAM

```
echo -n "Logged in users: "
```

```
who
```

```
echo
```

```
echo -n "Loggin Names: "
```

```
users
```

```
echo
```

```
echo -n "Current Shell: "
```

```
echo $SHELL
```

```
echo
```

```
echo -n "Home Directory: "
```

```
echo $HOME
```

```
echo
```

```
echo-n "Operating System type: "
```

```
uname -o
```

```
echo $OSTYPE
```

```
echo
```

```
echo "Path Settings: "
```

```
echo $PATH
```

```
echo
```

```
echo -n "Current working directory: "
```

```
pwd
```

```
echo
```

```
echo -n "No.of logged in users: "
```

```
users|wc -w
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 8.sh
```

```
Logged in users: richuantony38 :0      2022-07-10 04:05 (:0)
```

```
Login Names: richuantony38
```

```
Current Shell: /bin/bash
```

```
Home Directory: home/richuantony38
```

```
Operating System type:
```

```
GNU/Linux
```

```
linux-gnu
```

```
Path Settings:
```

```
/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin:/usr/games:/usr/local/games:/snap/bin
```

```
Current working directory: /home/richuantony38/Network_lab Record
```

```
No.of logged in users: 1
```

AIM: Write a Shell program to create a directory.

PROGRAM

```
echo -n "Enter directory name to be added: "  
  
read d  
  
mkdir $d  
  
echo "After inserting new directory into current working directory "  
  
ls
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 9.sh  
Enter directory name to be added: New  
After inserting new directory into current working directory  
9.sh New
```

AIM: Write a Shell program to perform file operations such as read a file, delete a file, append to file, check whether the file exists or not.

PROGRAM

```
echo "Read the contents of a file"

echo "Enter file name to be read with extension: "

read rfile

cat $rfile

echo $\n'


echo "Append a file"

echo "Enter file name to append content with extension: "

read sfile

echo "Enter file name to be append with extension: "

read rfile

echo "Before append"

cat $rfile

cat $sfile >> $rfile

echo

echo "After append"

cat $rfile

echo $\n'


echo "Search for a file"

echo "Enter the name of the file with extension: "

read file_name

if [ -e $file_name ]

then
```

```

    echo "$file_name exist"

else

    echo "$file_name not exist"

fi

echo $\n'


echo "Delete a file"

echo "Enter file name to be deleted with extension: "

read dfile

echo "Before delete"

ls

rm $dfile

echo "After delete"

ls

```

OUTPUT

```

richuantony38@Richu_Antony:~/Network_lab Record$ bash 10.sh
Read the contents of a file
Enter file name to be read with extension: com.txt
Hello, Welcome Programmer;

```

```

Append a file
Enter file name to append content with extension: linux.txt
Enter file name to be append with extension: com.txt
***** Before *****
Hello, Welcome Programmer;
***** After append *****
Hello Welcome Programmer; Linux is the kernal of Ubuntu 22.04

```

```

Search for a file
Enter the name of the file with extension: test.txt
test.txt exist

```

```

Delete a file
Enter file name to be deleted with extension: test.txt
***** Before delete *****
10.sh  linux.txt  hello.txt  test.txt  com.txt  New
***** After delete *****
10.sh  linux.txt  hello.txt  com.txt  New

```

AIM: Write a Shell program to find the substring of a string.

PROGRAM

```
LIST="some string with a substring you want to match"
```

```
SOURCE="substring"
```

```
if echo "$LIST" | grep -q "$SOURCE"; then
```

```
    echo "matched";
```

```
else
```

```
    echo "no match";
```

```
fi
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 11.sh  
matched
```

AIM: Write a Shell program to find the area of rectangle using functions.

PROGRAM

```
rectarea()
{
    a=`expr $1 \* $2`
    echo $a
}

echo -n "Enter length: "
read l
echo -n "Enter breadth: "
read b
echo "The area of rectangle having length = $l and breadth = $b is : "
rectarea $l $b
```

OUTPUT

```
richuantony38@Richu_Antony:~/Network_lab Record$ bash 12.sh
Enter length: 10
Enter breadth: 20
The area of rectangle having length = 10 and breadth = 20 is :
200
```


AIM: Write a Shell program to create a file in vi editor and replace one string with another, translate the line of text with capital letter.

PROGRAM

```
echo "Enter the file name with extension: "
```

```
read file
```

```
echo "Enter old string to be replaced: "
```

```
read oldtxt
```

```
echo "Enter new string: "
```

```
read newtxt
```

```
echo "File before replace"
```

```
cat $file
```

```
sed -i "s/$oldtxt/$newtxt/" $file
```

```
echo "File after replace"
```

```
cat $file
```

```
echo "Before conversion of second line into upper case: "
```

```
cat $file
```

```
res=`awk 'NR==2 {print toupper($0);exit}' $file`
```

```
res1=`awk 'NR==2' $file`
```

```
sed -i "s/$res1/$res/" $file
```

```
echo "After conversion of second line into upper case: "
```

```
cat $file
```

OUTPUT

```
deepak@deepak-System-Product-Name:~/Desktop/Record/13$ bash 13.sh
```

Enter the file name with extension:

test.txt

Enter old string to be replaced:

shell

Enter new string:

linux shell

File before replace

A shell is a command line interpreter and typical operations performed by shell scripts include file manipulation, program execution, and printing text.

File after replace


A linux shell is a command line interpreter and typical operations performed by shell scripts include file manipulation, program execution, and printing text.

Before conversion of second line into upper case:


A linux shell is a command line interpreter and typical operations performed by shell scripts include file manipulation, program execution, and printing text.


After conversion of second line into upper case:

A linux shell is a command line interpreter and typical operations performed by shell scripts INCLUDE FILE MANIPULATION, PROGRAM EXECUTION, AND PRINTING TEXT.



The screenshot shows a terminal window with a dark background. The title bar at the top reads "deepak@deepak-System-Product-Name: ~/Desktop/Record/14". The terminal prompt is "deepak@deepak-System-Product-Name:~/Desktop/Record/14\$". The command "vi test.txt" has been entered, and the cursor is at the end of the line. The terminal window has standard Linux window controls (minimize, maximize, close) on the right side of the title bar.

A screenshot of a terminal window. The title bar at the top shows the user 'deepak' and the system name 'deepak-System-Product-Name: ~/Desktop/Record/14'. On the right side of the title bar are standard window control buttons: a magnifying glass for search, a hamburger menu, a minus sign for zoom out, a square for zoom in, and a red circle with a white 'X' for close. The terminal area has a dark purple background. On the left side, there is a vertical column of approximately 20 tilde (~) characters. At the bottom left, there is a prompt character ':t' followed by a white cursor box.

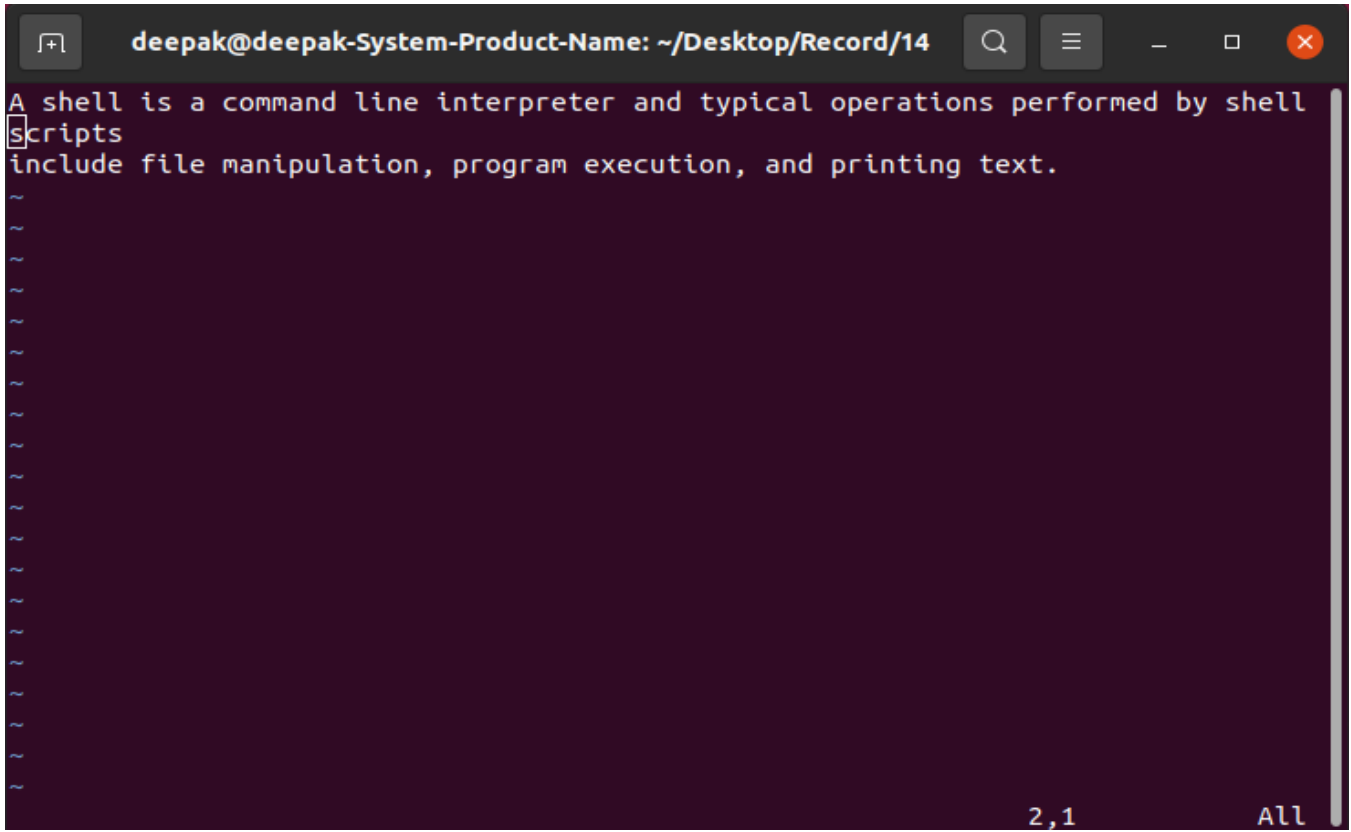

9. Introduction to command line tools for networking IPv4 networking, network commands: ping route traceroute, nslookup, ip. Setting up static and dynamic IP addresses. Concept of Subnets, CIDR address schemes, Subnet masks, iptables, setting up a firewall for LAN, Application layer (L7) proxies.

Set up repository

1. Ping IP address

Eg: ping 8.8.8.8 2.

2. nslookup

nslookup facebook.com

or

nslookup 157.240.23.35

3. To install traceroute

sudo apt install traceroute

4. To find how many hops


traceroute 172.16.13.163

or

traceroute 8.8.8 -m 30

5. To identify ip version

ip -v

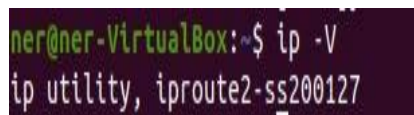

```
ner@ner-VirtualBox:~$ ip -V
ip utility, iproute2-ss200127
```

6. To get ip address

ip addr


IPv4 networking for Setting up static and dynamic IP addresses.

❖ For setting up ip address as static:

Step 1: Update the terminal sudo apt-get update

Step 2: To show ip address ip address

Step 3: To add new ip address Go to settings-> network->add ip address manually->save Open terminal and type, ifconfig

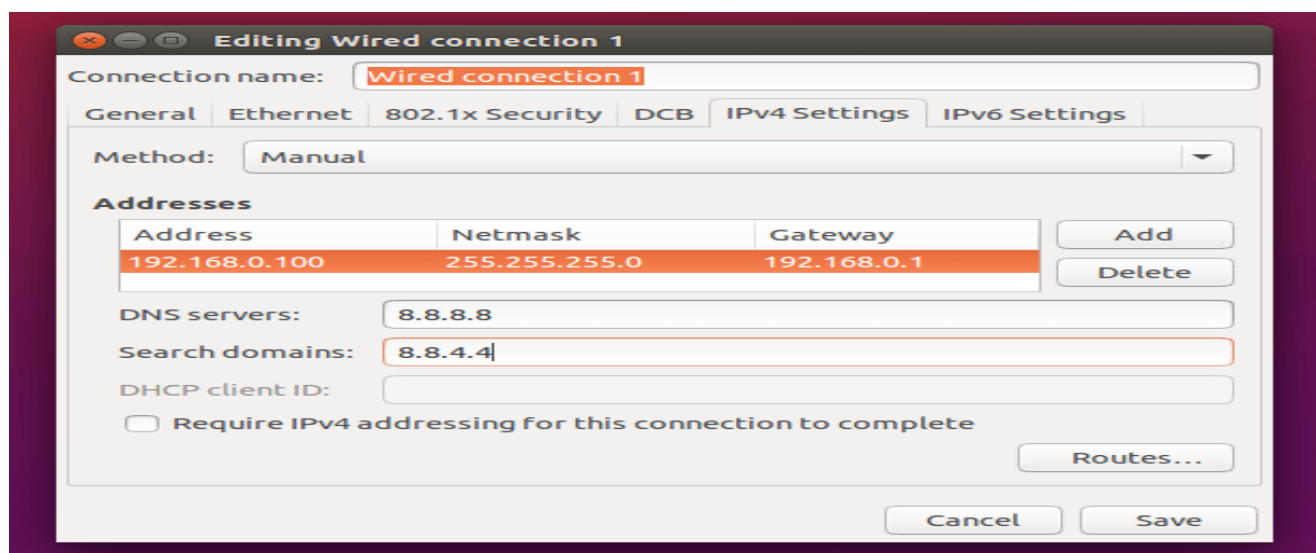

Step 4: To see new ip address, refresh network connection and again give command:

ip address

For setting up ip address as dynamic:

Step 1: To show device name nmcli connection add con -name “dyn”

Step 2: To show ip address ip address

Step 3: To connect nmcli connection add con-name “dyn” ifname emp4s0 autoconnect yes type ethernet

Step 4: To show the connection nmcli connection show

Step 5: To down the connection nmcli connection down docker 0

Step 6: To establish the connection nmcli connection up dyn

OUTPUT

```
net2_admin@net2: /etc/netplan
File Edit View Search Terminal Help
GNU nano 2.9.3 01-network-manager-all.yaml Modified
# Let NetworkManager manage all devices on this system
network:
  version: 2
  renderer: NetworkManager
  ethernet:
    ens32:
      dhcp4: no
      dhcp6: no
      addresses: [192.168.1.102/24]
      gateway4: 192.168.1.1
      nameservers:
        adresses: [8.8.8.8, 8.8.4.4]
```

10. ANALYSING NETWORK PACKET STREAM USING tcpdump and wireshark. PERFORM BASIC NETWORK SERVICE TESTS USING NC.

Installing tcpdump and analysing network packet stream

Procedure:

Step 1: Update the system

sudo apt-get update

Step 3: Check the version

tcpdump --version

Step 2: Install tcpdump on the system

sudo apt-get install tcpdump

To capture packets from a source ip.

tcpdump -n src host ip-address

OUTPUT

```
ner@ner-VirtualBox:~$ sudo tcpdump -v
tcpdump: listening on enp0s3, link-type EN10MB (Ethernet), capture size 262144 bytes
09:30:20.938746 IP (tos 0x0, ttl 64, id 17814, offset 0, flags [DF], proto UDP (17), length 75)
  ner-VirtualBox.domain.name.56383 > RTK_GW.domain.name.domain: 50943+ A? connectivity-check.ubuntu.com. (47)
09:30:20.946971 IP (tos 0x0, ttl 64, id 0, offset 0, flags [DF], proto UDP (17), length 171)
  RTK_GW.domain.name.domain > ner-VirtualBox.domain.name.56383: 50943 2/3/0 connectivity-check.ubuntu.com. A 35.232.111.17, connectivity-check.ubuntu.com. A 35.224.170.84 (143)
09:30:20.948698 IP (tos 0x0, ttl 64, id 43917, offset 0, flags [DF], proto TCP (6), length 60)
  ner-VirtualBox.domain.name.37590 > 84.170.224.35.bc.googleusercontent.com.http: Flags [S], cksum 0xf411 (incorrect -> 0xdb0e), seq 2387821799, win 64240, options [mss 1460,sackOK,TS val 3821024155 ec
r 0,nop,wscale 7], length 0
09:30:20.976316 IP (tos 0x0, ttl 64, id 17815, offset 0, flags [DF], proto UDP (17), length 72)
  ner-VirtualBox.domain.name.44641 > RTK_GW.domain.name.domain: 33465+ PTR? 1.101.168.192.in-addr.arpa. (44)
09:30:20.978261 IP (tos 0x0, ttl 64, id 0, offset 0, flags [DF], proto UDP (17), length 104)
  RTK_GW.domain.name.domain > ner-VirtualBox.domain.name.44641: 33465* 1/0/0 1.101.168.192.in-addr.arpa. PTR RTK_GW.domain.name. (76)
09:30:20.979636 IP (tos 0x0, ttl 64, id 17816, offset 0, flags [DF], proto UDP (17), length 72)
  ner-VirtualBox.domain.name.37289 > RTK_GW.domain.name.domain: 16101+ PTR? 6.101.168.192.in-addr.arpa. (44)
09:30:20.981791 IP (tos 0x0, ttl 64, id 0, offset 0, flags [DF], proto UDP (17), length 112)
  RTK_GW.domain.name.domain > ner-VirtualBox.domain.name.37289: 16101* 1/0/0 6.101.168.192.in-addr.arpa. PTR ner-VirtualBox.domain.name. (84)
09:30:20.983548 IP (tos 0x0, ttl 64, id 17817, offset 0, flags [DF], proto UDP (17), length 72)
  ner-VirtualBox.domain.name.36180 > RTK_GW.domain.name.domain: 8824+ PTR? 84.170.224.35.in-addr.arpa. (44)
09:30:21.016407 IP (tos 0x0, ttl 64, id 0, offset 0, flags [DF], proto UDP (17), length 124)
  RTK_GW.domain.name.domain > ner-VirtualBox.domain.name.36180: 8824 1/0/0 84.170.224.35.in-addr.arpa. PTR 84.170.224.35.bc.googleusercontent.com. (96)
09:30:21.951780 IP (tos 0x0, ttl 64, id 43918, offset 0, flags [DF], proto TCP (6), length 60)
  ner-VirtualBox.domain.name.37590 > 84.170.224.35.bc.googleusercontent.com.http: Flags [S], cksum 0xf411 (incorrect -> 0xd783), seq 2387821799, win 64240, options [mss 1460,sackOK,TS val 3821025158 ec
r 0,nop,wscale 7], length 0
09:30:22.241307 IP (tos 0x0, ttl 60, id 0, offset 0, flags [DF], proto TCP (6), length 60)
  84.170.224.35.bc.googleusercontent.com.http > ner-VirtualBox.domain.name.37590: Flags [S.], cksum 0x1d0d (correct), seq 2347169248, ack 2387821800, win 64768, options [mss 1420,sackOK,TS val 33017328
41 ecr 3821025158,nop,wscale 7], length 0
09:30:22.241416 IP (tos 0x0, ttl 64, id 43919, offset 0, flags [DF], proto TCP (6), length 52)
  ner-VirtualBox.domain.name.37590 > 84.170.224.35.bc.googleusercontent.com.http: Flags [.], cksum 0xf409 (incorrect -> 0x459a), ack 1, win 502, options [nop,nop,TS val 3821025448 ecr 3301732841], leng
th 0
09:30:22.242129 IP (tos 0x0, ttl 64, id 43920, offset 0, flags [DF], proto TCP (6), length 139)
  ner-VirtualBox.domain.name.37590 > 84.170.224.35.bc.googleusercontent.com.http: Flags [P.], cksum 0xf460 (incorrect -> 0x83f2), seq 1:88, ack 1, win 502, options [nop,nop,TS val 3821025449 ecr 330173
2841], length 87: HTTP, length: 87
  GET / HTTP/1.1
  Host: connectivity-check.ubuntu.com
  Accept: */*
  Connection: close
```

Installing wireshark and analysing network packet stream

Wireshark is a free and open-source network protocol analyser widely used around the globe. With Wireshark, you can capture incoming and outgoing packets of a network in real-time and use it for network troubleshooting, packet analysis, software and communication protocol development, and many more.

Procedure:

Step 1: Update the system

sudo apt-get update

Step 3: Check the version

wireshark --version

Step 2: Install wireshark on the system

sudo apt-get install wireshark

OUTPUT

```
nerger-VirtualBox:~$ sudo apt install wireshark
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following additional packages will be installed:
  libc-ares2 libdouble-conversion3 liblua5.2-0 libpcr2-16-0 libqt5core5a libqt5dbus5 libqt5gui5 libqt5multimedia5 libqt5multimedia5-plugins libqt5multimedia5-gsttools5 libqt5multimedia5-widgets
  libqt5network5 libqt5opengl5 libqt5printsupport5 libqt5svg5 libqt5widgets5 libsmi2ldbl libsnappy1v5 libspandsp2 libssh-gcrypt-4 libwireshark-data libwireshark13 libwiretap10 libwsutil11
  libxcb-xinerama0 libxcb-xinput0 qt5-gtk-platformtheme qtranslations5-110n wireshark-common wireshark-qt
Suggested packages:
  qt5-image-formats-plugins gstreamer1.0 libsnmp-downloader geolupdate geolp-database geolp-database-extra libjs-leaflet libjs-leaflet.markercluster wireshark-doc
The following NEW packages will be installed:
  libc-ares2 libdouble-conversion3 liblua5.2-0 libpcr2-16-0 libqt5core5a libqt5dbus5 libqt5gui5 libqt5multimedia5 libqt5multimedia5-plugins libqt5multimedia5-gsttools5 libqt5multimedia5-widgets
  libqt5network5 libqt5opengl5 libqt5printsupport5 libqt5svg5 libqt5widgets5 libsmi2ldbl libsnappy1v5 libspandsp2 libssh-gcrypt-4 libwireshark-data libwireshark13 libwiretap10 libwsutil11
  libxcb-xinerama0 libxcb-xinput0 qt5-gtk-platformtheme qtranslations5-110n wireshark-common wireshark-qt
0 upgraded, 31 newly installed, 0 to remove and 0 not upgraded.
Need to get 32.9 MB of archives.
After this operation, 163 MB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libdouble-conversion3 amd64 3.1.5-4ubuntu1 [37.9 kB]
Get:2 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libpcr2-16-0 amd64 10.34-7 [181 kB]
Get:3 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5core5a amd64 5.12.8+dfsg-0ubuntu1 [2,005 kB]
Get:4 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5dbus5 amd64 5.12.8+dfsg-0ubuntu1 [208 kB]
Get:5 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5network5 amd64 5.12.8+dfsg-0ubuntu1 [674 kB]
Get:6 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libxcb-xinerama0 amd64 1.14-2 [5,260 B]
Get:7 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libxcb-xinput0 amd64 1.14-2 [29.3 kB]
Get:8 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5gui5 amd64 5.12.8+dfsg-0ubuntu1 [2,971 kB]
Get:9 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5widgets5 amd64 5.12.8+dfsg-0ubuntu1 [2,293 kB]
Get:10 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5svg5 amd64 5.12.8-0ubuntu1 [131 kB]
Get:11 http://in.archive.ubuntu.com/ubuntu focal/main amd64 liblua5.2-0 amd64 5.2.4-1.1build3 [106 kB]
Get:12 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5multimedia5 amd64 5.12.8-0ubuntu1 [283 kB]
Get:13 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5opengl5 amd64 5.12.8+dfsg-0ubuntu1 [136 kB]
Get:14 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5multimedia5-gsttools5 amd64 5.12.8-0ubuntu1 [36.8 kB]
Get:15 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5multimedia5-plugins amd64 5.12.8-0ubuntu1 [184 kB]
Get:16 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5printsupport5 amd64 5.12.8-0ubuntu1 [197 kB]
Get:17 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libqt5printsupport5 amd64 5.12.8+dfsg-0ubuntu1 [193 kB]
Get:18 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libsmi2ldbl amd64 0.4.8+dfsg-2 [108 kB]
Get:19 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libspandsp2 amd64 0.0.6+dfsg-2 [272 kB]
Get:20 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 libssh-gcrypt-4 amd64 0.9.3-2ubuntu2.2 [202 kB]
Get:21 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libwireshark-data all 3.2.3-1 [1,456 kB]
Get:22 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 libc-ares2 amd64 1.15.0-1ubuntu0.1 [38.2 kB]
Get:23 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libsnappy1v5 amd64 1.1.8-1build1 [16.7 kB]
Get:24 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libwsutil11 amd64 3.2.3-1 [61.1 kB]
Get:25 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libwiretap10 amd64 3.2.3-1 [199 kB]
Get:26 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 libwireshark13 amd64 3.2.3-1 [15.2 MB]
Get:27 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 qt5-gtk-platformtheme amd64 5.12.8+dfsg-0ubuntu1 [124 kB]
Get:28 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 qtranslations5-110n all 5.12.8-0ubuntu1 [1,486 kB]
Get:29 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 wireshark-common amd64 3.2.3-1 [441 kB]
Get:30 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 wireshark-qt amd64 3.2.3-1 [3,774 kB]
Get:31 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 wireshark amd64 3.2.3-1 [5,088 B]
Fetched 32.9 MB in 5s (6,613 kB/s)
Extracting templates from packages: 100%
```

To capture network packet streams type, wireshark

then copy the ip address

Capturing from enp0s3

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
1726	72.421892981	192.168.101.6	142.251.42.77	TCP	66	47134 → 443 [FIN, ACK] Seq=103 Ack=40 Win=501 Len=0
1727	72.452264158	142.251.42.77	192.168.101.6	TCP	66	443 → 47134 [ACK] Seq=40 Ack=103 Win=265 Len=0 TSval=
1728	72.452264502	142.251.42.77	192.168.101.6	TCP	66	443 → 47134 [FIN, ACK] Seq=40 Ack=103 Win=265 Len=0
1729	72.4522652053	192.168.101.6	142.251.42.77	TCP	66	47134 → 443 [ACK] Seq=104 Ack=41 Win=501 Len=0 TSval=
1730	72.452264670	142.251.42.77	192.168.101.6	TCP	66	443 → 47134 [ACK] Seq=41 Ack=104 Win=265 Len=0 TSval=
1731	73.706586758	192.168.101.3	239.255.255.250	SSDP	215	M-SEARCH * HTTP/1.1
1732	74.382536651	192.168.101.6	142.250.183.130	TLSv1.2	105	Application Data
1733	74.420563249	142.250.183.130	192.168.101.6	TCP	66	443 → 52836 [ACK] Seq=40 Ack=79 Win=265 Len=0 TSval=
1734	74.463899998	192.168.101.6	142.250.183.130	TLSv1.2	90	Application Data
1735	74.463990057	192.168.101.6	142.250.183.130	TCP	66	52836 → 443 [FIN, ACK] Seq=103 Ack=40 Win=501 Len=0
1736	74.494896480	142.250.183.130	192.168.101.6	TCP	66	443 → 52836 [ACK] Seq=40 Ack=103 Win=265 Len=0 TSval=
1737	74.494896756	142.250.183.130	192.168.101.6	TCP	66	443 → 52836 [FIN, ACK] Seq=40 Ack=103 Win=265 Len=0
1738	74.494896034	192.168.101.6	142.250.183.130	TCP	66	52836 → 443 [ACK] Seq=104 Ack=41 Win=501 Len=0 TSval=
1739	74.494896855	142.250.183.130	192.168.101.6	TCP	66	443 → 52836 [ACK] Seq=41 Ack=104 Win=265 Len=0 TSval=
1740	74.707068919	192.168.101.3	239.255.255.250	SSDP	215	M-SEARCH * HTTP/1.1
1741	75.707762084	192.168.101.3	239.255.255.250	SSDP	215	M-SEARCH * HTTP/1.1
1742	75.776305161	192.168.101.6	54.182.1.170	TCP	66	[TCP Dup ACK 39#7] 55934 → 80 [ACK] Seq=1 Ack=1 Win=
1743	75.807863280	54.182.1.170	192.168.101.6	TCP	66	[TCP Dup ACK 40#7] [TCP ACKed unseen segment] 80 → 5

Frame 1: 66 bytes on wire (528 bits), 66 bytes captured (528 bits) on interface enp0s3, id 0
Ethernet II, Src: PcsCompu_71:fd:a1 (08:00:27:71:fd:a1), Dst: Syrotech_ab:a3:6e (38:94:e0:ab:a3:6e)
Internet Protocol Version 4, Src: 192.168.101.6, Dst: 117.18.237.29
Transmission Control Protocol, Src Port: 53158, Dst Port: 80, Seq: 1, Ack: 1, Len: 0

0000 38 94 e0 ab a3 6e 08 00 27 71 fd a1 08 00 45 00 8...n... 'q...E...
0010 00 34 48 a0 40 00 04 06 6a 45 c0 a8 65 06 75 12 .4H...@...jE...e...u...
0020 ed 1d cf a6 00 50 98 f7 5f d6 c5 dc 19 cc 80 10P...-...Q...W...<...
0030 01 f5 88 05 00 00 01 01 08 0a 51 8d 57 bb a7 3cQ...W...<...s
0040 1b 73

enp0s3: <live capture in progress> Packets: 1744 · Displayed: 1744 (100.0%) Profile: Default