

Jamaal Robinson

Professor Raymond Giles

BIS 23

April 16, 2026

AI RISEN FRAMEWORK ASSIGNMENT 3

Basic Output:

JavaScript Loop Example

Ask Gemini

chatgpt.com/c/69e30ae2-d794-83ea-b25a-621f66ddb7de

explain javascript loops

Here's a beginner-friendly explanation of JavaScript loops 🌟

What is a loop?

- A loop lets your code run the same block over and over.
- Instead of writing the same code many times, a loop does it automatically.

Example idea:
Instead of writing:

```
JavaScript
console.log(1);
console.log(2);
console.log(3);
```

You use a loop to do it faster.

Common Types of JavaScript Loops

1. for loop (most common)

```
JavaScript
for (let i = 0; i < 5; i++) {
  console.log(i);
}
```

Ask anything

JavaScript

- Start: `let i = 0`
- Condition: `i < 5`
- Update: `i++` (add 1 each time)

Output:
0 1 2 3 4

2. while loop

```
JavaScript
let i = 0;
while (i < 5) {
  console.log(i);
  i++;
}
```

- Runs while the condition is true
- You must manually update `i`

3. do...while loop

```
JavaScript
let i = 0;
do {

```

Ask anything

57°F
Mostly clear

Search

2:02 AM
4/18/2026

JavaScript Loop Example

Ask Gemini

chatgpt.com/c/69e30ae2-d794-83ea-b25a-621f66ddb7de

JavaScript

- Start: `let i = 0`
- Condition: `i < 5`
- Update: `i++` (add 1 each time)

Output:
0 1 2 3 4

2. while loop

```
JavaScript
let i = 0;
while (i < 5) {
  console.log(i);
  i++;
}
```

- Runs while the condition is true
- You must manually update `i`

3. do...while loop

```
JavaScript
let i = 0;
do {

```

Ask anything


57°F
Mostly clear

Search

2:02 AM
4/18/2026

Activate Windows
Go to Settings to activate Windows.

Activate Windows
Go to Settings to activate Windows.

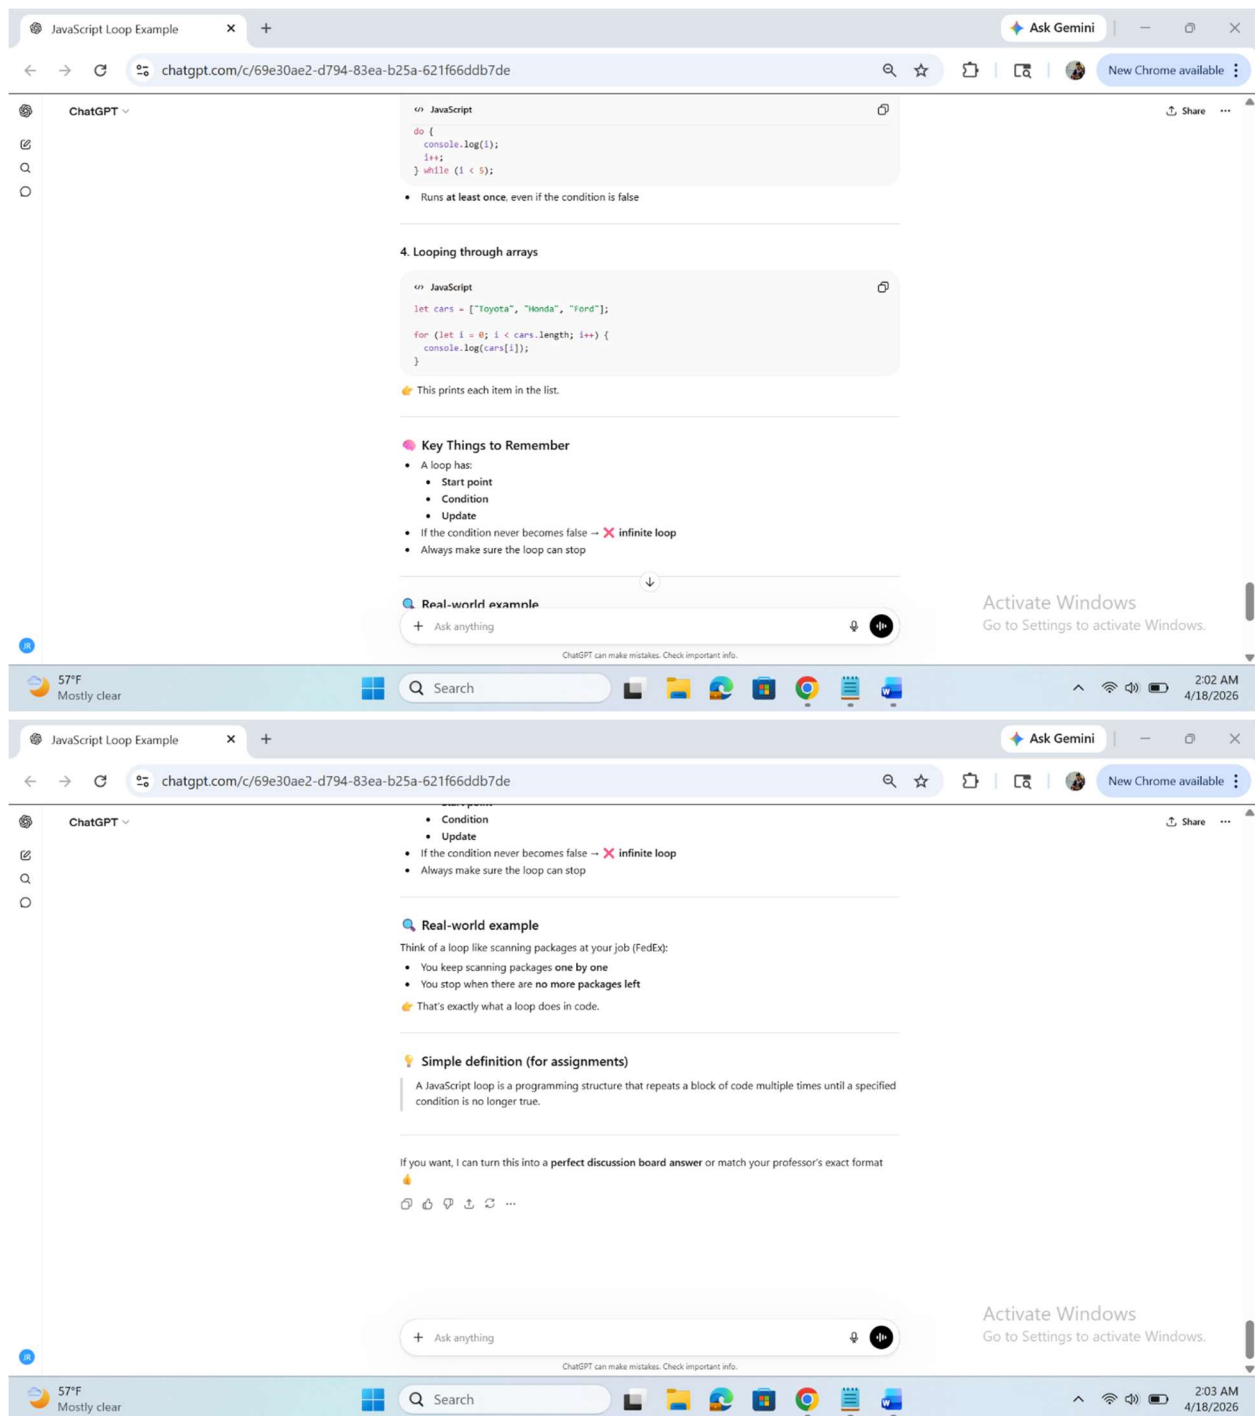

Risen Output:

JavaScript Loop Example

Ask Gemini

chatgpt.com/c/69e30ae2-d794-83ea-b25a-621f66ddb7de

ChatGPT

Act as a programming instructor.
Explain JavaScript loops in a simple way.
Include examples of for and while loops.
Break it down step-by-step and explain when to use each loop.
Use beginner-friendly language.

JavaScript loops are used when you want the computer to repeat something instead of writing the same code again and again.
What is a loop?
A loop is a way to run a block of code multiple times.
For example, instead of writing this:

```
JavaScript
console.log(1);
console.log(2);
console.log(3);
console.log(4);
console.log(5);
```

you can use a loop to do the same job in a shorter and cleaner way.

1. The for loop

Ask anything

Activate Windows
Go to Settings to activate Windows.

JavaScript Loop Example

Ask Gemini

chatgpt.com/c/69e30ae2-d794-83ea-b25a-621f66ddb7de

ChatGPT

1. The for loop
A for loop is best when you know how many times you want the code to repeat.
Example:

```
JavaScript
for (let i = 0; i < 5; i++) {
  console.log(i);
}
```

Step-by-step breakdown
Part 1: `let i = 0`
This creates a variable named `i` and starts it at `0`.
Part 2: `i < 5`
This is the condition.
The loop will keep running as long as `i` is less than `5`.
Part 3: `i++`
This increases `i` by 1 after each loop.
Part 4: `console.log(i);`
This prints the current value of `i`.
What it prints:

```
JavaScript
0
1
2
```

Ask anything

Activate Windows
Go to Settings to activate Windows.

JavaScript Loop Example

Ask Gemini

chatgpt.com/c/69e30ae2-d794-83ea-b25a-621f66ddb7de

ChatGPT

```
JavaScript
2
3
4
```

How it works:

- Start with `i = 0`
- Check if `0 < 5` → yes
- Print `0`
- Add 1 to `i`
- Check again
- Keep going until `i` becomes `5`

When `i` reaches `5`, the condition `i < 5` becomes false, so the loop stops.

When to use a `for` loop

Use a `for` loop when:

- You know the number of times you want to repeat something
- You want to count up or down
- You are working through a list using an index number

2. The `while` loop

A `while` loop is best when you want the code to repeat as long as a condition is true, but you may not know exactly how many times it will run.

Example:

```
JavaScript
let i = 0;
while (i < 5) {
  console.log(i);
  i++;
}
```

Step-by-step breakdown

Line 1: `let i = 0;`
This creates the variable `i` and starts it at `0`.

Line 2: `while (i < 5)`
This says:
"Keep running this code while `i` is less than `5`."

Line 3: `console.log(i);`
This prints the current value of `i`.

Line 4: `i++;`
This adds 1 to `i`.

What it prints:

```
JavaScript
0
1
2
3
4
```

55°F Clear

Search

2:05 AM
4/18/2026

JavaScript Loop Example

Ask Gemini

chatgpt.com/c/69e30ae2-d794-83ea-b25a-621f66ddb7de

ChatGPT

```
JavaScript
let i = 0;
while (i < 5) {
  console.log(i);
  i++;
}
```

Step-by-step breakdown

Line 1: `let i = 0;`
This creates the variable `i` and starts it at `0`.

Line 2: `while (i < 5)`
This says:
"Keep running this code while `i` is less than `5`."

Line 3: `console.log(i);`
This prints the current value of `i`.

Line 4: `i++;`
This adds 1 to `i`.


What it prints:

```
JavaScript
0
1
2
3
4
```

55°F Clear

Search

2:05 AM
4/18/2026

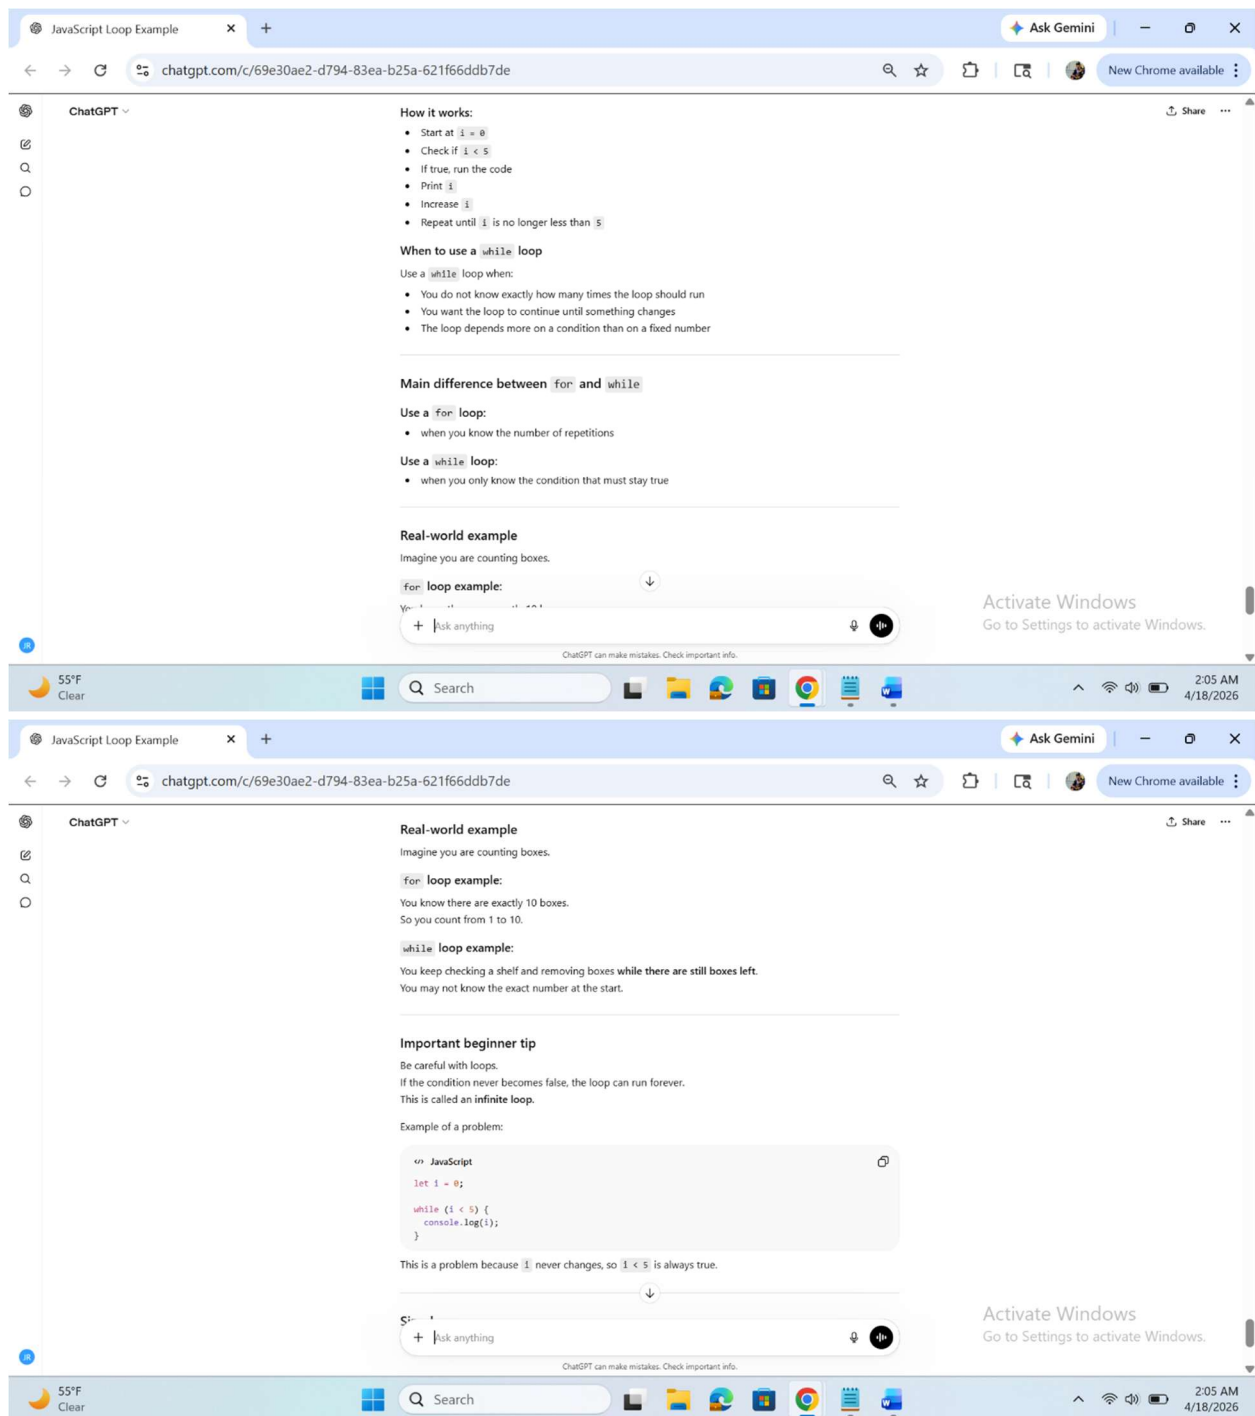

ANALYSIS:

The RISEN framework improved the response by making it more detailed, structured, and easier to understand. The basic prompt provided a general explanation, while the RISEN prompt included step-by-step details, examples, and clearer organization.

This made the information more useful and easier to learn.