Informe

• Se agrega el servicio en el docker compose:

• Se agrega un archivo de configuración "my2-httpd.conf" para el ApiLayer:


```
<VirtualHost *:8880>
    ServerName localhost

ProxyPreserveHost On


ProxyPass /kitchensink-angularjs/ http://srvwildfly:8080/kitchensink-angularjs/
ProxyPassReverse /kitchensink-angularjs/ http://srvwildfly:8080/kitchensink-angularjs/

ProxyPass / http://srvwildfly:8080/
ProxyPassReverse / http://srvwildfly:8080/
</VirtualHost>
```


Se verifica si esta funcional la ruta "http://localhost:8080/":

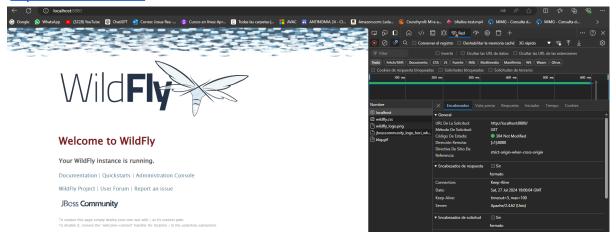

• Se verifica si esta funcional la ruta "http://localhost:8080/kitchensink-angularjs/" que apunta al "http://localhost:8080/kitchensink-angularjs/":

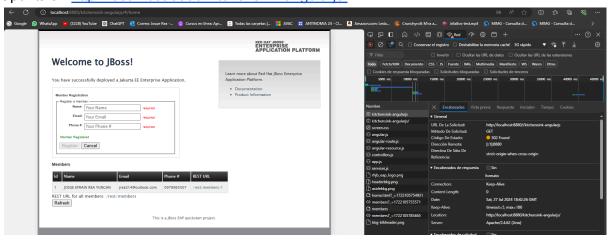

Se agrega un usuario para verificar que se está guardando:

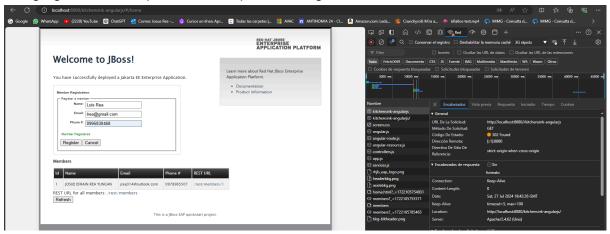

14]

