PHASE 8 / SAME-CONTEXT FULL VS APPEND / 16K HISTORY

A longer averaging window dilutes the stall

Single RTX 4090 | Qwen2.5-7B | Independent 128-token decode histories | 16K history + 1K new input | 5 repeats

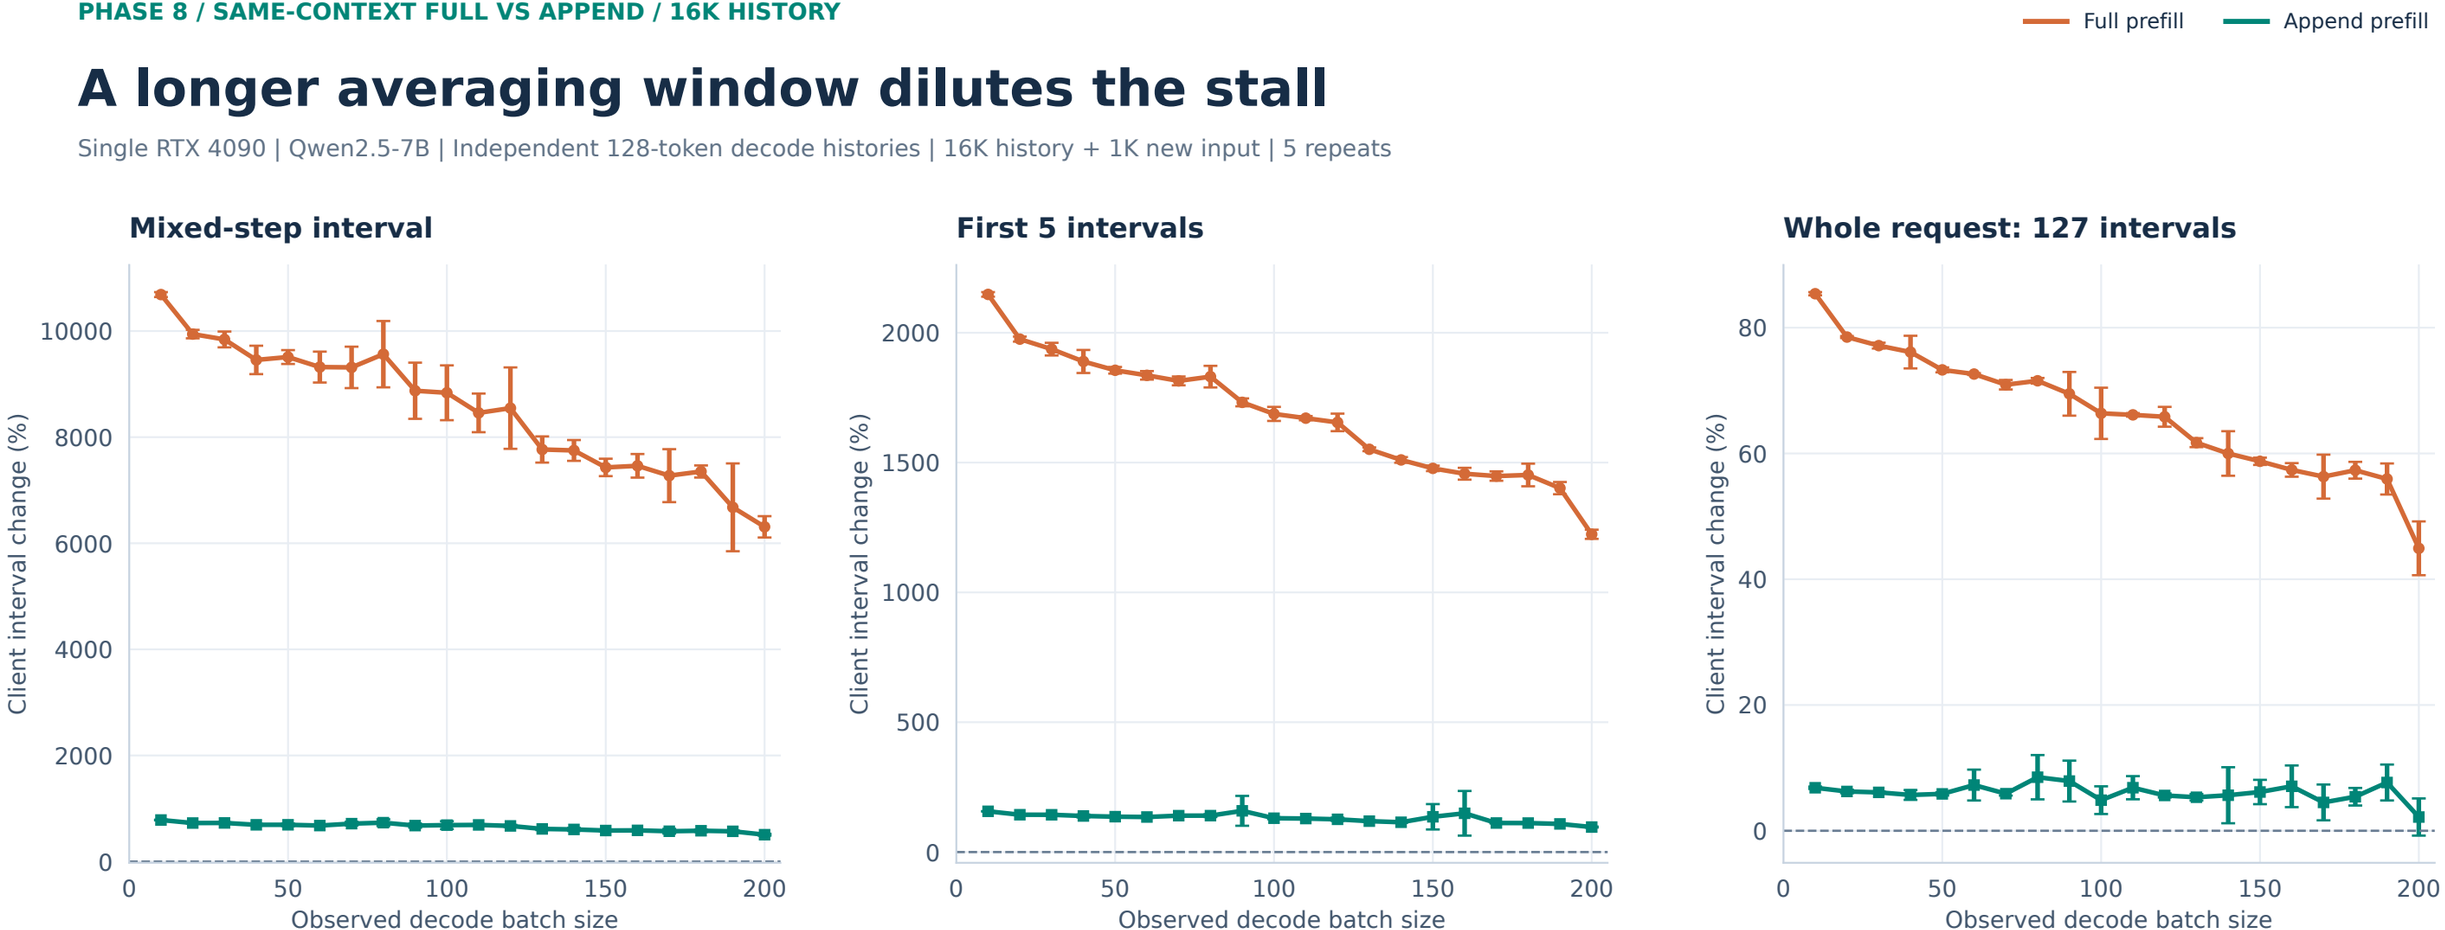

All panels use client token intervals and paired decode-only controls. Percent changes are computed per trial, then averaged; error bars = sample SD, n=5.
Panels have different vertical scales. The first two use event-aligned windows; the last reproduces the existing whole-request TPOT metric.
Batch 0 has no decode TPOT and is shown only in the prefill-cost figure. Full and append receive identical 17,408-token prompts.