PHASE 7 / 03

Socket and RoCE: a historical comparison

183 / 192 request pairs have identical payloads | Matched subsets only | Bars show group medians

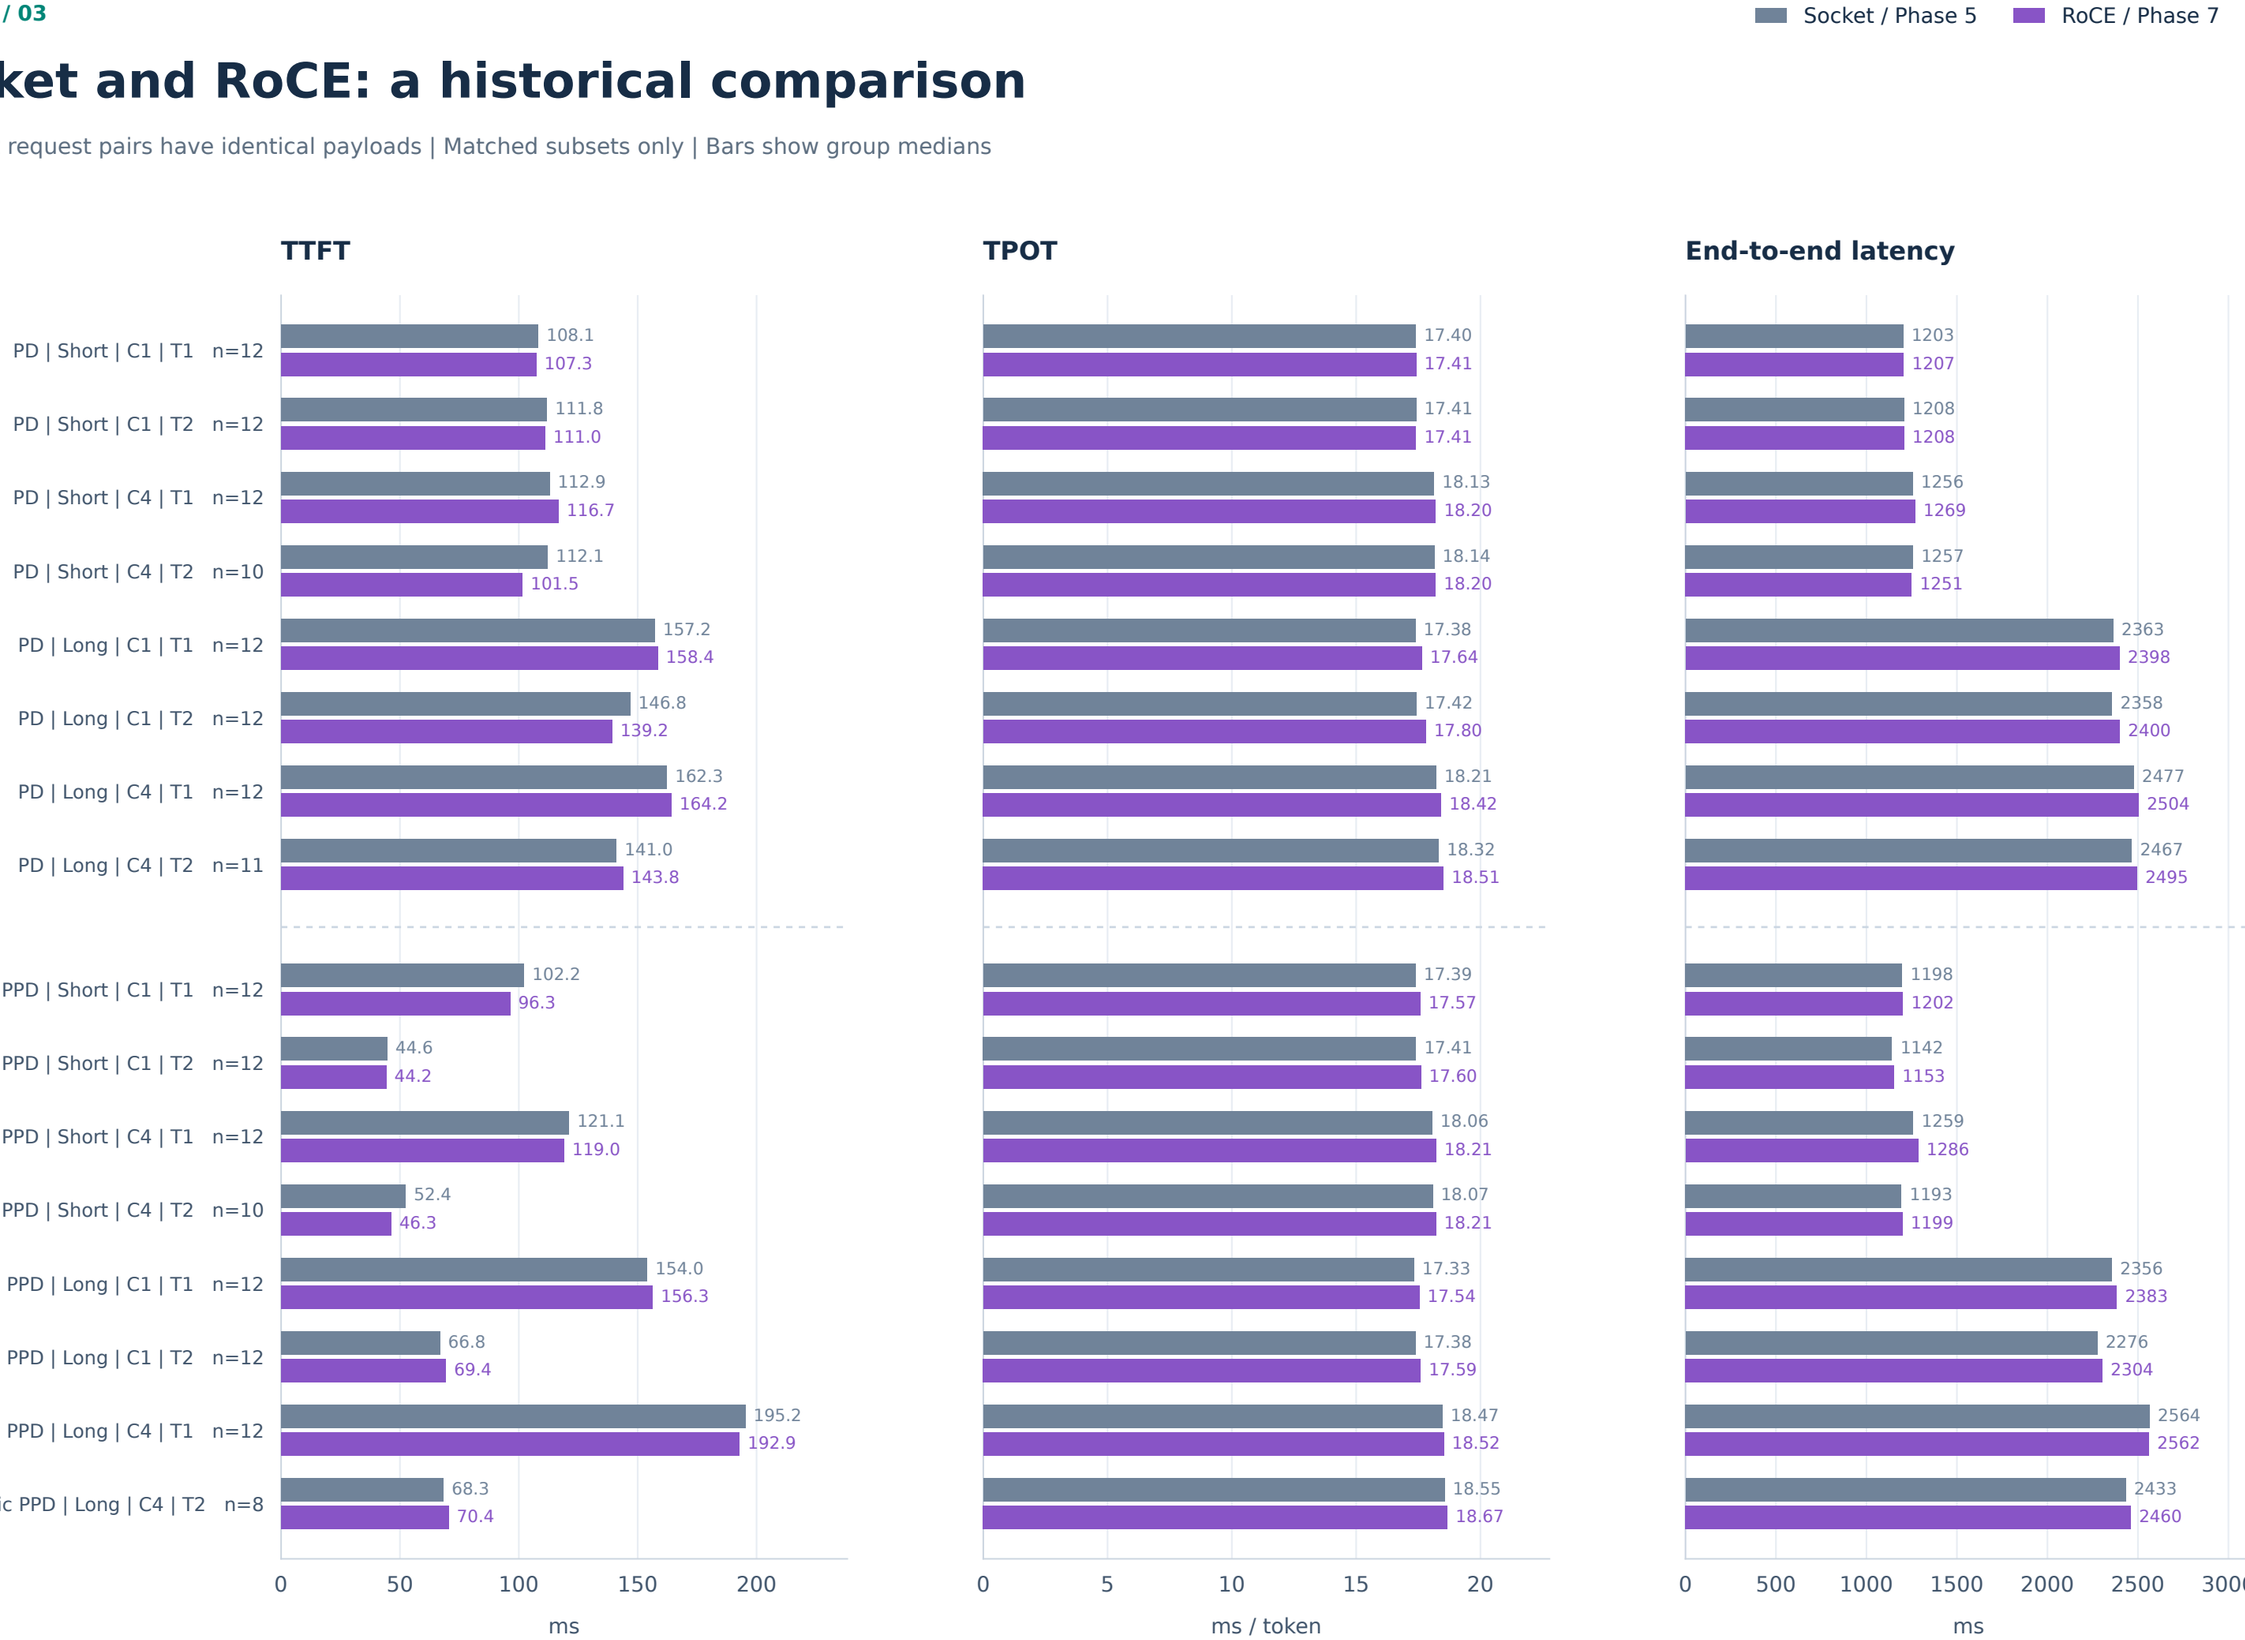

2 x RTX 4090 | Qwen2.5-7B-Instruct | Same runtime and workload | RoCE uses host staging; no GPUDirect RDMA

C = concurrent conversations; T = turn; n = identical-payload pairs in that row. Row subsets can differ; unmatched requests stay in the source data.

Source: socket-rdma-comparison.json, same_payload groups. Separate single runs; no causal protocol-speedup or statistical-significance claim.