PHASE 8 / FIGURE 2 EVENT-WINDOW DIAGNOSTIC

A longer averaging window dilutes the stall

Single RTX 4090 | Qwen2.5-7B-Instruct | Independent background histories | 5 paired repeats

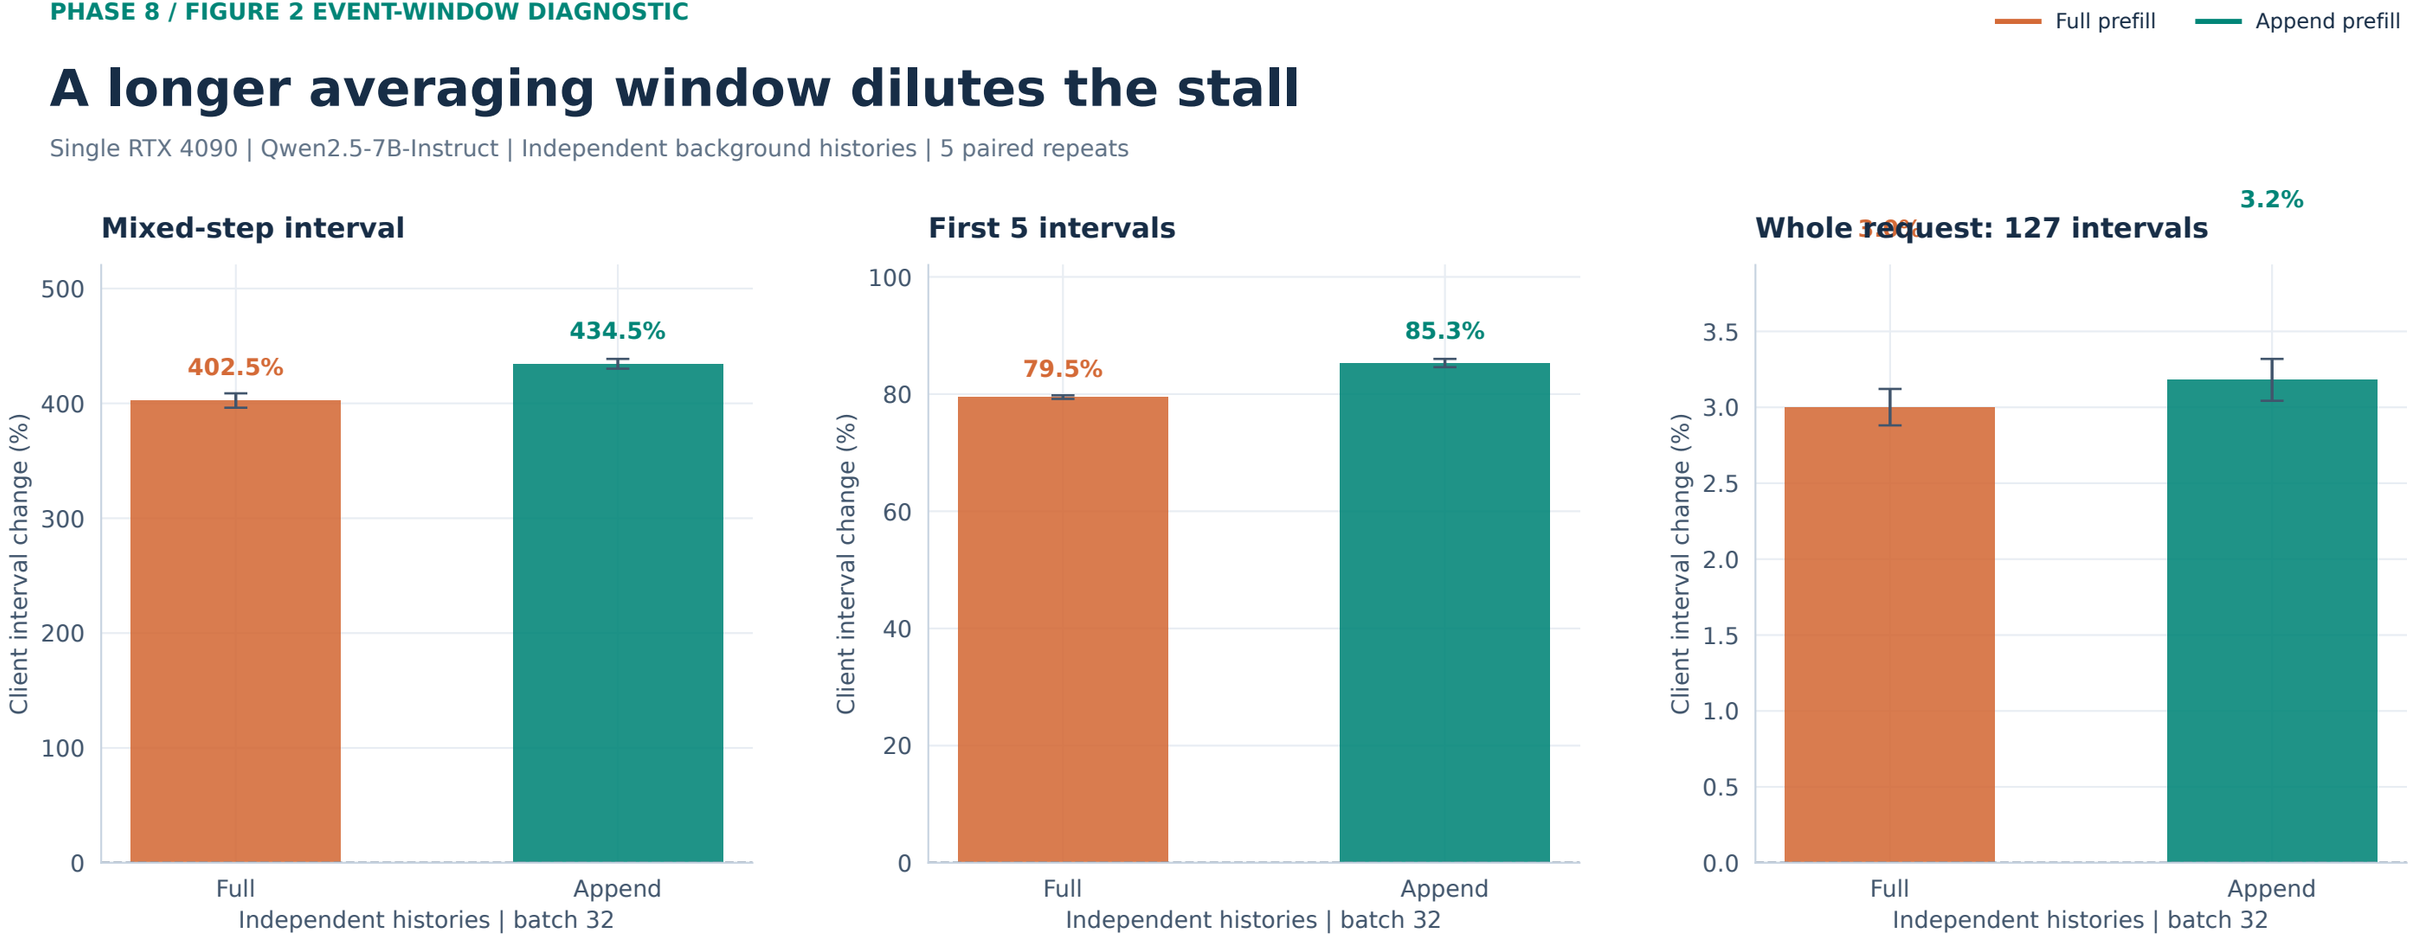

All panels use client token intervals and paired decode-only controls. Percent changes are computed per trial, then averaged; error bars = sample SD, n=5.
Panels have different vertical scales. The first two use event-aligned windows; the last reproduces the existing whole-request TPOT metric.
All measured batch sizes are shown. Changing the window reveals the stall magnitude; it does not establish a full-versus-append separation.