



# Confusion matrix - Direct coder + model reviewer

Positive class = FAIL | n=178

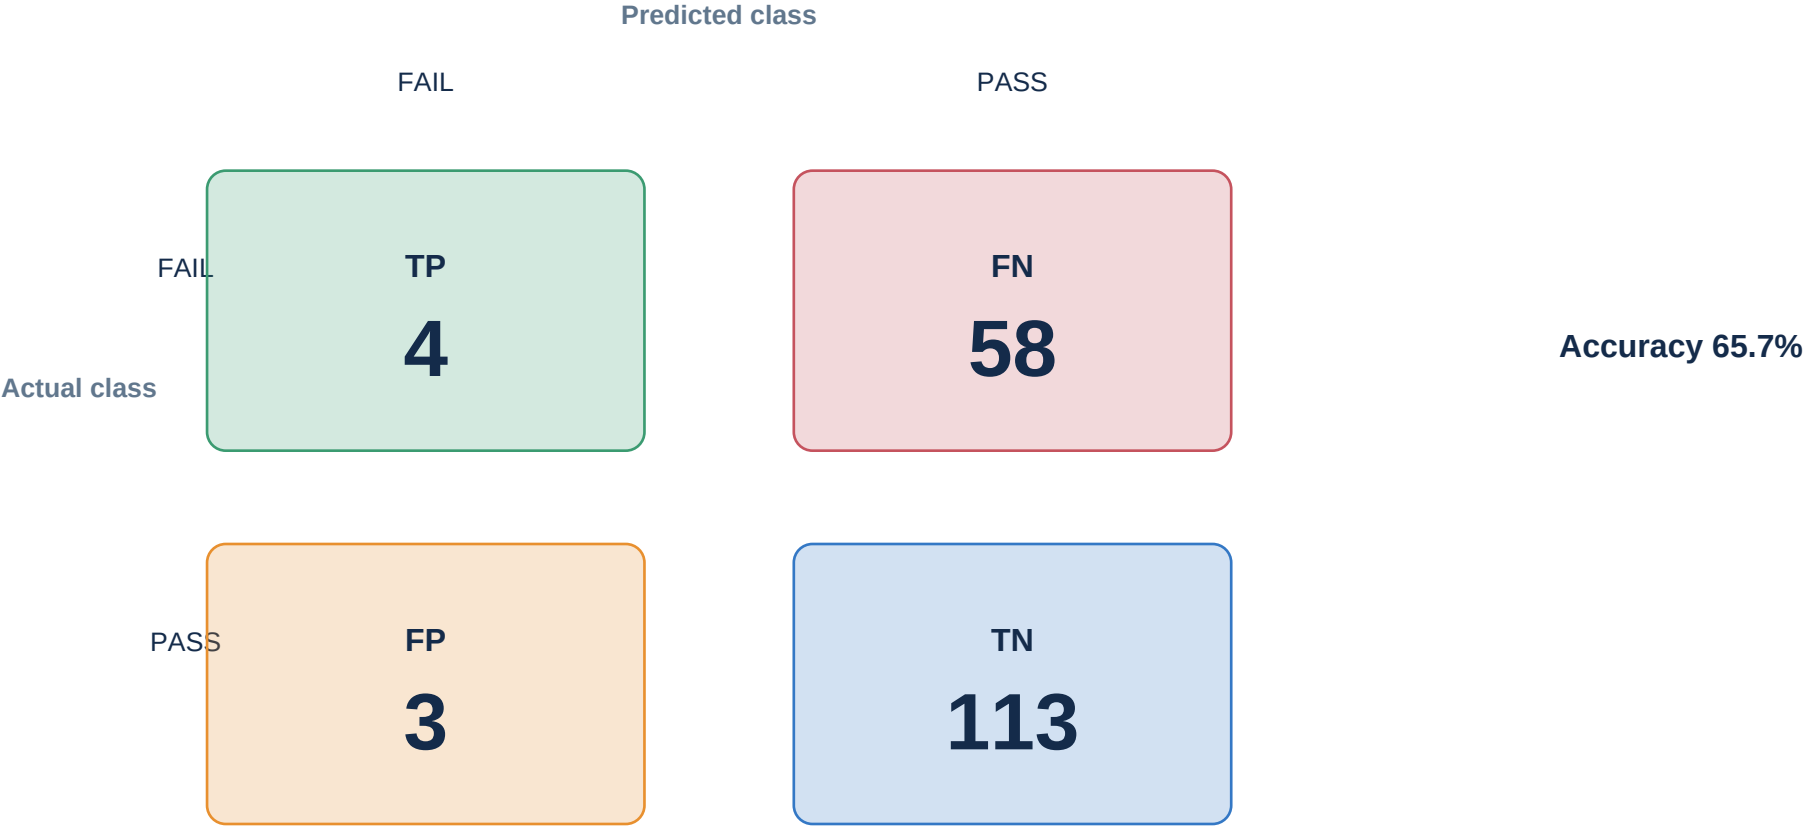


# Confusion matrix - Direct coder + Codex evaluator

Positive class = FAIL | n=178

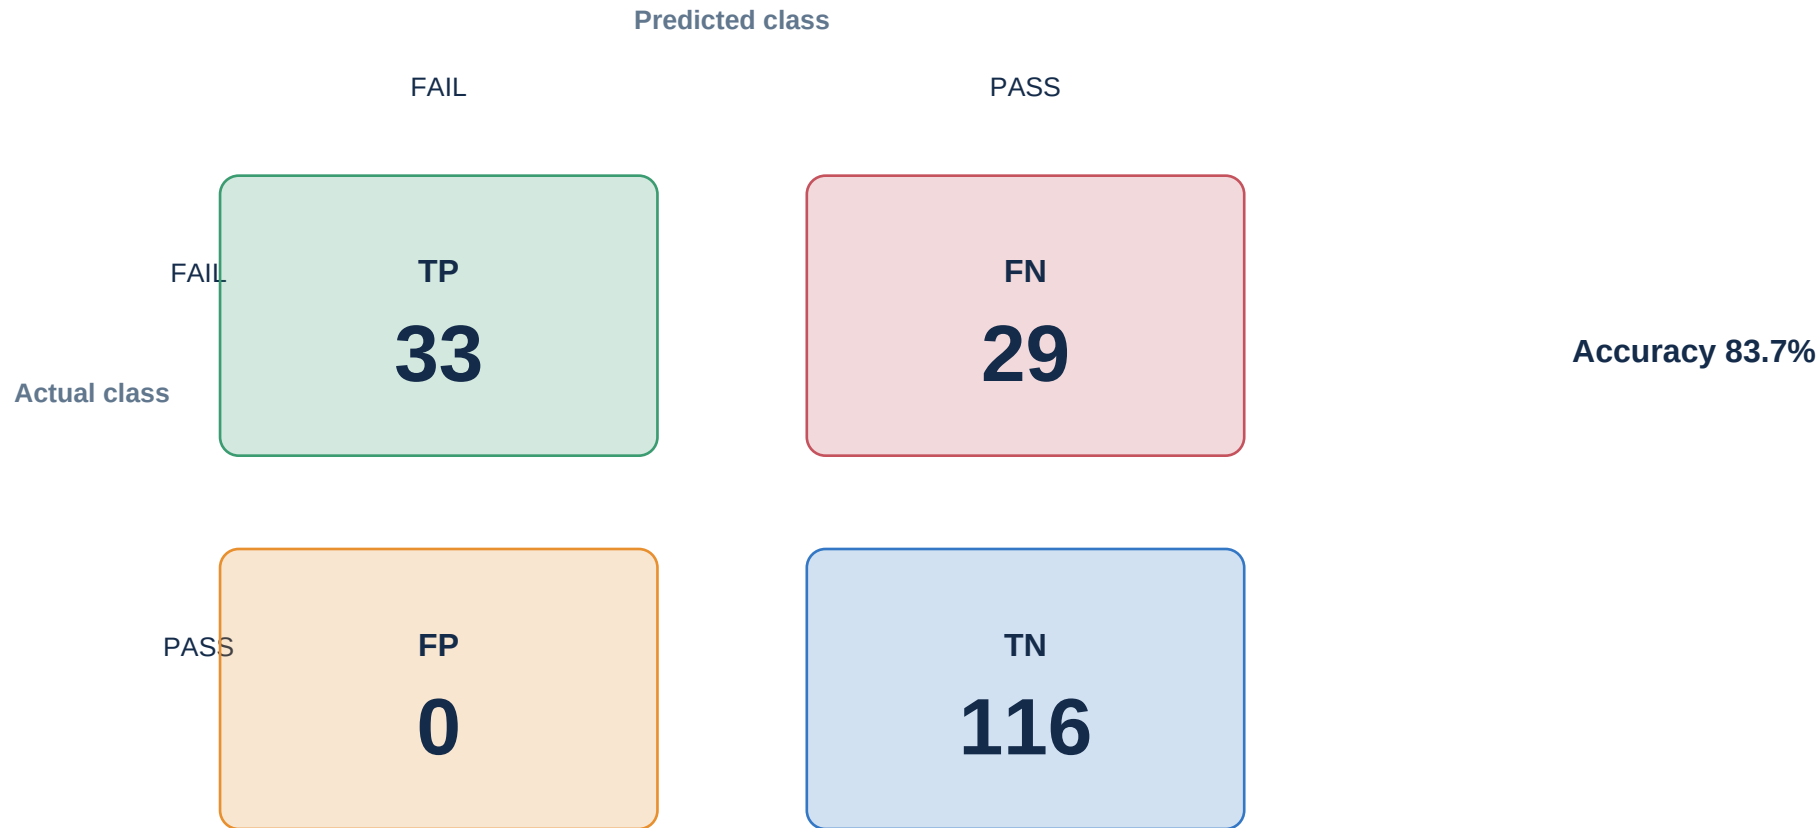


# Confusion matrix - Planner + coder + model reviewer

Positive class = FAIL | n=178

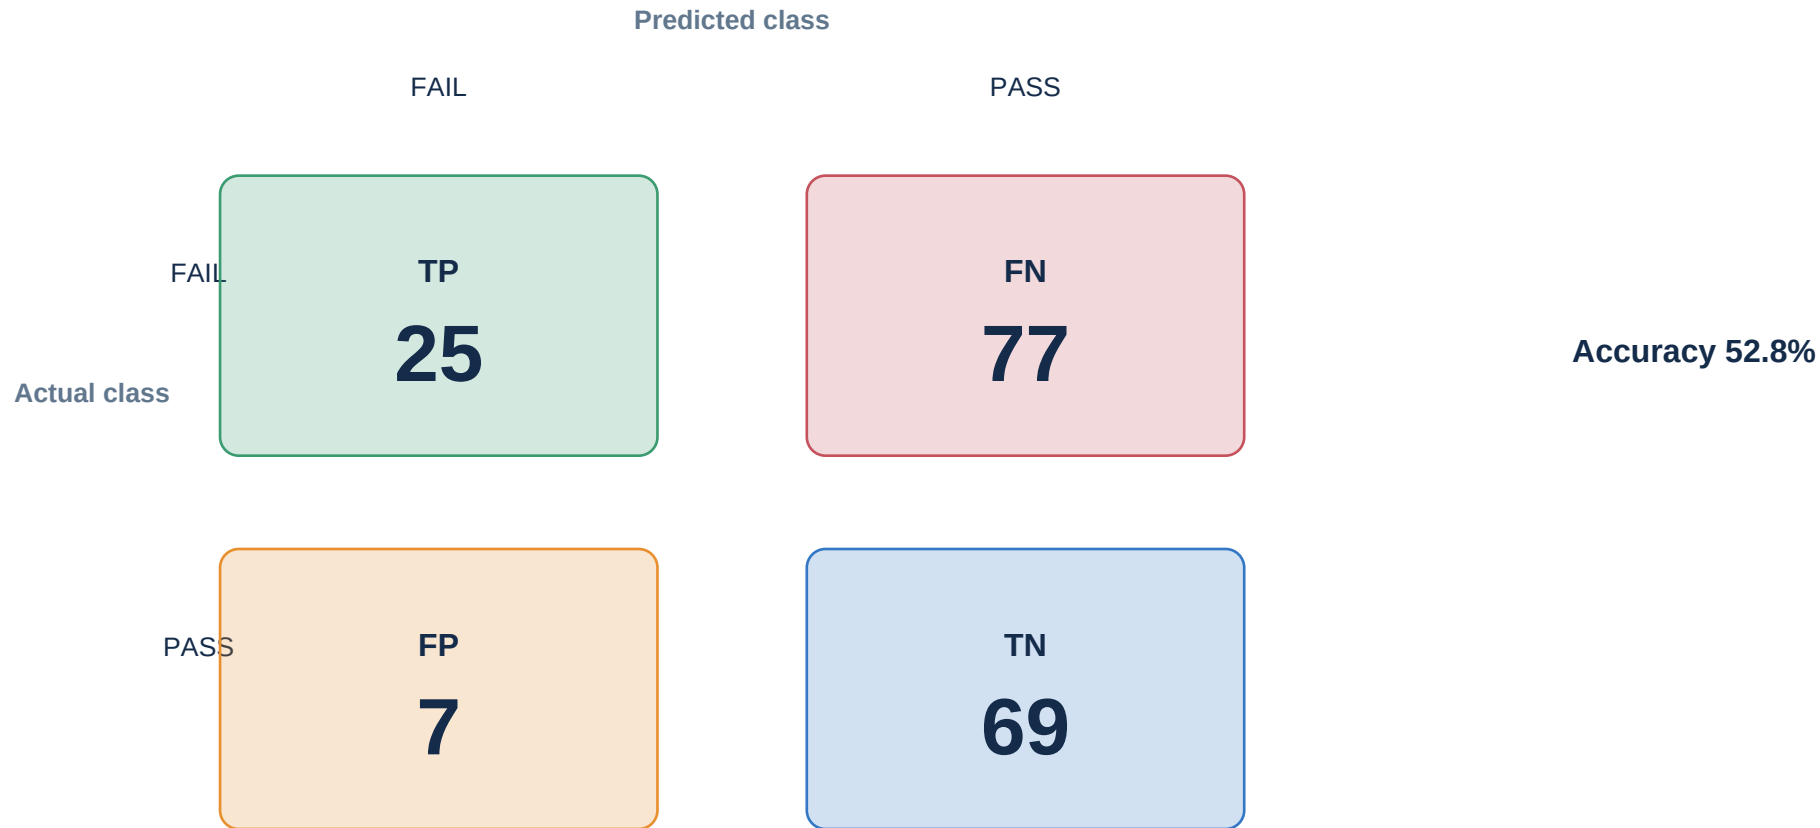

# Confusion matrix - Consolidated across all three approaches

Positive class = FAIL | n=534

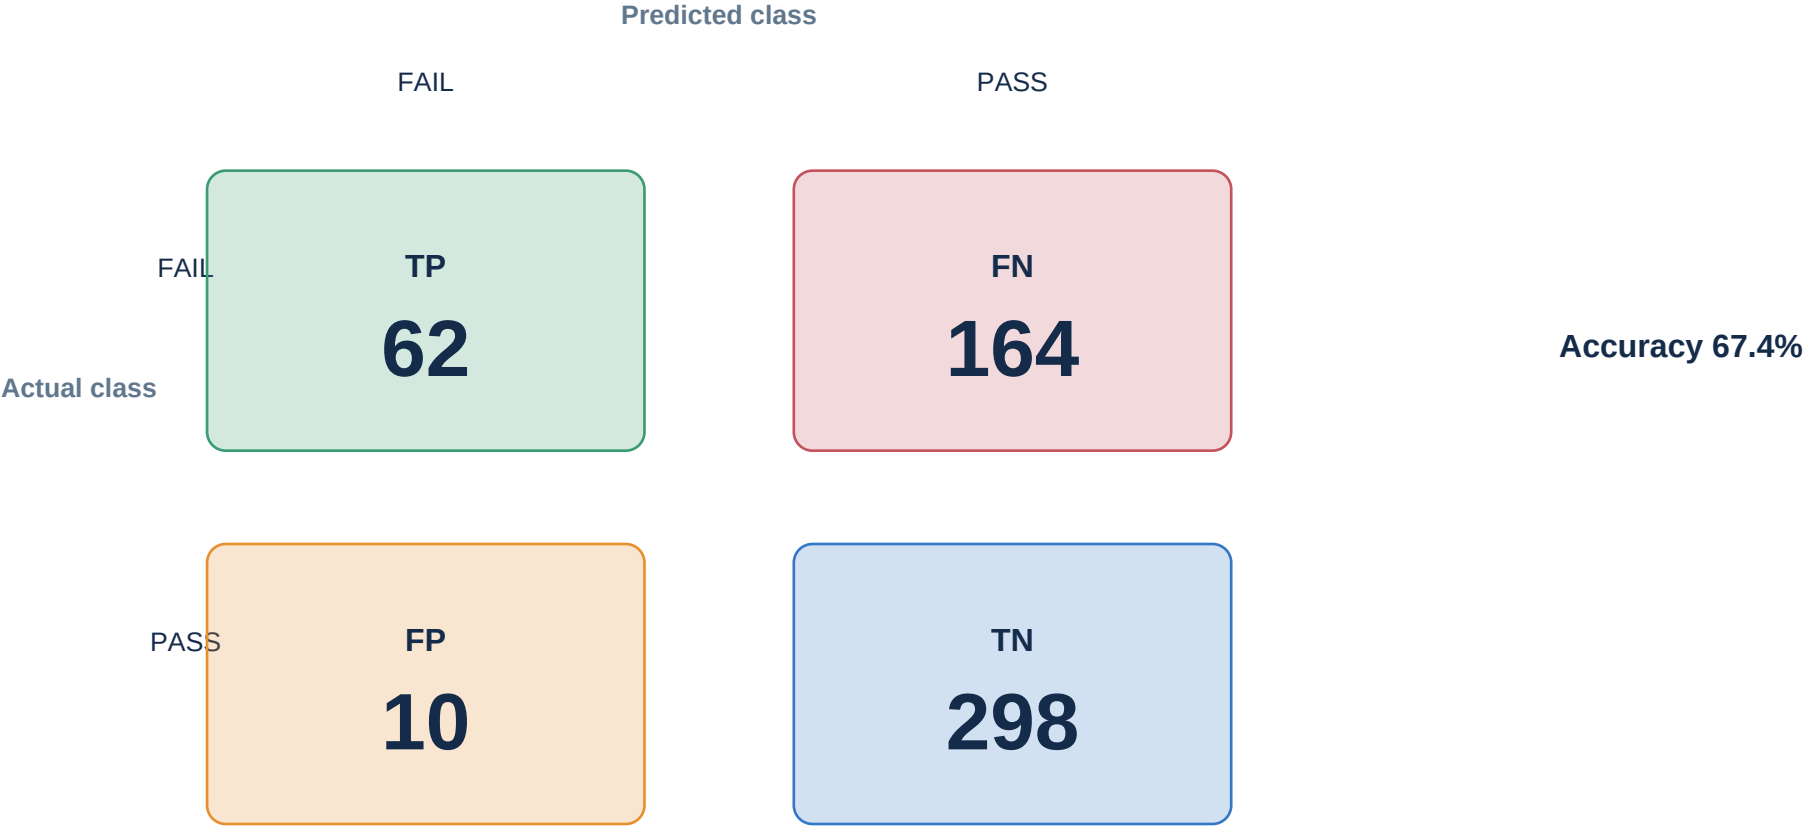

# Approach performance

Classifier accuracy and generated-code task success

Accuracy

Task success


Direct coder + model reviewer



Direct coder + Codex evaluator



Planner + coder + model reviewer




# Accuracy by prompt category

As-is, paired naturalized, and new natural-user prompts

Direct reviewer   Codex evaluator   Full pipeline


As Is

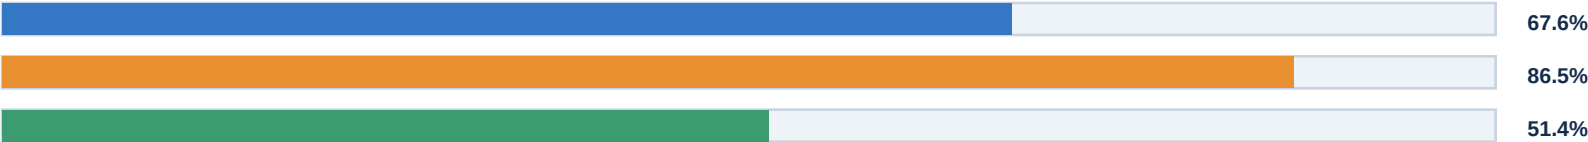

Naturalized Existing



New User Natural

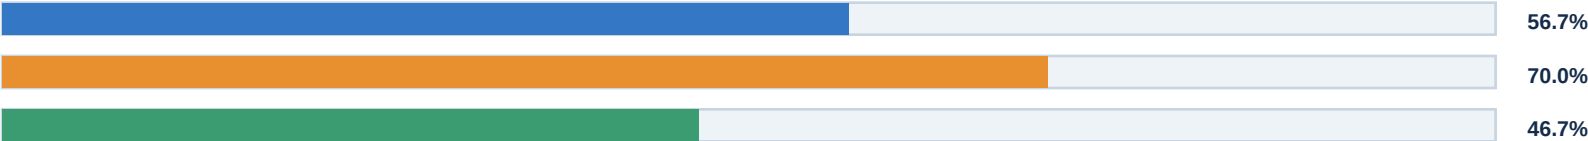

# Paired prompt task success

The same 74 requirements under as-is and naturalized wording

As-is success      Naturalized success


Direct coder + model reviewer



Direct coder + Codex evaluator




Planner + coder + model reviewer



# Generated-code failure modes

Deterministic ground-truth failures across all approaches

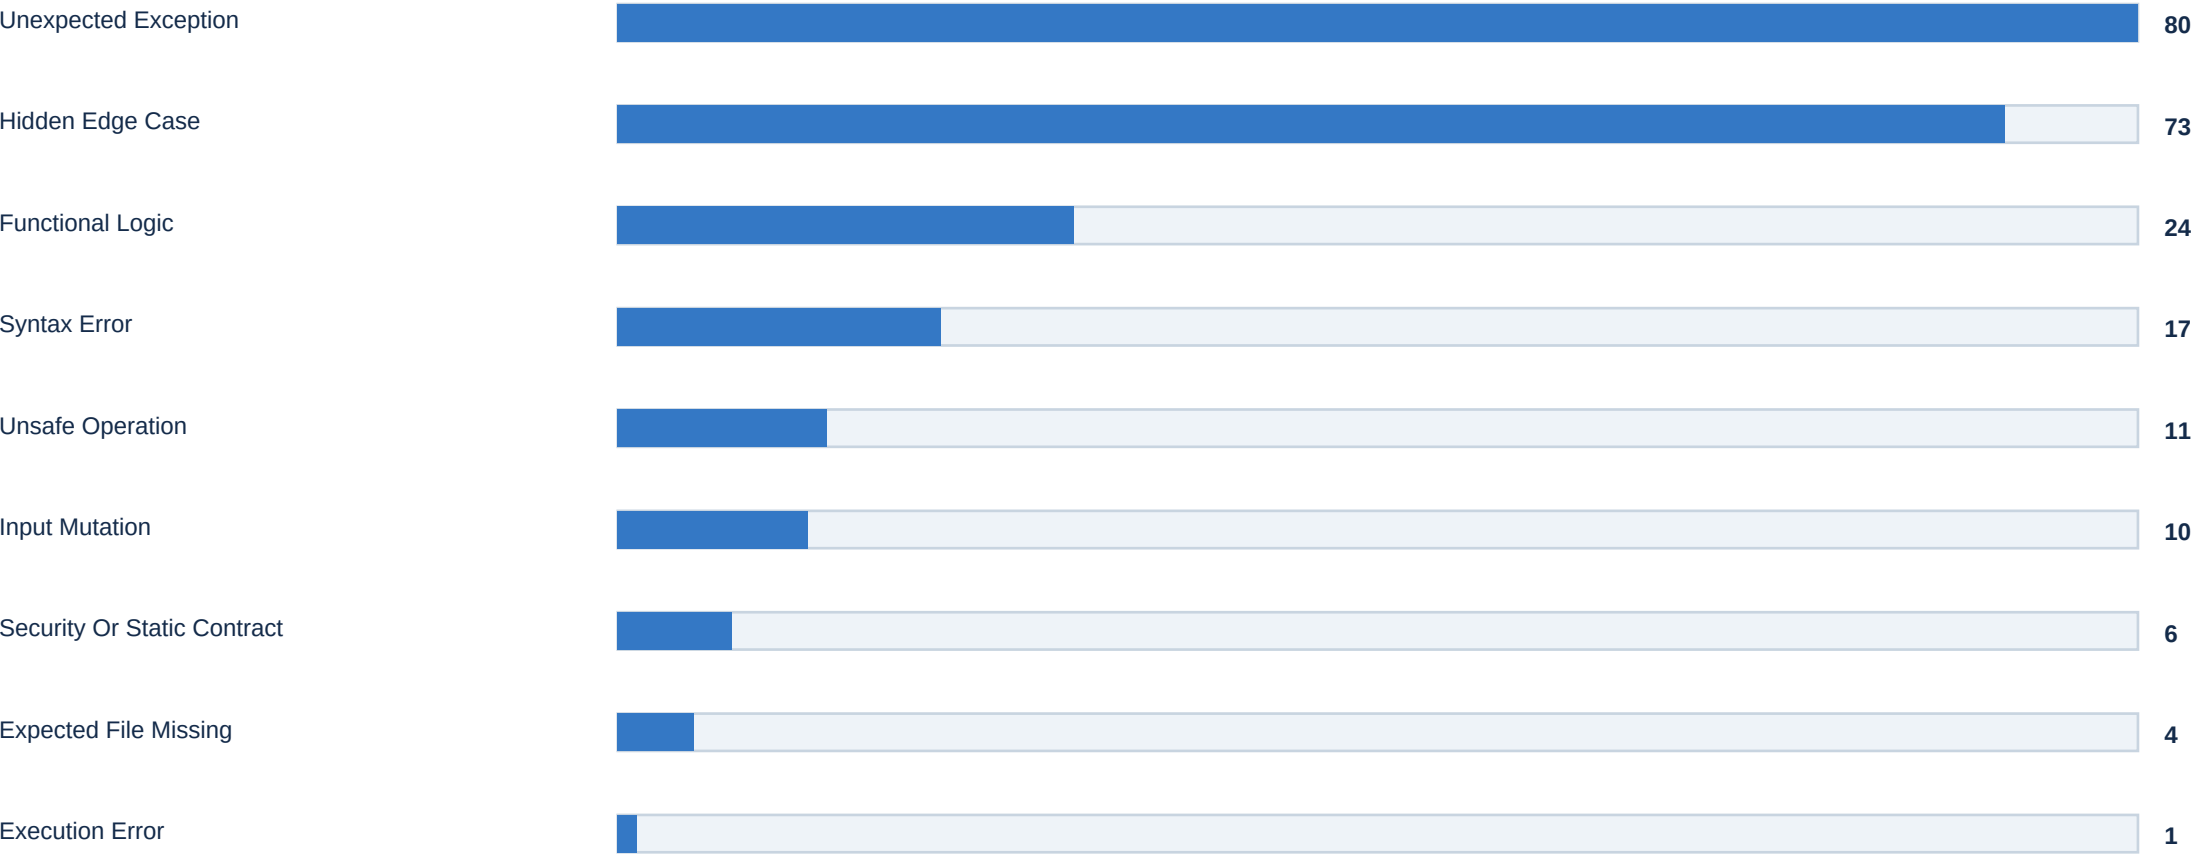



# FP/FN classification attribution

Incorrect decisions grouped by the responsible classifier

