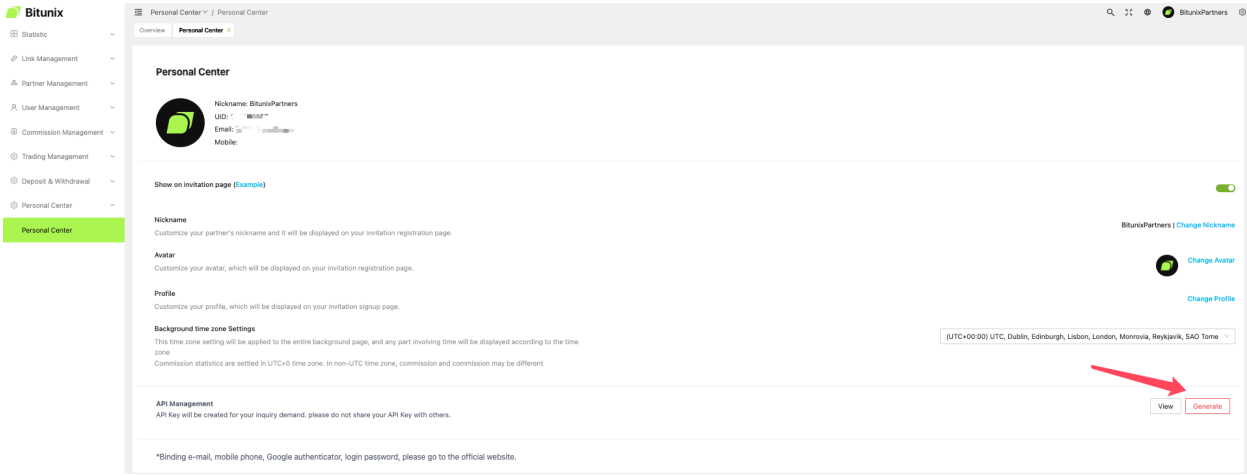
Preparation

- Create ApiKey and ApiSecret on **Partner Management System:** https://partners.bitunix.com/
    - Go to **Personal Center**, Click **Generate** under **API Management**
    - 

    - ApiKey: Included in the header during the request
    - ApiSecret: Used to sign parameters when requesting

Sign

- Sign with **ApiSecret,** Rules:
    - The request must carry the timestamp (in seconds) of the time when the request was made.
    - The difference between the timestamp of the request and the actual request time of the interface must not be more than 30 seconds, otherwise, it will display a parameter error.
    - Sort the request parameters according to [first letter], sorting priority: number > lowercase > uppercase.
    - After sorting, the parameter values are spliced (including timestamp), ApiSecret is spliced at the end, and the string is encrypted by SHA1 algorithm.
    - **Examples**
        - ApiSecret: thisistestapisecret
        - Request parameter: name=bitunix&age=18&Country=USA&24hProfit=0.59&timestamp=1694173446
        - Sign: SHA1(0.5918bitunix1694173446USAthisistestapisecret)

Example:

- Java

Java

```java
public class SignatureUtil {


    @SneakyThrows
    public static void main(String[] args) {


        //  Paremeters Setup
        String apiKey = "xxx";
        String apiSecret = "xxx";
        String hostname = "https://partners.bitunix.com";


        //  Set up Request Parameters
        Map<String, Object> params = new HashMap<>();
        params.put("timestamp", System.currentTimeMillis() / 1000);
        params.put("page", 1);
        params.put("pageSize", 10);


        //  URL Settings
        String apiUrl = "/partner/api/v1/openapi/userList";
        //  If it's GET request, then splice the URL parameters
```

```
        String queryStr = encodeUrlParamsByMap(params);
        apiUrl = String.format("%s?%s", apiUrl, queryStr);

        //  Transaction Signature
        String signature = signatureParams(params, apiSecret);

        //  Build POST Requset Body
//        HttpEntity reqEntity = new StringEntity(bodyStr,
ContentType.APPLICATION_JSON);
        HttpClient client = HttpClients.createDefault();
        HttpGet request = new HttpGet(hostname + apiUrl);
//        request.setEntity(reqEntity);
        request.setHeader("apiKey", apiKey);
        request.setHeader("signature", signature);
        request.setConfig(RequestConfig.custom()
                .setConnectTimeout(5000)
                .setSocketTimeout(5000)
                .setConnectionRequestTimeout(5000)
                .build());
        HttpResponse response = client.execute(request);

        //  Return Results
```

```
        HttpEntity resEntity = response.getEntity();
        String message = EntityUtils.toString(resEntity, "utf-8");
        System.out.println(message);
    }

    private static boolean regMatch(String regex, String str) {
        Pattern pattern = Pattern.compile(regex);
        Matcher matcher = pattern.matcher(str);
        return matcher.find();
    }

    private static Integer getParameterType(String str) {
        //  Verify if it's number
        boolean flag = regMatch("\\d+", str);
        if (flag) return 1;
        flag = regMatch("[a-z]+", str);
        if (flag) return 2;
        return 3;
    }

    public static int str2ASCII(String str) {
```

```
        if (StringUtils.isBlank(str)) return 0;
        int flag = 0;
        for (char c : str.toCharArray()) {
            flag += c;
        }
        return flag;
    }


    public static void sortStrings(List<String> strings) {
        //  Use treeMap to simplify
        strings.sort((o1, o2) -> {
            //  Return if value eqaul
            if (o1.equals(o2)) return 0;
            Integer type1 = getParameterType(o1.substring(0, 1));
            Integer type2 = getParameterType(o2.substring(0, 1));
            //  If the two data types are the same, then the first
letter of the hashCode is returned.
            if (type1.compareTo(type2) == 0) {
                int o1Ascii = str2ASCII(o1);
                int o22Ascii = str2ASCII(o2);
                return o1Ascii < o22Ascii ? -1 : 1;
            }
```

```
            //  If the data types don't match, the smaller one goes
first.
            return type1.compareTo(type2) < 0 ? -1 : 1;
        });
    }


    /**
     * Verify Signature
     *
     * @param params    Request Parameter Set
     * @param secret    secret
     * @param signature Parameter Signature
     * @return boolean
     */
    @SneakyThrows
    public static boolean validateSignature(Map<String, Object>
params, String secret, String signature) {
        String s = signatureParams(params, secret);
        //  Comparison with signatures based on results obtained


        return s.equals(signature);
    }
```

```java
    /**
     * Signature Paremeter
     *
     * @param params Request Parameter Set
     * @param secret secret
     * @return String
     */
    @SneakyThrows
    public static String signatureParams(Map<String, Object>
params, String secret) {
        //  Get all parameter keys
        List<String> strings = new ArrayList<>(params.keySet());
        //  Sort Strings
        sortStrings(strings);

        //  Build Strings
        StringBuilder signValue = new StringBuilder();
        for (String string : strings) {
            if (params.get(string) == null) continue;
            signValue.append(params.get(string).toString());
        }
```

```
        System.out.println(signValue);


        //  SHA1 Encription
        MessageDigest instance =
MessageDigest.getInstance("SHA-1");
        instance.update((signValue + secret).getBytes());
        byte[] digest = instance.digest();
        return Hex.encodeHexString(digest);
    }


    @SneakyThrows
    public static String encodeUrlParamsByMap(Map<String, Object>
map) {
        if (map == null) {
            return EMPTY;
        }
        StringBuilder sb = new StringBuilder();
        for (Map.Entry<String, Object> entry : new
TreeMap<>(map).entrySet()) {

sb.append(entry.getKey()).append("=").append(URLEncoder.encode(Stri
ng.valueOf(entry.getValue()), "UTF-8"));
            sb.append("&");
```

```
        }
        String s = sb.toString();
        if (s.endsWith("&")) {
            s = StringUtils.substringBeforeLast(s, "&");
        }
        return s;
    }


}
```

- PHP

```
None

<?php

$apiKey = 'xxx';
$apiSecret = 'xxx';

function regMatch($preg, $str)
{
    return preg_match($preg, $str);
}

function getParameterType($str)
{
    //  Verify if it's number
    $flag = regMatch("/\\d+/", $str);
    if ($flag) return 1;
    $flag = regMatch("/[a-z]+/", $str);
```

```
    if ($flag) return 2;
    return 3;
}

function str2ASCII($str)
{
    if (empty($str)) return 0;
    $flag = 0;
    for ($i = 0; $i < strlen($str); $i++) {
        $flag += ord($str[$i]);
    }
    return $flag;
}

//  Request Parameters
$data = [
    'timestamp' => time(),
    'page' => 1,
    'pageSize' => 10
];

//  Sorting transaction parameters
$dataKeys = array_keys($data);
usort($dataKeys, function ($item1, $item2) {
    if ($item1 == $item2) return 0;
    $type1 = getParameterType(substr($item1, 0, 1));
    $type2 = getParameterType(substr($item2, 0, 1));
    if ($type1 == $type2) {
        $ord1 = str2ASCII($item1);
        $ord2 = str2ASCII($item2);
        return $ord1 < $ord2 ? -1 : 1;
    }
    return $type1 < $type2 ? -1 : 1;
});
$sortParams = [];
foreach ($dataKeys as $item) {
```

```
    $sortParams[$item] = $data[$item];
}

//  Signature transaction parameters
$query = implode('', array_values($sortParams));
$signature = sha1($query . $apiSecret);

//  Setting the request message header
$headers[] = 'apiKey: ' . $apiKey;
$headers[] = 'signature: ' . $signature;

//  initiate a request
$ch = curl_init();
curl_setopt($ch, CURLOPT_URL,
"https://partners.bitunix.com/partner/api/v1/openapi/userList?" .
http_build_query($sortParams));
curl_setopt($ch, CURLOPT_HTTPHEADER, $headers);
curl_setopt($ch, CURLOPT_RETURNTRANSFER, true);
curl_setopt($ch, CURLOPT_SSL_VERIFYPEER, false);
curl_setopt($ch, CURLOPT_SSL_VERIFYHOST, false);
$response = curl_exec($ch);

echo "The result of the execution is: " . $response;


?>
```

- Python

Python

```
import requests
import hashlib
import time
from urllib.parse import urlencode
```

```python
# API Key and Secret
api_key = 'xxx'
api_secret = 'xxx'

def get_parameter_type(s):
    """Determine the type based on the first character of the
parameter (numeric, lowercase, other)"""
    if s[0].isdigit():
        return 1
    elif s[0].islower():
        return 2
    return 3


def str_to_ascii_sum(s):
    """Calculates the sum of the ASCII values of all characters in
a string"""
    return sum(ord(c) for c in s)


# Request Parameters
data = {
    'timestamp': int(time.time()),
    'page': 1,
    'pageSize': 10
}

# Sorting transaction parameters
# Sort first by type of key (numeric, lowercase, other), then by
ASCII value
sorted_keys = sorted(data.keys(), key=lambda k:
(get_parameter_type(k), str_to_ascii_sum(k)))
sorted_params = {k: data[k] for k in sorted_keys}

# Signature transaction parameters
```

```
query_string = urlencode(sorted_params)
value_strings = [str(v) for v in sorted_params.values()]
concatenated_string = ''.join(value_strings)
signature = hashlib.sha1((concatenated_string +
api_secret).encode('utf-8')).hexdigest()

# Setting the request message header
headers = {
    'Content-Type': 'application/json',
    'apiKey': api_key,
    'signature': signature
}

# initiate a request
url =
f"https://partners.bitunix.com/partner/api/v1/openapi/userList?{que
ry_string}"
response = requests.get(url, headers=headers, verify=False)  #
Disable SSL Certificate Validation

# Output response results
print("The result of the execution is:", response.text)
```

- JavaScript

None

```
const axios = require('axios'); // For making HTTP requests
const crypto = require('crypto'); // For hashing
const querystring = require('querystring'); // For constructing
query strings

// API keys and secret
const apiKey = 'xxx';
const apiSecret = 'xxx';
```

```
// Function to determine parameter type based on the first
character
function getParameterType(s) {
    if (/^\d/.test(s)) {
        return 1; // If the first character is a digit
    } else if (/^[a-z]/.test(s)) {
        return 2; // If the first character is a lowercase letter
    }
    return 3; // Otherwise
}

// Function to calculate the sum of ASCII values of all characters
in a string
function strToAsciiSum(s) {
    return Array.from(s).reduce((sum, char) => sum +
char.charCodeAt(0), 0);
}

// Request parameters
const data = {
    timestamp: Math.floor(Date.now() / 1000), // Current timestamp
in seconds
    page: 1,
    pageSize: 10
};

// Sort the transaction parameters
// First, sort by key type (number, lowercase letter, others), then
by ASCII sum of the keys
const sortedKeys = Object.keys(data).sort((a, b) => {
    const typeDiff = getParameterType(a) - getParameterType(b);
    return typeDiff !== 0 ? typeDiff : strToAsciiSum(a) -
strToAsciiSum(b);
});
const sortedParams = sortedKeys.reduce((obj, key) => {
```

```
    obj[key] = data[key];
    return obj;
}, {});

// Generate the signature
const queryString = querystring.stringify(sortedParams);
const concatenatedString = Object.values(sortedParams).join('');
const signature =
crypto.createHash('sha1').update(concatenatedString +
apiSecret).digest('hex');

// Set the request headers
const headers = {
    'Content-Type': 'application/json',
    'apiKey': apiKey,
    'signature': signature
};

// Make the request
const url =
`https://partners.bitunix.com/partner/api/v2/openapi/userList?${que
ryString}`;
axios.get(url, { headers, httpsAgent: new
(require('https').Agent)({ rejectUnauthorized: false }) }) //
Disable SSL certificate validation
    .then(response => {
        console.log("Execution result:", response.data);
    })
    .catch(error => {
        console.error("Error occurred:", error.message);
    });
```

Interface API

Public

- There is a traffic limit for each interface, which will be 30 times per 10 seconds
- **API Request Address: https://partners.bitunix.com**
- Public parameter
    - Header

Name	Type	Required	Description
apiKey	string	Yes	Apply apiKey at the backend system
signature	string	Yes	Signature of the parameter

    - Params

Name	Type	Required	Description
timestamp	int	Yes	Timestamps for the request (Unit: second)

Check if the user is a partner's direct referral

- Description
  - Check whether the user is under current partner by UID or Email, and return the value of the USDT of the user's deposited cryptocurrency.
- Address
  - /partner/api/v2/openapi/validateUser
- Method
  - POST
  - Content-Type: application/x-www-form-urlencoded;charset=UTF-8
- Parameters
  - Body

Name	Type	Required	Description
account	string	Yes	UID or email

- **Return**
  - Format

None

```
{
    "code": "0",
    "msg": "suc",
    "result": {
        "result": true,
        "deposit_usdt_amount": "0"
    }
}
```

■

Name	Type	Description
code	string	0: Success; Others: Fail
msg	string	Display failure information if it fails

result	boolean	When sending the UID parameters, return the result if that user is a subordinate to the current partner: true: yes false: no Otherwise, it will return a list of users
deposit_usdt_Onchain	decimal	The value in USDT of a user's onchain deposit and OTC deposit
deposit_usdt_OTC	decimal	The value in USDT of a user's OTC deposit
deposit_usdt_Internal	decimal	The value in USDT of a user's Internal

Check all invited users under a partner

- **Description**

    - Query the information of all invited users of the current partner, and the number of invited users under each user
    - Check if a certain user is a invited user under a specific partner
- **Address**
    - /partner/api/v1/openapi/userList
- **Method**
    - GET
- **Parameters**
    - Params

Name	Type	Required	Description
uid	string	No	User's UID If the UID is sent, it will return the result if the searched user is a subordinate to the partner: true, false
startTime	datetime	No	Filter by registration time. If this is sent, it will sort out the users who register after this time.
endTime	datetime	No	Filter by registration time. If this is sent, it will sort out the users who register before this time.
page	int	No	Page number, default is 1
pageSize	int	No	Item listed per page, default is 20

- **Response**
    - Format

```
None


{
```

```
    "code": "0",
    "msg": "suc",
    "result": {
        "items": [
            {
                "uid": 321319151,
                "registerTime": "2023-10-20T07:02:28Z",
                "totalUser": 3
            },
            {
                "uid": 311319151,
                "registerTime": "2023-10-20T05:56:04Z",
                "totalUser": 1
            }
        ],
        "total": 193
    }
}
```


■

Name	Type	Description
code	string	0: Success; Others: Fail

msg	string	Display failure information if it fails
result	boolean	If the UID is sent, it will return the result if the searched user is a subordinate to the partner:true: Yes; false: No If there is not UID sent, it will return to a list of users.
uid	int	User's UID
registerTime	datetime	Registration time
totalUser	int	Number of all users (including partners themselves) under this query partners' team
total	int	Total data amount

Check the deposit records of invited users

- **Description**

    - Check the deposit records of all invited users of current partner
    - Added all deposit methods, including on-chain deposit, third-party orders, P2P, card deposit, SEPA deposit, internal transfer.
    - The search date range should be within 180 days. When searching data from the date range over 180 days, please search separately.
    -
- **Address**
    - /partner/api/v2/openapi/depositList
- **Method**
    - GET
- **Parameters**
    - Params

Name	Type	Required	Description
uid	string	No	User's UID If the UID is sent, and the user is a subordinate to the partner, it will return the deposit record of the user. Otherwise, it will return: false
startTime	datetime	No	Filter by registration time. If this is sent, it will sort out the users who register after this time.
endTime	datetime	No	Filter by registration time. If this is sent, it will sort out the users who register before this time.
depositChannel	string	No	ON_CHAIN, OTC, P2P, BANK_CARD, FIAT,INTERNAL, SEPA; Display all if it's left empty Multi-select is also supported
page	int	No	Page number, default is 1
pageSize	int	No	Item listed per page, default is 20

- **Response**
    - Format

None


```
{
    "code": "0",
    "msg": "suc",
    "result": {
        "items": [
            {
                "uid": 127342167,
                "depositTime": "2023-10-12T14:47:45Z",
                "depositCoin": "USDT",
                "depositAmount": "11",
                "depositValueInUSDT": "11"
            }
        ],
        "total": 6
    }
}
```


■

Name	Type	Description
code	string	0: Success; Others: Fail
msg	string	Display failure information if it fails
result	boolean	List of deposit records. If the user is not a sub to the partner, it will return: false
uid	int	User's UID
depositTime	datetime	Deposit time
depositCoin	string	Deposit token
depositAmount	decimal	Deposit amount
depositType	string	OTC/Onchain/Internal
depositValueInUSDT	decimal	Value in USDT

depositChannel	string	Deposit methods, including on-chain deposit, third-party orders, P2P, card deposit, SEPA deposit, internal transfer.
total	int	Total amount of the data

Check the trading volume of the partner's invited users

- **Description**
  - Look up the trading volume of each trading pairs of all invited users of current partner
  - The search date range should be within 180 days. When searching data from the date range over 180 days, please search separately.
- **Request address**
  - /partner/api/v1/openapi/transAmountList
- **Method**
  - GET
- **Parameters**
  - Params

Name	Type	Required	Description
uid	string	No	User's UID If the UID is sent, and the user is a subordinate to the partner, it will return the trading volume of the user. Otherwise, it will return: false
startTime	datetime	No	Filter by registration time. If this is sent, it will sort out the volume after this time
endTime	datetime	No	Filter by registration time. If this is sent, it will sort out the volume before this time.
transCoinPair	string	No	Name of the trading pair
page	int	No	Page number, default is 1

pageSize	int	No	Item listed per page, default is 20

- **Response**
  - Format

None

```
{
    "code": "0",
    "msg": "suc",
    "result": {
        "items": [
            {
                "uid": 114379134,
                "transCoinPair": "BTCUSDT",
                "tradeType": "spot".
                "transVolume": "273.5535"
            }
        ],
        "total": 186
    }
}
```

■

Name	Type	Description
code	string	0: Success; Others: Fail
msg	string	Display failure information if it fails
result	boolean	List of trading volume; if the user is not under partner's team, return: false
uid	int	User's UID
transCoinPair	string	Name of trading pair
tradeType	string	Trading type, spot: spot trading, futures:perpetual futures trading

transVolume	decimal	Amount
transVolumeUsd	decimal	USD value when the trade is done
total	int	Total amount of data

Check the community activity under partner

- **Description**
  - Query all community activities under partner
- **Request Address**
  - /partner/api/v1/openapi/activityList
- **Method**
  - Get
- **Parameters**

Name	Type	Required	Description
activityId	int	No	Activity ID Return all activities if it's not sent
page	int	No	Page number, default: 1
pageSize	int	No	Items shown per page, default: 20

- **Response**

```
None
> Response

{

    "code": "0",

    "msg": "suc",

    "result": {

        "items": [
```

```
            {
                "activityId": 154,
                "title": "de",
                "endTime": "2023-11-30T13:37:22Z",
                "startTime": "2023-11-06T13:45:44Z",
                "enrollCount": 0,
                "status": 5
            }
        ],
        "total": 2
    }
}
```


Name	Type	Description
code	string	0: Success; Others: Fail
msg	string	Display failure information if it fails
result	boolean	If activity ID is sent, return the information of the related activity If no activity ID is sent, return the information of all activities
activityId	int	Activity ID
title	String	Activity Title
startTime	datetime	Starting time of the activity(UTC+0)
endTime	datetime	Ending time of the activity(UTC+0)

enrollCount	int	Number of entries
status	int	1: Under configuration 2: Open for entry; 3: Ongoing 4: Ended ; 5: Activity failed
total	int	Total data amount

Check the registration information of the partner's community activity

- **Description**
  - Query the activity entry status of the users in the partner's team
- **Request Address**
  - /partner/api/v1/openapi/communityRegistrationList
- **Method**
  - Get
- **Parameters**

Name	Type	Required	Description
activityId	int	Yes	Activity ID
uid	int	No	User UID If this is sent, it will only show the entry status of this user If this is not sent, it will return all activities under the enquired partner

- **Response**

```
None
> Response


{
```

```
    "code": "0",
    "msg": "suc",
    "result": {
        "items": [
            {
                "uid": 12345154,
                "isJoin": "True",
                "registrationTime": "2023-11-30T13:37:22Z",
            }
        ],
        "total": 2
    }
}
```


○

Name	Type	Description
code	string	0: Success; Others: Fail
msg	string	Display failure information if it fails
result	boolean	If UID is entered, return the entry status of the user If no UID is entered, return the entry status of all users of the partner
uid	int	User UID
isJoin	String	True: entered；False: not yet entered

registrationTime	datetime	Entry time (UTC time. "--" will be displayed if it's the user has not entered)
total	int	Total data amount

Check the commissions generated by the referrals

- **Description**
  - Check all the commissions generated by the referrals under the current partner during a certain period.
  - If UID is entered, it will return the commission generated to the partner during the selected period. If UID is not entered, it will return the total commission generated to the partner by all referrals, including the partners themselves during the period. Unit: USDT.
  - The search date range should be within 180 days. When searching data from the date range over 180 days, please search separately.
- **Request Address**
  - /partner/api/v1/openapi/totalCommission
- **Method**
  - GET
- **Parameters**
  - Params

Name	Type	Required	Description
uid	string	No	UID of the user. If it’s entered, it will return the commission generated and paid to the partner.
startTime	datetime	Yes	Start time of the period
endTime	datetime	Yes	End time of the period

- **Return**
  - Format

None

```
{
    "code": "0",
    "msg": "suc",
    "result": {
        "uid": 123456,
        "totalCommission": "123.456"
    }
```

■ }

■

Name	Type	Description
code	string	0: Success; Others: Failed
msg	string	Show failed
result		
uid	int	Enter UID
totalCommission	decimal	Commission generated by that user. (Unit: USDT at the rate during the enquiry)

Check the balance of the referrals

- **Description**
  - Check the account balance of all users under the partner, as well as the fund allocation
- **Address**
  - /partner/api/v1/openapi/totalAssetValue
- **Method**
  - GET
- **Parameters**
  - Params

Name	Type	Required	Description
uid	string	No	User's Account UID. If it's entered, it will return the balance of the user. If not, it will return false

- **Return**
  - Format

```
None
{
    "code": "0",
    "msg": "suc",
```

```
    "result": {
        "uid": 123456,
        "totalAssetValue": "12321.88829211",
        "spotAccounts": "8123.4467453",
        "futuresAccounts": "102093.6769475",
        "copyAccount": "10013.9026497",
        "leadAccount": "9982.8623786"
    }
```


- }

-

Name	Type	Description
code	string	0: Success; Others: Fail
msg	string	Display failure information if it fails
uid	int	UID
totalAssetValue	decimal	Total account balance in USDT
spotAccounts	decimal	Spot account balance in USDT
futuresAccounts	decimal	Futures account balance in USDT
copyAccount	decimal	Copy account balance in USDT
leadAccount	decimal	Lead account balance in USDT

Check all trading details from referrals

- **Description**
  - Check all trading details from all referrals
  - The search date range should be within 180 days. When searching data from the date range over 180 days, please search separately.
- **Address**
  - /partner/api/v1/openapi/transaction
- **Method**
  - GET
- **Parameters**
  - Params

Name	Type	Required	Description
userType	string	Yes	Request perspective, `agent` means query of the partner,`user` means query of the regular user. Default: `user`. **Partner perspective:** Trade Amount: the amount of each transaction of the user in the time period Paid commission: the actual paid fee for each transaction made by the user during the time period

			Commission: the amount of commission that the agent receives for each transaction of the user during the time period. Rebate ratio: the partner's percentage of commission generated by each transaction in the time period the user. **User query:** Trade Amount: the amount of each transaction during the time period. Paid commission: the actual paid fee for each transaction within the time period Commission: the user's share of the commission amount for each transaction within the time period. Rebate ratio: the percentage of the commission generated by each transaction of the user during the time period.
uid	int	Yes	Users' Account ID
startTime	string	Yes	Starting time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".
endTime	string	Yes	Ending time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".
page	int	Yes	Page, default: 1
pageSize	int	Yes	Items per page. Default: 20. Max: 10,000.

- Return

Name	Type	Description	
code	string	0: Success; Others: Fail	
msg	string	Display failure information if it fails	
result	object	List of the trading details. Returns false if the user is not a referral under the partner.	

items	array	A collection of transaction records that meet the query criteria.	
uid	int	Users' account ID	
ctime	datetime	Trading time (UTC+0)。	
tradeAmount	decimal	Trading volume (Total generated volume of the trade.	
coin	string	Token (e.g. USDT)	
tradeType	string	Spot or Futures	
feeDiscountVoucherDeduceFee	decimal	Fee deducted from fee discount voucher	Added on 2026-01-07
futuresBonusDeduceFee	decimal	Fee deducted from futures bonus	Added on 2026-01-07
fee	decimal	Fee	
partnerRebate	decimal	Commission paid	
ratio	number	Commission rate	
total	int	The total number of records that meet the criteria.	

- Format

None


```
{
    "code": "0",
    "msg": "suc",
    "result": {
        "items": [
            {
```

```
                "uid": 499785117,
                "tradeAmount": "999.94554",
                "coin": "ADA",
                "tradeType": "spot",
                "fee": "1.4226",
                "partnerRebate": "0.28452",
                "ratio": "0.2",
                "ctime": "2025-03-19T02:26:46Z"
            },
            {
                "uid": 499785117,
                "tradeAmount": "6921.7124",
                "coin": "USDT",
                "tradeType": "futures",
                "fee": "4.15302744",
                "partnerRebate": "0.83060548",
                "ratio": "0.2",
                "ctime": "2025-03-19T02:05:34Z"
            }
        ],
        "total": 2
    }
}
```


Check total trading data from all referrals.

- **Description**
  - Check the total data of all referrals of the current partner
- **Address**
  - /partner/api/v1/openapi/totalTransaction
- **Method**
  - GET
- **Parameter**
  - Params

Name	Type	Required	Description

userType	string	Yes	Request perspective, `Agent` means query of the partner,`user` means query of the regular user. Default: `user`.
			
			`Partner Perspective:`
			
			Total Trade Amount: the total amount of user transactions during the time period.
			
			Total Fee: the amount of paid commission for the total number of transactions made by the user during the time period.
			
			Total Commission: the amount of commission paid to the partner for the user's total transactions during the time period.
			
			Futures Commission Rate: the percentage of commission generated by the user's current futures transactions that the partner receives.
			
			Spot Commission Rate: the percentage of commission generated by the user's current spot transactions that the partner receives.
			
			`User Perspective`
			
			Total Trade Amount: the total amount of user transactions during the time period.
			
			Total Fee: User’s actual paid fee during the time period.
			
			Commission: User’s commission received during the time period.
			
			Futures Commission Rate: User’s percentage of the commission from the fee they generated in futures trading
			
			Spot Commission Rate: User’s percentage of the commission from the fee they generated in spot trading

uid	int	Yes	Users' account ID
startTime	string	Yes	Starting time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".
endTime	string	Yes	Ending time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".

- **Return**

Name	Type	Description
code	string	0: Success; Others: Fail
msg	string	Display failure information if it fails
result	object	List of the trading details. Returns false if the user is not a referral under the partner.
currency	string	Token (e.g. USDT)
tradeType	string	Trading type: Futures or Spot trading
totalTradeAmount	decimal	Total amount of the trade.
totalFee	decimal	Total fee in token
totalCommission	decimal	Total commission generated
futuresCommissionRate	number	Latest futures commission rate of the user
spotCommissionRate	number	Latest spot commission rate of the user

- /partner/api/v1/openapi/totalTransaction

None

```
{
    "code": "0",
    "msg": "suc",
```

```
    "result": {
        "detail": [
            {
                "currency": "ADA",
                "tradeType": "spot",
                "totalTradeAmount": "999.94554",
                "totalFee": "1.4226",
                "totalCommission": "0.28452"
            },
            {
                "currency": "USDT",
                "tradeType": "futures",
                "totalTradeAmount": "82597.80926",
                "totalFee": "49.55868555",
                "totalCommission": "9.91173711"
            }
        ],
        "spotCommissionRate": 20,
        "futuresCommissionRate": 20
    }
}
```


Check KYC status of all referrals

- Description:
  - Check KYC status of all referrals
- Address:
  - /partner/api/v1/openapi/kycLevel
- Method:
  - GET
- Parameter:
  - Params

Name	Type	Required	Description
uid	int	Yes	User's UID

- Return
  - Format

Name	Type	Description
code	string	0: Success; Others: failed
msg	string	Display failure information if it fails
result	string	no_auth: No KYC Completed Auth_lv1: Lv. 1 KYC Completed Auth_lv2: Lv.2 KYC Completed

None

```
{
    "code": "0",
    "msg": "suc",
    "result": "auth_lv2"
}
```

Check open positions of the referrals

- **Description**
  - Return all open positions data of the referrals
- **Address**
  - /partner/api/v1/openapi/futuresOpenPositions
- **Method**

    - POST
- **Parameters**
    - Body

Name	Type	Required	Description
uid	int	Yes	UID
page	int	Yes	Page, default: 1
pageSize	int	No	Items per page. Default: 20. Max: 10,000.

- **Return**

Name	Type	Description
code	string	0: Success; Others: Failed
msg	string	Display failure information if it fails
result	object	List of open positions. Return “false” if it’s not a user under this partner.
items	array	A collection of transaction records that satisfy the query criteria.
uid	int	UID
positionId	string	Position ID
pair	string	Trading Pair. Format “BASEQUOTE”, e.g. “BTCUSDT”
category	string	LINEAR: regular contract (USDT-M); INVERSE: Inverse Contract (Coin-M)
side	string	Side, “BUY” means open long, “SELL” means open short
leverage	int	Leverage, such as 10x, 20x
marginMode	string	Margin mode. Isolated margin or cross margin.
entryPrice	decimal	Avg. entry price. Unit: quote token.

amount	decimal	Position Size
margin	decimal	Margin in use of the position. Unit: quote token (USDT)
timeOpened	datetime	Position open time (UTC)

- Format

None


```
{
  "code": "0",
  "msg": "suc",
  "result": {
    "items": [
      {
        "uid": 499785117,
        "positionId": "8753196775106552848",
        "pair": "BTCUSDT",
        "category": "LINEAR",
        "side": "BUY",
        "leverage": 20,
        "marginMode": "CROSS",
        "entryPrice": "95152.8",
        "amount": "1.9819",
        "margin": "9429.2",
        "timeOpened": "2025-04-28T10:44:20Z"
      },
      {
        "uid": 499785117,
        "positionId": "7978229221258011008",
        "pair": "KMNOUSDT",
        "category": "LINEAR",
        "side": "BUY",
        "leverage": 20,
        "marginMode": "CROSS",
        "entryPrice": "0.06447063",
        "amount": "300000",
        "margin": "967.05951",
```

```
        "timeOpened": "2025-04-28T10:51:37Z"
      }
    ],
    "total": 2
  }

        ○  }
```


Check positions history of referrals

- **Description**
  - Return positions history data of the referrals under the partner
- **Address**
  - /partner/api/v1/openapi/futuresPositionsHistory
- **Method**
  - POST
- **Parameters**
  - Body

Name	Type	Required	Description
uid	int	Yes	UID
startTime	string	Yes	Starting time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".。
endTime	string	Yes	Ending time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".
page	int	No	Page, default: 1
pageSize	int	No	Items per page. Default: 20. Max: 10,000.

- **Return**

Name	Type	Description
code	string	0: Success; Others: Failed

msg	string	Display failure information if it fails
result	object	List of all futures orders history. Return “false” if it’s not a partner’s referral.
items	array	A collection of transaction records that satisfy the query criteria.
uid	int	UID
positionId	string	Position ID
pair	string	Trading Pair. Format “BASEQUOTE”, e.g. “BTCUSDT”
category	string	LINEAR: regular contract (USDT-M); INVERSE: Inverse Contract (Coin-M)
side	string	Side, “BUY” means open long, “SELL” means open short
leverage	int	Leverage, such as 10x, 20x
marginMode	string	Margin mode. Isolated or cross margin
unrealizedPnL	decimal	Unrealized PnL
timeOpened	datetime	Position opening time (UTC)
timeClosed	datetime	Position closing time (UTC)
entryPrice	decimal	Avg. entry price. Unit: quote token.
closePrice	decimal	Avg. closing price, unit: quote coin of the futures
positionPnl	decimal	Position PnL(Realized PnL), unit: quote coin
ROI	decimal	ROI, expressed as a percentage, e.g., 12.5 means 12.5%
maxHeld	decimal	Max size, the maximum quantity of the position
closeQty	decimal	Closed quantity
status	string	Status. Open: open position / Closed: position is closed

- Format

None


```
{
  "code": "0",
  "msg": "suc",
  "result": {
    "records": [
      {
        "uid": 499785117,
        "positionId": "7852753485151922537",
        "pair": "BTCUSDT",
        "category": "LINEAR",
        "side": "BUY",
        "leverage": 20,
        "marginMode": "CROSS",
        "entryPrice": "79394.07180428",
        "unrealizedPnL": "0",
        "roi": "-61.58",
        "timeOpened": "2025-04-08T06:24:02Z",
        "timeClosed": "2025-04-08T17:11:32Z",
        "closePrice": "77008.89963375",
        "positionPnl": "-23230.84381409",
        "maxHeld": "9.5018",
        "closeQty": "9.5018",
        "status": "CLOSED"
      },
      {
        "uid": 499785117,
        "positionId": "7752366385044845625",
        "pair": "BTCUSDT",
        "category": "LINEAR",
        "side": "BUY",
        "leverage": 20,
        "marginMode": "CROSS",
        "entryPrice": "77289.20418238",
        "unrealizedPnL": "0",
        "roi": "68.7",
```

```
        "timeOpened": "2025-03-21T09:58:18Z",
        "timeClosed": "2025-04-08T03:02:06Z",
        "closePrice": "80001.60659326",
        "positionPnl": "299496.84717778",
        "maxHeld": "112.797",
        "closeQty": "112.797",
        "status": "CLOSED"
      }
    ],
    "total": 2,
    "size": 20,
    "current": 1,
    "orders": [],
    "optimizeCountSql": true,
    "searchCount": true,
    "optimizeJoinOfCountSql": true,
    "maxLimit": null,
    "countId": null,
    "pages": 1
  }
```


- }

Check referrals' futures order history

- **Description**
  - Return the referrals' order history data in futures trading
- **Address**
  - /partner/api/v1/openapi/futuresOrdersHistory
- **Method**
  - POST
- **Parameters**
  - Body

Name	Type	Required	Description

uid	int	Yes	UID
startTime	string	Yes	Starting time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".。
endTime	string	Yes	Ending time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".
page	int	No	Page, default: 1
pageSize	int	No	Items per page. Default: 20. Max: 10,000.

- **Return**

Name	Type	Description
code	string	0: Success; Others: Failed
msg	string	Display failure information if it fails
result	object	List of all futures orders history. Return “false” if it’s not a partner’s referral.
items	array	A collection of transaction records that satisfy the query criteria.
uid	int	UID
orderId	string	Order ID
pair	string	Trading Pair. Format “BASEQUOTE”, e.g. “BTCUSDT”
category	string	Futures type, such as "Coin-M", "USDT-M"
orderType	string	Order type, Limit or market order
side	string	Side, “BUY” means open long, “SELL” means open short
leverage	int	Leverage, such as 10x, 20x
orderPrice	decimal	Order price, unit: quote coin of the pair

orderQuantity	decimal	Order quantity
avgPrice	decimal	Avg. transaction price.
filled	decimal	Transaction quantity
realizedPnL	decimal	Realized PnL. Unit: margin coin
fee	decimal	Fee/ Unit: margin coin
status	string	Order status, such as: “*FILLED*”: all filled; “PART_FILLED_CANCELED”: partially filled but then canceled; “*CANCELED*”: order canceled
orderTime	datetime	Order time (UTC)

- Format

None


```
{
  "code": "0",
  "msg": "suc",
  "result": {
    "records": [
      {
        "uid": 499785117,
        "orderId": "1916807508090716160",
        "pair": "KMNOUSDT",
        "category": "LINEAR",
        "side": "BUY",
        "leverage": 20,
        "orderType": "MARKET",
        "orderPrice": "0.06742",
        "orderQuantity": "300000",
        "avgPrice": "0.06447",
        "filled": "300000",
        "realizedPnL": "0",
        "fee": "5.80235705",
        "status": "FILLED",
```

```
      "orderTime": "2025-04-28T10:51:37Z"
    },
    {
      "uid": 499785117,
      "orderId": "1916805675330867200",
      "pair": "BTCUSDT",
      "category": "LINEAR",
      "side": "BUY",
      "leverage": 20,
      "orderType": "MARKET",
      "orderPrice": "99929.6",
      "orderQuantity": "1.9819",
      "avgPrice": "95152.8",
      "filled": "1.9819",
      "realizedPnL": "0",
      "fee": "56.57500029",
      "status": "FILLED",
      "orderTime": "2025-04-28T10:44:20Z"
    }
  ],
  "total": 2,
  "size": 20,
  "current": 1,
  "orders": [],
  "optimizeCountSql": true,
  "searchCount": true,
  "optimizeJoinOfCountSql": true,
  "maxLimit": null,
  "countId": null,
  "pages": 1
}
```


- }

Check referrals' transaction history

- **Description**
  - Return all data of the transaction history from the referrals
- **Address**
  - /partner/api/v1/openapi/futuresTransactionsHistory
- **Method**
  - POST
- **Parameters**
  - Body

Name	Type	Required	Description
uid	int	Yes	UID
startTime	string	Yes	Starting time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".。
endTime	string	Yes	Ending time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".
page	int	No	Page, default: 1
pageSize	int	No	Items per page. Default: 20. Max: 10,000.

- **Return**

Name	Type	Description
code	string	0: Success; Others: Failed
msg	string	Display failure information if it fails
result	object	Data list of futures transaction histories. Return “false” if it’s not a partner’s referral.
items	array	A collection of transaction records that satisfy the query criteria.
uid	int	UID
orderId	string	Order ID
pair	string	Trading Pair. Format “BASEQUOTE”, e.g. “BTCUSDT”

category	string	Trading type, such as COIN-M or USDT-M
side	string	Side, “BUY” means open long, “SELL” means open short
leverage	int	Leverage, such as 10x, 20x
avgPrice	decimal	Transaction price, unit: quote token
filled	decimal	Transaction quantity
closedValue	decimal	Transaction value (USDT)
realizedPnL	decimal	Realized PnL (USDT)
fee	decimal	Fee (USDT)
role	string	Liquidity side, MAKER or TAKER
time	datetime	Order Time

- Format

None


```
{
  "code": "0",
  "msg": "suc",
  "result": {
    "records": [
      {
        "uid": 499785117,
        "orderId": "6012331939082341410",
        "pair": "KMNOUSDT",
        "category": "LINEAR",
        "side": "BUY",
        "leverage": 20,
        "avgPrice": "0.06453",
        "filled": "58083",
        "realizedPnL": "0",
        "closedValue": "3748.09599",
```

```
      "fee": "1.12442879",
      "role": "TAKER",
      "time": "2025-04-28T10:51:37Z"
    },
    {
      "uid": 499785117,
      "orderId": "7211610572218840070",
      "pair": "KMNOUSDT",
      "category": "LINEAR",
      "side": "BUY",
      "leverage": 20,
      "avgPrice": "0.06452",
      "filled": "129709",
      "realizedPnL": "0",
      "closedValue": "8368.82468",
      "fee": "2.5106474",
      "role": "TAKER",
      "time": "2025-04-28T10:51:37Z"
    }
  ],
  "pagination": {
    "total": 567,
    "size": 20,
    "current": 1,
    "pages": 284
  }
}
```


      - }

Check referrals' spot order history

- **Description**
  - Return spot order history of partner's referrals
- **Address**
  - /partner/api/v1/openapi/spotOrdersHistory

- **Method**
  - POST
- **Parameters**
  - Body

Name	Type	Required	Description
uid	int	Yes	UID
startTime	string	Yes	Starting time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".。
endTime	string	Yes	Ending time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".
page	int	No	Page, default: 1
pageSize	int	No	Items per page. Default: 20. Max: 10,000.

- **Return**

Name	Type	Description
code	string	0: Success; Others: Failed
msg	string	Display failure information if it fails
result	object	Data list of spot transaction histories. Return “false” if it’s not a partner’s referral.
items	array	A collection of transaction records that satisfy the query criteria.
uid	int	UID
orderId	string	Order ID
pair	string	Trading Pair. Format “BASEQUOTE”, e.g. “BTCUSDT”
orderType	string	Order type, Limit or market order
side	string	Side, “BUY” means open long, “SELL” means open short

orderPrice	decimal	Order price, unit: quote coin of the pair
orderQuantity	decimal	Order quantity
avgPrice	decimal	Transaction price, unit: quote token
filled	decimal	Transaction quantity
closedValue	decimal	Transaction value (USDT)
status	string	Order status, such as FILLED (Fully filled), CANCELED (Order canceled), PART_FILLED_CANCELED (Partially filled but then canceled)
orderTime	datetime	Order time (UTC)

- Format

None


```
{
  "code": "0",
  "msg": "suc",
  "result": {
    "records": [
      {
        "uid": 499785117,
        "orderId": "1916776698070700032",
        "pair": "FRONTUSDT",
        "orderType": "LIMIT",
        "side": "SELL",
        "orderPrice": "0.6255",
        "orderQuantity": "50",
        "avgPrice": "0.6255",
        "filled": "50",
        "closedValue": "31.275",
        "status": "FILLED",
        "orderTime": "2025-04-28T08:49:11Z"
      },
      {
```

```
        "uid": 499785117,
        "orderId": "1916774617649774592",
        "pair": "PEPEUSDT",
        "orderType": "LIMIT",
        "side": "BUY",
        "orderPrice": "0.000009",
        "orderQuantity": "10000000000",
        "avgPrice": "0.000009",
        "filled": "10000000000",
        "closedValue": "90000",
        "status": "FILLED",
        "orderTime": "2025-04-28T08:40:55Z"
      }
    ],
    "total": 2,
    "size": 20,
    "current": 1,
    "orders": [],
    "optimizeCountSql": true,
    "searchCount": true,
    "optimizeJoinOfCountSql": true,
    "maxLimit": null,
    "countId": null,
    "pages": 1
}
```


- }

Check referrals' spot transaction history

- **Description**
  - Return spot transaction history of partner's referrals
- **Address**
  - /partner/api/v1/openapi/spotTransactionHistory
- **Method**
  - POST

- **Parameters**
  - Body

Name	Type	Required	Description
uid	int	Yes	UID
startTime	string	Yes	Starting time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".。
endTime	string	Yes	Ending time of the search range, format: "yyyy-MM-ddTHH:mm:ssZ".
page	int	No	Page, default: 1
pageSize	int	No	Items per page. Default: 20. Max: 10,000.

  - **Return**

Name	Type	Description
code	string	0: Success; Others: Failed
msg	string	Display failure information if it fails
result	object	Data list of spot transaction histories. Return “false” if it’s not a partner’s referral.
items	array	A collection of transaction records that satisfy the query criteria.
uid	int	UID
orderId	string	Order ID
pair	string	Trading Pair. Format “BASEQUOTE”, e.g. “BTCUSDT”
orderType	string	Order type, Limit or market order
side	string	Side, “BUY” means open long, “SELL” means open short
avgPrice	decimal	Transaction price, unit: quote token

filled	decimal	Transaction quantity
closedValue	decimal	Transaction value (USDT) 8 decimals, rounded up
fee	decimal	Fee (USDT) 8 decimals, rounded up
role	string	Liquidity side, MAKER or TAKER
time	datetime	Transaction time

- Format

None


```
{
  "code": "0",
  "msg": "suc",
  "result": {
    "records": [
      {
        "uid": 499785117,
        "orderId": "1916774617649774592",
        "pair": "PEPEUSDT",
        "orderType": "LIMIT",
        "side": "BUY",
        "avgPrice": "0.000009",
        "filled": "5313210607",
        "closedValue": "47818.895463",
        "fee": "19.12755818",
        "role": "MAKER",
        "time": "2025-04-28T08:49:28Z"
      },
      {
        "uid": 499785117,
        "orderId": "1916774617649774592",
        "pair": "PEPEUSDT",
        "orderType": "LIMIT",
        "side": "BUY",
```

```
        "avgPrice": "0.000009",
        "filled": "1848965397",
        "closedValue": "16640.688573",
        "fee": "6.65627542",
        "role": "MAKER",
        "time": "2025-04-28T08:49:27Z"
      }
    ],
    "total": 2,
    "size": 20,
    "current": 1,
    "orders": [],
    "optimizeCountSql": true,
    "searchCount": true,
    "optimizeJoinOfCountSql": true,
    "maxLimit": null,
    "countId": null,
    "pages": 1
  }
```


        - }

Check all users that meet the trading volume target

- **Description**
  - Check all users who meet the trading volume target within a given period
- **Address**
  - /partner/api/v1/openapi/volume-qualified
- **Method**
  - GET
- **Parameters**
  - Params

Name	Type	Required	Description

startTime	datetime	Yes	Filter by trading time This parameter is used to filter users whose trading time is later than the specified time, supporting queries within the last 6 months.
endTime	datetime	Yes	Filter by trading time This parameter is used to filter users whose trading time is earlier than the specified time.
minTradeamount	decimal	Yes	User total trading amount threshold within the time range
page	int	No	Page, default: 1
pageSize	int	No	Items per page. Default: 20.

- **Return**

Name	Type	Description
code	string	0: Success; Others: Failed
msg	string	Display failure information if it fails
result	object	Results that meet the target
items	array	A collection of records that satisfy the query criteria.
uid	int	UID of the users who meet the target
tradeVolume	decimal	Total volume of the selected user

- Format

```
None
{
  "code": "0",
```

```
"msg": "suc",
"result": {
  "items": [
    {
      "uid": 3086403,
      "tradeVolume": "13733.58"
    },
    {
      "uid": 3086415,
      "tradeVolume": "13715.73"
    },
    {
      "uid": 3086423,
      "tradeVolume": "10093.622"
    },
    {
      "uid": 3086424,
      "tradeVolume": "10555.781"
    },
    {
      "uid": 3086425,
      "tradeVolume": "11464.725"
    }
  ],
  "total": 5
}
```


- }

Check the daily trading volume of each day of the referrals

- Timezone is set at UTC+0
- Sorting is fixed to ascending date order (earlier -> later).
- **Description**
  - Used to query the transaction volume (USD equivalent) of users under the current agent within a specified time range, with a maximum span of 180 days.

- **Address**
  - partner/api/v1/openapi/dailyTransAmountList
- **Method**
  - POST
- **Parameters**
  - Body

Name	Type	Required	Description	Note
uid	int	Yes	Users UID	
startTime	string	Yes	Start time of the search time range, format: "yyyy-MM-dd"。(UTC+)	
endTime	string	Yes	End time of the time range. Format: "yyyy-MM-dd"（UTC+0)	
transCoinPair	string	No	Trading Pair	
page	int	No	Page, default: 1	
pageSize	int	No	Items per page. Default: 20. Maximum 10,000	

  - **Return**

Name	Type	Description
code	string	0: Success; Others: Failed
msg	string	Display failure information if it fails
result	boolean	Data list of volume records. Return “false” if it’s not a partner’s referral.
uid	int	Users UID
transCoinPair	string	Trading Pair
tradeType	string	Trading type: spot, futures

transVolume	decimal	Trading volume in USDT based on real time price
transVolumeUsd	decimal	Trading volume is USDT when the trade is completed
date	string	Display all date data in ascending order by date for each individual data point
total	int	Total data volume

Check trading volume, transactions and PnL of direct referrals

- Timezone is UTC+0
- **Description**
  - Find the trading date such as volume, trades and PnL of direct referrals. Up to 180 days are supported
- **Request Address**
  - /partner/api/v2/openapi/queryPnlAndTradeCnt
- **Request Methods**
  - GET
- **Parameters**
  - Params

Name	Type	Required	Description	Note
startTime	string	Yes	Start time of the search time range，format: "2024-01-15T00:00:00Z"(UTC+0)	
endTime	string	Yes	End time of the time range. Format: "2024-01-15T00:00:00Z"（UTC+0)	
pageNo	int	No	Page, default: 1	
pageSize	int	No	Items per page. Default: 10. Maximum 100	

  - Return

Name	Type	Description

code	string	0: Success; Others: Failed
msg	string	Display failure information if it fails
result	Object	Data list of all the results that meets the search requirements
items	array	Results
uid	int	UID
pnl	decimal	pnl
tradeCnt	int	Trading counts
tradeAmount	decimal	Trading Volume
nickName	string	User nickname
total	int	Total data