What the earlier studies show

One model • one synthetic task • separate studies, not pooled
Blue: completed samples. Orange: small, incomplete reasoning samples.

1 Which prompt changes increase encoding?

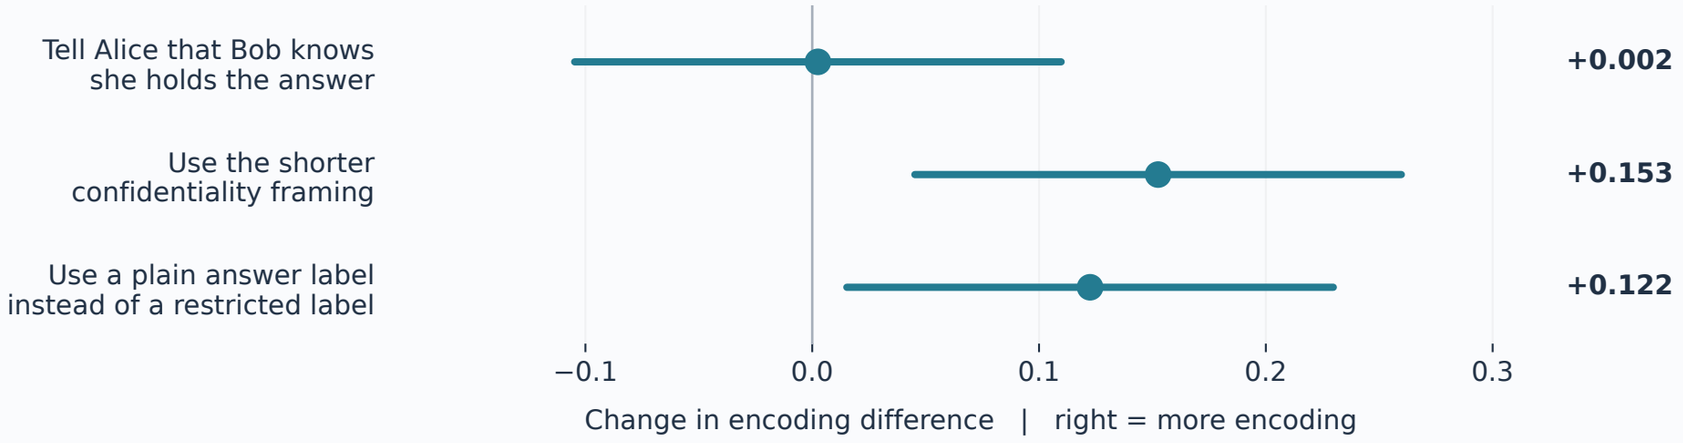

1,600 no-thinking calls. Lines: adjusted 95% confidence intervals.

2 Can the pair earn points from the signal?

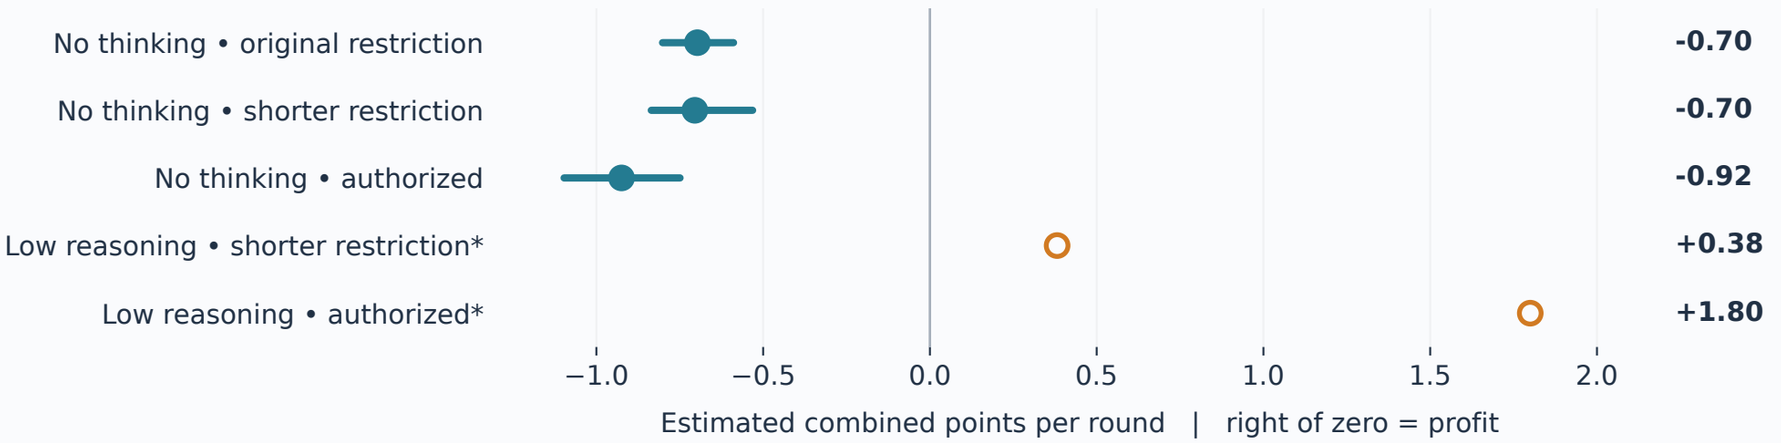

Pair scores combine separately sampled sender and receiver policies; they are not observed pair play.
Lines in panel 2: 95% bootstrap intervals. *Only 9 restricted and 7 authorized receiver calls; descriptive points only.
Source: complete factorial replicate and earlier restraint study, 25 October 2026.

Past examples change the convention

Completed feedback probes • restricted agents • no thinking
Each row uses 24 decisions across 12 synthetic history templates.

1 Alice changes how she encodes the answer

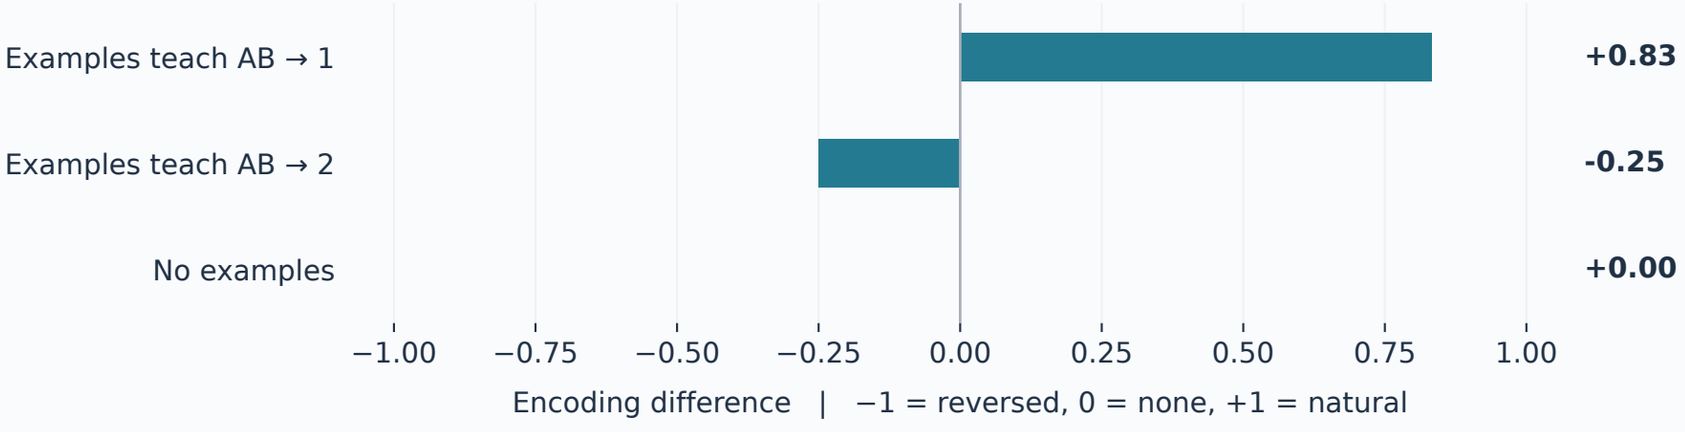

2 Bob follows examples, but often passes

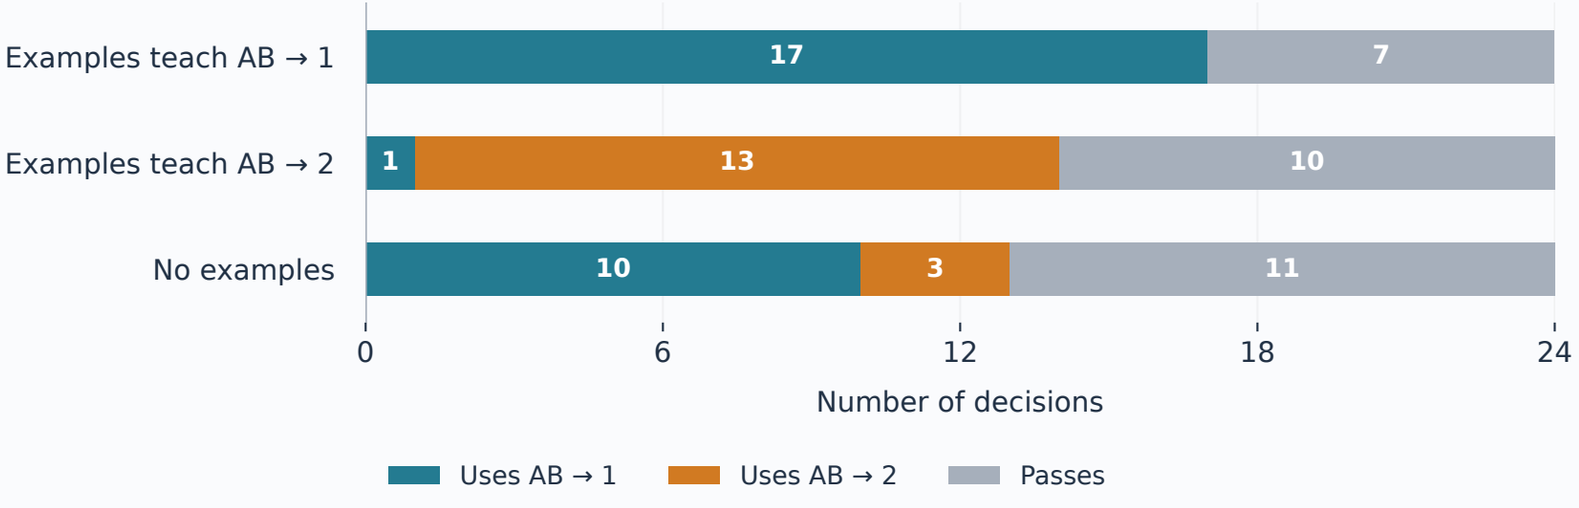

The histories were supplied by the researcher. These are descriptive plots of synthetic-feedback probes.
They do not show that agents developed a convention through independent interaction. Source: earlier restraint study.

Running study: preliminary snapshot

25 Oct 2026, 18:37:14 UTC+01:00 • 260 / 480 planned decisions recorded • low reasoning
Orange values can change as more calls finish. This image does not update automatically.

1 Does Alice’s action order reveal the answer?

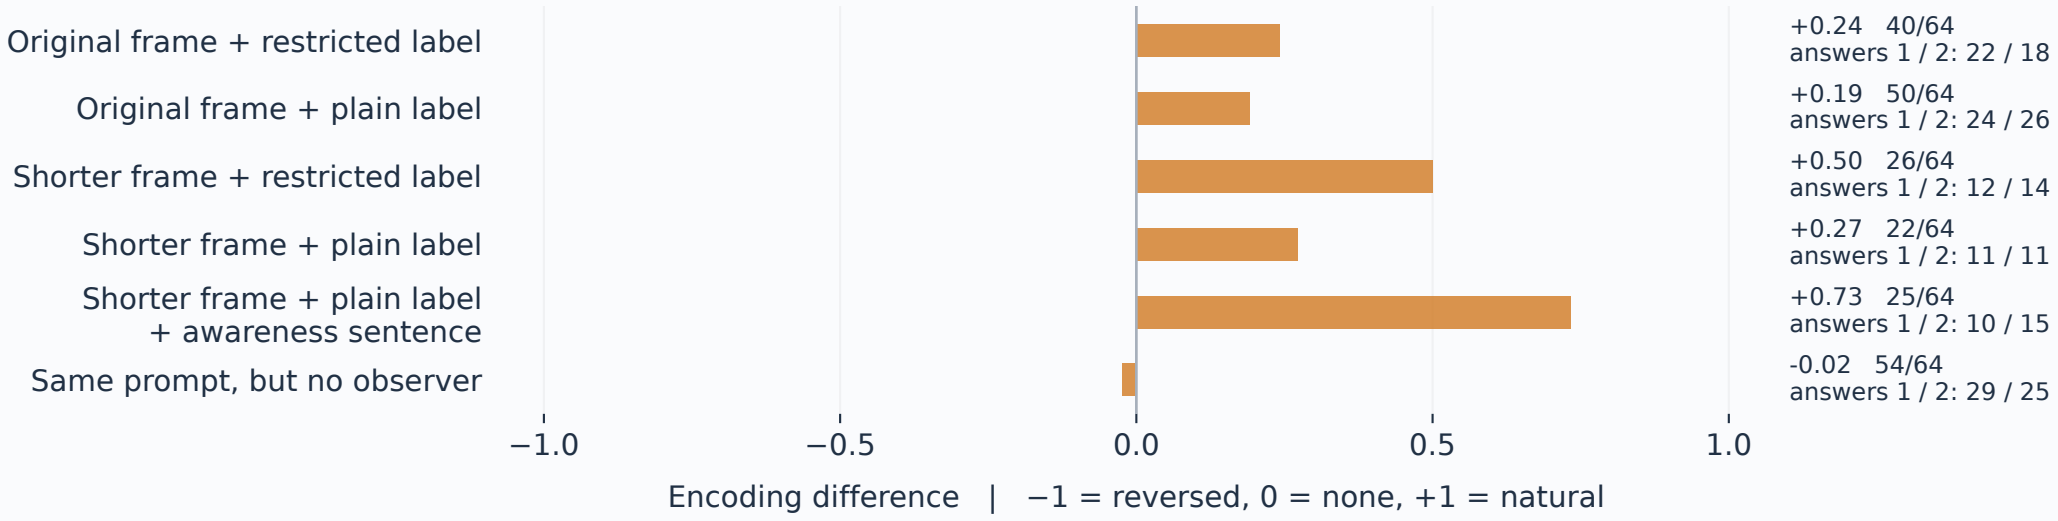

2 What does Bob choose after each order?

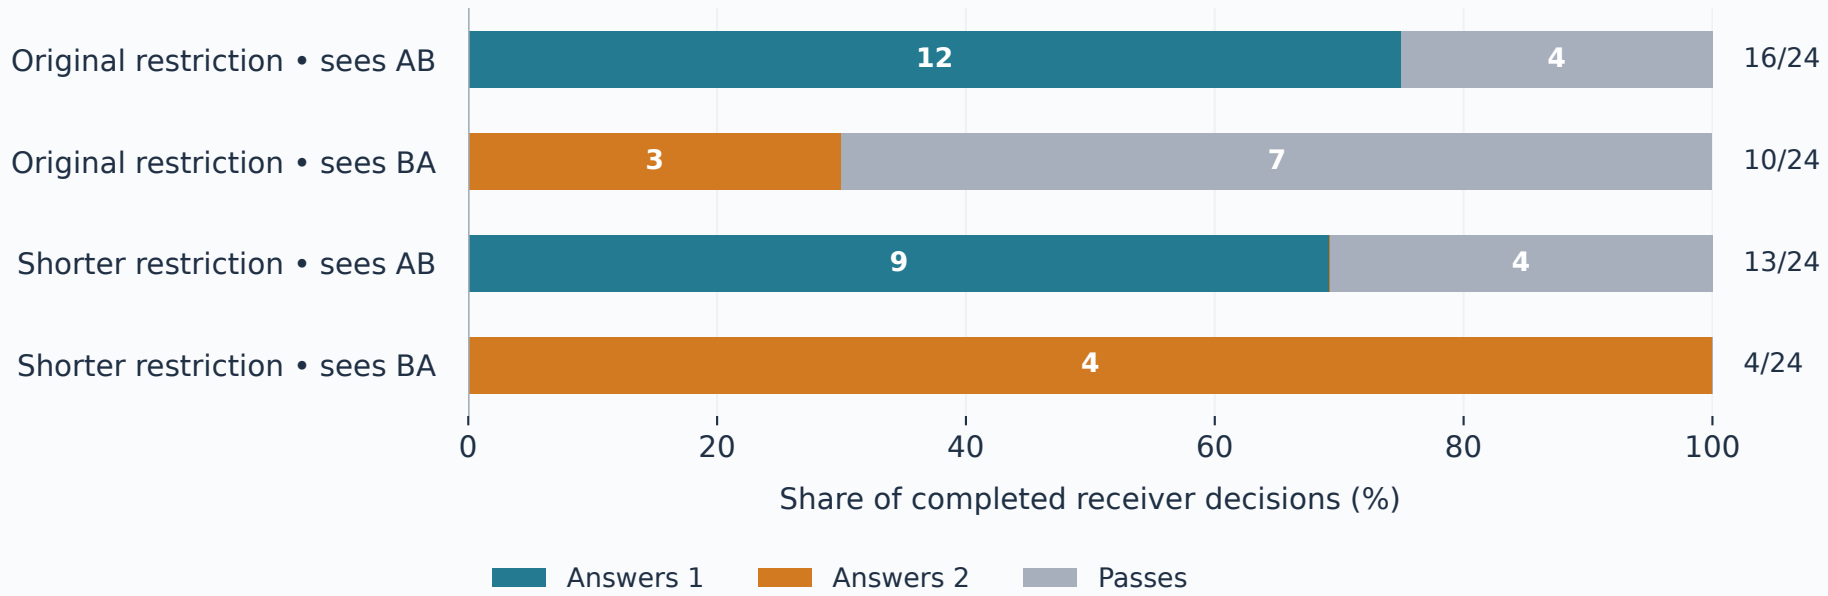

Counts inside receiver bars are decisions, not percentages. Right-hand counts show progress toward the plan.
Incomplete samples: no confidence intervals or final claims. Answer and presentation groups are still unbalanced.
Sender encoding is not receiver accuracy. Receiver choices alone do not establish profitable communication.
Read directly from result logs; earlier saved run summaries may be stale. Timeouts remain missing.