

## Practica 2 - GIT

1. Cread un repositorio (directorio) llamado practica2git e inicializa el sistema de control de versiones
2. Cread un fichero llamado contenido.txt con el siguiente texto:

```
- Introducción a linea de comandos
  - Windows
  - Linux
```

3. Comprobad el estado del repositorio

Captura de pantalla que muestra los pasos del 1 al 3.

```
Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub
$ ls
2-GIT-Repaso.pdf          Git_VT.pdf  U3Pr1Git-Juan.pdf
2-HerramientasdeDesarrollo-2-2_.pdf  Pr1.md     U3Pr1Git.md
CapturasPr1Git/          Pr2Git/     github-git-chuetas.pdf

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub
$ Pr2Git
bash: Pr2Git: command not found

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub
$ cd Pr2Git

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git
$ ls
Pr2.md

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git
$ ls

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git
$ ls
contenido.txt

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git
$ git init
Initialized empty Git repository in E:/1DAM/EdD/Tema3bGithub/Pr2Git/.git/

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git
$ git config --global --add safe.directory E:/1DAM/EdD/Tema3bGithub/Pr2Git

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    contenido.txt

nothing added to commit but untracked files present (use "git add" to track)
```

4. Añadid el fichero a la zona de preparado
  5. Comprobad de nuevo el estado del repositorio
  6. Haced el primer commit con su comentario correspondiente
- Captura de pantalla que muestra los pasos del 4 al 6.

```
Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$ git add --all

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   contenido.txt

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$ git commit -m "txtPr2GIT"
[master (root-commit) 75f32e9] txtPr2GIT
1 file changed, 3 insertions(+)
create mode 100644 contenido.txt

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$
```

7. Añadid la línea al fichero:


- Mac

8. Compruebad de nuevo el estado del repositorio
9. Añadid el fichero a preparado
10. Haced otro commit del fichero
11. Cambiad el mensaje del último commit por "Añadido la línea de MAC."

Para cambiar el mensaje del commit se usa:

```
$git commit --amend -m "Mensaje"
```

Captura de pantalla que muestra los pasos del 8 al 11.

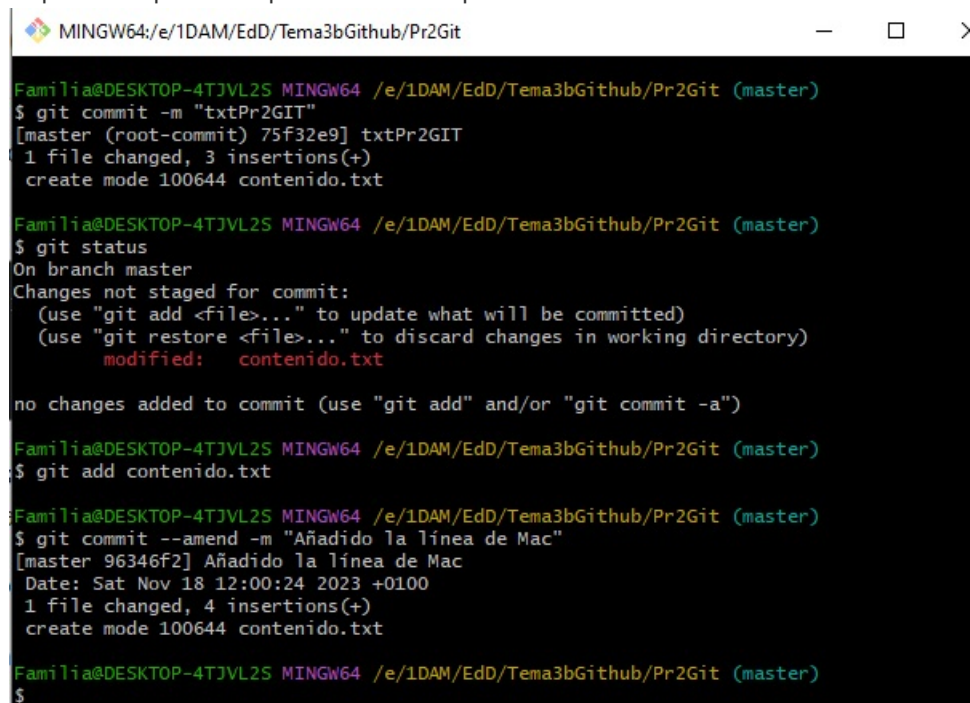

```
MINGW64:/e/1DAM/EdD/Tema3bGithub/Pr2Git

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$ git commit -m "txtPr2GIT"
[master (root-commit) 75f32e9] txtPr2GIT
1 file changed, 3 insertions(+)
create mode 100644 contenido.txt

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$ git status
On branch master

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   contenido.txt

no changes added to commit (use "git add" and/or "git commit -a")

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$ git add contenido.txt

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$ git commit --amend -m "Añadido la línea de Mac"
[master 96346f2] Añadido la línea de Mac
Date: Sat Nov 18 12:00:24 2023 +0100
1 file changed, 4 insertions(+)
create mode 100644 contenido.txt

Familia@DESKTOP-4TJVL2S MINGW64 /e/1DAM/EdD/Tema3bGithub/Pr2Git (master)
$
```

