

How to save the world while programming?

7 'tips' on sparing CPU cycles



Juanmi Huertas
R&D Software Engineer
Color and Imaging team
HP



Introduction*

Seven topics to **know** to better use the CPU in your applications

But... why do we care about CPU?

* Disclaimer: This talk may contain some traces of C++ and/ maths. In case of allergy talk to your closer software engineer.

1) Know your tools

- Language, C, C++, Java, Python, Smalltalk, C#, LISP, openGLSL, CUDA...

C++... 98? 11? 14? 17? Lambda, Auto, &&, Variant,...

Learn! Cppcon, JavaOne, PyCon...

- Compiler, virtual machine? Just in time compilation?

C++... gcc? Mvisual? Clang? CLANG!

Do not help the compiler!

- We code for: hardware, peers, future you.


3 /40

2) Know your hardware: CPU

"The only bad thing about theoretical computing is that there are no theoretical computers."
Andy Thomason.

CPU pipeline

Do not help the compiler!
But don't sabotage it!

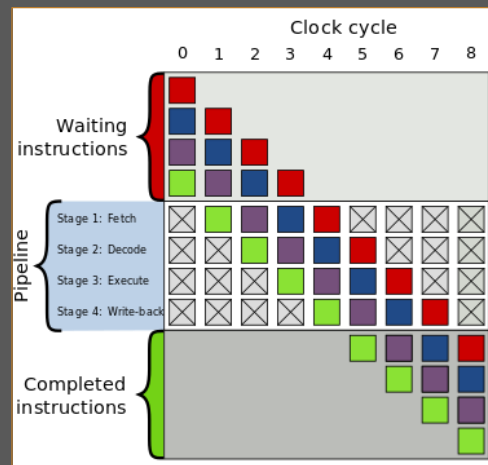

4 /40


2) Know your hardware: CPU

"The only bad thing about theoretical computing is that there are no theoretical computers."
Andy Thomason.

CPU pipeline

Do not help the compiler!
But don't sabotage it!

Concurrency.

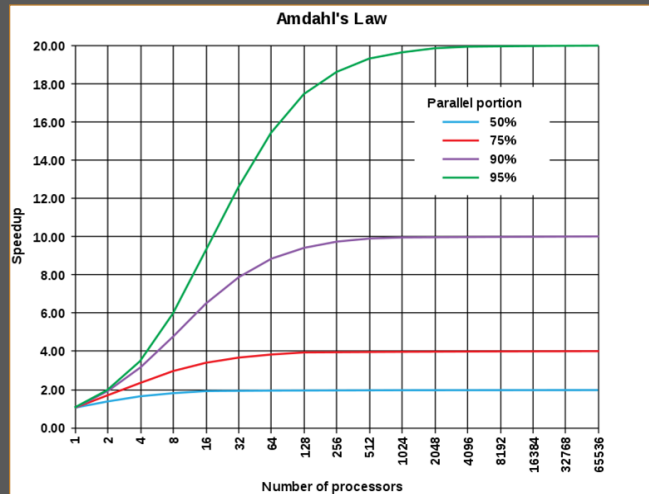

5 /40


2) Know your hardware: CPU

"The only bad thing about theoretical computing is that there are no theoretical computers."
Andy Thomason.

CPU pipeline

Do not help the compiler!
But don't sabotage it!

Concurrency?

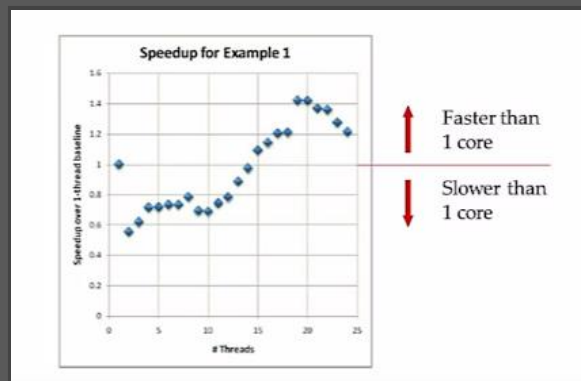


6 /40

2) Know your hardware: CPU

CPUs are fast:

- 1.000.000.000 cycles/second
- 12+ cores per socket
- 3+ execution ports per core
- 36.000.000.000 instru/second

Intel® Core™ i7-3960X Processor Die Detail

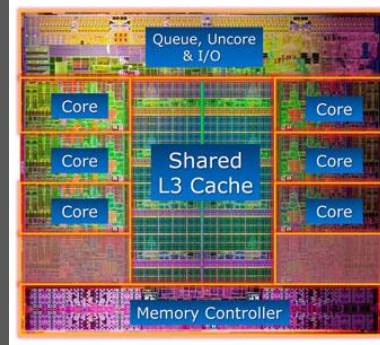


7 /40

2) Know your hardware: CPU

CPUs are **too** fast:

- 1.000.000.000 cycles/second
- 12+ cores per socket
- 3+ execution ports per core
- 36.000.000.000 instru/second
- Waiting for data!

Intel® Core™ i7-3960X Processor Die Detail

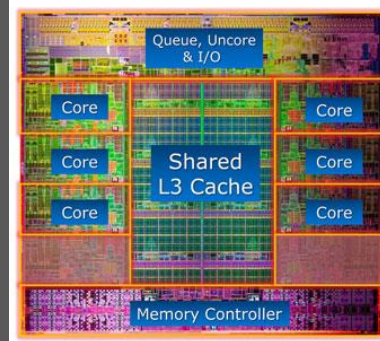

8 /40

2) Know your hardware: CPU

CPUs are **too** fast:

- 1.000.000.000 cycles/second
- 12+ cores per socket
- 3+ execution ports per core
- 36.000.000.000 instru/second
- **Waiting for data!**

'Pipeline' of instructions.

BAD, aliasing is bad - prefetch

BAD, conccionals are bad - taking decisions beforehand

BAD, virtualization is bad - vtable=alias

Multi-threading, not necessarily better!

Threads may share the cache. Caution!

9 /40

3) Know your hardware: Memory

CPUs are **too** fast:

Waiting for data!


"The only bad thing about theoretical computing is that there are no theoretical computers."

Andy Thomason.

- Jeff Dean numbers.
- Cache speed & size comparison.

Domino XOR

The XOR gate can be very elegantly made from dominoes: we need two input chains, either of which will set off the output chain of dominoes, but not both. This can be achieved by making the two inputs pass along the same section of domino run, and if they're both running they will stop each other. This can be achieved with a gate like this:



10/40

3) Know your hardware: Memory

Jeff Dean
numbers!

Latency Comparison Numbers


L1 cache reference	0.5	ns			
Branch mispredict	5	ns			
L2 cache reference	7	ns			14x L1 cache
Mutex lock/unlock	25	ns			
Main memory reference	100	ns			20x L2 cache, 200x L1 cache
Compress 1K bytes with Zippy	3,000	ns	3	us	
Send 1K bytes over 1 Gbps network	10,000	ns	10	us	
Read 4K randomly from SSD*	150,000	ns	150	us	~1GB/sec SSD
Read 1 MB sequentially from memory	250,000	ns	250	us	
Round trip within same datacenter	500,000	ns	500	us	
Read 1 MB sequentially from SSD*	1,000,000	ns	1,000	us	1 ms ~1GB/sec SSD, 4X memory
Disk seek	10,000,000	ns	10,000	us	10 ms 20x datacenter roundtrip
Read 1 MB sequentially from disk	20,000,000	ns	20,000	us	20 ms 80x memory, 20X SSD
Send packet CA->Netherlands->CA	150,000,000	ns	150,000	us	150 ms

Note: These numbers are not perfectly accurate, and they don't intent to be. The order of magnitude are accurate, though.

11/40

3) Know your hardware: Memory

Speed comparison (to scale, duh!)




Inspired in 'Data-oriented desing and C++'. Mike Acton. Cppcon'14.

12/40

3) Know your hardware: Memory

CPUs are **too** fast. Waiting for data!

The level 1 **cache** is **too** fast. The **main memory** is **BORINGLY** slow.

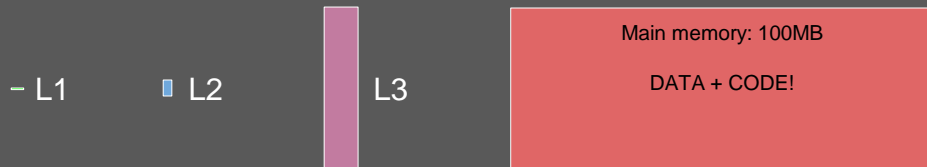

Data that fits the cache, compact data, and data contiguous in memory.

Code that fits the cache, compact code, and code contiguous in memory.

13/40

Things to know, so far...

- 1) Know your **tools**
Knowledge on language, compiler...
- 2) Know your hardware: **CPU**
CPUs are TOO fast.
- 3) Know your hardware: **memory**
L1 cache is fast, main memory is very slow.
- 4)
- 5)
- 6)
- 7)

14/40

4) Know your numbers

Back-of-the-envelope calculations:

- Powers of 2.
- Size_of: int, float, char...
- Size of cache (Jeff Dean numbers).
- Combinatory.
- Geometrical mathematics.
- <Name your own maths>.

2 ⁰	=	1
2 ¹	=	2
2 ²	=	4
2 ³	=	8
2 ⁴	=	16
2 ⁵	=	32
2 ⁶	=	64
2 ⁷	=	128
2 ⁸	=	256
2 ⁹	=	512
2 ¹⁰	=	1,024

Example: $2^{24} = ?$

$$\begin{aligned}
 2^{24} &= 2^{10} * 2^{10} * 2^4 = \\
 &\simeq 1000 * 1000 * 2^4 = \\
 &= 1000 * 1000 * 16
 \end{aligned}$$

$$2^{24} \simeq 16.000.000$$

15/40

4) Know your numbers

Let's play.

- How to know if two spheres collide with each other?
 - Implement a method to detect collisions between two spheres.

```
float radius;


bool doCollide(point3d s1, point3d s2){
    float distance = sqrt( (s1.x-s2.x)^2 + (s1.y-s2.y)^2 + (s1.z-s2.z)^2 );
    return distance < radius * 2;
}
```

16/40

4) Know your numbers

Let's play.

- How to know if two spheres collide with each other?
 - Implement a method to detect collisions between two spheres.



Good data structures?

```
float radius;
float two_radius_square;
bool doCollide(point3d s1, point3d s2){
    float distance_square = (s1.x-s2.x)^2 + (s1.y-s2.y)^2 + (s1.z-s2.z)^2;
    return distance_square < two_radius_square;
}
```

17/40

5) Know your algorithms

Computer science?


18/40

5) Know your algorithms

Efficiency through algorithms

“How much work does it take to do a task”

Improve efficiency by doing less work.



```
int find(vector<int> vec, int value); //17?
```

19/40

Inspired in 'Efficiency through algorithms and performance through data structures'. Chandler Carruth. Cppcon'14.

5) Know your algorithms

Example: Array sorting (based in a true story)

Do you know any good sorting algorithm?

Insertion-sort, Bubble-sort, Merge-sort, Radix-sort, Bucket-sort, Quick-sort



20/40

5) Know your algorithms

Example: Array sorting (based in a true story)

Do you know any good sorting algorithm?

Quick-sort! $O(n \log n)$

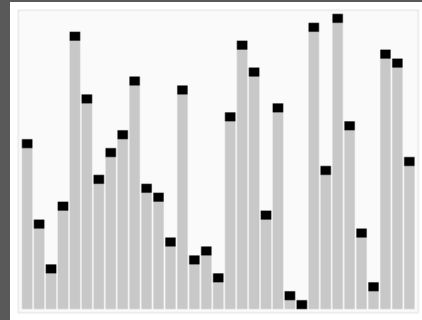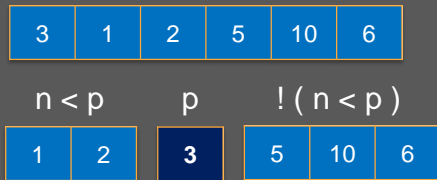

21/40

5) Know your algorithms

Example: Array sorting (based in a true story)

Do you know a **better** sorting algorithm? Quick-sort! $O(n \log n)$

Question: Did you think about corner cases? (repeated values)




22/40

5) Know your algorithms

Example: Array sorting (based in a true story)

Do you know **an even better** sorting algorithm? **3-way-quick-sort!** $O(n \log n)$

Question: Did you think about corner cases? (repeated values)

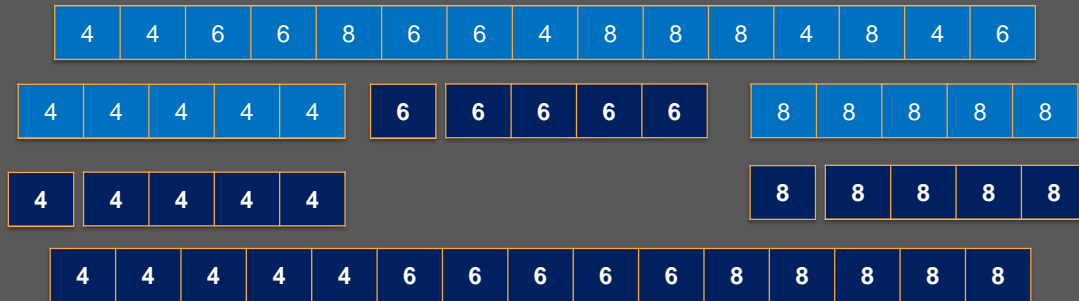

23/40

5) Know your algorithms

"Do less work by avoiding doing unnecessary work" C. Caruth

```
vector<X> f(int n){
    vector<X> result;
    for(int i=0; i<n; ++i)
        result.push_back(X(...));
    return result;
}
```

```
vector<X> f(int n){
    vector<X> result;
    result.reserve(n);
    for(int i=0; i<n; ++i)
        result.push_back(X(...));
    return result;
}
```

24/40

Inspired in Copied from 'Efficiency through algorithms and performance through data structures'. Chandler Carruth. Cppcon'14.

5) Know your algorithms

“Do less work by avoiding doing unnecessary work” C. Caruth

```
X *getX(string key,
        unordered_map<string,
        unique_ptr<X>> &cache){

    if(cache[key])
        return cache[key].get();

    cache[key] = make_unique<X>(...);
    return cache[key].get;
}

X *getX(string key,
        unordered_map<string,
        unique_ptr<X>> &cache){

    unique_ptr<X> &entry = cache[key];
    if(entry)
        return entry.get();

    entry = make_unique<X>(...);
    return entry.get;
}
```

25/40

Inspired in Copied from 'Efficiency through algorithms and performance through data structures'. Chandler Carruth. Cppcon'14.

5) Know your algorithms

Efficiency through algorithms.

“How much work does it take to do a task”

Improve efficiency by doing less work.

Performance through data structures.

“How long does it take to your program to do an ammount of work”

Improve performance by faster doing your work.

26/40

Inspired in 'Efficiency through algorithms and performance through data structures'. Chandler Carruth. Cppcon'14.

6) Know your data structures

Theory vs reality = performance!

*"The goal of every program,
and of every component of those programs,
is to convert data from one form to another"*

Mike Acton

'Jack-of-all-trades' data structures?

Hybrid data structures?

Specialiced data structures?




27/40

6) Know your data structures

Why you should **hate*** linked lists.

- Pointers, data aliasing.
- Every next element is a "cache miss".
- Every element is allocated on his own.
- It *may* be good if you only traverse your list once.

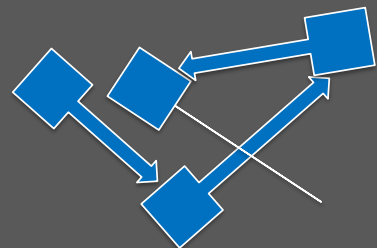

* You can quote me on this. And please, do challenge on this afterwards if you want.

28/40

6) Know your data structures

Why you should **love*** vectors and hash tables**.

- 'Cache friendly', compact, easy to handle, allocation.
- Stack, Queue, Linked list... Everything built upon an array.
- Good hash table:
 - Key-value pairs.
 - Contiguous in memory.
 - Good if both key and values are small.



* You can quote me on this.

** They are nothing more than a glorified array.

29/40

6) Know your data structures

AoS vs SoA (Array of Structs vs Struct of Arrays) (AKA: cache friendly)

```
struct cell_type{
    checking_box block;
    sample_type sample;
    other_stuff other;
};

vector<cell_type> cells;
//-----

point3d point;
for(int i=0; i<size; ++i)
{
    if(cells[i].block.check(point))
    {
        // do important things with cell
    }
}
```

[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]

30/40

6) Know your data structures

AoS vs SoA (Array of Structs vs Struct of Arrays) (AKA: cache friendly)

```
struct cell_type{
    checking_box block;
    sample_type sample;
    other_stuff other;
};

vector<cell_type> cells;
//-----

point3d point;
for(int i=0; i<size; ++i)
{
    if(cells[i].block.check(point))
    {
        // do important things with cell
    }
}
```

[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]
[b	b	s	s	s	o	o]	[b	b	s	s	s	o	o]

31/40

6) Know your data structures

AoS vs SoA (Array of Structs vs Struct of Arrays) (AKA: cache friendly)

```
struct cell_type{
    checking_box block;
    sample_type sample;
    other_stuff other;
};

vector<cell_type> cells;
//-----

point3d point;
for(int i=0; i<size; ++i)
{
    if(cells[i].block.check(point))
    {
        // do important things with cells
    }
}
```

```
struct cell_type{
    sample_type sample;
    other_stuff other;
};

vector<checking_box> blocks;
vector<cell_type> cells;
//-----

point3d point;
for(int i=0; i<size; ++i)
{
    if(blocks[i].check(point))
    {
        auto& cell = cells[i];
        // do important things with cell
    }
}
```

32/40

6) Know your data structures

AoS vs SoA (Array of Structs vs Struct of Arrays) (AKA: cache friendly)

```
struct cell_type{
    sample_type sample;
    other_stuff other;
};
vector<checking_box> blocks;
vector<cell_type> cells;
//-----
point3d point;
for(int i=0; i<size; ++i)
{
    if(blocks[i].check(point))
    {
        auto& cell = cells[i];
        // do important things with cell
    }
}
```

[b	b]	[b	b]	[b	b]	[b	b]	[b	b]	[b	b]	[b	b]
[b	b]	[b	b]	[b	b]	[b	b]	[b	b]	[b	b]	[b	b]
[b	b]	[b	b]	[b	b]	[b	b]	[s	s	s	o	o]	[s
s	s	o	o]	[s	s	s	o	o]	[s	s	s	o	o]
[s	s	s	o	o]	[s	s	s	o	o]	[s	s	s	o
o]	[s	s	s	o	o]	[s	s	s	o	o]	[s	s	s
o	o]	[s	s	s	o	o]	[s	s	s	o	o]	[s	s
s	o	o]	[s	s	s	o	o]	[s	s	s	o	o]	[s
s	s	o	o]	[s	s	s	o	o]	[s	s	s	o	o]

33/40

6) Know your data structures

Efficiency through algorithms.

“How much work does it take to do a task”

Improve efficiency by doing less work.

Performance through data structures.

“How long does it take to your program to do an ammount of work”

Improve performance by faster doing your work.

To sum up:

- Solve only ONE problem.
 - Check the data entropy.
- Data locality (cache!), *memory is slow!*
 - Array of structs vs struct of arrays (AoS vs SoA).

34/40


6! One to go for the perfect number.

- 1) Know your **herramientas**
Knowledge on language, compiler...
- 2) Know your hardware: **CPU**
CPUs are TOO fast.
- 3) Know your hardware: **memory**
Cache fast, main memory slow.
- 4) Know your **numbers**
Mathematics, powers of two...
- 5) Know your **algorithms**.
Efficiency through algorithms, 'do only the work you need'.
- 6) Know your **data structures**.
Performance through data structures, 'make your work faster'.
- 7)

35/40

7) Know your problem


- Don't solve a problem that you don't have to solve.
- Use the common sense! Knowledge vs wisdom.
- Be careful regarding creating new problems.

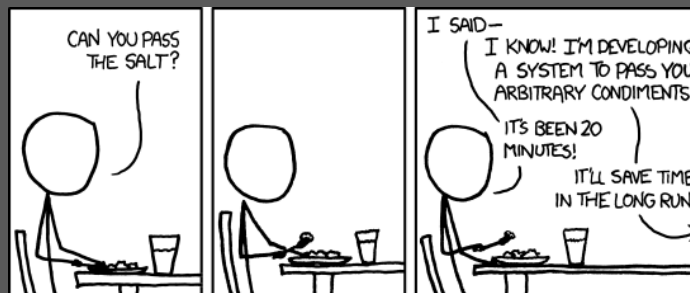

36/40

7) Know your problem


- Don't solve a problem that you don't have to solve.
- Use the common sense! Knowledge vs wisdom.
- Be careful regarding creating new problems.
- Don't pre-optimize.
- Take measurements. Use 'performance analysis' tools.
- Look at the data. Size? Cache? Entropy?
- 20/80 rule.

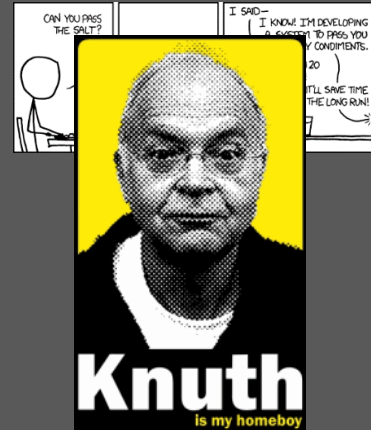

37/40

7) Know your problem

- Don't solve a problem that you don't have to solve.
- Use the common sense! Knowledge vs wisdom.
- Be careful regarding creating new problems.
- Don't pre-optimize.
- Take measurements. Use 'performance analysis' tools.
- Look at the data. Size? Cache? Entropy?
- 20/80 rule.
- Don't get cozy. AKA Recognize your ignorance.
- Go to Watch talks of conferences.
- Ask. Try. Learn.

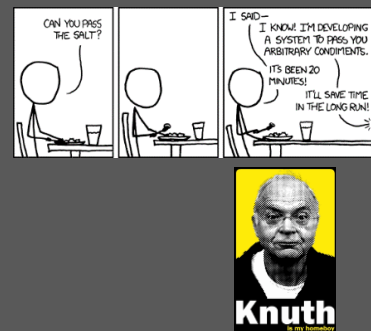

38/40

7 things to know to reduce CPU usage

- 1) Know your **tools**
Knowledge on language, compiler...
- 2) Know your hardware: **CPU**
CPUs are TOO fast.
- 3) Know your hardware: **memory**
L1 cache is fast, main memory is very slow.
- 4) Know your **numbers**
Mathematics, powers of two...
- 5) Know your **algorithms**
Efficiency through algorithms, 'do only the work you need'.
- 6) Know your **data structures**
Performance through data structures, 'make your work faster'.
- 7) Know your **problem**
Use your common sense!

39/40

Thanks!

Any feedback?

Any questions?

40/40