Stage 1: build a balanced training set by CLIP-similarity-guided subsampling

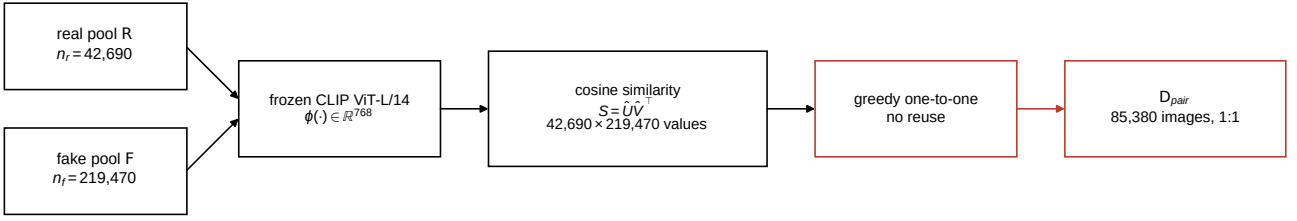

What happens to the 219,470 fakes



The subsample uses 32.6% of the 262,160 training images. Most generator diversity in the fake pool never reaches the detector.