

By Jubin Mohanty

Plant Seedling Classification using V2 Plant Seedling Dataset (Kaggle)
Convolutional Neural Network
Domain: Computer Vision

Capstone Project
Machine Learning Engineer Nanodegree, Udacity

2nd July 2021

Table of Contents

Definition	3
Project Overview	3
Problem Statement	3
Metrics	3
ANALYSIS	4
Data Exploration.....	4
Data Visualization and Techniques.....	6
Benchmark.....	8
Methodology	8
Data Preprocessing.....	8
Implementation and Refinement	9
Results.....	11
Model Evaluation and Validation	11
Conclusions.....	13
Improvements	14
References	14

Definition

Project Overview

As University of Pretoria stated, a successful cultivation of crops broadly depends on the weed control strategies. It has been widely observed that tons of cultivated crops are wasted due to crop infestations. A zero percent loss in crops is entirely a rare event, generally there is 10 to 100% losses as per the current weed control practices. (Pretoria, n.d.)

Additionally, for farmers it is of vital importance to detect weed in the initial first to six weeks of plantation, because both weed and crop vigorously search of nutrients and water in the soil for this specific period.

According to the research paper published by Thomas Mosgaard Giselsson and co, there is no robust computer vision system out there, which can classify the species of ground-based weed. (Giselsson, Jørgensen, Jensen, Dyrmann, & Midtiby, 2017)

In this project, I have developed a CNN model which can detect plant species up to 92% of accuracy.

Problem Statement

Here, I am using a dataset which contains 5,539 images of crop and weed seedlings. The images are grouped in 12 classes. Moreover, these classes represent common plant species from Danish Agriculture. (Dyrmann)

Each classes contain RGB images, which reflect various stages of plant growth.

Using this dataset, the goal is to build a model which can further classify weed seedlings and crops.

Moreover, I have also planned to further extend this project by integrating this Deep Learning API with a web or mobile application, where a farmer will just have to upload the image in the mobile or web application, and the API will be able to predict the species of the weed or crop, thus, farmer can take appropriate action. In this way, if a farmer found a specific seedling as weed, it can be destroyed before it infestate the actual crop.

The actual data set can be found out from the link mentioned below.

<https://vision.eng.au.dk/plant-seedlings-dataset/>

Metrics

The development of machine learning models revolves around the idea of constructive feedback principle. When we build a model, the evaluation metrics are used to get feedbacks, and thus further improvement is continued to achieve a desired accuracy. (Srivastava, 2016)

Simply building a predictive model is not the prime motive, we must utilize the capability of evaluation metrics to discriminate among model results.

In this project, the evaluation metrics that I have used to validate the model, and for further improvement of model accuracy are Validation Accuracy, Precision, Recall, F-1 score, and Confusion Matrix.

- Validation Accuracy is where both true positive and true negative is taking into consideration.

$$\text{Validation Accuracy} = \frac{\text{true negatives} + \text{true positives}}{\text{size of the dataset}}$$

- Precision: It tells the accuracy of positive predictions.

$$\text{Precision} = \frac{\text{true positives}}{\text{true positives} + \text{false positives}}$$

- Recall defines the fraction of positive cases that the model is able to catch or correctly identified.

$$\text{Recall} = \frac{\text{true positives}}{\text{true positives} + \text{false negatives}}$$

- F1 scores tells the percent of correct positive predictions. It is nothing but the weighted harmonic mean of precision and recall such that the best score is 1.0 and the worst score is 0.

$$\text{F1 Score} = \frac{2 * (\text{Recall} * \text{Precision})}{(\text{Recall} + \text{Precision})}$$

ANALYSIS

Data Exploration

The dataset consists of around 5,539 images and weed seedlings. All the images are further classified into 12 groups or classes.

These classes are nothing, but the common plant species from the Danish Agriculture.

Image Types: All the classes contain RGB images in .png format having different sizes.

Below is a list of all the 12 classes:

```
['Scentless Mayweed',  
 'Common wheat',  
 'Charlock',  
 'Black-grass',  
 'Sugar beet',  
 'Loose Silky-bent',  
 'Maize',  
 'Cleavers',  
 'Common Chickweed',  
 'Fat Hen',  
 'Small-flowered Cranesbill',  
 'Shepherd's Purse']
```

Moreover, as an initial data exploration step, I want to investigate the count of images present in each class such that I can examine whether the dataset is balanced or not.

```
Scentless Mayweed: 607  
Common wheat: 253  
Charlock: 452  
Black-grass: 309  
Sugar beet: 463  
Loose Silky-bent: 762  
Maize: 257  
Cleavers: 335  
Common Chickweed: 713  
Fat Hen: 538  
Small-flowered Cranesbill: 576  
Shepherd's Purse: 274  
  
Total Images:- 5539
```

Image shape is in 3 dimensions. Below is the shape of a randomly chosen image.

```
(330, 330, 3)
```

Data Visualization and Techniques

First and foremost, I want to plot images in a clean, tight grid like structure, along with its class name(species). The approach which I adopted was to first create a pandas data frame with filename and target.

Note: Here, filename denotes the path of the image, and target is the species name.

Using this strategy, I would set up the data for further preprocessing, where it will be further balanced, and split into train and test sets.

	file_path	target
0	./all_files/Scentless Mayweed_511.png	Scentless Mayweed
1	./all_files/Maize_182.png	Maize
2	./all_files/Scentless Mayweed_277.png	Scentless Mayweed
3	./all_files/Sugar beet_13.png	Sugar beet
4	./all_files/Small-flowered Cranesbill_479.png	Small-flowered Cranesbill
5	./all_files/Small-flowered Cranesbill_312.png	Small-flowered Cranesbill
6	./all_files/Fat Hen_54.png	Fat Hen
7	./all_files/Common wheat_241.png	Common wheat
8	./all_files/Cleavers_79.png	Cleavers
9	./all_files/Shepherd's Purse_50.png	Shepherd's Purse

Fig1. Denotes a pandas dataframe with filename and target as label.

Finally, I plot the images in a grid format having 3 rows and 5 columns, where I labeled each image with its species name.

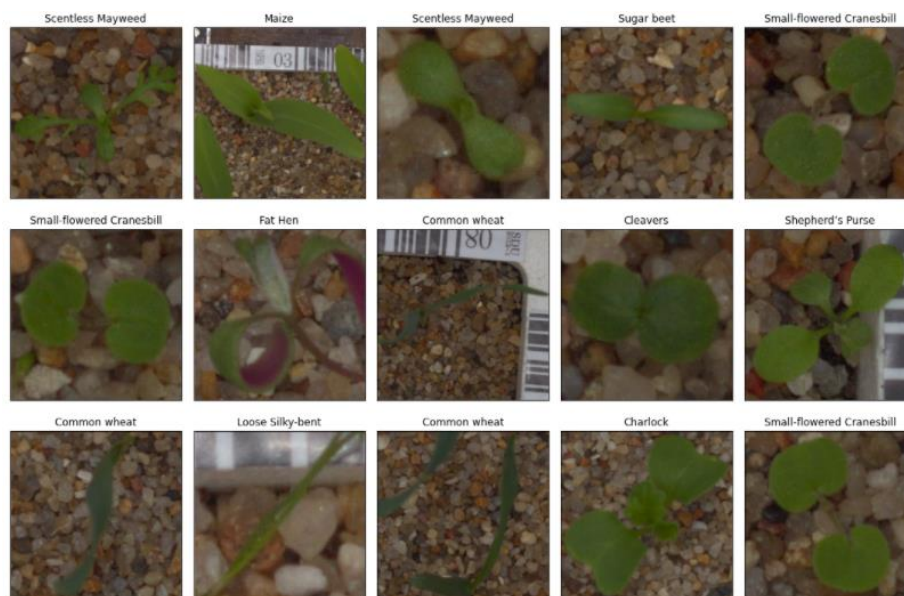


Fig2 is a plot of 25 images having its species as its label.

For Data balancing, I first performed some exploratory data analysis and visualization to fetch information about the overall data distribution.

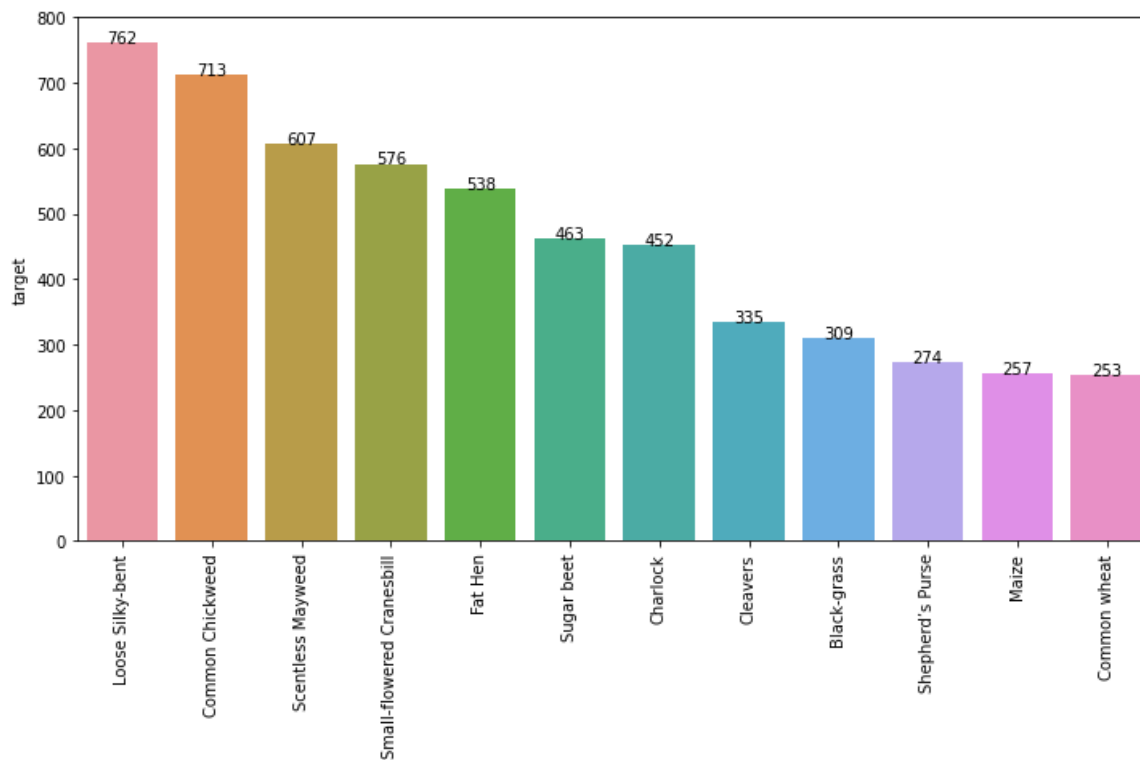


Fig3 is a bar plot, which display the information regarding the counts of all images categorized based on species type.

From the above figure, it is quite evident that the distribution of data is quite contrasting in nature, where Loose Silky-bent is having 762 images as compared to common wheat, which is only 253.

This specific situation will be highly problematic in a classification scenario, as it will leads to misleading accuracy of classes. To solve this issue, I have equally distributed the images for each class. Because of this, now each class will have necessary amount of information for training a robust, and accurate model.

Also, another important aspect about neural network is, that while building the architecture of CNN, we have to decide the layers of CNN based on the input size of images. Also, the images should have same size while feeding to the input layer.

Thus, it is always good to resize the images, especially to smaller size before feeding to CNN.

Since, we have to investigate the size of images, therefore I performed a jointplot of seaborn library, which basically plots the dimensions (height & width) of all the images in x and y axis.

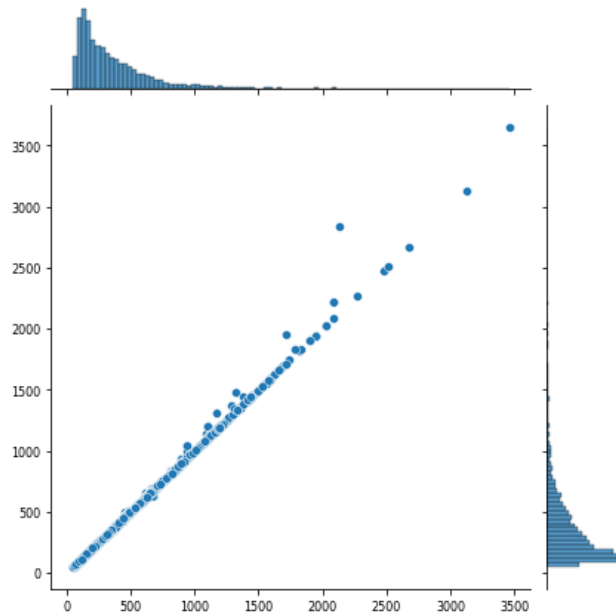


Fig4 gives information about the shape of the image ranging from 0-500 to >3500, therefore in preprocessing steps we will resize the images.

Benchmark

As benchmark for this classification model, I followed Kaggle evaluation metrics. As per Kaggle, for this competition project, meanFScore which is actually a micro-averaged F1-score is considered as a benchmark. It is nothing but the harmonic mean of precision and recall. (Plant Seedlings Classification, n.d.)

Moreover, I took the leaderboard score as a benchmark which is 0.99. Also, while developing the CNN architecture, my first goal was to secure validation accuracy around 70-80% by using only custom layers.

After achieving this, I incorporated a pre-trained model which is already fine-tuned to optimize the model further, which increase the model accuracy.

Methodology

Data Preprocessing

The steps which are involved in the data processing are mentioned below:

1. First, I copied all the images into a file, and then according to each class(species), I wrote a logic which balances the entire dataset.

target	file_path
Black-grass	250
Charlock	250
Cleavers	250
Common Chickweed	250
Common wheat	250
Fat Hen	250
Loose Silky-bent	250
Maize	250
Scentless Mayweed	250
Shepherd's Purse	250
Small-flowered Cranesbill	250
Sugar beet	250

Fig6: This is how the dataset looks like after balancing.

2. Now, I created a directory which contain further two subdirectory's called train and valid.
3. Using the scikit learn train test split method, I split the dataset (Fig6) into train and validation.
4. After splitting, I reshaped all the images were all of them are set to equal width and height, and using opencv imwrite method, I copied all the images into their respective train and test subfolder. Here, the main Idea is to allow ImageDataGenerator to load the images from these subdirectories. Thus, I have followed this specific folder structure to save image files.

Small-flowered Cranesbill:- 225	Small-flowered Cranesbill:- 25
Sugar beet:- 225	Sugar beet:- 25
Black-grass:- 225	Black-grass:- 25
Charlock:- 225	Charlock:- 25
Common Chickweed:- 225	Common Chickweed:- 25
Scentless Mayweed:- 225	Scentless Mayweed:- 25
Shepherd's Purse:- 225	Shepherd's Purse:- 25
Cleavers:- 225	Cleavers:- 25
Loose Silky-bent:- 225	Loose Silky-bent:- 25
Maize:- 225	Maize:- 25
Common wheat:- 225	Common wheat:- 25
Fat Hen:- 225	Fat Hen:- 25
Total images: 2700	Total images: 300

Fig7: The figure display the count of images in train and validation folder.

Implementation and Refinement

So, the implementation is divided into four parts:

1. Data Augmentation.

2. Data Loading.
3. Developing CNN model.
4. Training the model.

- In the **data augmentation** step, I used keras ImageDataGenerator class to artificially expand the training dataset to create modified versions of the image. In this way it will improve the performance of the model to generalize.

However, we still need to be careful while making modification, because it might also lead to extra noise in the image and can substantially decrease the accuracy of the model.

```
datagen = ImageDataGenerator(rotation_range=30, # rotate the image 30 degrees
                             width_shift_range=0.2, # Shift the pic width by a max of 2%
                             height_shift_range=0.2, # Shift the pic height by a max of 2%
                             shear_range=0.15, # Shear means cutting away part of the image (max 15%)
                             zoom_range=0.15, # Zoom in by 15% max
                             horizontal_flip=True,
                             fill_mode="nearest", # Fill in missing pixels with the nearest filled value
                             )
```

- In the **data loading** step, I have used flow_from_directory() method of ImageDataGenerator class. It will basically load images to train, validation and test object from the respective class(species) folder containing images, which is further used while training, and prediction.
- While developing the CNN model, I used a InceptionResNetV2 as my pretrained mode, which then further feed to a hidden dense layer with 128 layers, and finally to the output layer consists of 12 layers after flattening the pretrained model.

Model: "model_2"

Layer (type)	Output Shape	Param #
image_input (InputLayer)	[(None, 96, 96, 3)]	0
inception_resnet_v2 (Func	(None, None, None, 1536)	54336736
flatten_2 (Flatten)	(None, 1536)	0
dense_4 (Dense)	(None, 128)	196736
dense_5 (Dense)	(None, 12)	1548
Total params: 54,535,020		
Trainable params: 54,474,476		
Non-trainable params: 60,544		

Activation Function

- For the hidden layer I have used rectified linear activation function, as it is quite simple to implement, and less susceptible to vanishing gradients that prevent deep learning model to be learned.
- In case of output layer, I used Softmax as an activation function, because it is a case of mutually exclusive classes. Thus, here the range will be 0 to 1, which are nothing but the probabilities of each class.

Cost Function

- In CNN after each epoch the network try to learn and iterate through different weight value to minimize the error.
 - The best approach for this would Adam optimizer, this is what I have used it in my network. In this way during the backpropagation, it network is updated with a new weight.
 - This optimizer initially starts with larger steps and once the slope gets closer to zero it tends to take smaller steps.
 - Then, I compiled the model with I compile the model, with a loss parameter assigned to categorical_crossentropy as it is a multi -class classification problem to calculate loss.
- In the last step I **train** the model, where I pass training tensor data, epochs, steps per epoch, validation data and steps, and callbacks as its parameter values.

Results

Model Evaluation and Validation

After a lot of iteration and tuning the hyperparameters, I come up with the above-mentioned CNN architecture.

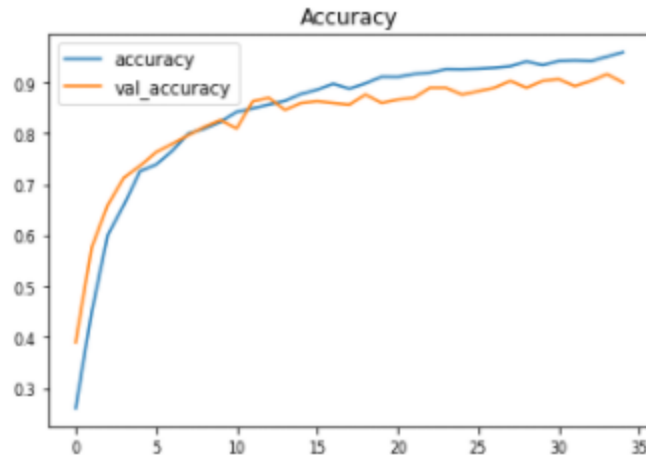


Fig 8 Line Plot

As per above graph, it is quite evident that over the period of 35 epochs both accuracy of the training and validation model significantly improved.

Also, the validation accuracy is about 92%, which is better than what I set it as a benchmark.

```
Validatio Loss: 129.3146
Validation Accuracy: 92.33%
```

Moreover, I used precision, recall and F-1 score to rate the model accuracy. For this, I generate a classification report which explains the prediction accuracy of each class individually.

	precision	recall	f1-score	support
Black-grass	0.70	0.64	0.67	25
Charlock	0.89	0.96	0.92	25
Cleavers	0.96	1.00	0.98	25
Common Chickweed	1.00	0.92	0.96	25
Common wheat	1.00	0.96	0.98	25
Fat Hen	1.00	1.00	1.00	25
Loose Silky-bent	0.68	0.76	0.72	25
Maize	1.00	1.00	1.00	25
Scentless Mayweed	1.00	0.96	0.98	25
Shepherd's Purse	0.93	1.00	0.96	25
Small-flowered Cranesbill	0.96	0.96	0.96	25
Sugar beet	1.00	0.92	0.96	25
accuracy			0.92	300
macro avg	0.93	0.92	0.92	300
weighted avg	0.93	0.92	0.92	300

Additionally, I am making a prediction for a set 25 test images, to know the true positive, true negative, false positive, false negative. I generated a confusion matrix.

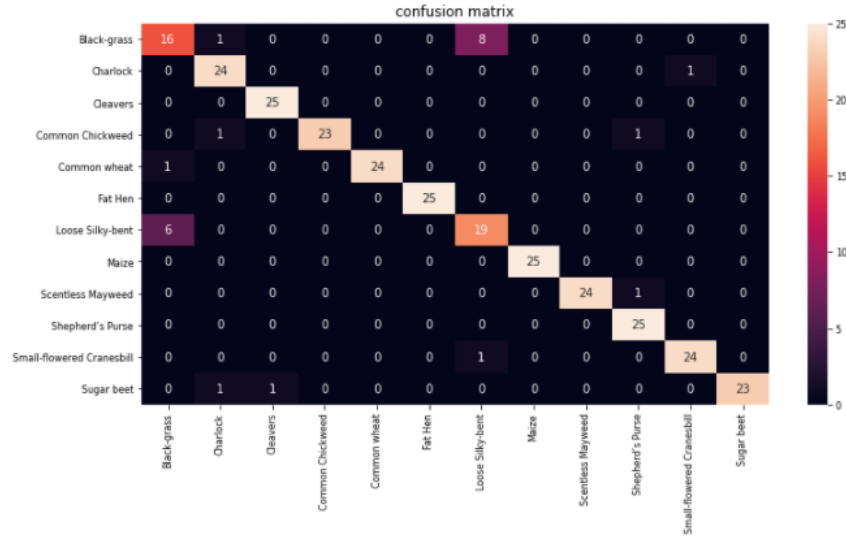


Fig 9: Confusion Matrix seaborn heatmap

As this is a Kaggle competition project, I finally created a csv file for submission, which have one column contains name of the image and another column contains the predicted class(species).

	file	species
0	Black-grass/118.png	Loose Silky-bent
1	Black-grass/161.png	Black-grass
2	Black-grass/175.png	Black-grass
3	Black-grass/180.png	Loose Silky-bent
4	Black-grass/181.png	Black-grass
5	Black-grass/189.png	Black-grass

Conclusions

The current model is highly accurate; however, there is further room for improvement by tuning data augmentation parameters and hyperparameters.

Also, the model is highly efficient and able to predict species with 92.33% accuracy.

This project also has a real-life application, where it can help farmers to identify seed and crop species. In this way, farmers can protect crops before infestation from weed.

Improvements

After experimenting with VGG19 and InceptionResnetV2, I found out CNN will require powerful GPU processors to run the model efficiently, especially while working with computer vision problem due to high-resolution images and big datasets.

An alternate model with which we can go for, is MobileNetV2 as our pretrained model because it is quite light as compared to other model, and it is primarily designed to run on mobile devices, to offer better performance.

References

Dyrmann, M. (n.d.). *COMPUTER VISION AND BIOSYSTEMS SIGNAL PROCESSING GROUP*. Retrieved from <https://vision.eng.au.dk/plant-seedlings-dataset/>

Giselsson, T. M., Jørgensen, R. N., Jensen, P. K., Dyrmann, M., & Midtiby, H. S. (2017, Nov 16). *A Public Image Database for Benchmark of Plant Seedling Classification Algorithms*. Retrieved from https://www.researchgate.net/publication/321095442_A_Public_Image_Database_for_Benchmark_of_Plant_Seedling_Classification_Algorithms

Plant Seedlings Classification. (n.d.). Retrieved from kaggle: <https://www.kaggle.com/c/plant-seedlings-classification/overview/evaluation>

Pretoria, U. O. (n.d.). *Important Weeds in Maize*. Retrieved from <https://www.up.ac.za/sahri/article/1810372/important-weeds-in-maize>

Srivastava, T. (2016). *11 Important Model Evaluation Metrics for Machine Learning Everyone should know*. Retrieved from <https://www.analyticsvidhya.com/blog/2019/08/11-important-model-evaluation-error-metrics/>