
Wireframe — New collection form (manager view)

Screen used during use case **UC-A "Plan a collection"** · route `/collections/new` · tables `collection`, `collection_point`, `treatment_center`, `app_user`

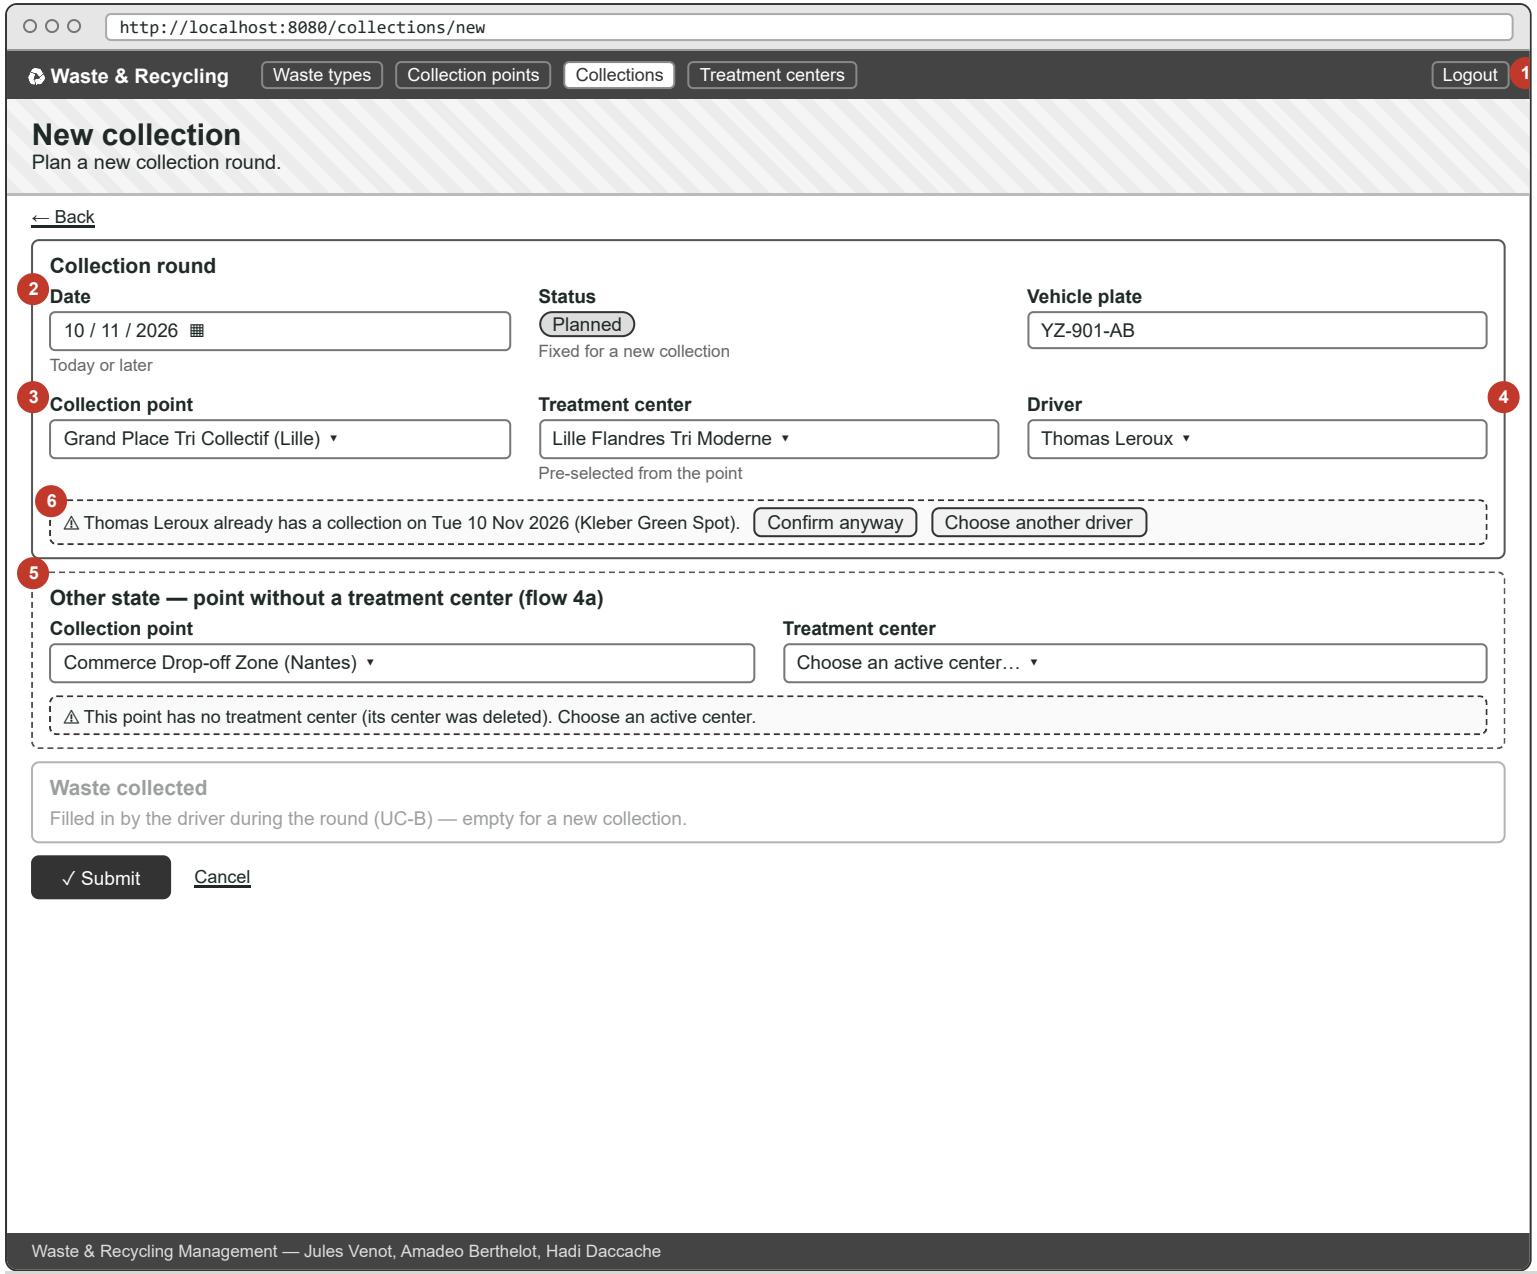


Annotations

1. Shared navbar; the current section (*Collections*) is highlighted. The "New collection" button on top of the list opens this blank form.
2. Date picker: the date must be today or later, otherwise the form is refused (flow 5a). The status is fixed to *planned* for a new collection (ENUM default).
3. Drop-down filled from `collection_point` (name + city). Choosing a point pre-selects its center from `collection_point.center_id` (step 4). Only active centers (`is_active`) are listed.
4. Driver chosen among the users with role `driver` in `app_user`; stored with the plate in `collection.driver_name` and `vehicle_plate`.
5. Flow 4a: the point has no center (FK `ON DELETE SET NULL`) → inline error, the manager picks an active center manually.
6. Flow 5b: the driver already has a collection that day → warning, not a blocking error. Submit sends `POST /api/collections`; Cancel goes back without saving.

Legend
Dark button = main action · dashed border = exceptional action / message · ▾ = drop-down · ▦ = date picker · faded box = not used in this screen · hatched area = header picture.

Activity diagram — Plan a collection


Use case **UC-A** · actor: manager (role `manager` in `app_user`) · alternative flows 4a, 5a and 5b

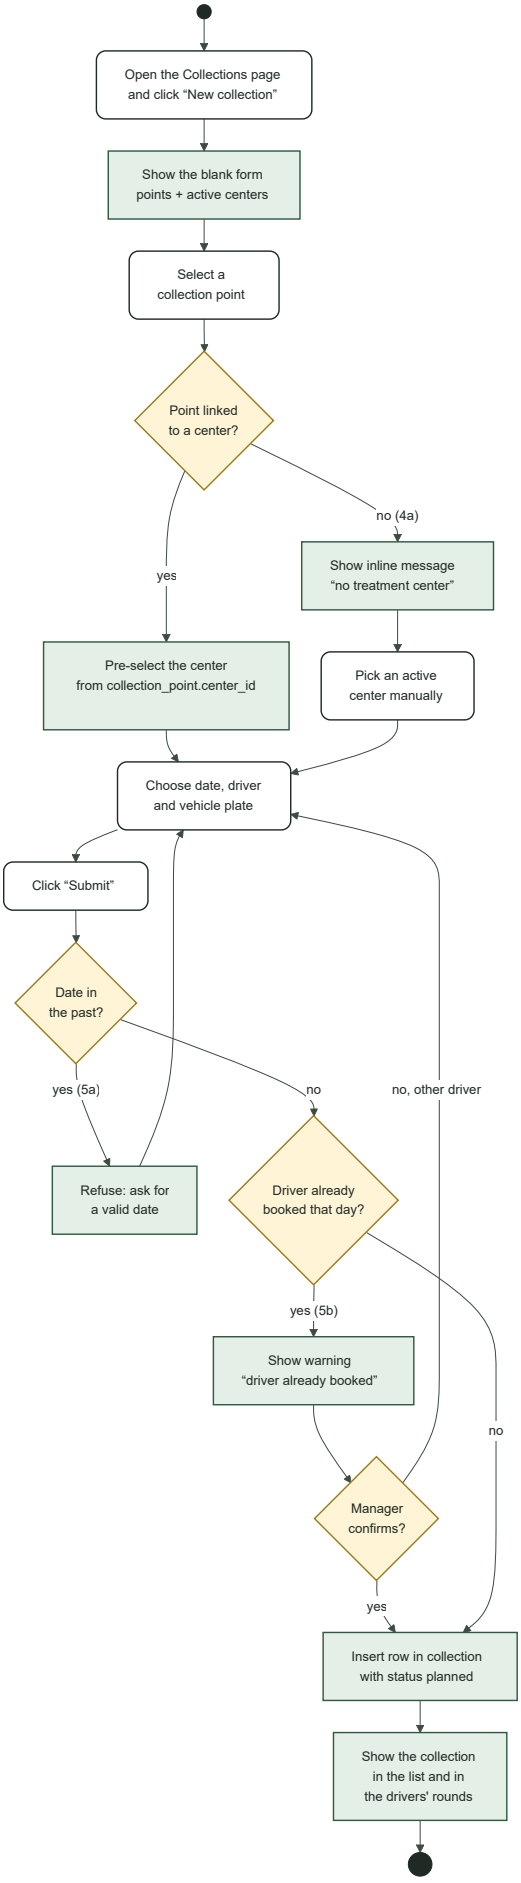

manager action · system action (Vue + server) · decision · ● start · ◉ end · numbers = UC-A alternative flows

Sequence diagram — Save a new collection

UC-A steps 6–7 · planned server flow (Express MVC pipeline + repository) · `POST /api/collections` → `INSERT INTO collection`

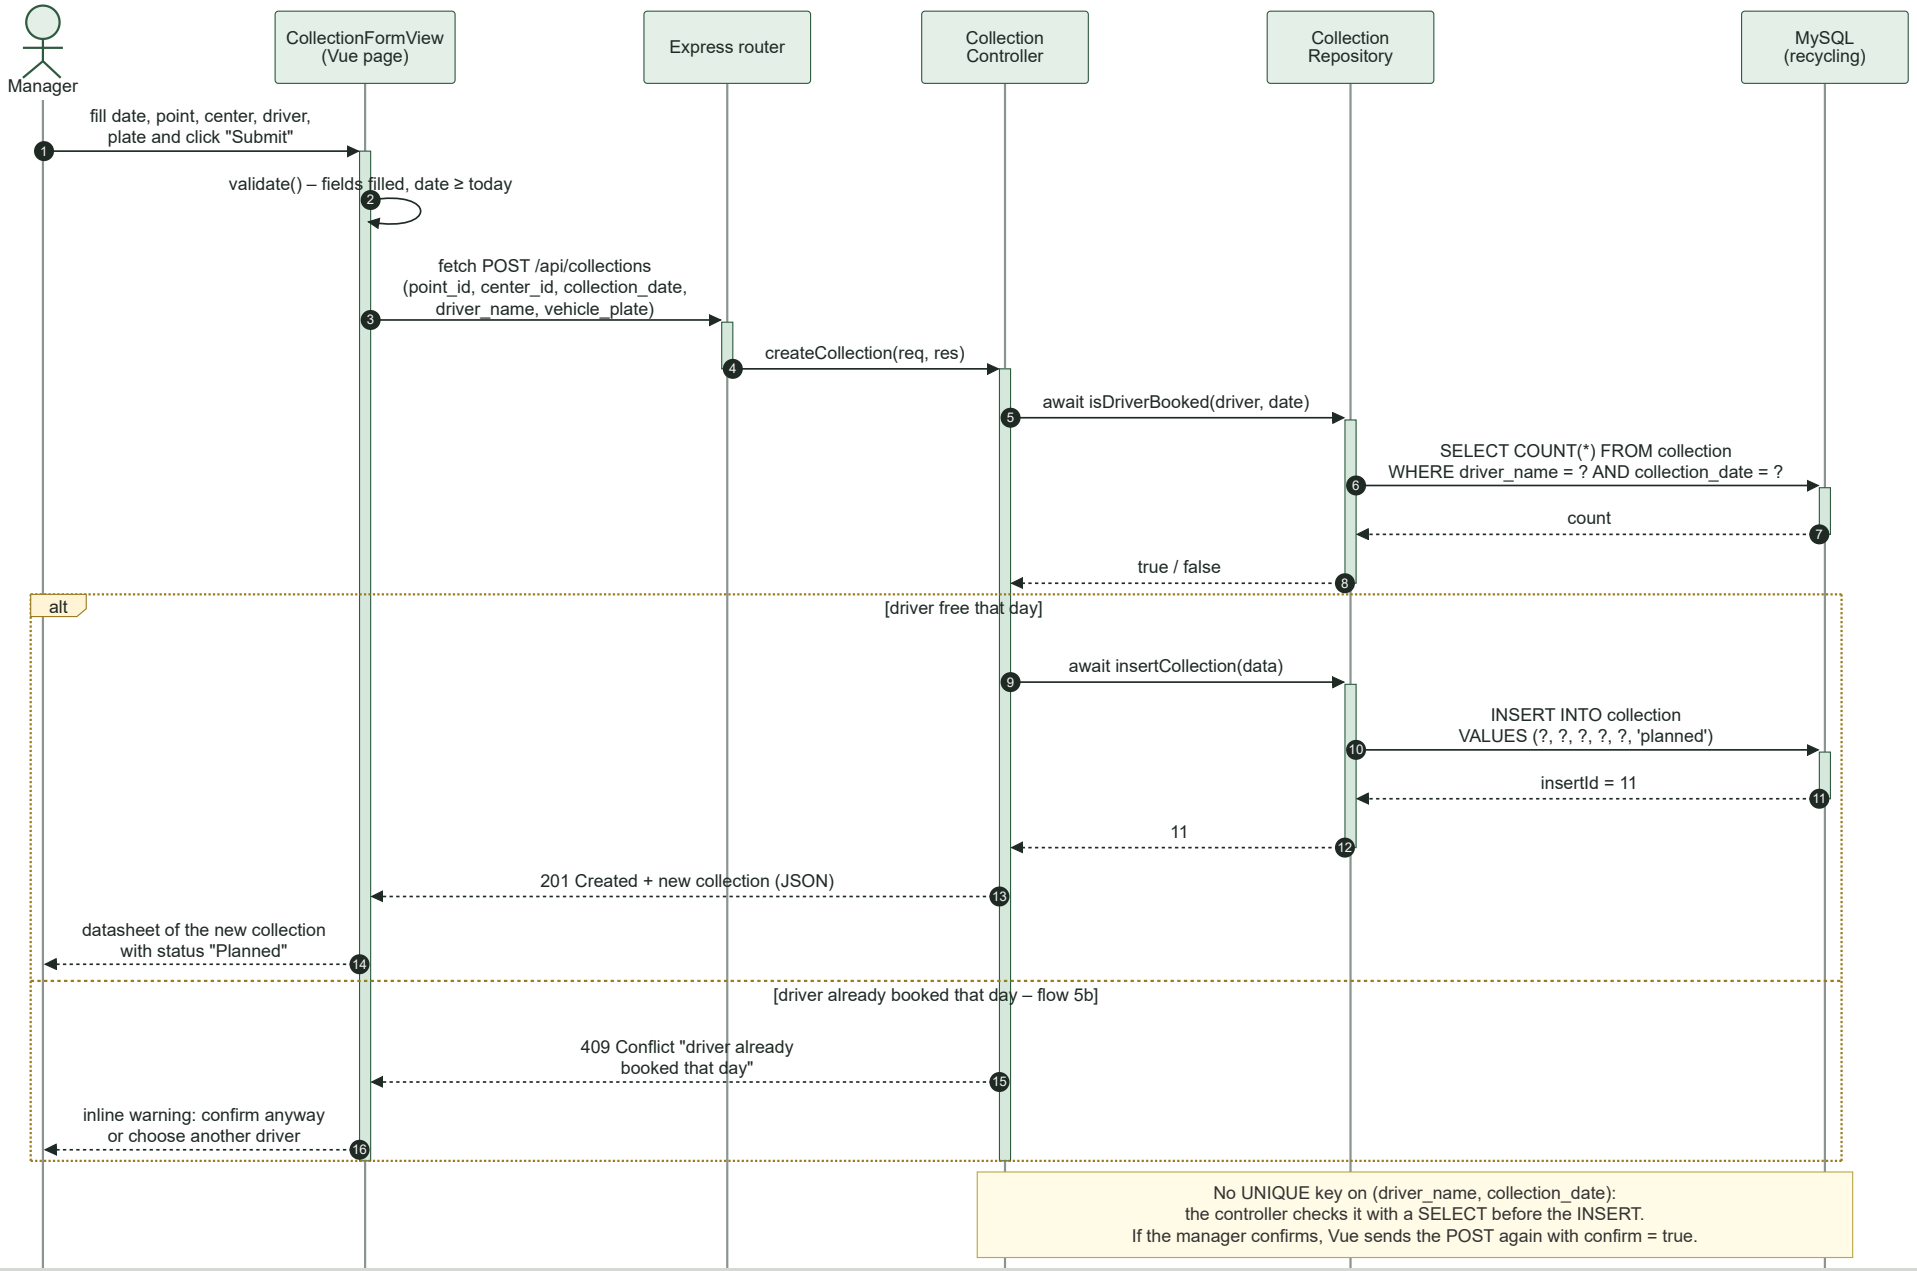

Source: docs/diagrams/src/jules_sequence.mmd (Mermaid, editable on mermaid.live) · solid arrow = call, dashed = return