
Wireframe — Collection points (manager view)

Screens used to manage the network: list `/collection-points` and form `/collection-points/new` · `/collection-points/:id/edit` · tables `collection_point`, `treatment_center`

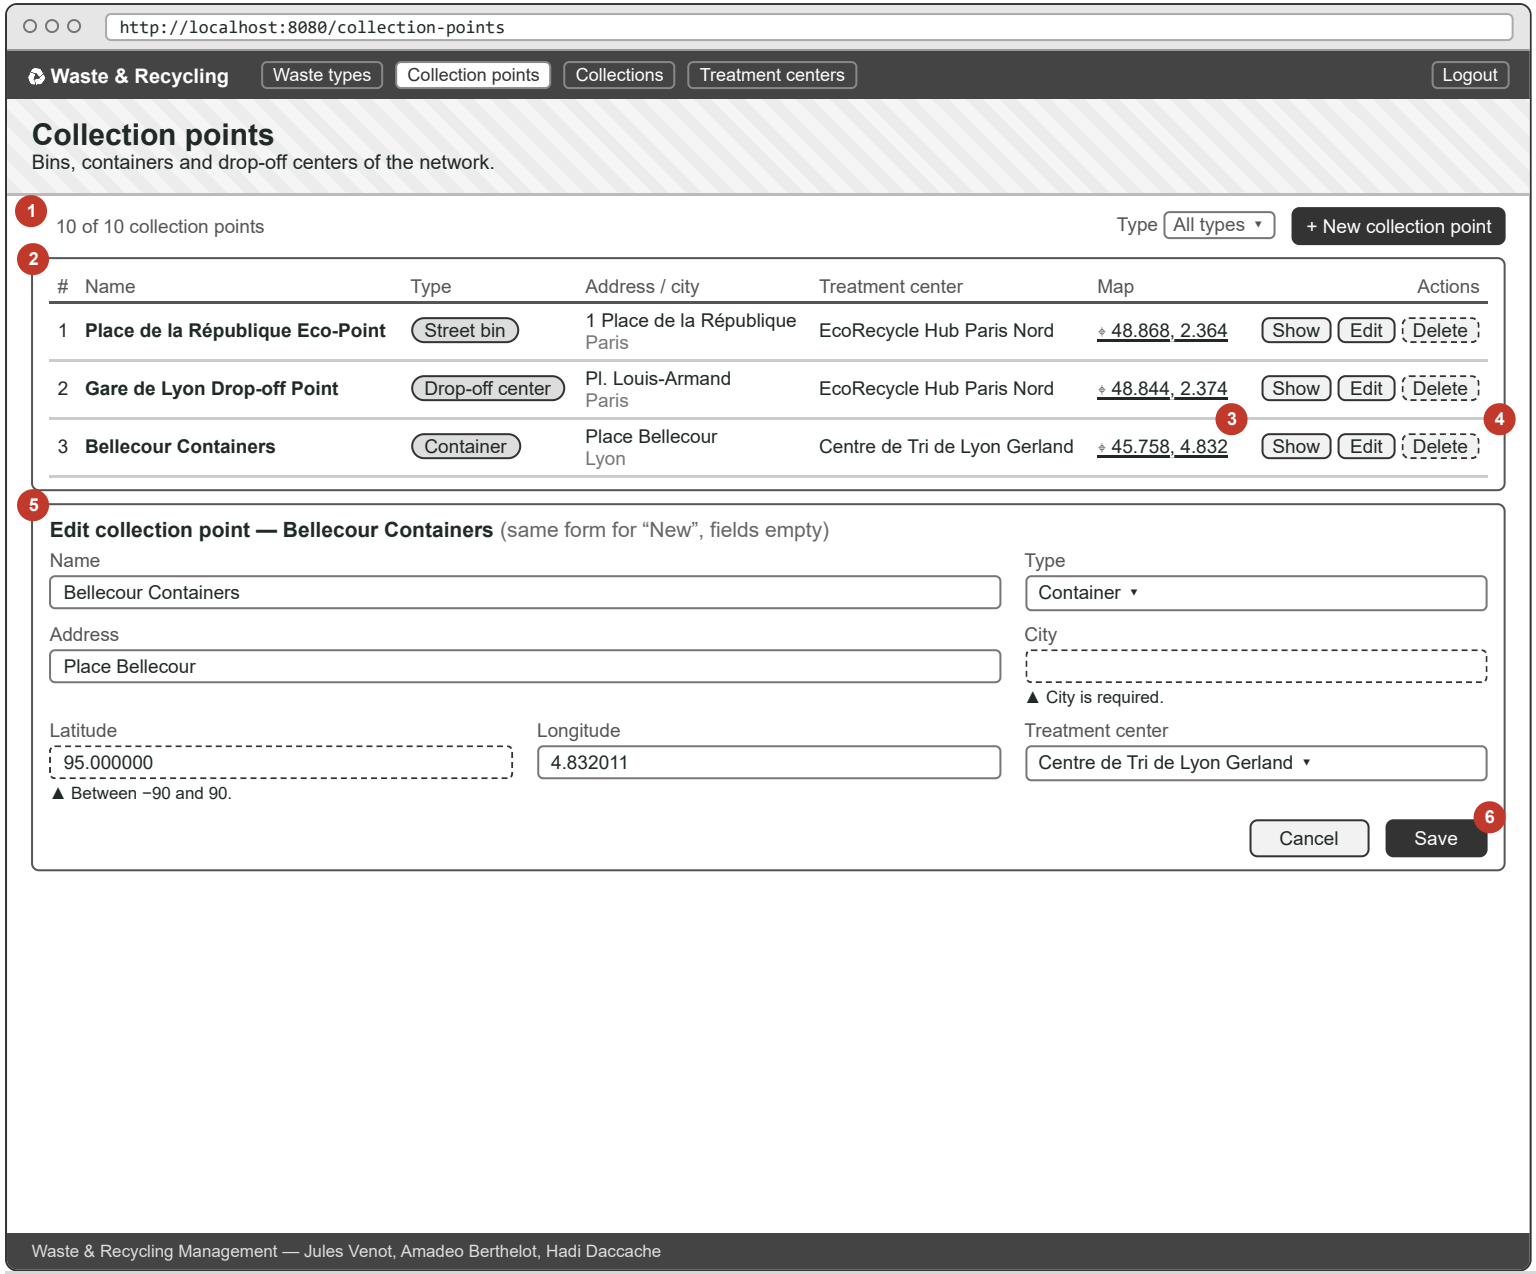


Annotations

1. Toolbar: counter, filter on the `point_type` ENUM (*street_bin, drop_off_center, container, business*) and the main action “New collection point”.
2. One row per `collection_point`. The center name comes from the FK `center_id` (JOIN with `treatment_center`), “—” if none.
3. Map link built from `latitude` / `longitude`, opens OpenStreetMap in a new tab.
4. Shared Show / Edit / Delete buttons. Delete asks for confirmation: the linked collections are deleted too (`ON DELETE CASCADE`).
5. Form with the table columns: name, type, address, city, latitude, longitude, treatment center (drop-down of **active** centers only).
6. “Save” checks the fields first; errors are shown inline under each field, no pop-up. On success → POST / PUT, then back to the list.

Legend
Dark button = main action · dashed border = destructive action / invalid field · ▾ = drop-down · ⌖ = map link · hatched area = header picture.

Activity diagram — Add or edit a collection point

Network management · actor: manager (role `manager` in `app_user`) · create / edit with validations, plus deletion with confirmation

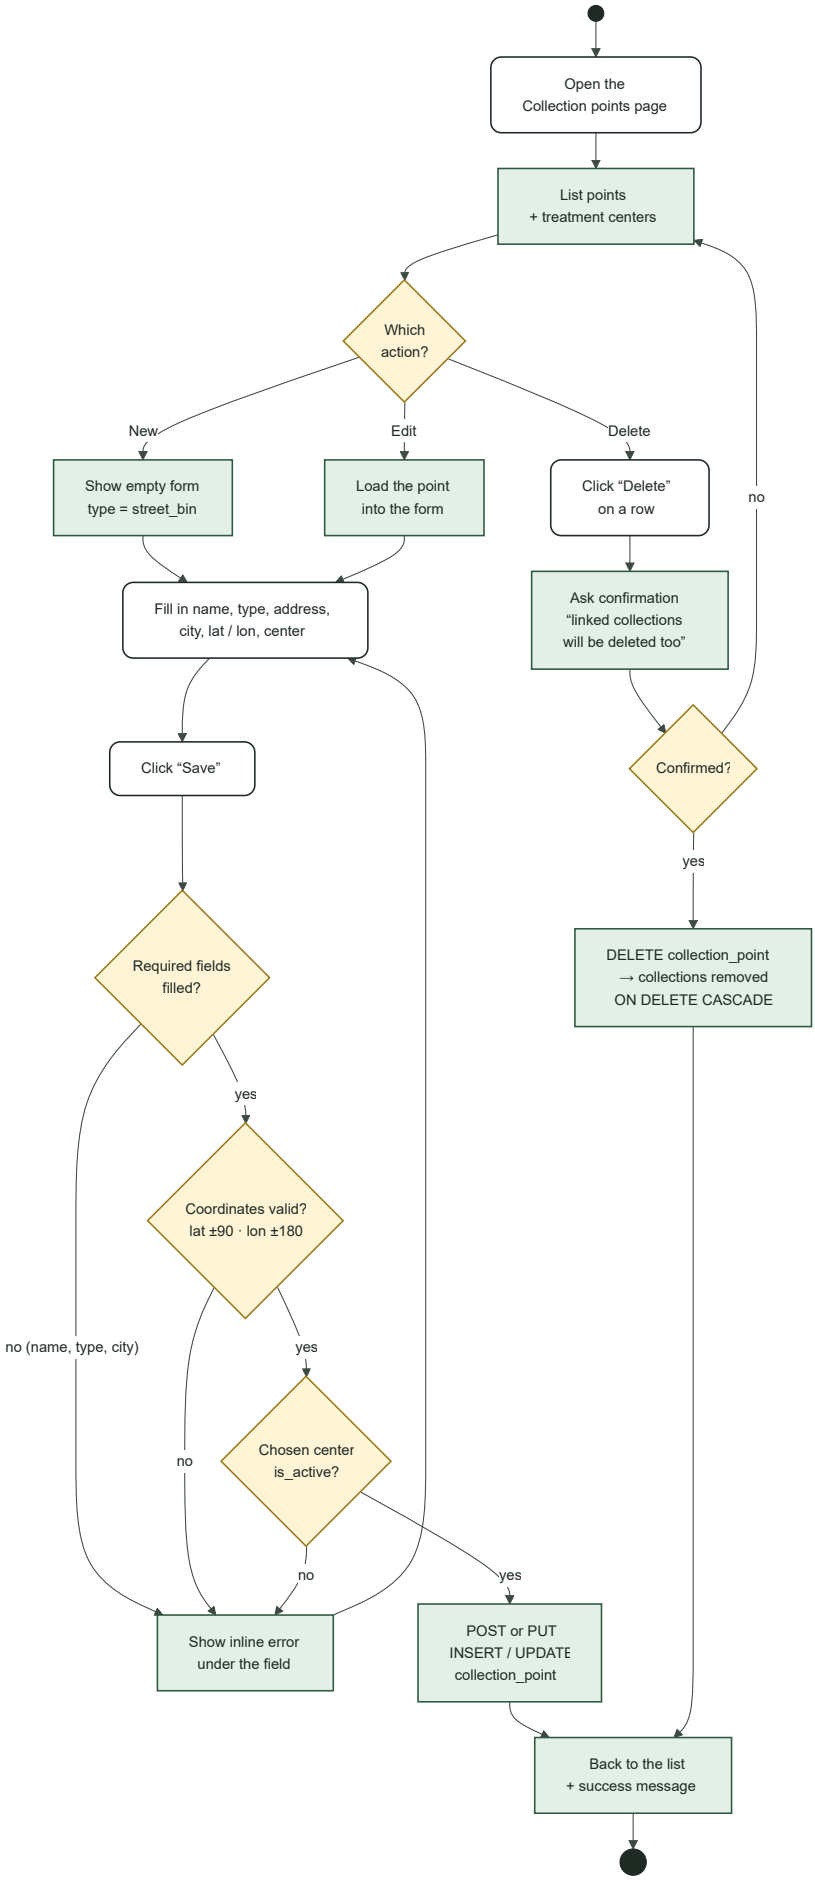

manager action · system action (Vue + server) · decision · ● start · ◉ end · any validation error loops back to the form

Source: docs/diagrams/src/hadi_activity.mmd (Mermaid, editable on mermaid.live)

Sequence diagram — Edit a treatment center

Planned server flow (Express MVC pipeline + repository) · `PUT /api/treatment-centers/:id` → `UPDATE treatment_center … WHERE center_id = ?`

