
Wireframe — Collection datasheet (driver view)

Screen used during use case **UC-B "Carry out a collection round"** · route `/collections/:id` · tables `collection`, `collection_waste`, `waste_type`

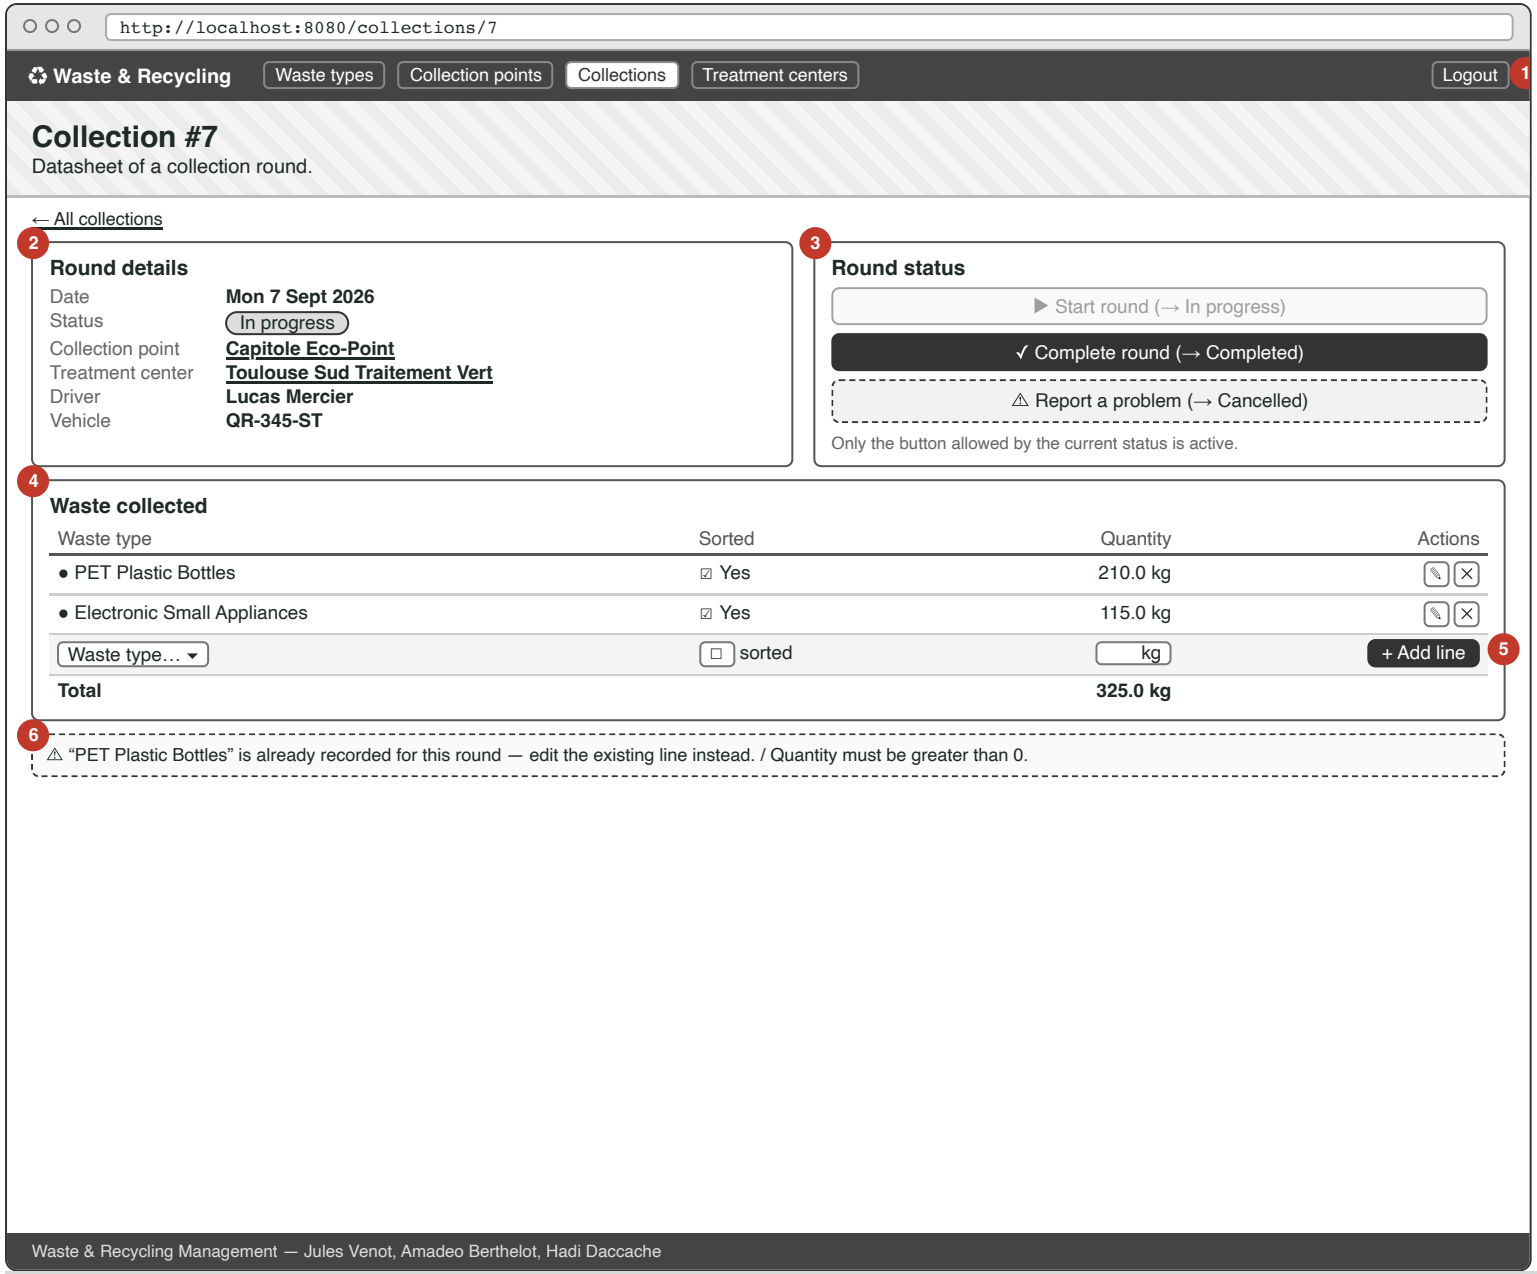


Annotations

1. Shared navbar; the current section (*Collections*) is highlighted.
2. Read-only facts of the `collection` row. Point and center are links to their own datasheets (FK `point_id`, `center_id`).
3. Status buttons follow the ENUM: *planned* → *in_progress* → *completed*, or *cancelled* when the point is inaccessible (UC-B steps 2, 5 and extension).
4. One row per `collection_waste` line (JOIN with `waste_type` for the label and colour). Each line can be edited or removed.
5. Inline "add line" row: waste type, sorted yes/no, quantity in kg. The total is recalculated after each change (SUM of `quantity_kg`).
6. Inline error message, no pop-up: duplicate waste type (PK `collection_id + waste_type_id`, flow 3a) or empty / negative quantity (flow 3b).

Legend
Dark button = main action · dashed border = exceptional action / message · ▾ = drop-down · □ = checkbox · hatched area = header picture.

Activity diagram — Carry out a collection round


Use case **UC-B** · actor: collection driver (role `driver` in `app_user`) · includes alternative flows 3a, 3b, 5a and the “point inaccessible” extension

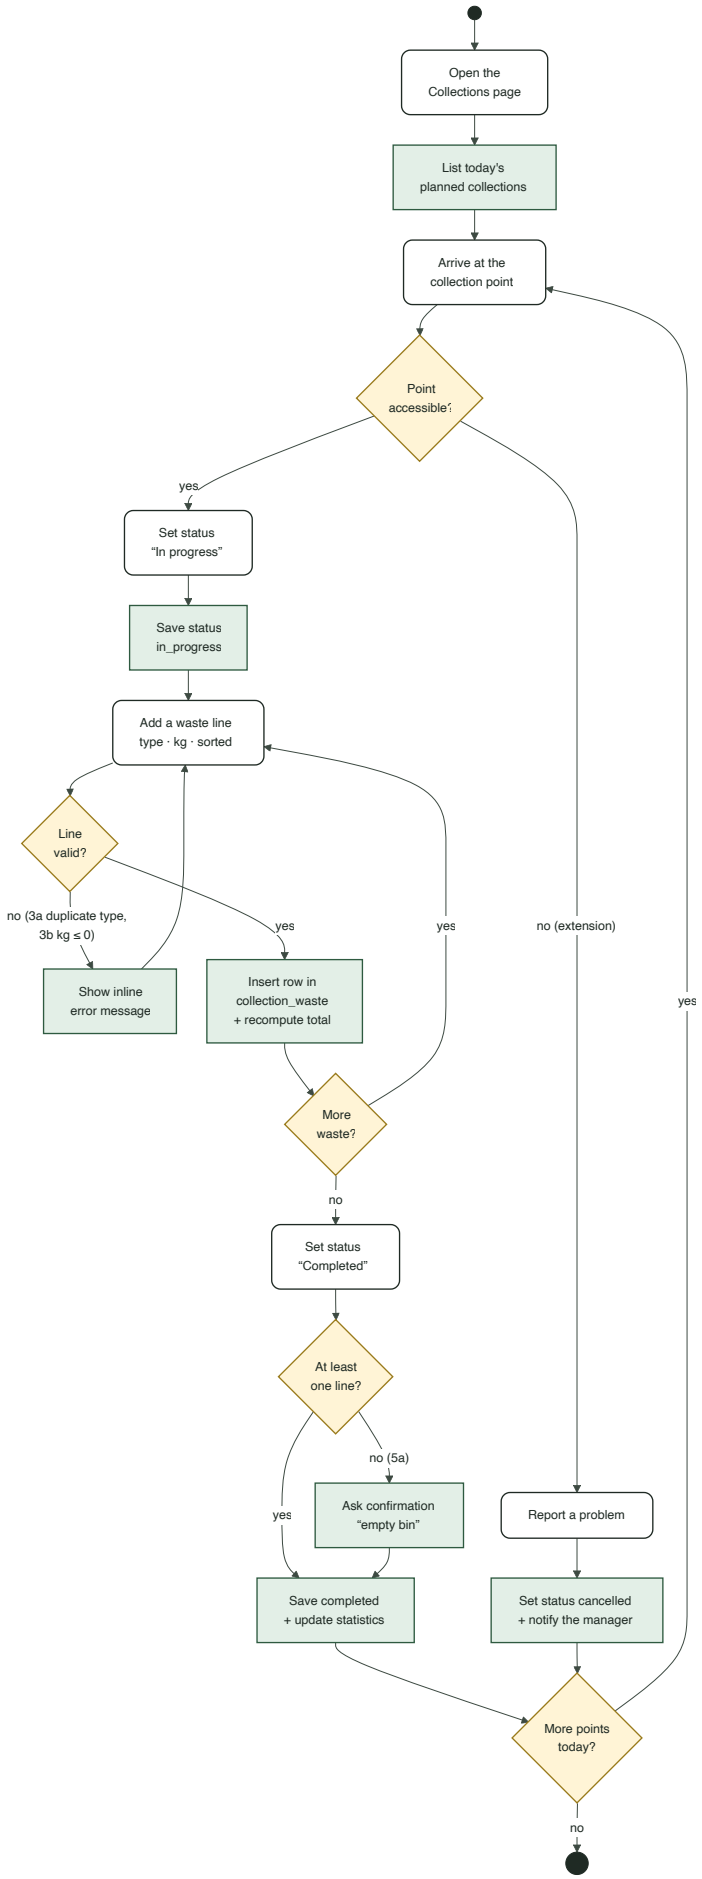

Source: docs/diagrams/src/amadeo_activity.mmd (Mermaid, editable on mermaid.live)

Sequence diagram — Record a collected waste line

UC-B steps 3–4 · planned server flow (Express MVC pipeline + repository) · `POST /api/collections/:id/waste` → `INSERT INTO collection_waste`

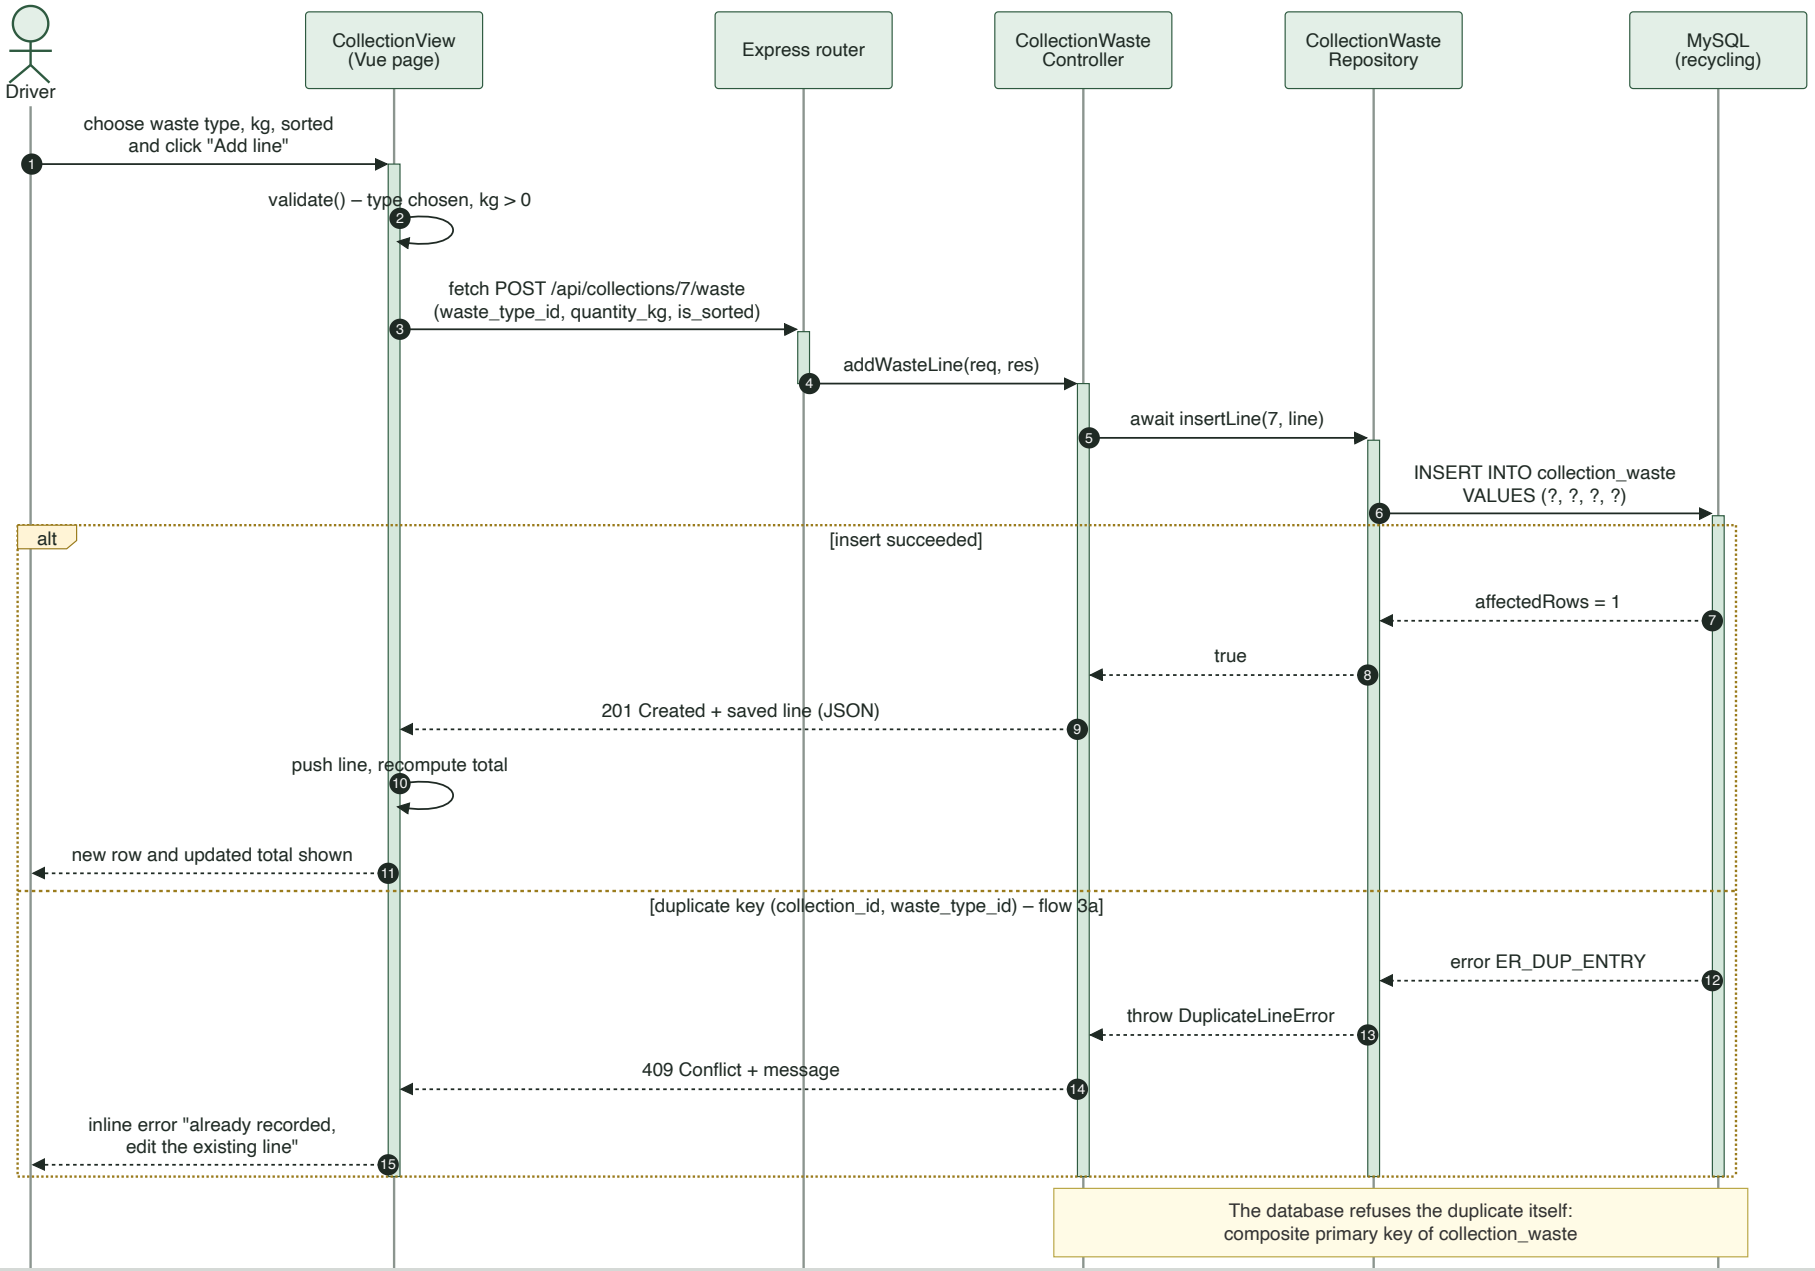

Source: docs/diagrams/src/amadeo_sequence.mmd (Mermaid, editable on mermaid.live) · solid arrow = call, dashed = return