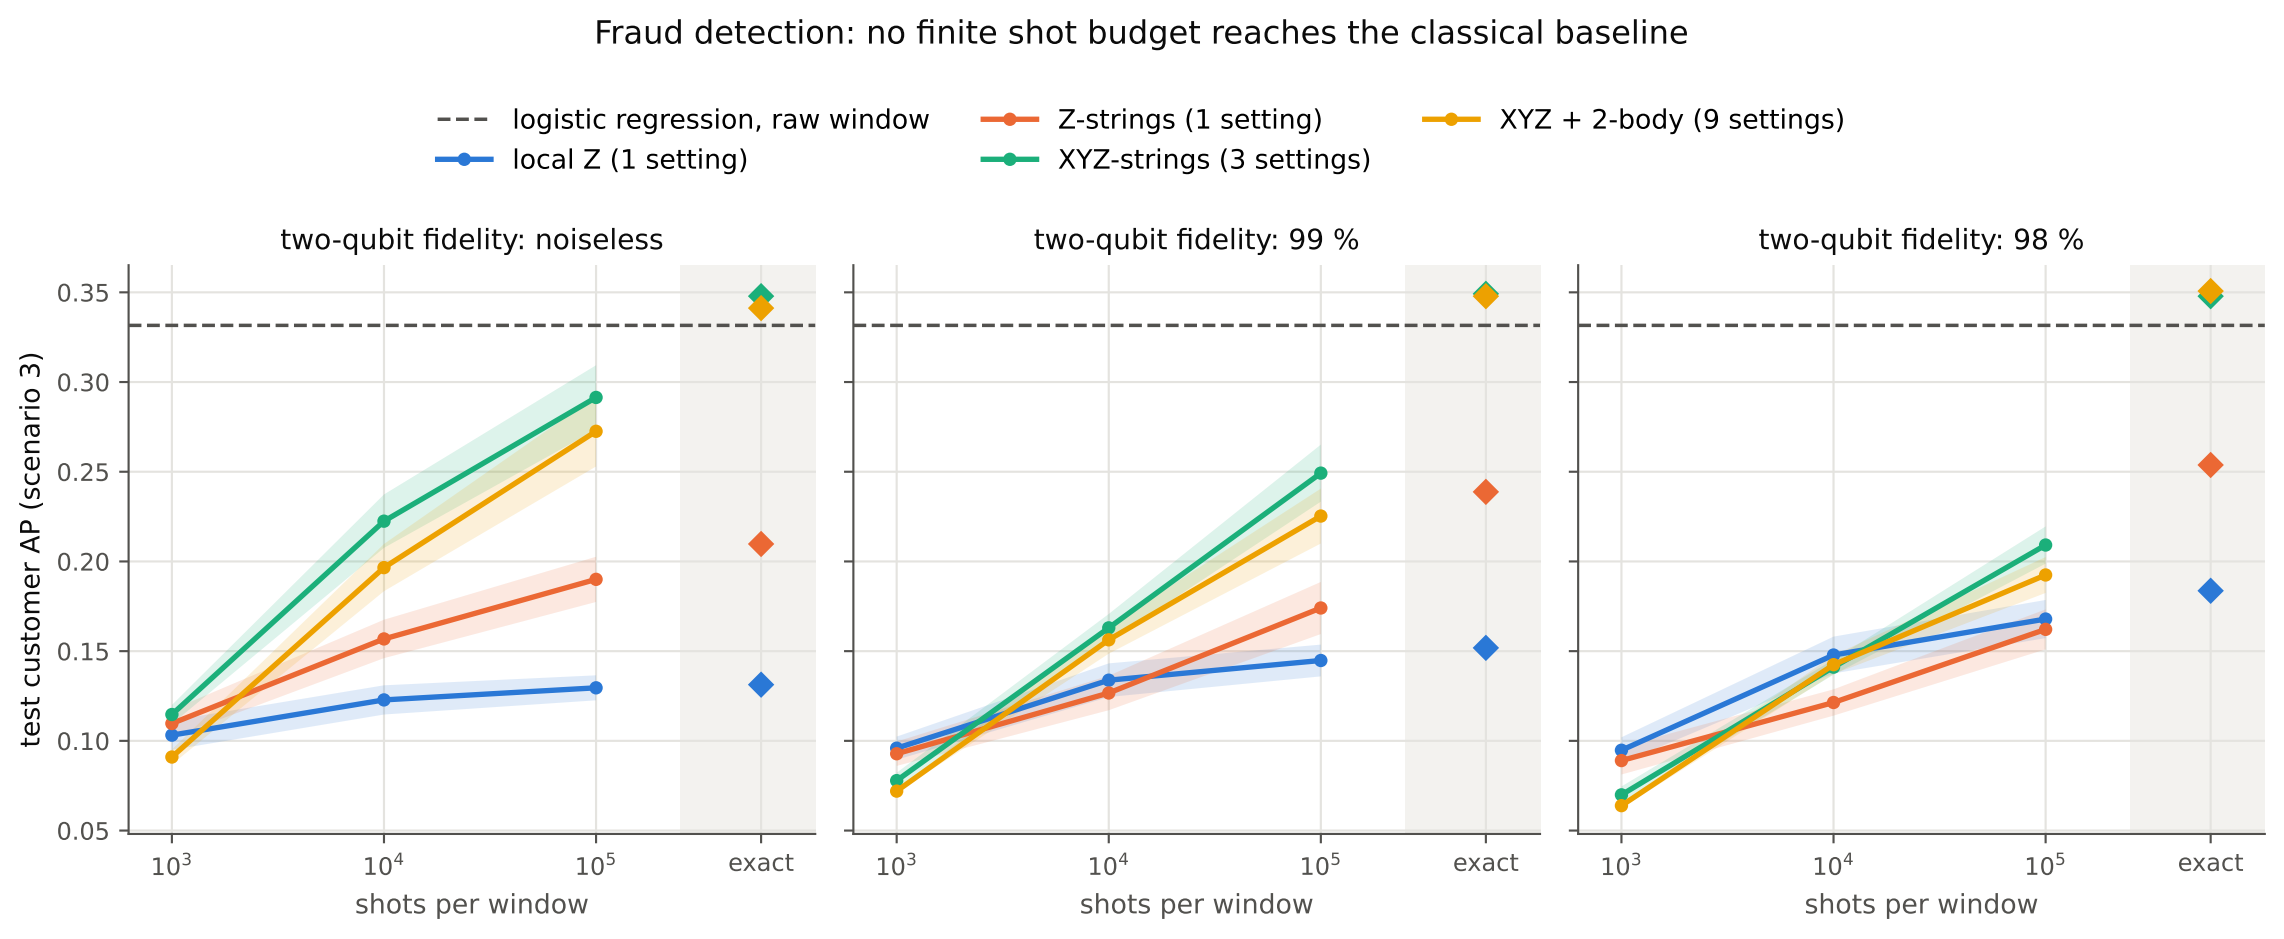
Fraud detection: no finite shot budget reaches the classical baseline
logistic regression, raw window
local Z (1 setting)
Z-strings (1 setting)
XYZ-strings (3 settings)
XYZ + 2-body (9 settings)
two-qubit fidelity: noiseless
two-qubit fidelity: 99 %
two-qubit fidelity: 98 %
test customer AP (scenario 3)
0.35
0.30
0.25
0.20
0.15
0.10
0.05
10^3
10^4
10^5
exact
shots per window