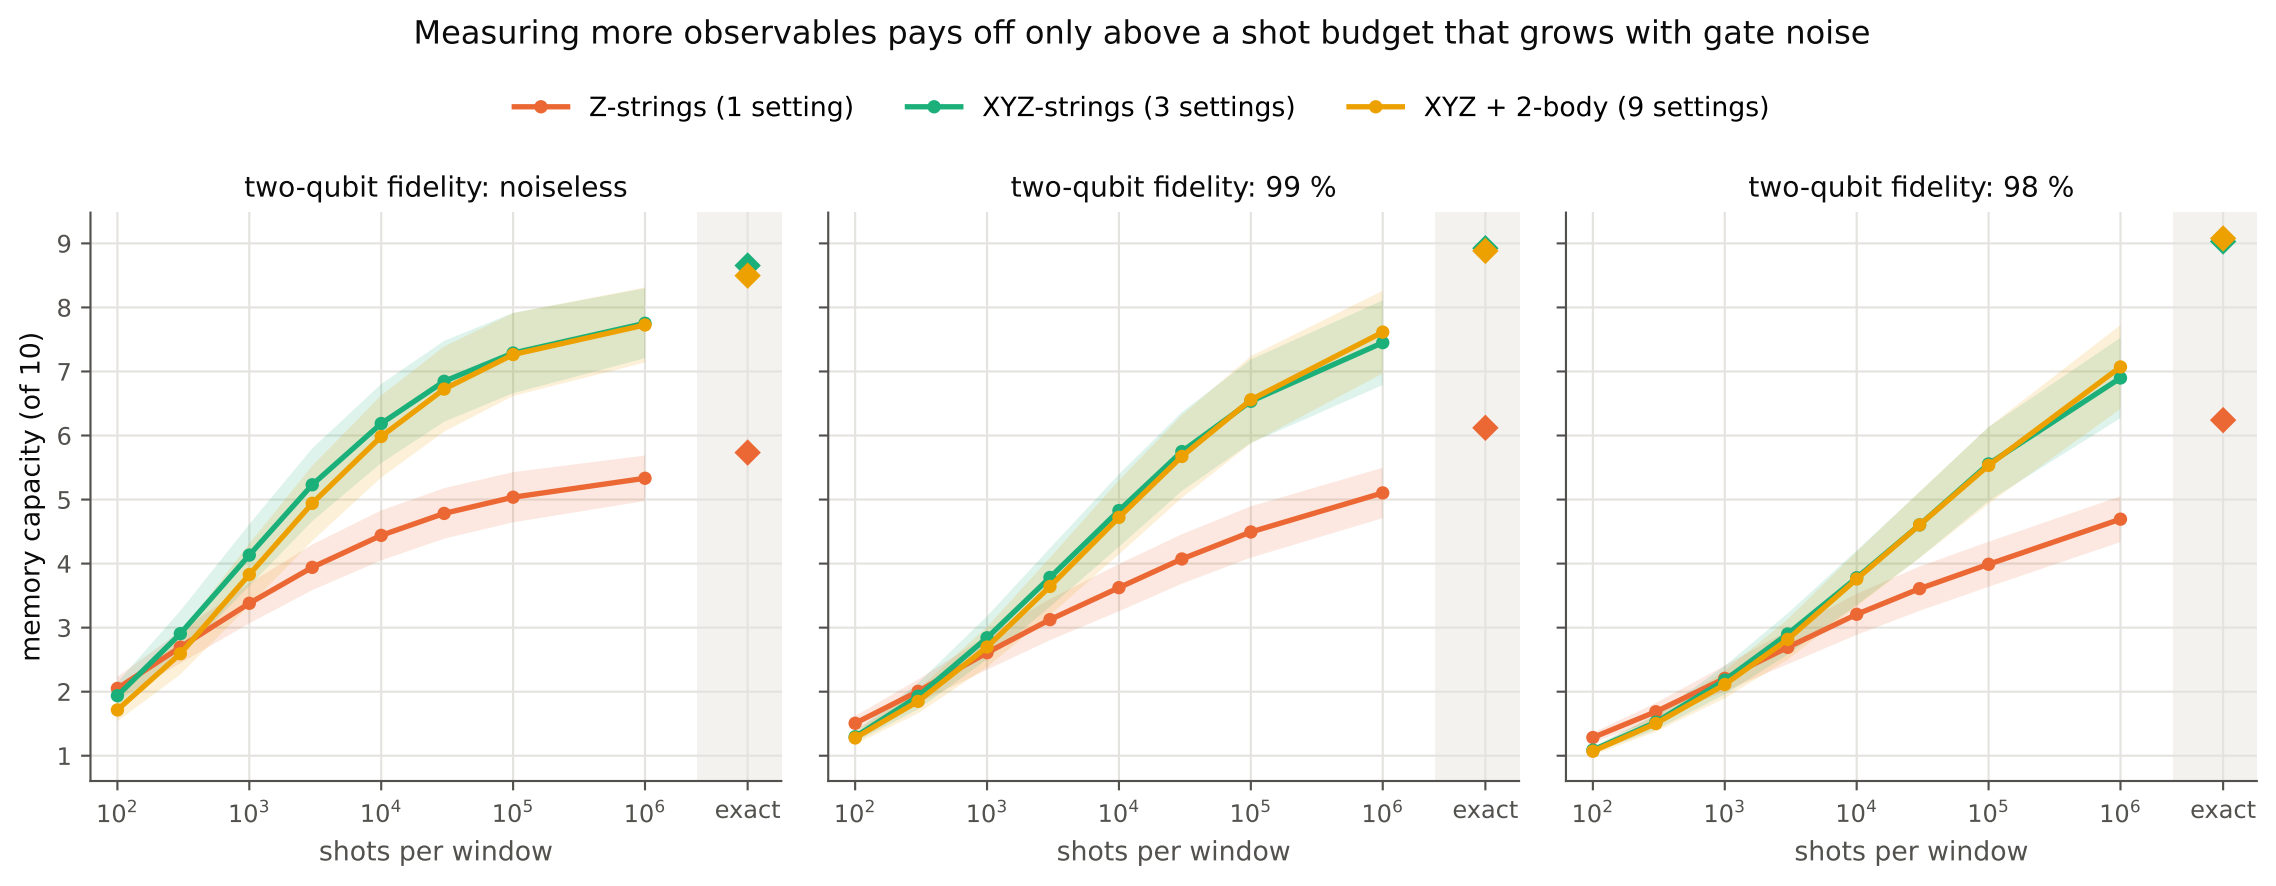
Measuring more observables pays off only above a shot budget that grows with gate noise
Z-strings (1 setting)
XYZ-strings (3 settings)
XYZ + 2-body (9 settings)
two-qubit fidelity: noiseless
two-qubit fidelity: 99 %
two-qubit fidelity: 98 %
memory capacity (of 10)
1
2
3
4
5
6
7
8
9
10^2
10^3
10^4
10^5
10^6
exact
shots per window