

PROGRAMA BIENESTAR UNIVERSITARIO

LINA REY

CARLOS PRIETO

SEBASTIAN HEANO

JULIAN CACERES

BRAYAN OTALORA

LUIS ROMERO



UNIVERSIDAD DE CUNDINAMARCA

INGENERIA DE SOFTWARE

PROYECTO II

2023

CODIGO DE INGRESO DE ESTUDIANTES

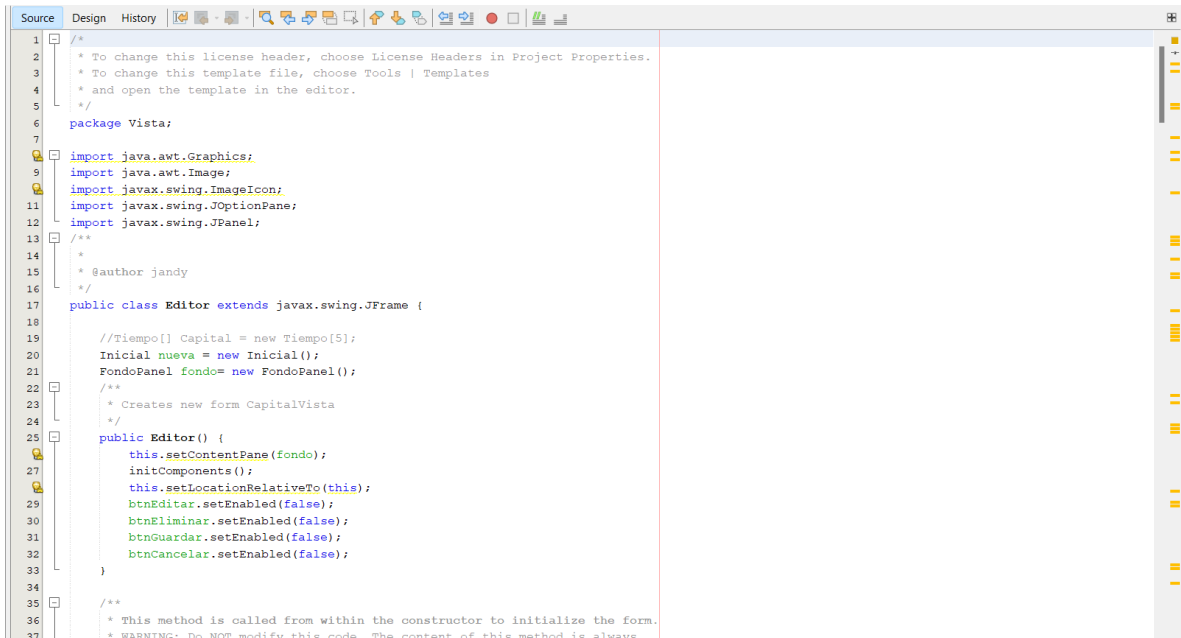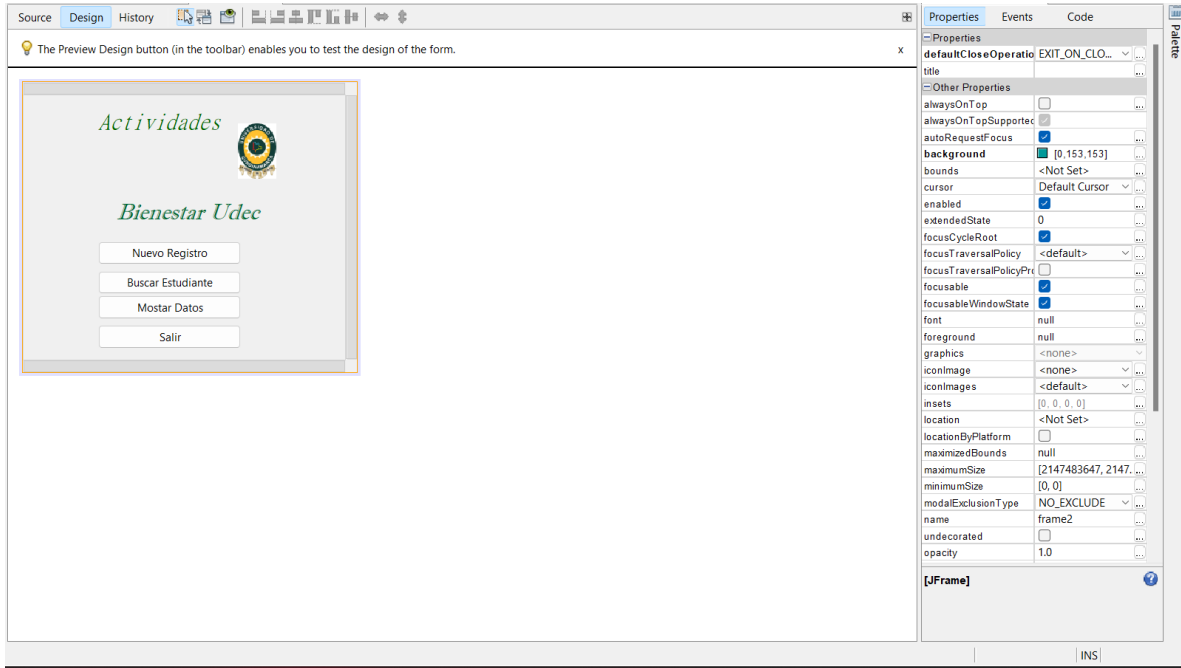

```
Source History
1 package Modelo;
2
3 public class DatosPaciente {
4
5
6
7
8
9
10
11
12
13
14
15 public String getId() {
16     return id;
17 }
18
19 public void setId(String id) {
20     this.id = id;
21 }
22
23 public String getNombre() {
24     return nombre;
25 }
26
27 public void setNombre(String nombre) {
28     this.nombre = nombre;
29 }
30
31 public String getDireccion() {
32     return direccion;
33 }
34
35 public void setDireccion(String direccion) {
36     this.direccion = direccion;
37 }
```

Source Design History

The Preview Design button (in the toolbar) enables you to test the design of the form.

Registro Estudiantes

Cedula :

Nombre :

Apellido :

Telefono :

Direccion :

Properties Events Code

Properties

defaultCloseOperation DISPOSE

title

Other Properties

alwaysOnTop

alwaysOnTopSupported

autoRequestFocus

background [240,240,240]

bounds <Not Set>

cursor Default Cursor

enabled

extendedState 0

focusCycleRoot

focusTraversalPolicy <default>

focusTraversalPolicy

focusable

focusableWindowState

font null

foreground null

graphics <none>

iconImage <none>

iconImages <default>

insets [0, 0, 0, 0]

location <Not Set>

locationByPlatform

maximizedBounds null

maximumSize [2147483647, 2147...

minimumSize [0, 0]

modalExclusionType NO_EXCLUDE

name frame3

undecorated

opacity 1.0

[JFrame]

```
Source Design History
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37
/*
 * To change this license header, choose License Headers in Project Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package Vista;

import Modelo.DatosPaciente;
import java.awt.Graphics;
import java.awt.Image;
import javax.swing.ImageIcon;
import javax.swing.JOptionPane;
import javax.swing.JPanel;

public class Ingresar extends javax.swing.JFrame {

    //Tiempo[] Capital = new Tiempo[5];
    Inicial nueva = new Inicial();
    FondoPanel fondo= new FondoPanel();

    /**
     * Creates new form CapitalVista
     */
    public Ingresar() {
        this.setContentPane(fondo);
        initComponents();
        this.setLocationRelativeTo(this);
    }

    /**
     * This method is called from within the constructor to initialize the form.
     * WARNING: Do NOT modify this code. The content of this method is always
     * regenerated by the Form Editor.
     */
    @SuppressWarnings("unchecked")
    Generated Code
    Transferring Maven repository index: Central Repository 22% 1:1 INS
```

The Tools>Palette>Swing/AWT Components menu item allows you to modify the content of the Palette.

Buscador

Cedula :

Direccion :

Nombre :

Apellido :

Telefono :

Properties

defaultCloseOperation: DISPOSE

title

Other Properties

alwaysOnTop: ☐

alwaysOnTopSupported: ☐

autoRequestFocus: ☒

background: [240,240,240]

bounds: <Not Set>

cursor: Default Cursor

enabled: ☒

extendedState: 0

focusCycleRoot: ☒

focusTraversalPolicy: <default>

focusTraversalPolicyPro: ☐

focusable: ☒

focusableWindowState: ☒

font: null

foreground: null

graphics: <none>

iconImage: <none>

iconImages: <default>

insets: [0, 0, 0, 0]

location: <Not Set>

locationByPlatform: ☐

maximumBounds: null

maximumSize: [2147483647, 2147483647]

minimumSize: [0, 0]

modalExclusionType: NO_EXCLUDE

name: frame1

undecorated: ☐

opacity: 1.0

[JFrame]

```
Source Design History
266 }
267
268 private void btnEditarActionPerformed(java.awt.event.ActionEvent evt) {
269
270     jt_cedula.setEditable(true);
271     jt_nombre.setEditable(false);
272     jt_apellido.setEditable(false);
273
274     jt_telefono.setEditable(false);
275
276     jt_dirreccion.setEditable(false);
277
278     btnBuscar.setEnabled(true);
279     btnGuardar.setEnabled(true);
280     btnCancelar.setEnabled(true);
281     btnEditar.setEnabled(true);
282     btnEliminar.setEnabled(true);
283 }
284
285 private void btnBuscarActionPerformed(java.awt.event.ActionEvent evt) {
286     // TODO add your handling code here:
287
288     jt_cedula.setEditable(true);
289     jt_nombre.setEditable(false);
290     jt_apellido.setEditable(false);
291
292     jt_telefono.setEditable(false);
293
294     jt_dirreccion.setEditable(false);
295     btnBuscar.setEnabled(true);
296     btnGuardar.setEnabled(false);
297     btnCancelar.setEnabled(false);
298     btnEditar.setEnabled(true);
299     btnEliminar.setEnabled(true);
300
301     int id = BuscarId(jt_cedula.getText());
302 }
```

Source Design History

The Navigator window displays a tree hierarchy of components in the opened form.

Datos Registrados

Title 1	Title 2	Title 3	Title 4	Title 5

Volver

Properties Events Code

Properties

- defaultCloseOperation EXIT_ON_CLOSE
- title
- Other Properties**
- alwaysOnTop
- alwaysOnTopSupported
- autoRequestFocus
- background [240,240,240]
- bounds <Not Set>
- cursor Default Cursor
- enabled
- extendedState 0
- focusCycleRoot
- focusTraversalPolicy <default>
- focusTraversalPolicyPr
- focusable
- focusableWindowState
- font null
- foreground null
- graphics <none>
- iconImage <none>
- iconImages <default>
- insets [0,0,0,0]
- location <Not Set>
- locationByPlatform
- maximizedBounds null
- maximumSize [2147483647, 2147483647]
- minimumSize [0,0]
- modalExclusionType NO_EXCLUDE
- name frame4
- undecorated
- opacity 1.0

[JFrame]

```
Source Design History
import javax.swing.JPanel;
import javax.swing.table.DefaultTableModel;

public class TablaDatos extends javax.swing.JFrame {

    DefaultTableModel modelo;
    //String matriz[] = new String[4];
    FondoPanel fondo= new FondoPanel();
    /**
     * Creates new form TablaDatos
     */
    public TablaDatos() {
        this.setContentPane(fondo);
        initComponents();
        this.setLocationRelativeTo(this);
        modelo = new DefaultTableModel();
        modelo.addColumn("Cedula");
        modelo.addColumn("Nombre");
        modelo.addColumn("Apellido");


        modelo.addColumn("Telefono");

        modelo.addColumn("Direccion");

        this.jTable1.setModel(modelo);
    }

    /**
     * This method is called from within the constructor to initialize the form.
     * WARNING: Do NOT modify this code. The content of this method is always
     * regenerated by the Form Editor.
     */
}
```

Transferring Maven repository index: Central Repository 82% 1:1 INS

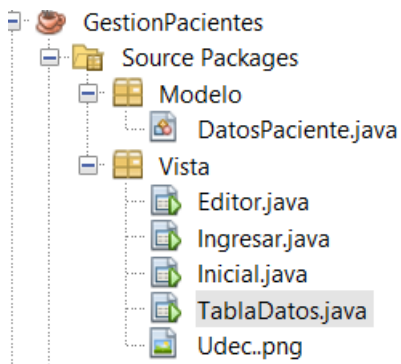



XAMPP Control Panel v3.3.0

Config

Netstat

Shell

Explorer

Services

Help

Quit

Modules

Service	Module	PID(s)	Port(s)	Actions			
<input type="checkbox"/>	Apache	13812 16112	4436, 8080	Stop	Admin	Config	Logs
<input type="checkbox"/>	MySQL	11788	3306	Stop	Admin	Config	Logs
<input type="checkbox"/>	FileZilla			Start	Admin	Config	Logs
<input type="checkbox"/>	Mercury			Start	Admin	Config	Logs
<input type="checkbox"/>	Tomcat			Start	Admin	Config	Logs

```
5:00:09 p. m. [main] All prerequisites found
5:00:09 p. m. [main] Initializing Modules
5:00:09 p. m. [main] Starting Check-Timer
5:00:09 p. m. [main] Control Panel Ready
5:00:11 p. m. [Apache] Attempting to start Apache app...
5:00:12 p. m. [Apache] Status change detected: running
5:00:12 p. m. [mysql] Attempting to start MySQL app...
5:00:13 p. m. [mysql] Status change detected: running
```