

PSEUDOCODE

A. Program 1

START

Input teks

Jumlah_kalimat $\leftarrow$ 0

For setiap karakter In teks Do

 If karakter = "." Then

 Jumlah_kalimat $\leftarrow$ Jumlah_kalimat + 1

 End if

End for

Daftar_kata $\leftarrow$ split(teks, "")

Jumlah_kata $\leftarrow$ length(Daftar_kata)

Output "Teks tersebut memuat", jumlah_kalimat, "kalimat"

Output "Teks tersebut memuat", jumlah_kata, "kata"

END

B. Program 2

START

K1 $\leftarrow$ "Saya tak 'kan menyerah"

K2 $\leftarrow$ "Ia berkata, 'Aku Menyayangimu'"

K3 $\leftarrow$ "Coba jelaskan pengertian cross-validation dalam Machine Learning!"

K4 $\leftarrow$ "Surat keputusan itu bernomor 62/UN.34/19/2023."

Output K1

Output K2

Output K3

Output K4

END

C. Program 3

START

Input a

Input b

Input c

$D \leftarrow b^2 - 4 \times a \times c$

if $D > 0$ then

$x1 \leftarrow (-b + \sqrt{D}) / (2 \times a)$

$x2 \leftarrow (-b - \sqrt{D}) / (2 \times a)$

```

        Output x1 dan x2
    else if D = 0 then
         $x \leftarrow -b/(2 \times a)$ 
        Output x

    else
        Output "Persamaan hanya memiliki akar imajiner"
    end if

END

```

D. Program 4

START

Input NIP

tahun $\leftarrow$ digit 1 sampai 4
 bulan $\leftarrow$ digit 5 sampai 6
 tanggal $\leftarrow$ digit 7 sampai 8

```

IF bulan = 1 THEN
    nama_bulan  $\leftarrow$  "Januari"
ELSE IF bulan = 2 THEN
    nama_bulan  $\leftarrow$  "Februari"
ELSE IF bulan = 3 THEN
    nama_bulan  $\leftarrow$  "Maret"
ELSE IF bulan = 4 THEN
    nama_bulan  $\leftarrow$  "April"
ELSE IF bulan = 5 THEN
    nama_bulan  $\leftarrow$  "Mei"
ELSE IF bulan = 6 THEN
    nama_bulan  $\leftarrow$  "Juni"
ELSE IF bulan = 7 THEN
    nama_bulan  $\leftarrow$  "Juli"
ELSE IF bulan = 8 THEN
    nama_bulan  $\leftarrow$  "Agustus"
ELSE IF bulan = 9 THEN
    nama_bulan  $\leftarrow$  "September"
ELSE IF bulan = 10 THEN
    nama_bulan  $\leftarrow$  "Oktober"
ELSE IF bulan = 11 THEN
    nama_bulan  $\leftarrow$  "November"
ELSE IF bulan = 12 THEN
    nama_bulan  $\leftarrow$  "Desember"
ELSE
    nama_bulan  $\leftarrow$  "Tidak diketahui"
END IF

```

Output ("Tanggal lahir:", tanggal, nama_bulan, tahun)

END

E. Program 5

START

```
function jarak (P, Q)
    jarak  $\leftarrow \sqrt{(P1-Q1)^2 + (P2-Q2)^2 + (P3-Q3)^2}$ 
    return jarak
end function
```

A $\leftarrow$ (2,1,3)

B $\leftarrow$ (1,-4,6)

C $\leftarrow$ (-2,3,-2)

input x1

input x2

input x3

U $\leftarrow$ (x1,x2,x3)

dA $\leftarrow$ Jarak(U,A)

dB $\leftarrow$ Jarak(U,B)

dC $\leftarrow$ Jarak(U,C)

```
if dA < dB and dA < dC then
    cluster  $\leftarrow$  "A"
else if dB < dA and dB < dC then
    cluster  $\leftarrow$  "B"
else if dC < dA && dC < dB then
    cluster  $\leftarrow$  "C"
else if dA == dB && dA < dC then
    cluster  $\leftarrow$  "Perbatasan cluster A dan B"
else if dA == dC && dA < dB then
    cluster  $\leftarrow$  "Perbatasan cluster A dan C"
else if dB == dC && dB < dA then
    cluster  $\leftarrow$  "Perbatasan cluster B dan C"
else
    cluster  $\leftarrow$  "Perbatasan cluster A, B, dan C"
end if
```

output "Titik termasuk cluster ", cluster

END

F. Program 6

START

```
function interval_proporsi(phat, n, alpha)
    if phat < 0 or phat > 1 then
        output "Error: proporsi harus antara 0 dan 1"
        return
    end if
```

```

if alpha = 0.10 then
  z ← 1.645
else if alpha = 0.05 then
  z ← 1.96
else
  output "Alpha harus 0.10 atau 0.05"
  return
end if

margin ←  $z \times \sqrt{(\text{phat} \times (1-\text{phat}))/n}$ 

bawah ← phat – margin
atas ← phat + margin

output "Interval Konfidensi"
output "(", bawah, ",", atas, ")"
end function


input phat
input n
input alpha

call interval_proporsi(phat, n, alpha)


END

```


PROGRAM 1

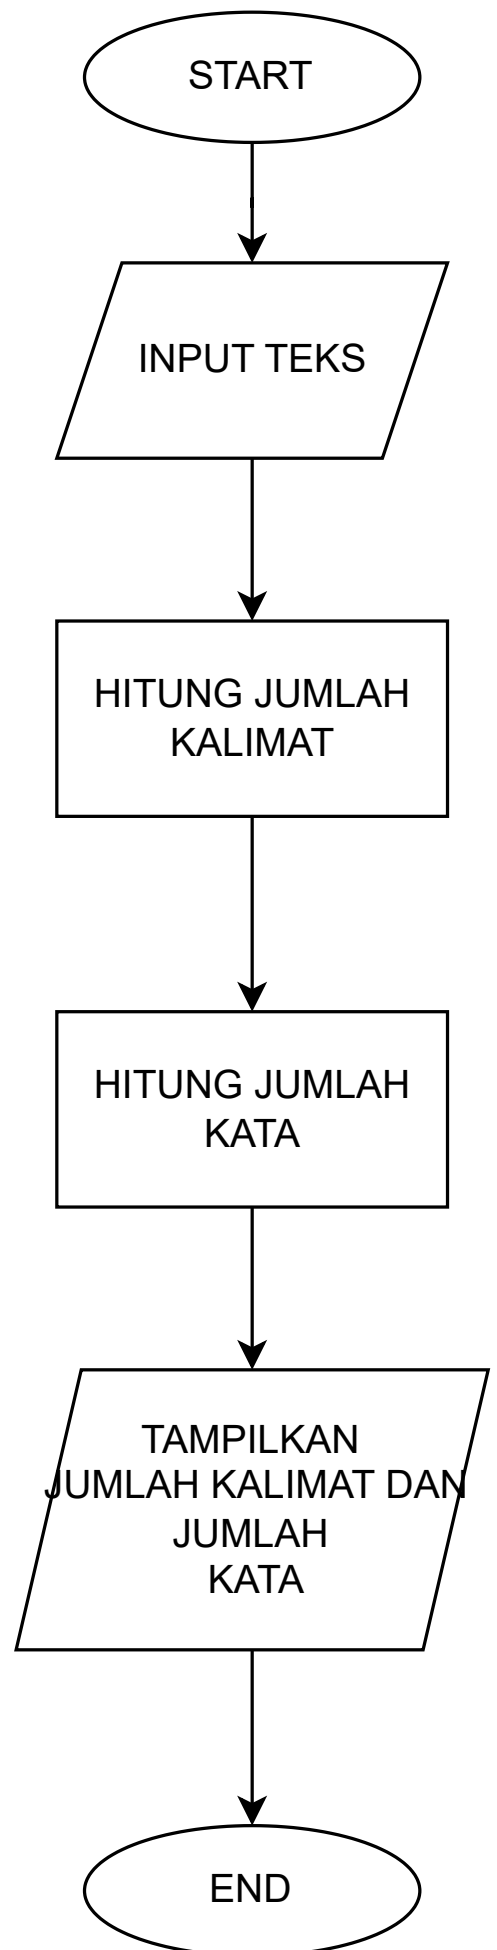


PROGRAM 2

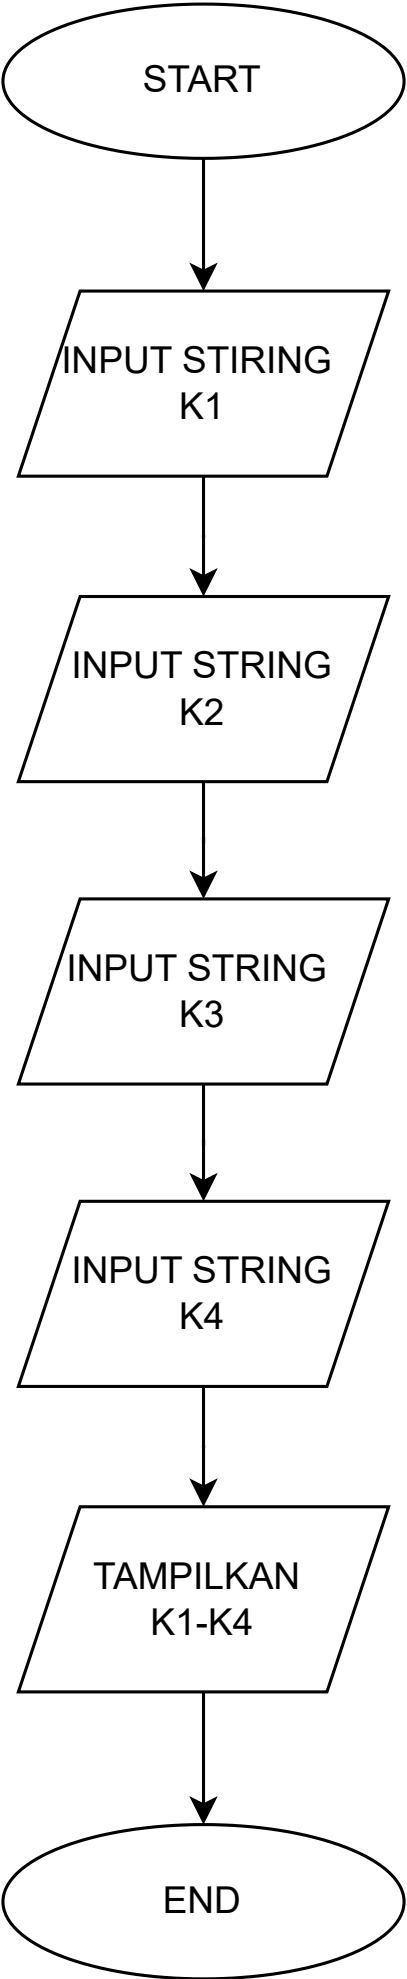


PROGRAM 3

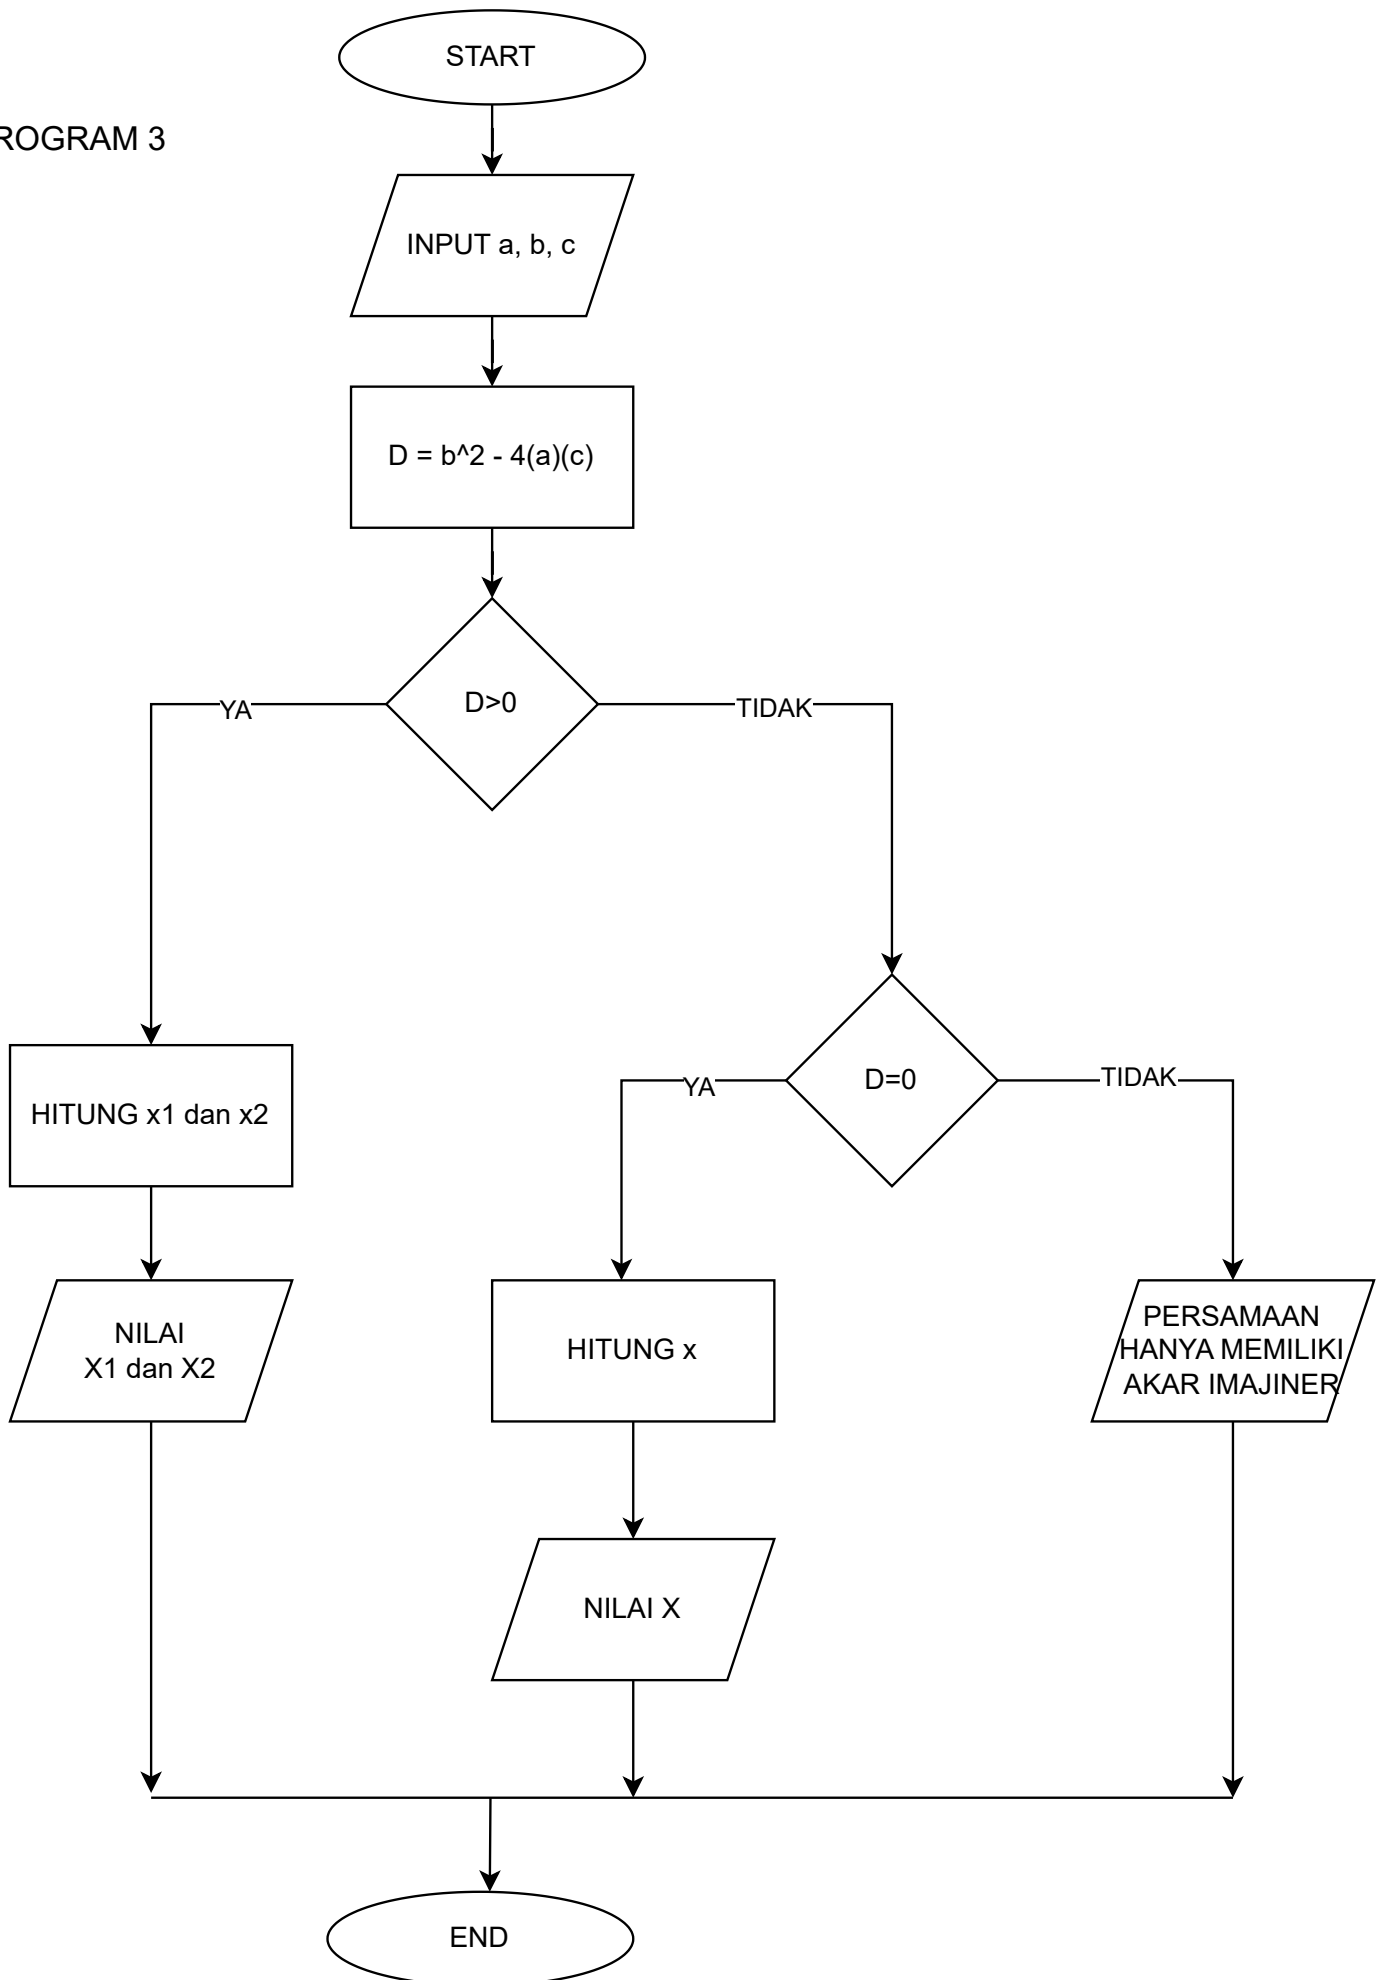

PROGRAM 4

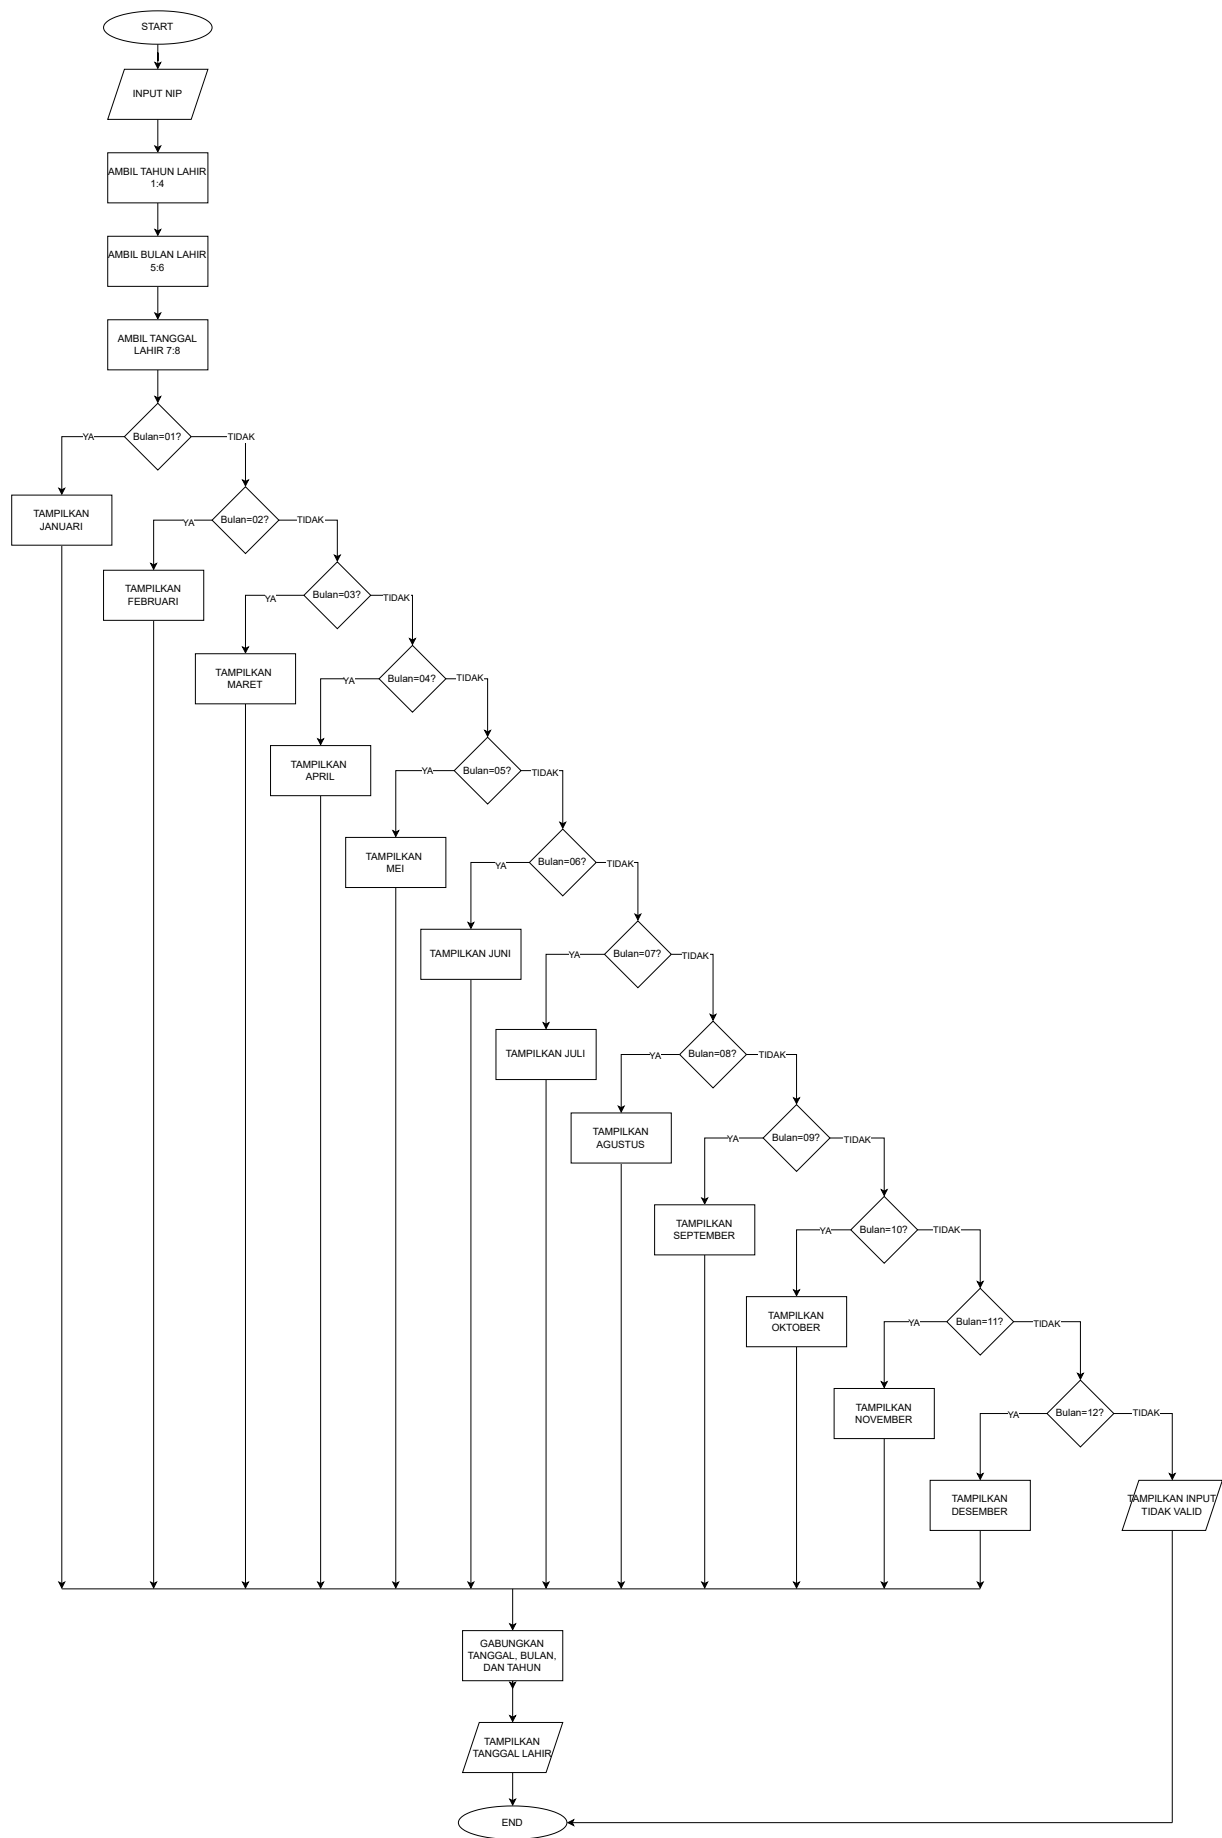

PROGRAM 5

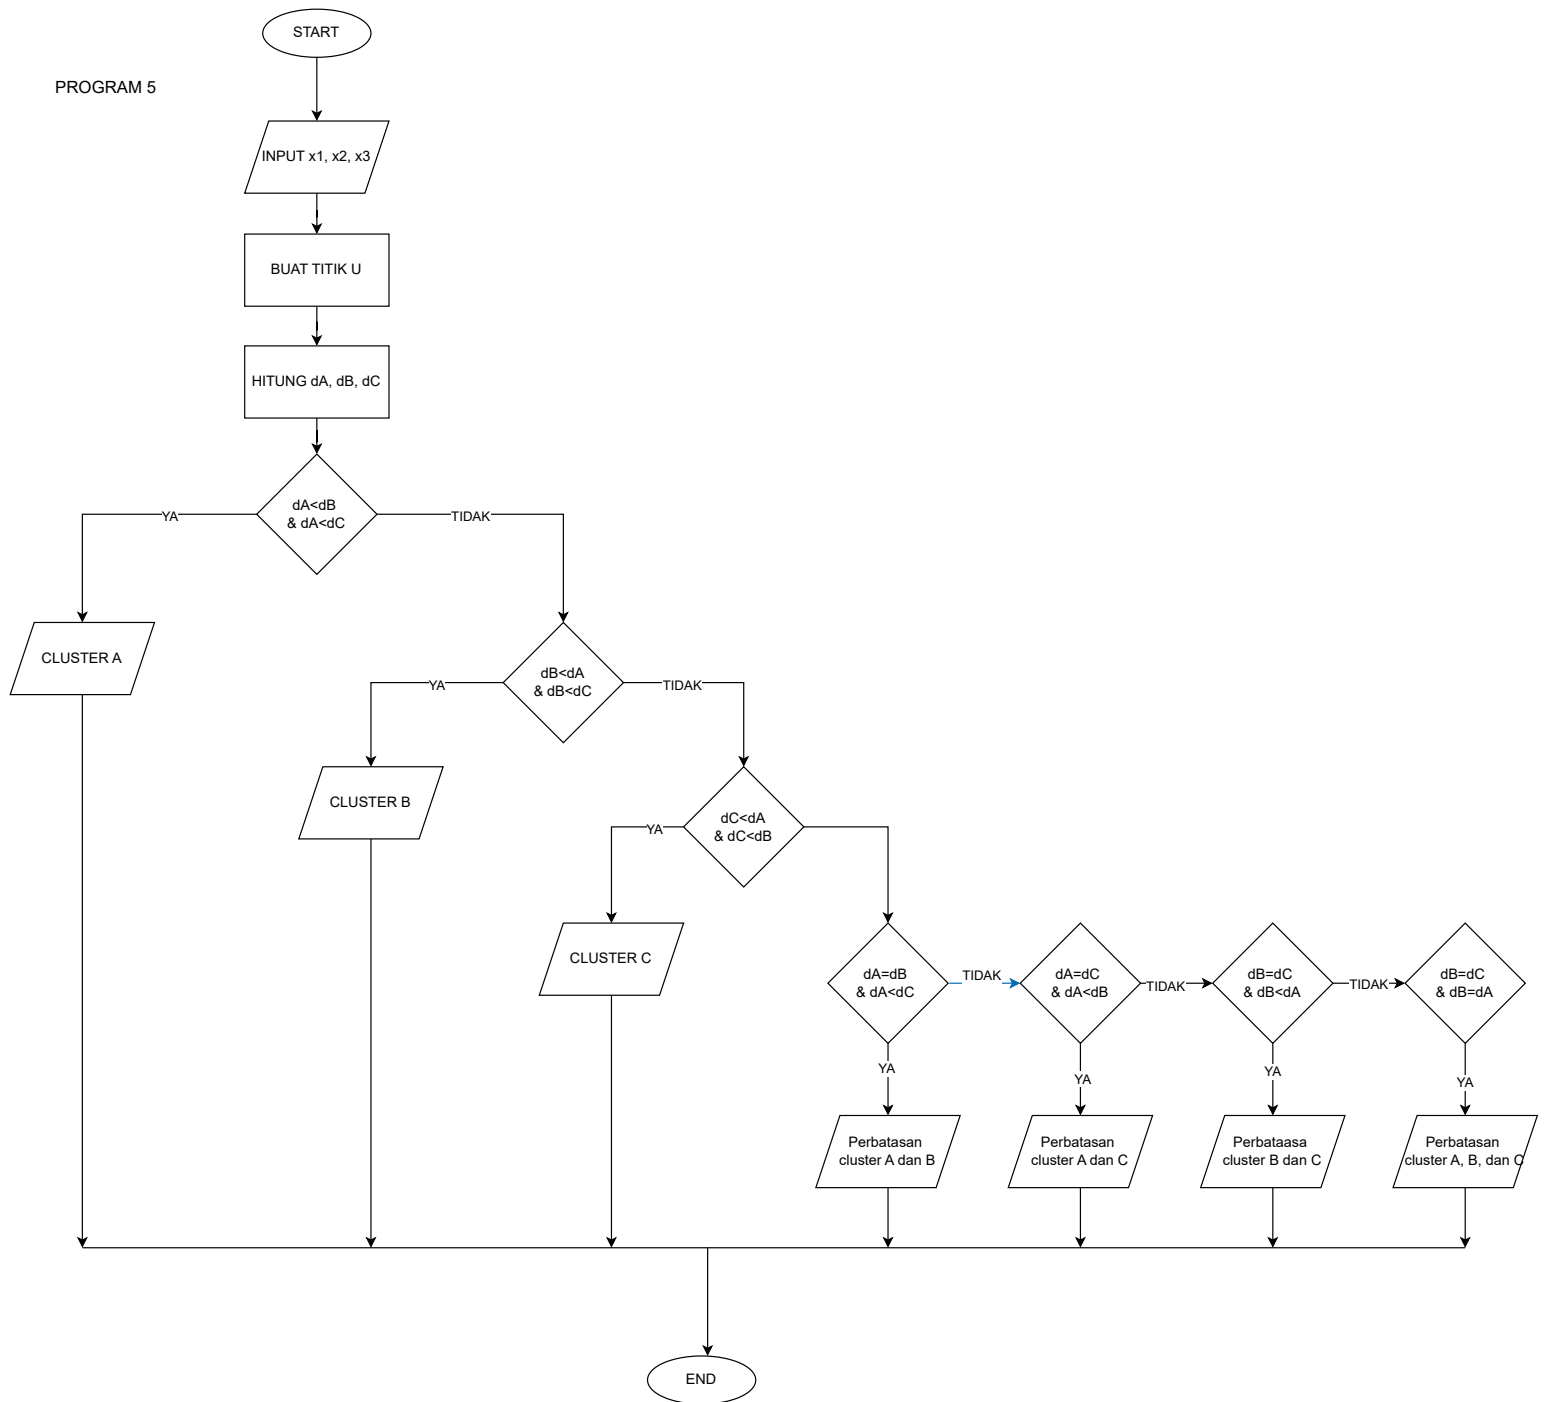

PROGRAM 6

