EXAMTOPICS
- Expert Verified, Online, **Free**.

Custom View Settings

Topic 1 - Single Topic

Question #1

Topic 1

Which CSS3 code fragment styles an H2 element only if it is a direct child of a DIV element?

A.
```
div {
background-color: #900;
}
h2 {
background-color: #900;
}
```

B.
```
div > h2 {
background-color: #900;
}
```

C.
```
h2 > div {
background-color: #900;
}
```

D.
```
div, h2 {
background-color: #900;
}
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *B*

Nick_144 4 months, 3 weeks ago
b is the answer
upvoted 1 times

vicky98_375 4 months, 3 weeks ago
Can you help me with the preparation currently I am also preparing for this exam
upvoted 1 times

vicky98_375 4 months, 3 weeks ago
B
is the answer
upvoted 1 times

Question #2 *Topic 1*

Which CSS property defines which sides of an element where other floating elements are not allowed?

A. float

B. position

C. display

D. clear

Correct Answer: *D*

Nick_144 4 months, 3 weeks ago
d is the answer
upvoted 2 times

vicky98_375 4 months, 3 weeks ago
D is the answer
upvoted 1 times

Question #3 *Topic 1*

You write the following code to create a page. (Line numbers are included for reference only.)

```
01 <html>
02 …
03  <body>
04    <svg xmlns="http://www.w3.org/2000/svg" version="1.1">
05     <defs>
06      <filter id="blur" filterUnits="objectBoundingBox" x="-1" y="-1" width="2.0" height="2.0">
07      <feGaussianBlur stdDeviation="1"/>
08     </filter>
09    </defs>
10   <text x="10" y="50" >Blur Me!</text>
11  </svg>
12  </body>
13 </html>
```

You need to apply the SVG blur filter to the text tag on the page.

Which HTML/CSS code should you insert at line 02?

A.
```
<style>
text{font:48px arial bold; fill:blur;}
</style>
```

B.
```
<style>
text{font:48px arial bold; filter:url(#blur);}
</style>
```

C.
```
<style>
text{font:48px arial bold; filter:#blur;}
</style>
```

D.
```
<style>
text{font:48px arial bold; filter:url(blur);}
</style>
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *B*

Nick_144 4 months, 3 weeks ago

b is the answer

upvoted 1 times

vicky98_375 4 months, 3 weeks ago

B is the answer

upvoted 1 times

Question #4 *Topic 1*

Which layout can you create by using a single CSS3 region?

A. a table layout

B. a snaked-column layout

C. a multiple column liquid layout

D. a multiple column fixed layout

Correct Answer: *A*

Nick_144 4 months, 3 weeks ago

c is the answer

upvoted 1 times

Question #5 *Topic 1*

In CSS, the flow-into property deposits:

A. the flow into the content.

B. the regions into a flow.

C. the flow into the regions.

D. content into the flow.

Correct Answer: *D*

Question #6 *Topic 1*

Which CSS code fragment centers an image horizontally?

A. `img.center { text-align: center; }`

B. `img.center { display: block; text-align: center; }`

C. `img.center { display: block; }`

D. `img.center { display: block; margin-left: auto; margin-right: auto; }`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *D*

vicky98_375 4 months, 3 weeks ago

D is the answer

upvoted 1 times

Question #7 *Topic 1*

DRAG DROP -

Match the CSS terms to the corresponding examples. (To answer, drag the appropriate term from the column on the left to its example on the right. Each term may be used once, more than once, or not at all. Each correct match is worth one point.)

Select and Place:

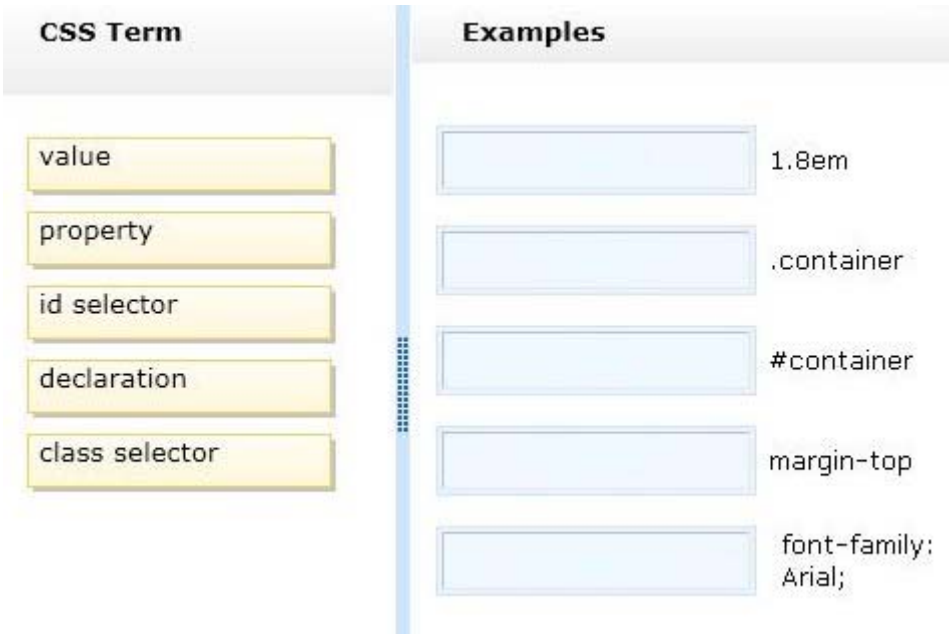

Correct Answer:

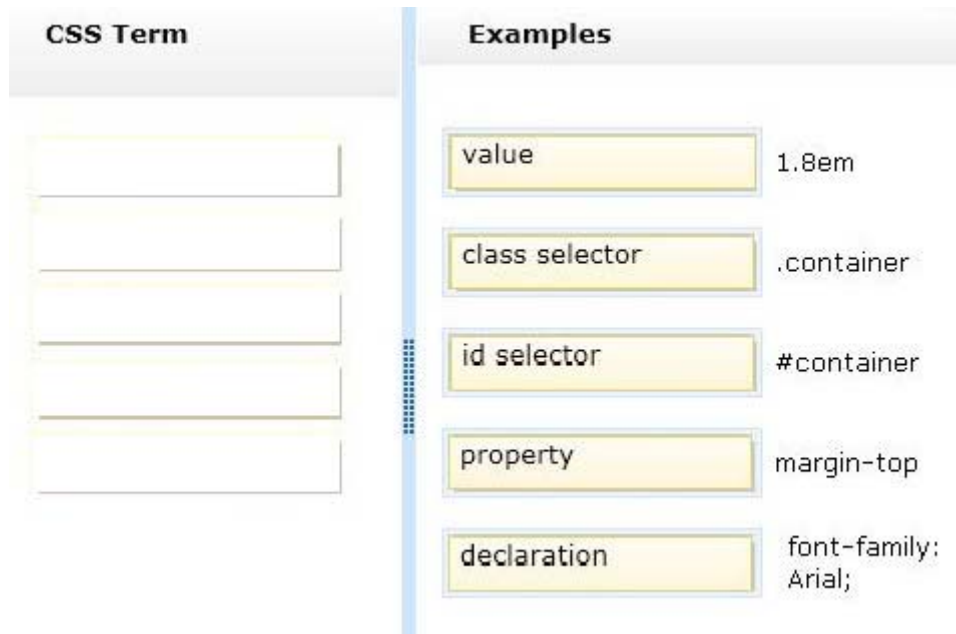

Question #8 *Topic 1*

Which positioning scheme places an object in normal document flow?

A. absolute

B. relative

C. fixed

D. float

Correct Answer: *B*

ruth_4_n 6 months, 2 weeks ago

Relative positioning fit with the normal flow of a document.

upvoted 1 times

vicky98_375 4 months, 3 weeks ago

B is the answer

upvoted 1 times

Question #9 *Topic 1*

The variable named "ctx" is the context of an HTML5 canvas object. What does the following code fragment draw? ctx.arc(x, y, r, 0, Math.PI, true);

A. a circle at the given point

B. a square at the given point

C. a semi-circle at the given point

D. a line from one point to another

Correct Answer: *C*

Question #10 *Topic 1*

Which three are valid JavaScript variables? (Choose three.)

A. xyz1

B. .Int

C. int1

D. _int

E. 1xyz

Correct Answer: *ACD*
Variable names must begin with a letter or special variable with either $ or _
Variable names are case sensitive (y and Y are different variables)

Question #11 *Topic 1*

Your code includes the following fragment:
<input type="text" name="text1" id="myText" />
You need to add code that will retrieve the contents of the INPUT element.
Which JavaScript code fragment will accomplish this?

A. vartxtContents =document.getElementById('text1').value;

B. vartxtContents = document.getElementyById('myText').value;

C. vartxtContents =document.getElementById('text1');

D. vartxtContents = document.getElementById('myText');

Correct Answer: *B*

konrad_m 1 year ago
Should be A. - getElementyId seems wrong, should be getElementId?
upvoted 1 times

bekki 1 year ago
I think that is a typo, if you look at the contents of the brackets, The contents of option A doesn't match up to the ID of the element.
upvoted 2 times

father077 9 months ago
Should be D - vartxtContents = document.getElementById('myText');
upvoted 2 times

_dudus 8 months, 3 weeks ago
Correct Answer is B, there is a typo
upvoted 4 times

ruth_4_n 6 months, 2 weeks ago
vartxtContents = document.getElementyId('myText').value;
The correct answer is B because we are using 'getElementBId' and the 'id' in the code is 'myText'. It's also asking us to retrieve the contents thus we need 'value' at the end.
upvoted 1 times

Question #12 *Topic 1*

Which two events are supported on touch devices? (Choose two.)

A. click

B. touchstart

C. selection

D. drag

Correct Answer: *AB*
when the user touches the screen both touch and click events will occur.

The touchstart event -
A user agent must dispatch this event type to indicate when the user places a touch point on the touch surface.
Note:
The main touch events are:
touchstart triggered when a touch is detected
touchmove triggered when a touch movement is detected
touchend triggered when a touch is removed e.g. the users finger is removed from the touchscreen touchcancel triggered when a touch is interrupted, e.g. if touch moves outside of the touch-capable area

Question #13 *Topic 1*

The data in a specific HTML5 local storage database can be accessed from:

A. Different browsers on the same device.

B. Different browsers on different devices.

C. The same browser on different devices.

D. The same browser on the same device.

Correct Answer: *A*

betamalon 10 months ago
The answer is D
upvoted 6 times

mariannedemunter 6 months, 4 weeks ago
I checked it, and it is indeed browser dependent. If you store information in one browser in the local storage, you can't retrieve it in another browser
upvoted 2 times

Indrasis 5 months, 1 week ago
Yes, D is the correct answer
upvoted 1 times

Bran738 3 months, 2 weeks ago
The correct answer is D.

"Local Storage is "local" in that exact browser and ONLY in that browser. To retrieve something stored in Local Storage, you must use the same browser, the same key and retrieve it from a page in the same origin (e.g. domain)."

https://stackoverflow.com/a/26795496
upvoted 1 times

Question #14 *Topic 1*

You are creating a page by using HTML5. You add script tags to the page.
You need to use JavaScript to access an element by id and add a class to the element.
Which property or attribute should you use?

A. the tagName property

B. the className property

C. the style property

D. the class attribute

Correct Answer: *B*

Bran738 3 months, 2 weeks ago
The correct answer is B.

https://developer.mozilla.org/es/docs/Web/API/Element/className
upvoted 1 times

Question #15 *Topic 1*

DRAG DROP -

Match the JavaScript code fragments with the HTML5 local storage functions. (To answer, drag the appropriate code fragment from the column on the left to its local storage function on the right. Each code fragment may be used once, more than once, or not at all. Each correct match is worth one point.)

Select and Place:

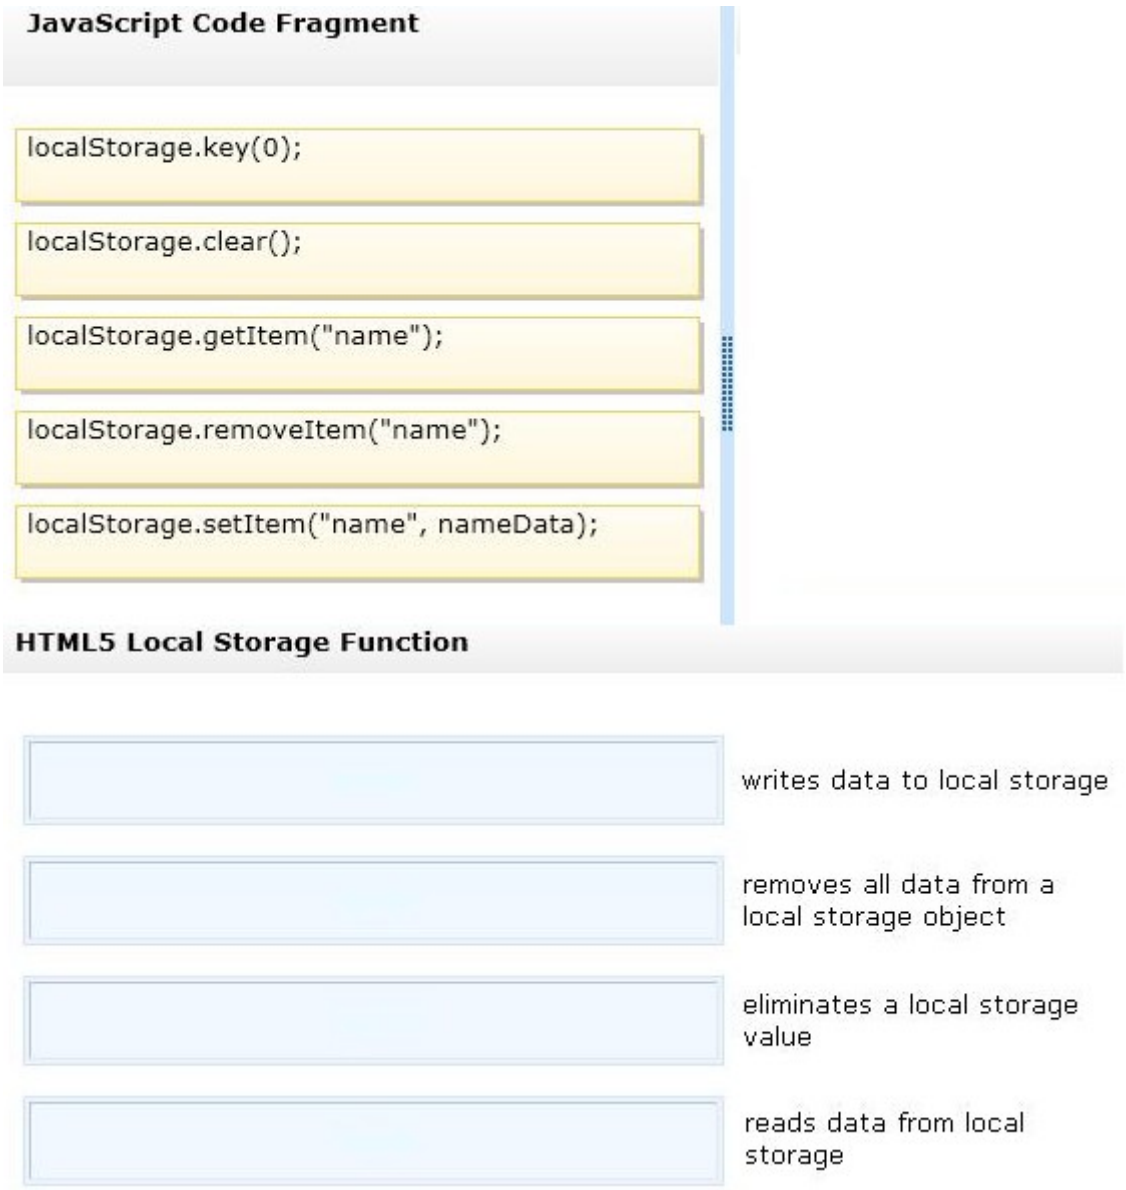

Correct Answer:

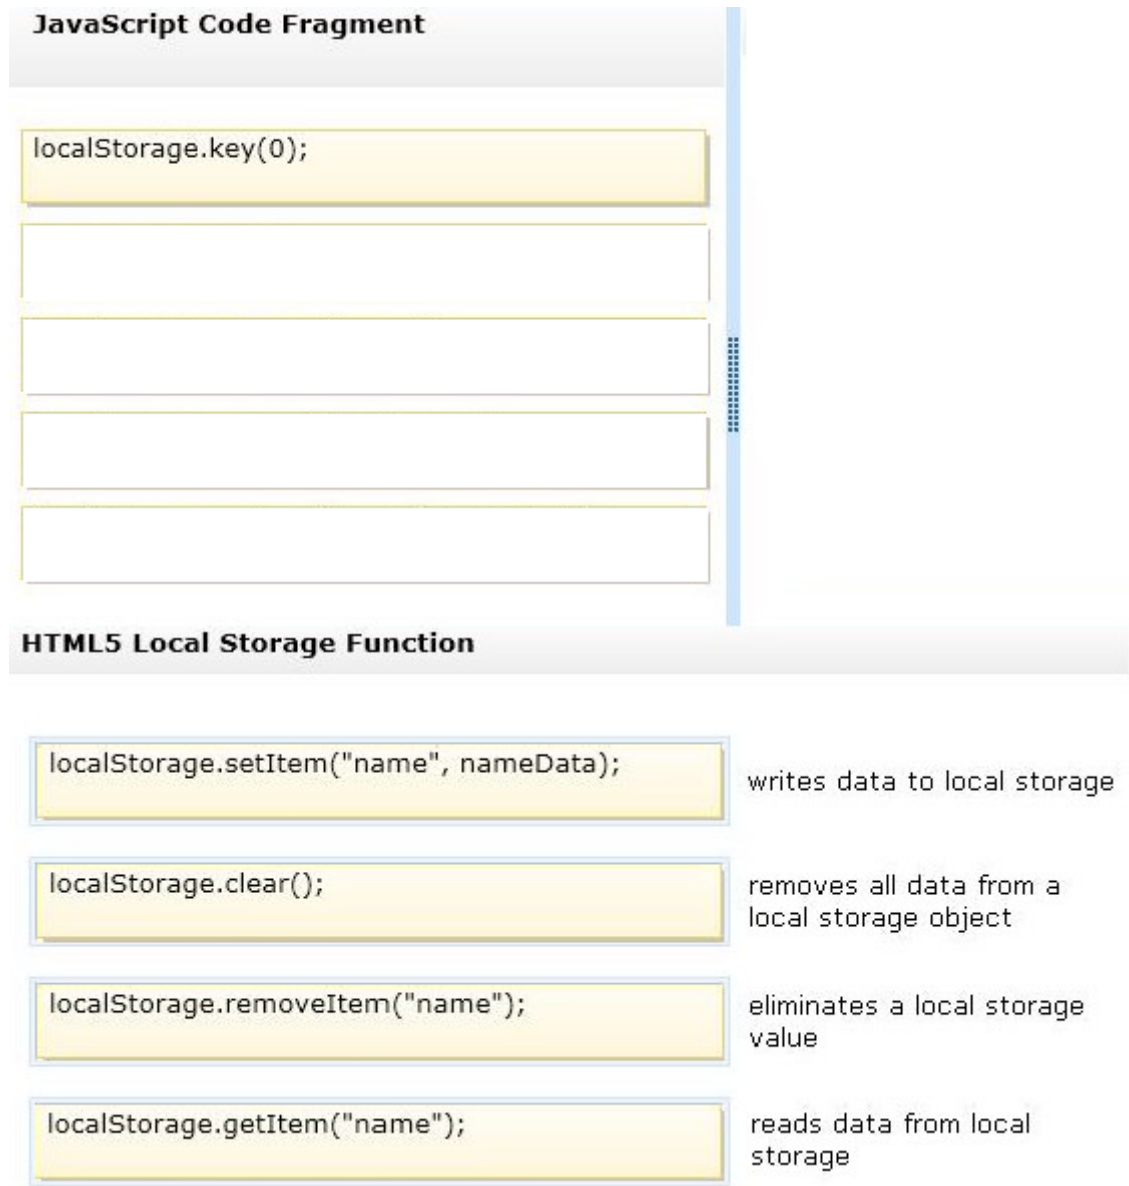

ruth_4_n 6 months, 2 weeks ago

It's pretty self explanatory when you think about it. 'clear' removes all data making a clean slate, 'getItem' reads the data, 'removeItem' eliminates a value, and 'setItem' writes the data into the storage.

upvoted 3 times

Question #16 *Topic 1*

Which code fragment sets up a timer that calls a function named "adjust" every second?

A. setTimeout(adjust, 1000);

B. setInterval(adjust, 1000);

C. setInterval(adjust, 1);

D. setTimeout(adjust, 1);

Correct Answer: *B*

Question #17 *Topic 1*

Which two HTML properties can JavaScript access to change the text value of an HTML element? (Choose two.)

A. innerHTML

B. nodeType

C. title

D. nodeValue

Correct Answer: *AC*
The innerHTML property sets or returns the inner HTML of an element.
Example:
document.getElementById('myAnchor').innerHTML="Contoso";
The title property sets or returns the element's advisory title.
Example:
var x=document.getElementsByTagName('body')[0];
document.write("Body title: " + x.title);

bartek2000 8 months, 3 weeks ago
innerHTML, nodeValue ?
upvoted 5 times

mvtthew 8 months, 1 week ago
you cannot get 'nodeValue' value of element, you can access title and innerHTML
upvoted 4 times

Bran738 3 months, 2 weeks ago
I think you're wrong. This page says how to get the content of nodeValue: https://www.w3schools.com/jsref/prop_node_nodevalue.asp

Title exists but I think it is used as metadata and not shown on the page. See https://www.w3schools.com/tags/att_global_title.asp
upvoted 3 times

Toszi 8 months, 2 weeks ago
A, D are correct
upvoted 5 times

Question #18 *Topic 1*

Web Workers define an API for:

A. Publishing frequently updated works for syndication.

B. Running scripts in the background,

C. Bi-directional, full-duplex communications over a single TCP socket.

D. Distributing load across multiple web servers.

Correct Answer: *A*

Martin77 1 year, 6 months ago
I think the answer is B (running scripts in the background) .Text from the MTA book: Web Workers are APIs that allow scripts to run in the background as parallel threads.
upvoted 9 times

Chidaz 1 year, 1 month ago
The question asks for the web worker API not Script?? A is correct.
upvoted 2 times

Indrasis 5 months, 1 week ago
B is the correct answer
upvoted 2 times

princesskay 2 months, 1 week ago
B is correct
https://www.html5rocks.com/en/tutorials/workers/basics/#:~:text=The%20Web%20Workers%20specification%20defines,scripts%20to%20handle%20user%20interactions.
upvoted 1 times

gtk 2 weeks, 5 days ago
B
is right ans
upvoted 1 times

Question #19 *Topic 1*

Which two are WebSocket events? (Choose two.)

A. onconnect

B. onmessage

C. ondatareceived

D. onopen

Correct Answer: *BD*
Following are the events associated with WebSocket object. Assuming we created Socket object:
Event, Event Handler, Description
* open

Socket.onopen -
This event occurs when socket connection is established.
* message

Socket.onmessage -
This event occurs when client receives data from server.
error

Socket.onerror -
This event occurs when there is any error in communication.
* close

Socket.onclose -
This event occurs when connection is closed.

Bran738 3 months, 2 weeks ago
B and D are the correct answers.

See https://www.linode.com/docs/guides/introduction-to-websockets/
upvoted 1 times

Question #20 *Topic 1*

You create an interface for a touch-enabled application.
During testing you discover that some touches trigger multiple input areas.
Which situation will cause this problem?

A. The touch screen is not calibrated.

B. The input areas are too close together.

C. The defined input areas are too small.

D. The input areas are semi-transparent.

Correct Answer: *B*

Question #21 *Topic 1*

An HTML5 application can be used without going through a manufacturer's approval process if:

A. the browser on the device supports HTML5.

B. the manufacturer has unlocked the device's SIM card.

C. the application has been compiled.

D. the developer has the correct application ID.

Correct Answer: *A*

Question #22 *Topic 1*

DRAG DROP -

Match the HTML5 technologies to the corresponding descriptions. (To answer, drag the appropriate technology from the column on the left to its description on the right. Each technology may be used once, more than once, or not at all. Each correct match is worth one point.)

Select and Place:

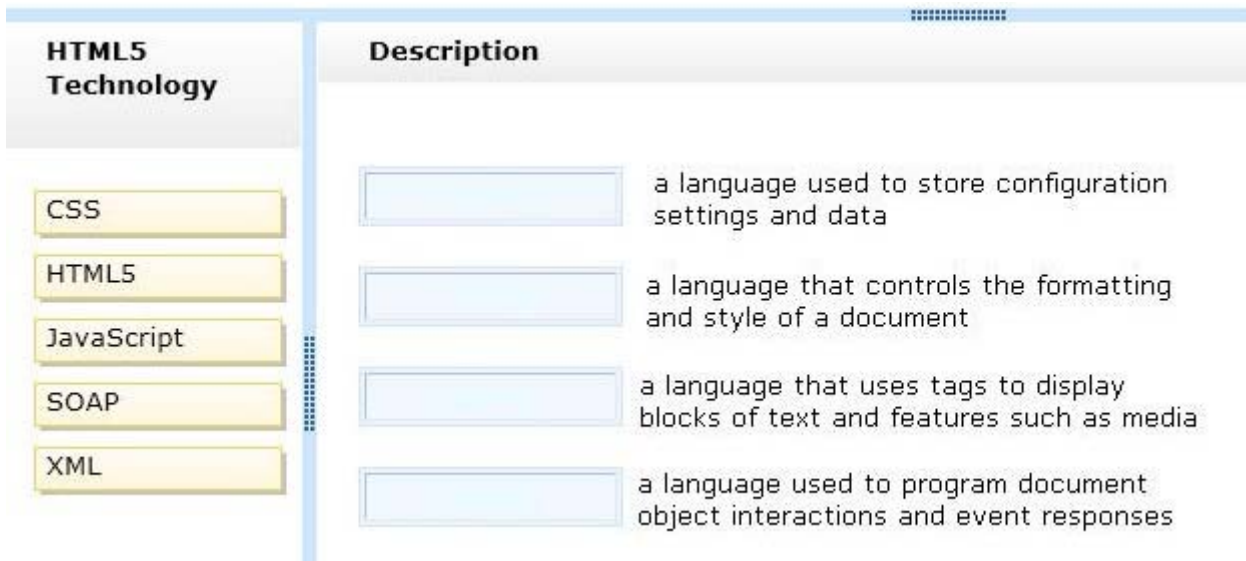

Correct Answer:

Question #23 *Topic 1*

Which item specifies resources for an offline HTML5 application?

A. a CSS style sheet

B. an HTML5 file

C. a JavaScript file

D. a cache manifest file

Correct Answer: *A*

Martin77 1 year, 6 months ago
Answer should be D. Cache Mafest!
Using AppCache, a developer uses a text file called a “cache manifest” to specify the files a Web browser should cache offline. Even if a user presses the Refresh button offline, the app will load and work correctly.
upvoted 10 times

roah 11 months, 1 week ago
Answer is 'D'
upvoted 4 times

Indrasis 5 months, 1 week ago
D is the correct answer
upvoted 1 times

Question #24 *Topic 1*

In HTML5, which two objects in the Web Storage specification are used to store data on the client? (Choose two.)

A. websocket

B. navigator

C. cache

D. sessionStorage

E. localStorage

Correct Answer: *DE*
There are two new objects for storing data on the client:
localStorage - stores data with no expiration date
sessionStorage - stores data for one session

Bran738 3 months, 2 weeks ago
D and E are the correct answers.

See https://www.w3schools.com/html/html5_webstorage.asp
upvoted 1 times

Question #25 *Topic 1*

Which two code fragments represent ways to use HTML5 to save values to session storage? (Choose two.)

A. `sessionStorage.setItem('someKey','someValue');`

B. `sessionStorage.setItem.someKey='someValue';`

C. `sessionStorage.someKey='someValue';`

D. `sessionStorage.updateItem('someKey','someValue');`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *AC*

Example:

sessionStorage.setItem("key", "value");

Example:

```
if (sessionStorage.clickcount)
{
sessionStorage.clickcount=Number(sessionStorage.clickcount)+1;
}
else
{
sessionStorage.clickcount=1;
}
document.getElementById("result").innerHTML="You have clicked the button " + sessionStorage.clickcount + " time(s) in this session.";
```

Question #26 *Topic 1*

When you are testing a touch interface, which two gestures can you simulate by using a mouse? (Choose two.)

A. tap

B. pinch

C. flick

D. rotate

Correct Answer: *AD*

I_Am_Right 1 year, 7 months ago
The Answer is (A, C).
upvoted 6 times

Martin77 1 year, 6 months ago
This is correct as checked in the MTA book (page 244, Lesson 10)
upvoted 3 times

Martin77 1 year, 6 months ago
I mean that the Answer is (A, C) is correct
upvoted 3 times

what_if98 5 months, 1 week ago
shouldn't the answer be A, B? that was the answer for the G'metrix session...
upvoted 1 times

Question #27 *Topic 1*

Which three event attributes are used with the CAPTION element in HTML5? (Choose three.)

A. onmouseover

B. ondblclick

C. onkeydown

D. onconnect

E. onabort

Correct Answer: *ABC*
A: onmouseover -
The cursor moved over the object (i.e. user hovers the mouse over the object).

B: ondblclick -
Invoked when the user clicked twice on the object.

C: onkeydown -
Invoked when a key was pressed over an element.

Question #28 *Topic 1*

Which HTML5 tag defines superscript text?

A. < small >

B. <script>

C. <sup>

D. <sub>

Correct Answer: *C*

Question #29 *Topic 1*

DRAG DROP -

Match the HTML5 input attributes to the corresponding descriptions. (To answer, drag the appropriate attribute from the column on the left to its description on the right. Each attribute may be used once, more than once, or not at all. Each correct match is worth one point.)

Select and Place:

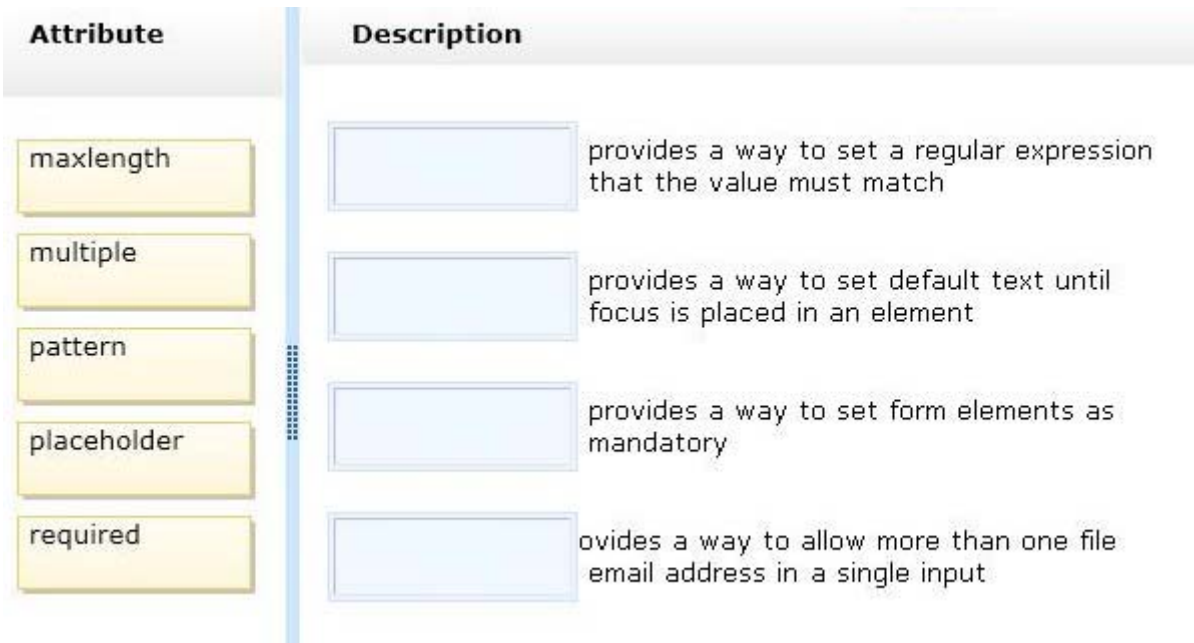

Correct Answer:

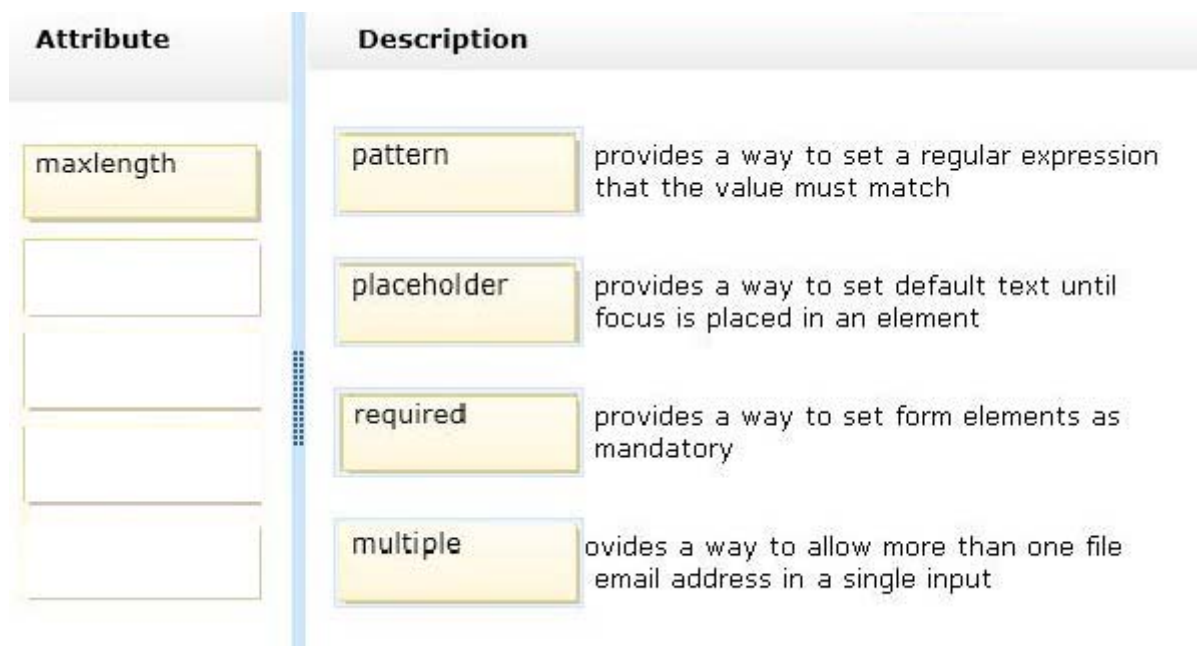

Question #30 *Topic 1*

What does the following HTML5 code fragment do?

```
<video controls>
  <source src="myVacation.avi" type="video/avi">
  <source src="myVacation.ogg" type="video/ogg">
 </video>
```

A. It plays the myVacation.avi video if the browser supports it; otherwise, plays the myVacation.ogg video if the browser supports it.

B. It plays two videos: first myVacation.avi, and then myVacation.ogg.

C. It plays both videos simultaneously, myVacation.avi and myVacation.ogg.

D. It prompts the user to choose which format of the myVacation video it should play, .avi or .ogg.

Correct Answer: *D*

nikolova 1 year, 4 months ago
The answer should be A.
The <source> element allows you to specify alternative video files which the browser may choose from. The browser will use the first recognized format.
upvoted 11 times

roah 11 months, 2 weeks ago
Answer should be 'A'
upvoted 7 times

Indrasis 5 months, 1 week ago
A is the correct answer
upvoted 1 times

princesskay 2 months ago
Answer is A: https://developer.mozilla.org/en-US/docs/Web/HTML/Element/video
upvoted 1 times

Question #31 *Topic 1*

Which are two features of SVG? (Choose two.)

A. uses high performance pixel-based graphics

B. can be modified by using CSS

C. uses high performance raster-based graphics

D. can be modified by using JavaScript

Correct Answer: *CD*
Note:
SVG stands for Scalable Vector Graphics
SVG defines the graphics in XML format
SVG graphics do NOT lose any quality if they are zoomed or resized
Every element and every attribute in SVG files can be animated
SVG is a W3C recommendation

Anon_7567 1 year ago
It should be B and D. The book uses Raster images as another way to say "Pixels" and you can modify an SVG with CSS
upvoted 7 times

father077 9 months ago
Should be B can be modified by using CSS and D can be modified by using Java Script
upvoted 5 times

Question #32 *Topic 1*

Which HTML5 tag is used to display text with a fixed-width font and preserves both spaces and line breaks?

A. <area>

B. <hr>

C. <pre>

D.

Correct Answer: *C*

Question #33 *Topic 1*

What does "V" stand for in the file type SVG?

A. Video

B. Vertical

C. Vector

D. Variable

Correct Answer: *C*

Question #34 *Topic 1*

Which tag is used to create a drop-down list in HTML5?

A. <ul>

B. <select>

C. <datalist>

D. <dd>

Correct Answer: *B*

Question #35 *Topic 1*

Which attribute prefills a default value for an input element in HTML5?

A. name

B. placeholder

C. autocomplete

D. required

Correct Answer: *B*

Question #36 *Topic 1*

Which two outcomes will this code fragment accomplish? (Each correct answer presents a complete solution. Choose two.)

```
<audio src="happy.wav" controls="controls">
Hello World
</audio>
```

A. On pre-HTML5 browsers, the happy.wav file will not play, and instead Hello World will be displayed.

B. On an HTML5 browser that supports .wav files, the happy.wav file will be played and Hello World will be hidden.

C. On an HTML5 browser that supports .wav files, the happy.wav file will be played and Hello World will be displayed.

D. on pre-HTMLS browsers, the happy.wav file will play and Hello World will be hidden.

Correct Answer: *AB*
Audio on the Web -
Until now, there has not been a standard for playing audio files on a web page.

Today, most audio files are played through a plug-in (like flash). However, different browsers may have different plug-ins.

HTML5 defines a new element which specifies a standard way to embed an audio file on a web page: the <audio> element.

Browser Support -
Internet Explorer 9+, Firefox, Opera, Chrome, and Safari support the <audio> element.

Example:
<audio controls>
<source src="horse.ogg" type="audio/ogg">
<source src="horse.mp3" type="audio/mpeg">
Your browser does not support the audio element.
</audio>

Question #37 *Topic 1*

Which three technologies does HTML5 encompass? (Choose three.)

A. CSS

B. ASP.NET

C. C#

D. JavaScript

E. HTML

Correct Answer: *ADE*
* HTML5 has full CSS3 Support.
* While developing HTML5 some rules were established including:
New features should be based on HTML, CSS, DOM, and JavaScript

Question #38 *Topic 1*

You create an interface for a touch-enabled application.
You discover that some of the input buttons do not trigger when you tap the screen.
You need to identify the cause of the problem.
What are two possible causes? (Choose two.)

A. The input areas overlap with other input areas.

B. The touch screen is not initialized.

C. The input areas are using event handlers to detect input.

D. The defined input areas are not large enough.

Correct Answer: *AD*

Question #39 *Topic 1*

An HTML5 application can run without an Internet connection if:

A. the application is converted to an executable.

B. the .NET Framework is installed on the client computer.

C. the application specifies the use of a client-side SQL database.

D. the application specifies the use of an ApplicationCache interface.

Correct Answer: *D*

Question #40 *Topic 1*

On a Windows touch device, which gesture serves the same purpose as a right-click of the mouse?

A. swipe

B. pinch

C. tap

D. hold

Correct Answer: *D*

Question #41 *Topic 1*

Which three components define the URL used for localStorage data in HTML5? (Choose three.)

A. scheme

B. user credentials

C. hostname

D. unique port

E. query

Correct Answer: *ACD*
localStorage is also the same as globalStorage[location.hostname], with the exception of being scoped to an HTML5 origin (scheme + hostname + non-standard port) and localStorage being an instance of Storage
* HTML5 local storage saves data in string form as key-value pairs. If the data you wish to save is not string data, you are responsible for conversion to and from string when using LocalStorage.

Question #42 *Topic 1*

DRAG DROP -
Match the JavaScript objects to the corresponding characteristics or methods. (To answer, drag the appropriate JavaScript object from the column on the left to its characteristic or method on the right. Each JavaScript object may be used once, more than once, or not at all. Each correct match is worth one point.)
Select and Place:

Correct Answer:

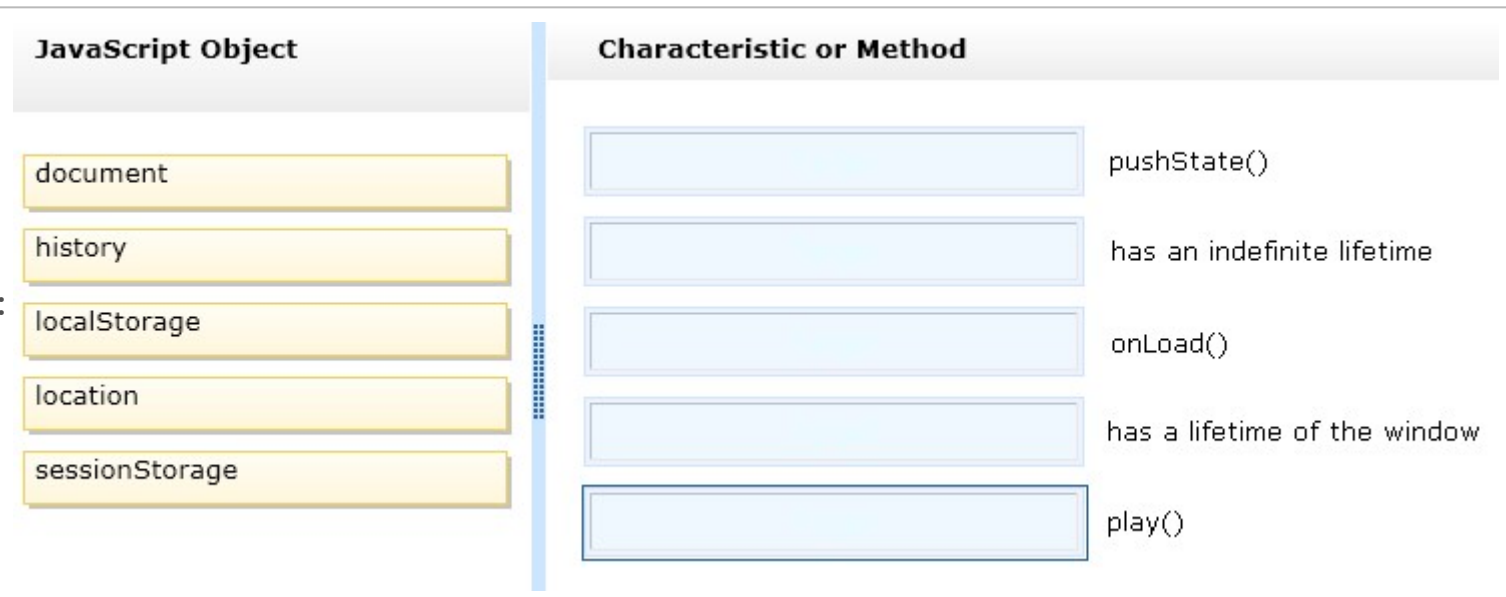

roah 11 months, 2 weeks ago
Should be, in this order:
-History
-LocalStorage
-Document
-SessionStorage
-Location
upvoted 12 times

Question #43 *Topic 1*

Which two code segments declare JavaScript functions? (Choose two.)

A. varfunct= (a);

B. function Foo(a){ }

C. var a=new Foo();

D. Foo=function(a){

Correct Answer: *CD*
Example:
function add(x, y) {
return x + y;
}
var t = add(1, 2);
alert(t); //3
Example:
//x,y is the argument. 'returnx+y' is the function body, which is the last in the argument list. var add = new Function('x', 'y', 'return x+y'); var t = add(1, 2); alert(t); //3
Incorrect:
Not A: funct keyword not used in JavaScript

betamalon 10 months ago
The answer is B,D
upvoted 10 times

Question #44 *Topic 1*

You add script tags to an HTML page. You need to update the text value within a specific HTML element. You access the HTML element by id. What should you do next?

A. Use the createTextNode method.

B. Use the appendChild method.

C. Set the new text value with the setAttribute method.

D. Use the firstChild property and set the new text value with the nodeValue property.

Correct Answer: *D*

Question #45 *Topic 1*

You create an instance named "location" of a geolocation object.
Which code fragment will initiate periodic updates of a device's geographic location?

A. location = navigator.geolocation;

B. location.watchPosition(showLocation) ;

C. location.getCurrentPosition(showLocation);

D. location.clearNatch(watchid);

Correct Answer: *B*

Currently there are no comments in this discussion, be the first to comment!

Question #46 *Topic 1*

You need to use JavaScript to access the "section1" element in the following code fragment:

Which method should you use?

A. getElementsByTagName

B. getElementById

C. getElementsByName

D. getElementsByClassName

Correct Answer: *B*

Question #47 *Topic 1*

Which three properties can be used with the TouchEvent object in the Safari touch API? (Choose three.)

A. offsetTop

B. clientHeight

C. scale

D. touches

E. rotation

Correct Answer: *CDE*

Question #48 *Topic 1*

DRAG DROP -
Match the touch events to the corresponding actions. (To answer, drag the appropriate touch event from the column on the left to its action on the right. Each touch event may be used once, more than once, or not at all. Each correct match is worth one point.)
Select and Place:

Correct Answer:

egjalt 12 months ago
The question is hidden in the solution. No way to verify if you are correct
upvoted 2 times

roah 11 months, 2 weeks ago
I believe the answer should be, in this order:
-TouchCancel
-TouchStart
-TouchEnd
-TouchMove
upvoted 14 times

Question #49 *Topic 1*

Which three statements describe cookies? (Choose three.)

A. They can be created, read, and erased using the document.cookie property.

B. They are limited in size to 5 MB.

C. They are deleted automatically when the session ends.

D. They can be used only by pages on the domain where they were set.

E. They contain the data in the form of a name=value pair.

Correct Answer: *ADE*
Note:
Cookies are small, usually randomly encoded, text files that help your browser navigate through a particular website. The cookie file is generated by the site you're browsing and is accepted and processed by your computer's browser software. The cookie file is stored in your browser's folder or subfolder.

Question #50 *Topic 1*

Which two terms represent interfaces in the File API? (Choose two.)

A. Font

B. Blob

C. Keygen

D. FileList

Correct Answer: *BD*
The File Interface -
This interface describes a single file in a FileList and exposes its name. It inherits from Blob.

IDL -
[Constructor(Blob fileBits, [EnsureUTF16] DOMStringfileName)] interface File : Blob { readonly attribute DOMString name; readonly attribute Date lastModifiedDate;
};

Question #51 *Topic 1*

Which two semantic tags are used to define layouts in HTML5? (Choose two.)

A. <footer>

B. <head>

C. <progress:

D. <section>

Correct Answer: *AD*
New Semantic Elements in HTML5 -
Many of existing web sites today contains HTML code like this: , , or , to indicate navigation links, header, and footer.
HTML5 offers new semantic elements to clearly define different parts of a web page:
<header>
<nav>
<section>
<article>
<aside>
<figcaption>
<figure>
<footer>
Note: A semantic element clearly describes its meaning to both the browser and the developer.
Examples of non-semantic elements: and - Tells nothing about its content.
Examples of semantic elements: <form>, <table>, and <img> - Clearly defines its content.

Question #52 *Topic 1*

Which two HTML5 tags format text content only? (Choose two.)

A. <map>

B.

C. <canvas>

D.

Correct Answer: *BD*
Example:
I can notemphasise this enough!

Question #53 *Topic 1*

In HTML5, the autofocus attribute:

A. defines the cursor location when a form is first accessed.

B. controls the movement between fields in a form.

C. adds a default value to the field in a form.

D. enables one field and disables all others.

Correct Answer: *A*

Question #54 *Topic 1*

Which two tags are used with the HTML5 TABLE element? (Choose two.)

A. <body>

B. <tfoot>

C. <td>

D. <head>

Correct Answer: *BC*
An HTML table consists of the <table> element and one or more <tr>, <th>, and <td> elements.
The <tr> element defines a table row, the <th> element defines a table header, and the <td> element defines a table cell.
A more complex HTML table may also include <caption>, <col>, <colgroup>, <thead>, <tfoot>, and <tbody> elements.

Question #55 *Topic 1*

Which code shows the correct way to nest tags in HTML5?

A. `<p>This is HTML5<b><i>text formatting</b></i></p>`

B. `<p>This is HTML5<b><i>text formatting</p></i></b>`

C. `<p>This is HTML5<b><i>text formatting</p></b></i>`

D. `<p>This is HTML5<b><i>text formatting</i></b></p>`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *D*

Question #56 *Topic 1*

Which JavaScript method is used to draw a circle on a canvas?

A. ellipse

B. circle

C. bezierCurveTo

D. arc

Correct Answer: *D*

Question #57 *Topic 1*

Which code fragment will display an image file while the video is downloading?

A. `<video width="740" height="416" src="fireworks.jpg">`

B. `<video width="740" height="416" poster="fireworks.jpg">`

C. `<video width="740" height="416" autoplay="autoplay">`

D. `<video width="740" height="416" preload="fireworks.jpg">`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *B*

Question #58 *Topic 1*

Which term describes the canvas API?

A. xml-based

B. vector-based

C. retained-mode

D. immediate-mode

Correct Answer: *D*

thelearner 7 months, 3 weeks ago
I thought the answer was B - unsure if D is correct.
upvoted 1 times

dzialek777 7 months, 1 week ago
correct is D, because B says about SVG
upvoted 2 times

Janez1000 7 months ago
Agreed it's D, as canvas is raster-based.
upvoted 1 times

princesskay 2 months ago
Answer is D: http://tutorials.jenkov.com/html5-canvas/overview.html
upvoted 1 times

Question #59 *Topic 1*

Which three generic font family names are valid values of the font-family property in CSS? (Choose three.)

A. cursive

B. system

C. serif

D. fixed

E. fantasy

Correct Answer: *ACE*
There are five generic fonts: serif, sans-serif, monospace, cursive and fantasy.
Note:
There are two types of font family names:
family-name - The name of a font-family, like "times", "courier", "arial", etc. generic-family - The name of a generic-family, like "serif", "sans-serif", "cursive", "fantasy", "monospace".

Question #60 *Topic 1*

DRAG DROP -
Match the CSS terms to the corresponding CSS code examples. (To answer, drag the appropriate CSS term from the column on the left to its CSS code example on the right. Each CSS term may be used once, more than once, or not at all. Each correct match is worth one point.)
Select and Place:

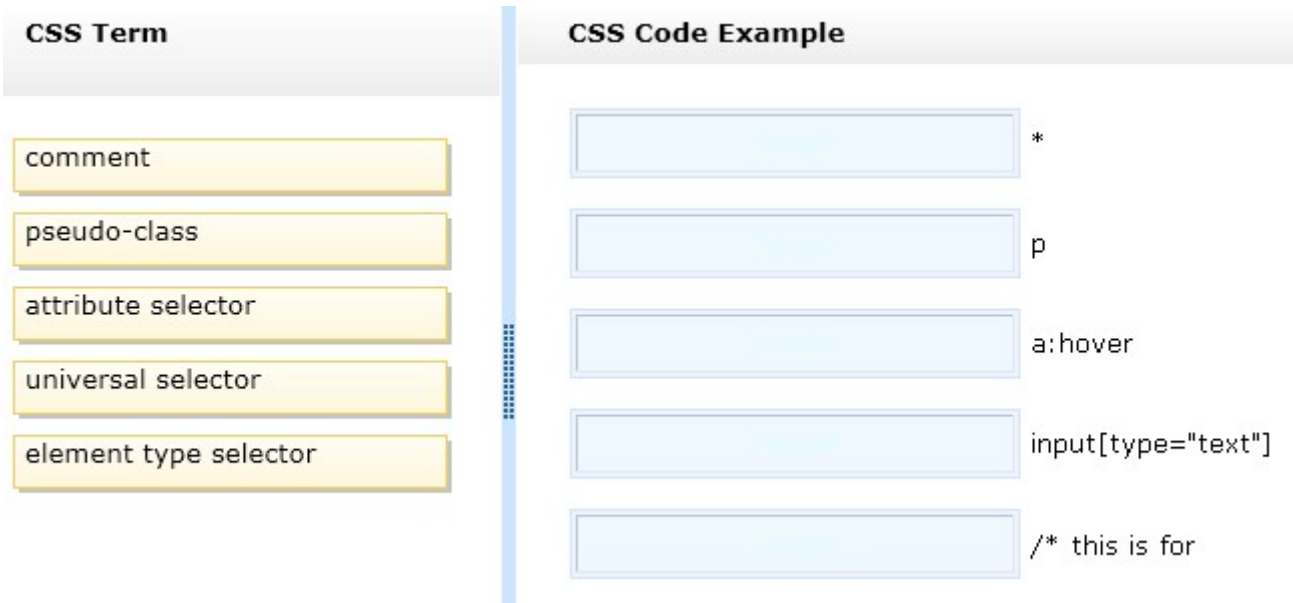

Correct Answer:

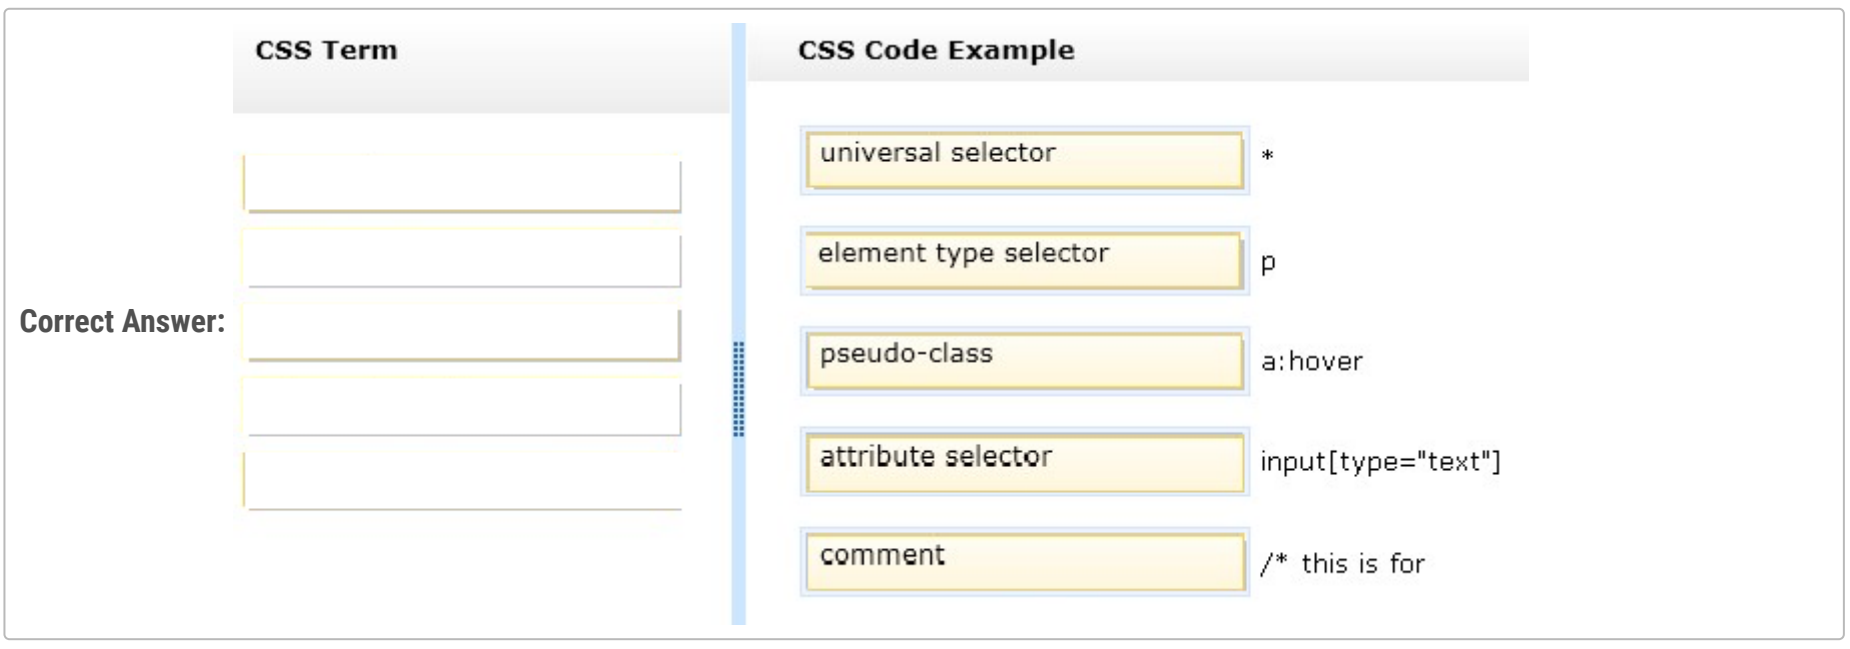

Question #61 *Topic 1*

When applied to an image, the CSS float:right property:

A. positionsthe image to the left and displays all of the text to the right of the image.

B. positionsthe image to the right of the region and wraps text around the top, left, and bottom.

C. positionsthe image to the left of the region and wraps text around the top, right, and bottom.

D. positionsthe image to the right and wraps text to the top and bottom.

Correct Answer: *B*

Question #62 *Topic 1*

Which CSS3 code segment styles the text color of EM elements to be red and semi-transparent?

A. `em { color: rgba(100%,0%,0%,50%); }`

B. `em { color: rgba(255,0,0,0.5); }`

C. `em { color: #ff00007f; }`

D. `em { color: rgba(255,0,0,127); }`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *B*

Janez1000 7 months ago

Could also be A ->The intensity of red can be defined as an integer between 0 and 255, or as a percentage value between 0% and 100%

upvoted 1 times

mariannedemunter 6 months, 3 weeks ago

No, because the alpha parameter value must be between 0.0 and 1.0. So a percentage is a wrong value

upvoted 2 times

Question #63 *Topic 1*

Which CSS position value is used to position an element relative to the browser window?

A. position: relative;

B. position: absolute;

C. position: static;

D. position: fixed;

Correct Answer: *D*

Question #64 *Topic 1*

What is the default value of the CSS position property?

A. fixed

B. absolute

C. static

D. relative

Correct Answer: *C*

Question #65 *Topic 1*

You write the following code. (Line numbers are included for reference only.)

```
01  <html>
02    <style>
03     #animUpStyle{
04 -ms-animation-name: moveUp;
05 -ms-animation-duration: 5s;
06 width: 400px;
07 height: 50px;
08 position: relative;
09 left: 0px;
10 top: 0px;
11  }
12  @-ms-keyframes moveUp {
13   …
14 100% {
15 top: 0px;
16 }
17  }
18  </style>
19  <body>
20  <text id="animUpStyle">Going Up!</text>
21    </body>
22  </html>
```

You need to make the text animate up the screen from a starting position of 400 pixels.

Which CSS code fragment should you insert at line 13?

A.
```
100% {
top: 400px;
}
```

B.
```
0% {
top: 0px;
}
```

C.
```
0% {
top: 400px;
}
```

D.
```
50% {
top: 200px;
}
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *C*

Question #66 *Topic 1*

Which code fragment prepares the HTML5 application to be used offline?

A. `<!DOCTYPE html>`

B. `<html manifest="app.appcache">`

C. `<html xmlns="http://www.w3.org/1999/xhtml">`

D. `<html lang="en">`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *B*

Question #67 *Topic 1*

You need to retrieve a value from local storage by using the key "aardvark."
Which code fragment should you use?

A. `var value=localStorage.getItem("aardvark");`

B. `var value=localStorage.key("aardvark");`

C. `var value=localStorage.setItem("aardvark");`

D. `localStorage.setItem("aardvark",value);`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *A*

Question #68 *Topic 1*

What value does the following JavaScript code fragment store into the variable num? varnum = localStorage.length;

A. maximum length of a character string

B. potential capacity of local storage

C. number of bytes available in local storage

D. number of key-value pairs in local storage

Correct Answer: *D*

Question #69 *Topic 1*

Which two touch gestures require a multi-touch device? (Choose two.)

A. hold

B. tap

C. pinch

D. spread

Correct Answer: *BC*

Adrian 1 year, 8 months ago
The answer should be C and D
upvoted 17 times

dzialek777 7 months, 1 week ago
correct is B and C
upvoted 1 times

Question #70 *Topic 1*

You add a div object to a page.

Which CSS3 code fragment will add a scrollbar only if the content exceeds the width or height of the object?

A.
```
div {
inline:scroll;
}
```

B.
```
div {
inline:auto;
}
```

C.
```
div {
overflow:scroll;
}
```

D.
```
div {
overflow:auto;
}
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *A*

Adrian 1 year, 8 months ago
Should be D
upvoted 13 times

Martin77 1 year, 7 months ago
I also think so
upvoted 4 times

roah 11 months, 1 week ago
Answer is 'D'
upvoted 4 times

slayers94rx7 9 months, 2 weeks ago
Should be D
upvoted 4 times

Question #71 *Topic 1*

DRAG DROP -

Match the CSS position property values to the corresponding descriptions. (To answer, drag each value from the column on the left to its description on the right.

Each value may be used once, more than once, or not at all. Each correct match is worth one point.)

Select and Place:

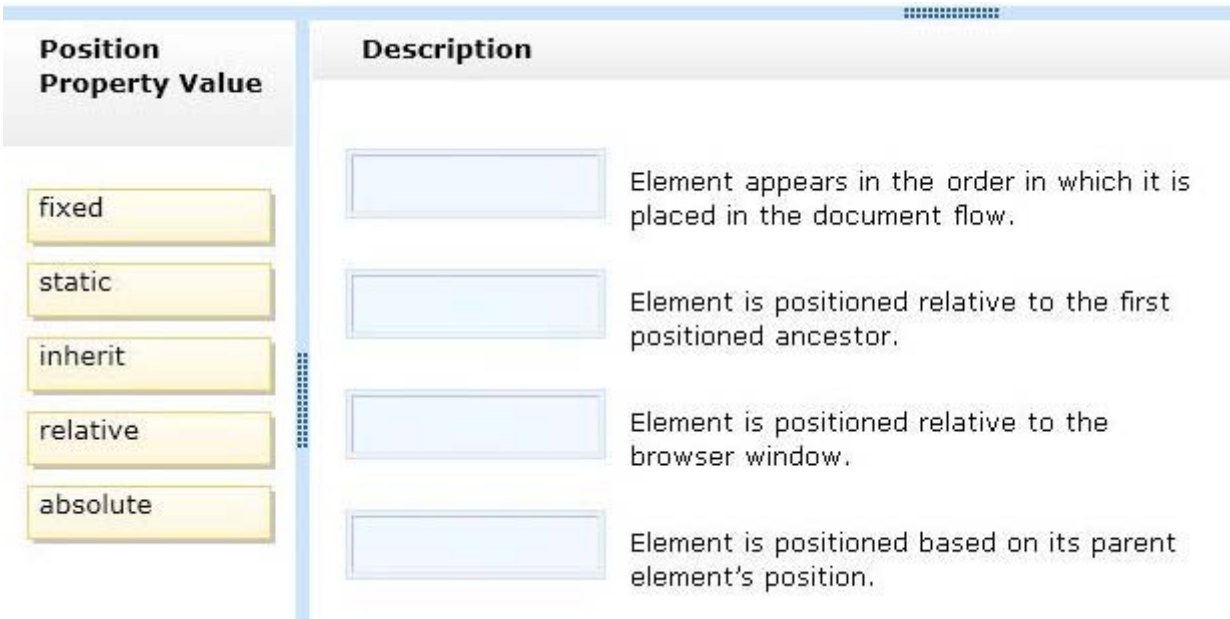

Correct Answer:

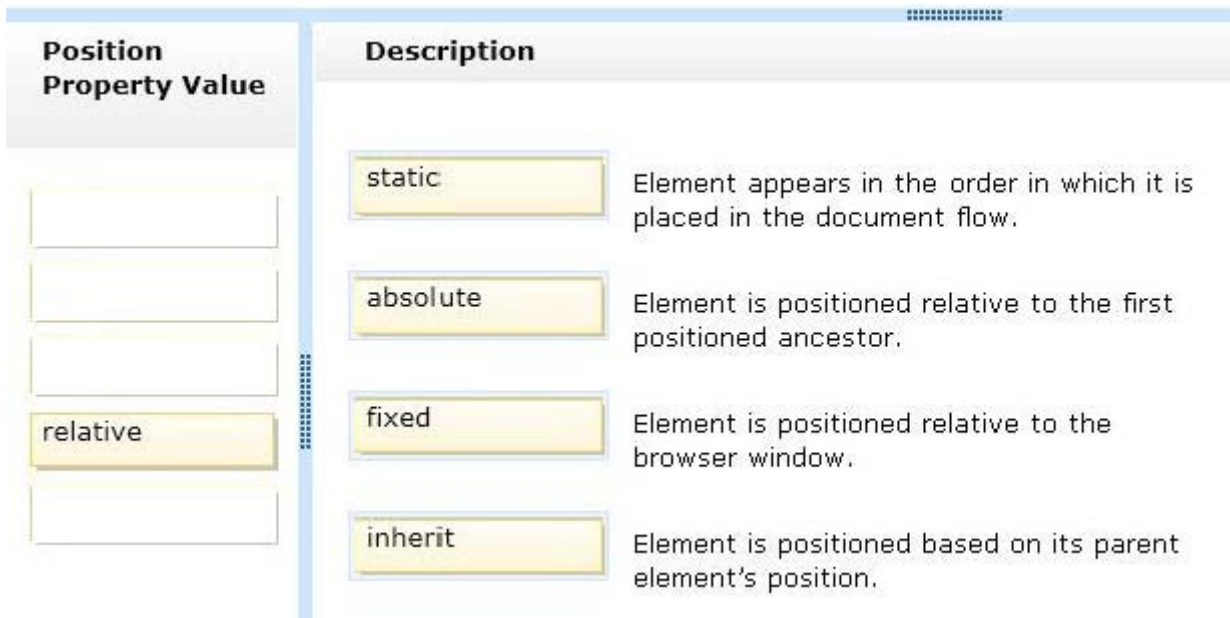

Question #72 *Topic 1*

When content from a flow is loaded into a region, overflowed content:

A. attempts to fit into the region by auto-adjusting the styles.

B. continues into the next region.

C. is truncated and an error flag is set.

D. is buffered for download.

Correct Answer: *B*

Question #73 *Topic 1*

Which CSS3 code fragment rounds the corners of a border?

A. border-image: 50px;

B. border-clip: 50px concave;

C. border-radius: 50px;

D. border-clip: 50px;

Correct Answer: *C*

Question #74 *Topic 1*

Which two CSS properties can be used to position multiple HTML elements next to one another? (Choose two.)

A. display

B. position

C. overflow

D. float

Correct Answer: *BD*
CSS position Property -
The position property specifies the type of positioning method used for an element (static, relative, absolute or fixed).

CSS float Property -
The float property specifies whether or not a box (an element) should float.

Question #75 *Topic 1*

Which CSS3 code fragment will style only the external links in an HTML document?

A.
```
a[href$="http://"] {
font-weight:bold;
}
```

B.
```
a:visited {
font-weight:bold;
}
```

C.
```
a {
font-weight:bold;
}
```

D.
```
a[href^="http://"] {
font-weight:bold;
}
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *D*

Question #76 *Topic 1*

You write the following JavaScript code. (Line numbers are included for reference only.)

```
01 <script>
02 ...
03 bestStudent=new Student("David Hamilton");
04 document.write(bestStudent.fullname + "is registered.");
05 </script>
```

You need to write a function that will initialize and encapsulate the member variable full name.

Which are two possible code fragments you could insert at line 02 to achieve this goal? (Each correct answer presents a complete solution. Choose two.)

A.
```
function Student(someName) {
fullname=someName;
}
```

B.
```
function Student(someName) {
this.fullname=someName;
}
```

C.
```
function Student(fullname) {
this.fullname=fullname;
}
```

D.
```
function Student(someName) {
var fullname=someName;
}
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *BD*

Note:

* In JavaScript this always refers to the "owner" of the function we're executing, or rather, to the object that a function is a method of.

* If you assign a value to variable that has not yet been declared, the variable will automatically be declared as a GLOBAL variable.

This statement:

carname="Volvo";

Will declare the variable carname as a global variable , even if it is executed inside a function.

betamalon 10 months ago

The answer is B,C

upvoted 7 times

Question #77 *Topic 1*

Your HTML5 code includes this code segment:

```
<form action="#">
<p>What flavor do you prefer? </p>
<input type="radio" name="flavor" id="vanilla" />Vanilla<br />
<input type="radio" name="flavor" id="butterscotch" />Butterscotch<br />
<input type="radio" name="flavor" id="chocolate" />Chocolate<br />
</form>
```

Which JavaScript code fragment will determine that a visitor has selected the "Chocolate" radio button?

A. `if (document.getElementById("chocolate").checked == true)`

B. `if (document.getElementById("chocolate").value = true)`

C. `if (document.getElementById("chocolate").checked = true)`

D. `if (document.getElementById("chocolate").value == true)`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *A*

Question #78 *Topic 1*

You need to ensure the scope of a variable named j is limited to the block of a single function named foo(). Which JavaScript code fragment will accomplish this?

A.
```
function foo(){
var j;
...
}
```

B.
```
var j;
function foo() {
...
}
```

C.
```
j = 0;
function foo() {
...
}
```

D.
```
function foo() {
j = 0;
...
}
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *A*

Question #79 *Topic 1*

Which JavaScript method allows you to register multiple handlers for a single touch event?

A. dispatchEvent

B. initUIEvent

C. addEventListener

D. initEvent

Correct Answer: *C*

Question #80 *Topic 1*

When you are working with the path API, what is the purpose of the clip method?

A. pastes a shape object in from the system clipboard

B. constrains the rendered output of the shape object

C. copies the shape object to the system clipboard

D. stores the shape object for later reference in script

Correct Answer: *B*

Question #81 *Topic 1*

When you are using the GeoLocation API, which two arguments does the getCurrentPosition function utilize? (Choose two.)

A. success callback

B. MAC address

C. browser type

D. ip address

E. failure callback

Correct Answer: *DE*
The getCurrentPosition() method returns an object if it is successful. The latitude, longitude and accuracy properties are always returned.The second parameter of the getCurrentPosition() method is used to handle errors. It specifies a function to run if it fails to get the user's location.
Note:
* The HTML5 Geolocation API is used to get the geographical position of a user.
* The getCurrentPosition() method returns an object if it is successful. The latitude, longitude and accuracy properties are always returned.

_dudus 8 months, 3 weeks ago
A, E is correct
upvoted 5 times

gmzych 8 months, 3 weeks ago
D,E are correct answers.
The latitude, longitude and accuracy properties are always returned. The second parameter of the getCurrentPosition() method is used to handle errors. It specifies a function to run if it fails to get the user's location
upvoted 1 times

_dudus 8 months, 3 weeks ago
But ip address is not argument of getCurrentPosition() function, referring to mozilla docs this is how it looks like: getCurrentPosition(success[, error[, [options]])
There is no ip address :)
upvoted 4 times

Question #82 *Topic 1*

You create an instance named "ac" of an accelerometer object.

Which code fragment will retrieve a single update?

A. `ac = navigator.accelerometer;`

B. `ac.getAcceleration(accelerometerFunction);`

C. `ac.watchAcceleration(accelerometerFunction);`

D. `ac.clearWatch(watchid);`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *C*

mariannedemunter 6 months, 3 weeks ago

Shouldn't this be B? The 'get method' usually gets something one time, while a 'watch method' does this continuously

upvoted 6 times

Question #83 *Topic 1*

DRAG DROP -

Match the HTML5 elements to the corresponding functions. (To answer, drag the appropriate HTML5 element from the column on the left to its function on the right. Each HTML5 element may be used once, more than once, or not at all. Each correct match is worth one point.)

Select and Place:

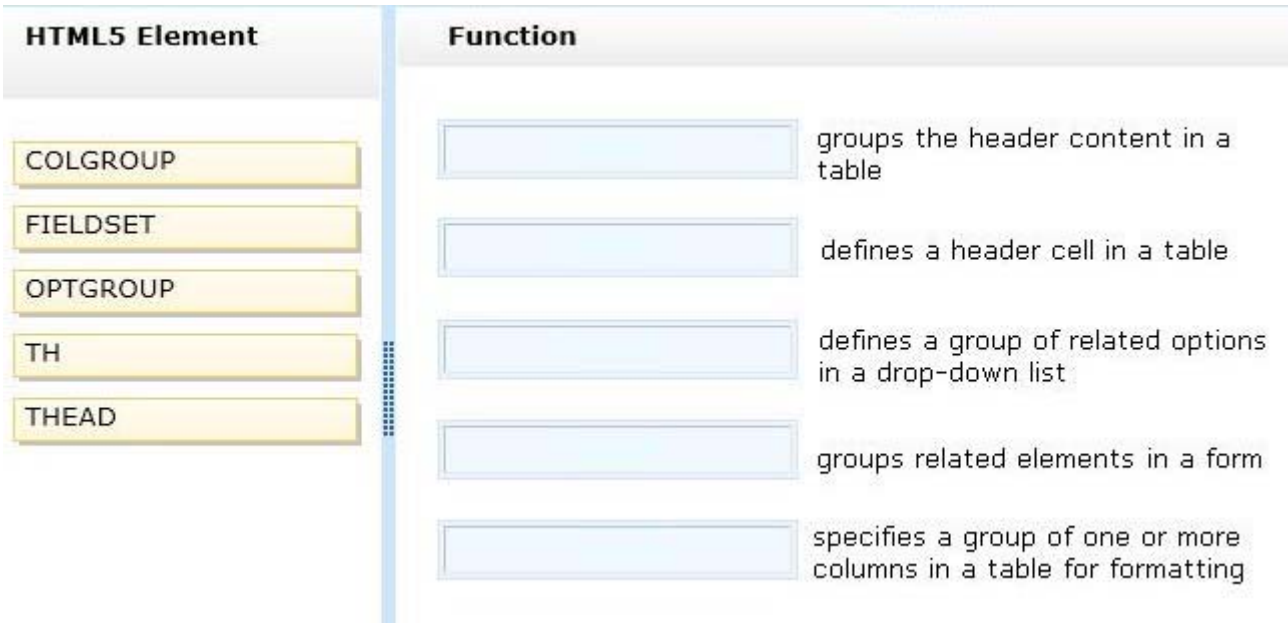

Correct Answer:

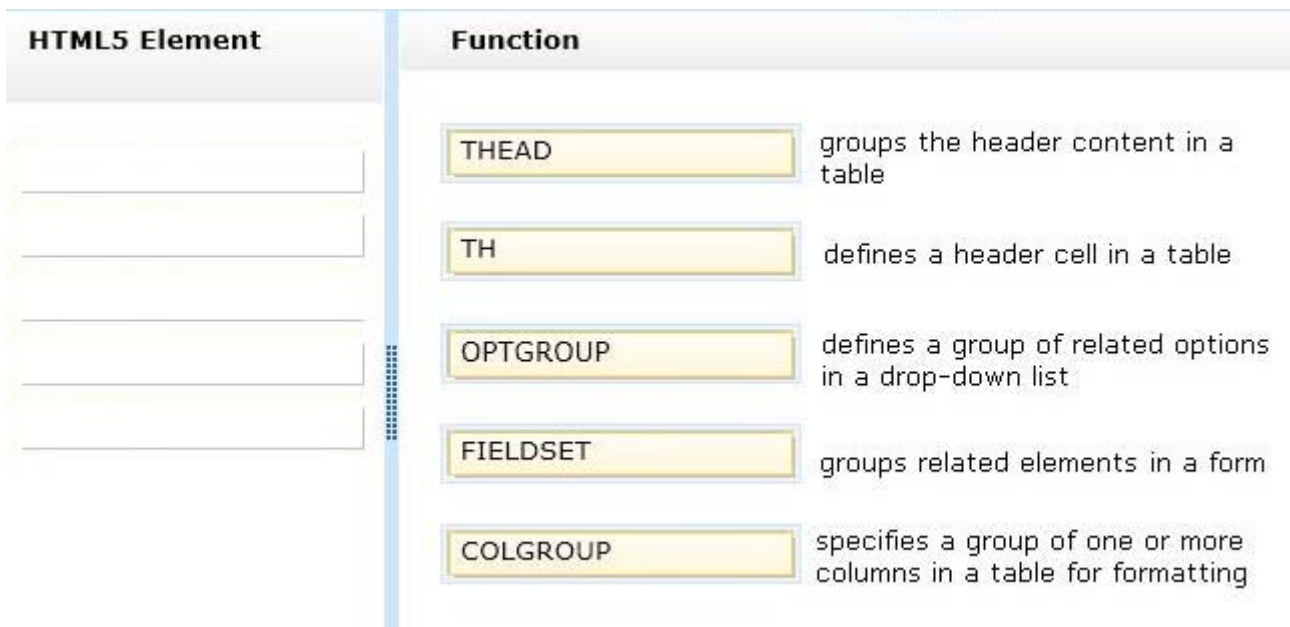

Question #84 *Topic 1*

Which HTML5 tag is used to mark text that has been added to the original document?

A. <q>

B. <pre>

C. <ins>

D. <i>

Correct Answer: *C*

Question #85 *Topic 1*

Which element should you use to rotate an SVG square?

A. path

B. ANIMATETRANSFORM

C. ANIMATEMOTION

D. AREA SHAPE

Correct Answer: *B*

Question #86 *Topic 1*

Which HTML5 code fragment shows a way to validate numeric input as having a value from 1 to 100, inclusive?

A. `<input type="num" min="1" max="100">`

B. `<input type="positive" limit="100">`

C. `<input type="number" low="1" high="100">`

D. `<input type="number" min="1" max="100">`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *D*

Question #87 *Topic 1*

Which three events are valid for the HTML CANVAS element? (Choose three.)

A. scroll

B. mouseup

C. blur

D. datareceived

E. hover

Correct Answer: *ABE*
B: You can also detect a mouse click on your canvas. Again, this is done with addEventListener. There are quite a few mouse events you can detect: mousedown, mouseup, mousemove, mouseout and mouseover.
E: MouseHover Event Mouse Hover Event is a combination of two mouse events MouseOver and MouseOut so it makes easier for the developer to handle the hover event easily.
Note:
* If you want to target a touch-enabled device like an iPad, iPhone, Android tablet or phone, etc, then you need the touch events. These events are touchstart, touchend, touchcancel, touchleave, touchmove.

Janez1000 6 months, 4 weeks ago
I think it should be B, C and E, since <canvas> is not on the "Supported HTML tags" list for onscroll Event.
upvoted 2 times

Question #88 *Topic 1*

Which code fragment will display the Play and Pause controls in the audio interface?

A. `<audio controls="controls">`

B. `<audio preload="controls">`

C. `<audio preload="auto">`

D. `<audio autoplay="autoplay">`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: *A*

Question #89 *Topic 1*

Which three code fragments define an HTML input control? (Choose three.)

A. `<input type="combobox">`

B. `<input type="optionbutton">`

C. `<input type="url">`

D. `<input type="tel">`

E. `<input type="search">`

A. Option A

B. Option B

C. Option C

D. Option D

E. Option E

Correct Answer: *CDE*

HTML input types include:

button

checkbox

color

date

datetime

datetime-local

email

file

hidden

image

month

number

password

radio

range

reset

search

submit

tel

text

time

url

week

Note:

HTML Forms - The Input Element -

The most important form element is the <input> element.

The <input> element is used to select user information.

An <input> element can vary in many ways, depending on the type attribute. An <input> element can be of type text field, checkbox, password, radio button, submit button, and more.

Topic 2 - More Questions.

Question #1 *Topic 2*

You create a web page that displays text images.
You need to use CSS to rotate some text counterclockwise when the page renders in Internet Explorer.
Which markup segment will accomplish this?

A. -ms-transform: rotate(-30deg);

B. transform: rotate(30deg);

C. ""o-transform: rotate(-30deg);

D. ""ms-transform: rotate(30deg);

Correct Answer: *D*
Incorrect Answers:
A: -30deg rotates the text clockwise.
C: -o-transform is used for Opera.
References:
https://css-tricks.com/snippets/css/text-rotation/
https://www.w3schools.com/cssref/css3_pr_transform.asp

booo12 1 year, 2 months ago
The correct answer should be A
upvoted 9 times

slayers94rx7 9 months, 2 weeks ago
Answer should be A
upvoted 6 times

Question #2 *Topic 2*

Which two functions support 2D transformations in CSS3? (Choose two.)

A. skew()

B. zoom()

C. move()

D. scroll()

E. matrix()

Correct Answer: *AE*
References:
https://www.w3schools.com/cssref/css3_pr_transform.asp

Question #3 *Topic 2*

This question requires that you evaluate the underlined text to determine if it is correct.
You want a certain element to always default its positioning to directly follow the previous element, regardless of the display characteristics. The positioning method you should use is fixed.
Instructions: Review the underlined text. If it makes the statement correct, select "No change is needed". If the statement in incorrect, select the answer choice that makes the statement correct.

A. No change is needed.

B. static

C. relative

D. absolute

Correct Answer: *B*
References:
https://www.w3schools.com/Css/css_positioning.asp

Question #4 *Topic 2*

You are creating the styling for your webpage.
Which two CSS attributes produce a scroll bar if your content overflows its element? (Choose two.)

A. hidden

B. scroll

C. auto

D. visible

Correct Answer: *BC*
References:
https://www.w3schools.com/cssref/pr_pos_overflow.asp