98-375.exam.47q

Number: 98-375
Passing Score: 0
Time Limit: 120 min

https://www.gratisexam.com/

98-375

HTML5 Application Development Fundamentals

Exam A

QUESTION 1
Which positioning scheme places an object in normal document flow?

https://www.gratisexam.com/

A. absolute
B. relative
C. fixed
D. float

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 2
The variable named "ctx" is the context of an HTML5 canvas object. What does the following code fragment draw?
ctx.arc(x, y, r, 0, Math.PI, true);

A. a circle at the given point
B. a square at the given point
C. a semi-circle at the given point
D. a line from one point to another

Correct Answer: C
Section: (none)
Explanation

Explanation/Reference:

QUESTION 3
Which three are valid JavaScript variables? (Choose three.)

A. xyz1
B. .Int
C. int1
D. _int
E. 1xyz

Correct Answer: ACD
Section: (none)
Explanation

Explanation/Reference:
Variable names must begin with a letter or special variable with either $ or _
Variable names are case sensitive (y and Y are different variables)

QUESTION 4
You are creating a page by using HTML5. You add script tags to the page.
You need to use JavaScript to access an element by id and add a class to the element.
Which property or attribute should you use?

A. the tagName property
B. the className property
C. the style property
D. the class attribute

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 5
Which code fragment sets up a timer that calls a function named "adjust" every second?

A. setTimeout(adjust, 1000);
B. setInterval(adjust, 1000);

C. setInterval(adjust, 1);
D. setTimeout(adjust, 1);

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 6
Which two HTML properties can JavaScript access to change the text value of an HTML element? (Choose two.)

A. innerHTML

https://www.gratisexam.com/

B. nodeType
C. title
D. nodeValue

Correct Answer: AC
Section: (none)
Explanation

Explanation/Reference:
The innerHTML property sets or returns the inner HTML of an element.

Example:
document.getElementById('myAnchor').innerHTML="Contoso";

The title property sets or returns the element's advisory title.
Example:

```
var x=document.getElementsByTagName('body')[0];
document.write("Body title: " + x.title);
```

QUESTION 7
Web Workers define an API for:

A. Publishing frequently updated works for syndication.
B. Running scripts in the background,
C. Bi-directional, full-duplex communications over a single TCP socket.
D. Distributing load across multiple web servers.

Correct Answer: A
Section: (none)
Explanation

Explanation/Reference:

QUESTION 8
Which two are WebSocket events? (Choose two.)

A. onconnect
B. onmessage
C. ondatareceived
D. onopen

Correct Answer: BD
Section: (none)
Explanation

Explanation/Reference:
Following are the events associated with WebSocket object. Assuming we created Socket object:

Event, Event Handler, Description
* open
Socket.onopen
This event occurs when socket connection is established.
* message
Socket.onmessage
This event occurs when client receives data from server.
error
Socket.onerror
This event occurs when there is any error in communication.

* close
Socket.onclose
This event occurs when connection is closed.

QUESTION 9
You create an interface for a touch-enabled application.
During testing you discover that some touches trigger multiple input areas.
Which situation will cause this problem?

A. The touch screen is not calibrated.
B. The input areas are too close together.
C. The defined input areas are too small.
D. The input areas are semi-transparent.

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 10
An HTML5 application can be used without going through a manufacturer's approval process if:

A. the browser on the device supports HTML5.
B. the manufacturer has unlocked the device's SIM card.
C. the application has been compiled.
D. the developer has the correct application ID.

Correct Answer: A
Section: (none)
Explanation

Explanation/Reference:

QUESTION 11
Which item specifies resources for an offline HTML5 application?

A. a CSS style sheet
B. an HTML5 file
C. a JavaScript file
D. a cache manifest file

Correct Answer: A
Section: (none)
Explanation

Explanation/Reference:

QUESTION 12
In HTML5, which two objects in the Web Storage specification are used to store data on the client? (Choose two.)

A. websocket
B. navigator
C. cache
D. sessionStorage
E. localStorage

Correct Answer: DE
Section: (none)
Explanation

Explanation/Reference:
There are two new objects for storing data on the client:

localStorage - stores data with no expiration date
sessionStorage - stores data for one session

QUESTION 13

Which two code fragments represent ways to use HTML5 to save values to session storage? (Choose two.)

A. `sessionStorage.setItem('someKey','someValue');`

B. `sessionStorage.setItem.someKey='someValue';`

C. `sessionStorage.someKey='someValue';`

D. `sessionStorage.updateItem('someKey','someValue');`

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: AC
Section: (none)
Explanation

Explanation/Reference:
Example:
sessionStorage.setItem("key", "value");

Example:

```
if (sessionStorage.clickcount)
  {
sessionStorage.clickcount=Number(sessionStorage.clickcount)+1;
  }
else
  {
sessionStorage.clickcount=1;
  }
document.getElementById("result").innerHTML="You have clicked the button " + sessionStorage.clickcount + " time(s) in this session.";
```

QUESTION 14
When you are testing a touch interface, which two gestures can you simulate by using a mouse? (Choose two.)

A. tap
B. pinch
C. flick
D. rotate

Correct Answer: AD
Section: (none)
Explanation

Explanation/Reference:

QUESTION 15
DRAG DROP
Match the HTML5 input attributes to the corresponding descriptions. (To answer, drag the appropriate attribute from the column on the left to its description on the right. Each attribute may be used once, more than once, or not at all. Each correct match is worth one point.)

Select and Place:

Attribute	Description
maxlength	provides a way to set a regular expression that the value must match
multiple	provides a way to set default text until focus is placed in an element
pattern	provides a way to set form elements as mandatory
placeholder	ovides a way to allow more than one file email address in a single input
required	

Correct Answer:

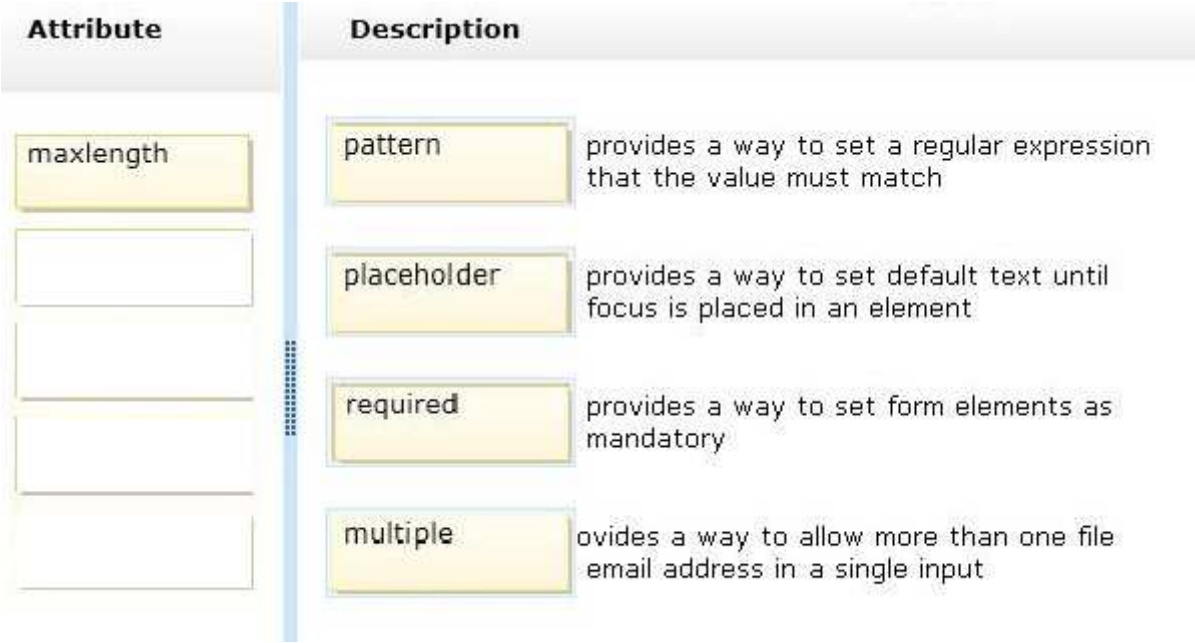

Section: (none)
Explanation

Explanation/Reference:

QUESTION 16
Which are two features of SVG? (Choose two.)

A. uses high performance pixel-based graphics
B. can be modified by using CSS
C. uses high performance raster-based graphics
D. can be modified by using JavaScript

Correct Answer: CD
Section: (none)
Explanation

Explanation/Reference:
Note:
SVG stands for Scalable Vector Graphics
SVG defines the graphics in XML format
SVG graphics do NOT lose any quality if they are zoomed or resized
Every element and every attribute in SVG files can be animated
SVG is a W3C recommendation

QUESTION 17
Which HTML5 tag is used to display text with a fixed-width font and preserves both spaces and line breaks?

A. <area>
B. <hr>
C. <pre>
D.

Correct Answer: C
Section: (none)
Explanation

Explanation/Reference:

QUESTION 18
What does "V" stand for in the file type SVG?

A. Video
B. Vertical
C. Vector
D. Variable

Correct Answer: C
Section: (none)
Explanation

Explanation/Reference:

QUESTION 19
Which tag is used to create a drop-down list in HTML5?

A. <ul>
B. <select>
C. <datalist>
D. <dd>

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 20
Which attribute prefills a default value for an input element in HTML5?

A. name
B. placeholder
C. autocomplete
D. required

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 21
Which two outcomes will this code fragment accomplish? (Each correct answer presents a complete solution. Choose two.)

```
<audio src="happy.wav" controls="controls">
Hello World
</audio>
```

A. On pre-HTML5 browsers, the happy.wav file will not play, and instead Hello World will be displayed.

B. On an HTML5 browser that supports .wav files, the happy.wav file will be played and Hello World will be hidden.
C. On an HTML5 browser that supports .wav files, the happy.wav file will be played and Hello World will be displayed.
D. on pre-HTMLS browsers, the happy.wav file will play and Hello World will be hidden.

Correct Answer: AB
Section: (none)
Explanation

Explanation/Reference:
Audio on the Web
Until now, there has not been a standard for playing audio files on a web page.

Today, most audio files are played through a plug-in (like flash). However, different browsers may have different plug-ins.

HTML5 defines a new element which specifies a standard way to embed an audio file on a web page: the <audio> element.

Browser Support
Internet Explorer 9+, Firefox, Opera, Chrome, and Safari support the <audio> element.

Example:
```
<audio controls>
  <source src="horse.ogg" type="audio/ogg">
  <source src="horse.mp3" type="audio/mpeg">
Your browser does not support the audio element.
</audio>
```

QUESTION 22
Which three technologies does HTML5 encompass? (Choose three.)

A. CSS
B. ASP.NET
C. C#

D. JavaScript
E. HTML

Correct Answer: ADE
Section: (none)
Explanation

Explanation/Reference:
* HTML5 has full CSS3 Support.

* While developing HTML5 some rules were established including:
New features should be based on HTML, CSS, DOM, and JavaScript

QUESTION 23
You create an interface for a touch-enabled application.
You discover that some of the input buttons do not trigger when you tap the screen.
You need to identify the cause of the problem.
What are two possible causes? (Choose two.)

A. The input areas overlap with other input areas.
B. The touch screen is not initialized.
C. The input areas are using event handlers to detect input.
D. The defined input areas are not large enough.

Correct Answer: AD
Section: (none)
Explanation

Explanation/Reference:

QUESTION 24
Which two code segments declare JavaScript functions? (Choose two.)

A. varfunct= (a);
B. function Foo(a){
…
}
C. var a=new Foo();

D. Foo=function(a){
...}

Correct Answer: CD
Section: (none)
Explanation

Explanation/Reference:
Example:
```
function add(x, y) {
return x + y;
}
var t = add(1, 2);
alert(t);  //3
```

Example:
```
//x,y is the argument. 'returnx+y' is the function body, which is the last in the argument list.
var add = new Function('x', 'y', 'return x+y');
var t = add(1, 2);
alert(t);   //3
```

Incorrect:
Not A: funct keyword not used in JavaScript

QUESTION 25
You add script tags to an HTML page. You need to update the text value within a specific HTML element. You access the HTML element by id. What should you do next?

A. Use the createTextNode method.
B. Use the appendChild method.
C. Set the new text value with the setAttribute method.
D. Use the firstChild property and set the new text value with the nodeValue property.

Correct Answer: D
Section: (none)
Explanation

Explanation/Reference:

QUESTION 26

You create an instance named "location" of a geolocation object.
Which code fragment will initiate periodic updates of a device's geographic location?

A. location = navigator.geolocation;
B. location.watchPosition(showLocation) ;
C. location.getCurrentPosition(showLocation);
D. location.clearNatch(watchid);

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 27
You need to use JavaScript to access the "section1" element in the following code fragment:

Which method should you use?

A. getElementsByTagName
B. getElementById
C. getElementsByName
D. getElementsByClassName

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 28
Which three properties can be used with the TouchEvent object in the Safari touch API? (Choose three.)

A. offsetTop
B. clientHeight

C. scale
D. touches
E. rotation

Correct Answer: CDE
Section: (none)
Explanation

Explanation/Reference:

QUESTION 29
Which three statements describe cookies? (Choose three.)

A. They can be created, read, and erased using the document.cookie property.
B. They are limited in size to 5 MB.
C. They are deleted automatically when the session ends.
D. They can be used only by pages on the domain where they were set.
E. They contain the data in the form of a name=value pair.

Correct Answer: ADE
Section: (none)
Explanation

Explanation/Reference:
Note:
Cookies are small, usually randomly encoded, text files that help your browser navigate through a particular website. The cookie file is generated by the site you're browsing and is accepted and processed by your computer's browser software. The cookie file is stored in your browser's folder or subfolder.

QUESTION 30
Which two terms represent interfaces in the File API? (Choose two.)

A. Font
B. Blob
C. Keygen
D. FileList

Correct Answer: BD
Section: (none)

Explanation

Explanation/Reference:
The File Interface
This interface describes a single file in a FileList and exposes its name. It inherits from Blob.

IDL

```
[Constructor(Blob fileBits, [EnsureUTF16] DOMStringfileName)]
interface File : Blob {

readonly attribute DOMString name;
readonly attribute Date lastModifiedDate;

};
```

QUESTION 31
Which two HTML5 tags format text content only? (Choose two.)

A. <map>
B.
C. <canvas>
D.

Correct Answer: BD
Section: (none)
Explanation

Explanation/Reference:
Example:
I can notemphasise this enough!

QUESTION 32
In HTML5, the autofocus attribute:

A. defines the cursor location when a form is first accessed.
B. controls the movement between fields in a form.
C. adds a default value to the field in a form.
D. enables one field and disables all others.

Correct Answer: A
Section: (none)
Explanation

Explanation/Reference:

QUESTION 33
Which two tags are used with the HTML5 TABLE element? (Choose two.)

A. <body>
B. <tfoot>

https://www.gratisexam.com/

C. <td>
D. <head>

Correct Answer: BC
Section: (none)
Explanation

Explanation/Reference:
An HTML table consists of the <table> element and one or more <tr>, <th>, and <td> elements.

The <tr> element defines a table row, the <th> element defines a table header, and the <td> element defines a table cell.

A more complex HTML table may also include <caption>, <col>, <colgroup>, <thead>, <tfoot>, and <tbody> elements.

QUESTION 34
Which code shows the correct way to nest tags in HTML5?

A. `<p>This is HTML5<b><i>text formatting</b></i></p>`

B. `<p>This is HTML5<b><i>text formatting</p></i></b>`

C. `<p>This is HTML5<b><i>text formatting</p></b></i>`

D. `<p>This is HTML5<b><i>text formatting</i></b></p>`

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: D
Section: (none)
Explanation

Explanation/Reference:

QUESTION 35
Which JavaScript method is used to draw a circle on a canvas?

A. ellipse
B. circle
C. bezierCurveTo
D. arc

Correct Answer: D
Section: (none)
Explanation

Explanation/Reference:

QUESTION 36
Which code fragment will display an image file while the video is downloading?

A. `<video width="740" height="416" src="fireworks.jpg">`

B. `<video width="740" height="416" poster="fireworks.jpg">`

C. `<video width="740" height="416" autoplay="autoplay">`

D. `<video width="740" height="416" preload="fireworks.jpg">`

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 37
What is the default value of the CSS position property?

A. fixed
B. absolute
C. static
D. relative

Correct Answer: C
Section: (none)
Explanation

Explanation/Reference:

QUESTION 38
You write the following code. (Line numbers are included for reference only.)

```
01  <html>
02    <style>
03     #animUpStyle{
04 -ms-animation-name: moveUp;
05 -ms-animation-duration: 5s;
06 width: 400px;
07 height: 50px;
08 position: relative;
09 left: 0px;
10 top: 0px;
11  }
12  @-ms-keyframes moveUp {
13   …
14 100% {
15 top: 0px;
16 }
17  }
18  </style>
19  <body>
20  <text id="animUpStyle">Going Up!</text>
21    </body>
22  </html>
```

You need to make the text animate up the screen from a starting position of 400 pixels.
Which CSS code fragment should you insert at line 13?

A.
```
100% {
top: 400px;
}
```

B.
```
0% {
top: 0px;
}
```

C.
```
0% {
top: 400px;
}
```

D.
```
50% {
top: 200px;
}
```

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: C
Section: (none)
Explanation

Explanation/Reference:

QUESTION 39
Which code fragment prepares the HTML5 application to be used offline?

A. `<!DOCTYPE html>`

B. `<html manifest="app.appcache">`

C. `<html xmlns="http://www.w3.org/1999/xhtml">`

D. `<html lang="en">`

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

QUESTION 40
You need to retrieve a value from local storage by using the key "aardvark."
Which code fragment should you use?

A. `var value=localStorage.getItem("aardvark");`

B. `var value=localStorage.key("aardvark");`

C. `var value=localStorage.setItem("aardvark");`

D. `localStorage.setItem("aardvark",value);`

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: A
Section: (none)
Explanation

Explanation/Reference:

QUESTION 41
What value does the following JavaScript code fragment store into the variable num?
varnum = localStorage.length;

A. maximum length of a character string
B. potential capacity of local storage
C. number of bytes available in local storage
D. number of key-value pairs in local storage

Correct Answer: D
Section: (none)
Explanation

Explanation/Reference:

QUESTION 42
Which CSS3 code fragment rounds the corners of a border?

A. border-image: 50px;
B. border-clip: 50px concave;
C. border-radius: 50px;
D. border-clip: 50px;

Correct Answer: C
Section: (none)
Explanation

Explanation/Reference:

QUESTION 43
Which two CSS properties can be used to position multiple HTML elements next to one another? (Choose two.)

A. display
B. position
C. overflow
D. float

Correct Answer: BD
Section: (none)
Explanation

Explanation/Reference:
CSS position Property
The position property specifies the type of positioning method used for an element (static, relative, absolute or fixed).

CSS float Property
The float property specifies whether or not a box (an element) should float.

QUESTION 44
Which CSS3 code fragment will style only the external links in an HTML document?

A.
```
a[href$="http://"] {
font-weight:bold;
}
```

B.
```
a:visited {
font-weight:bold;
}
```

C.
```
a {
font-weight:bold;
}
```

D.
```
a[href^="http://"] {
font-weight:bold;
}
```

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: D
Section: (none)
Explanation

Explanation/Reference:

QUESTION 45
You write the following JavaScript code. (Line numbers are included for reference only.)

```
01 <script>
02 ...
03 bestStudent=new Student("David Hamilton");
04 document.write(bestStudent.fullname + "is registered.");
05 </script>
```

You need to write a function that will initialize and encapsulate the member variable full name.

Which are two possible code fragments you could insert at line 02 to achieve this goal? (Each correct answer presents a complete solution. Choose two.)

A.
```
function Student(someName) {
fullname=someName;
}
```

B.
```
function Student(someName) {
this.fullname=someName;
}
```

C.
```
function Student(fullname) {
this.fullname=fullname;
}
```

D.
```
function Student(someName) {
var fullname=someName;
}
```

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: BD

Section: (none)
Explanation

Explanation/Reference:
Note:
* In JavaScript this always refers to the “owner” of the function we're executing, or rather, to the object that a function is a method of.

* If you assign a value to variable that has not yet been declared, the variable will automatically be declared as a GLOBAL variable.

This statement:

carname="Volvo";
Will declare the variable carname as a global variable , even if it is executed inside a function.

QUESTION 46
Your HTML5 code includes this code segment:

```
<form action="#">
<p>What flavor do you prefer? </p>
<input type="radio" name="flavor" id="vanilla" />Vanilla<br />
<input type="radio" name="flavor" id="butterscotch" />Butterscotch<br />
<input type="radio" name="flavor" id="chocolate" />Chocolate<br />
</form>
```

Which JavaScript code fragment will determine that a visitor has selected the "Chocolate" radio button?

A. `if (document.getElementById("chocolate").checked == true)`

B. `if (document.getElementById("chocolate").value = true)`

C. `if (document.getElementById("chocolate").checked = true)`

D. `if (document.getElementById("chocolate").value == true)`

A. Option A

B. Option B
C. Option C
D. Option D

Correct Answer: A
Section: (none)
Explanation

Explanation/Reference:

QUESTION 47
You need to ensure the scope of a variable named j is limited to the block of a single function named foo(). Which JavaScript code fragment will accomplish this?

A.
```
function foo(){
var j;
...
}
```

B.
```
var j;
function foo() {
...
}
```

C.
```
j = 0;
function foo() {
...
}
```

D.
```
function foo() {
j = 0;
...
}
```

A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: A
Section: (none)
Explanation

Explanation/Reference:

https://www.gratisexam.com/