



DC – AI – Routing – Switching – Security – Wireless – Automation

Apstra Freeform Day-2 Configuration

An HPE Juniper Networking Techpost

Andy Ford

2023-10-31

HPE



Contents

1	Apstra Freeform Day-2 Configuration	2
1.1	Introduction	2
1.2	Using Freeform Elements to Dynamically Build Configuration	2
1.2.1	Tags	3
1.2.2	Property Sets	4
1.2.3	Device Context	4
1.2.4	3-Pane Editor	5
1.2.5	The Jinja Templates	5
1.3	Pulling This All Together	6
1.3.1	trunks.jinja Config Template	6
1.3.2	trunks.jinja Config Template	7
1.4	Summary	8
1.5	Useful links	9
1.6	Glossary	9
1.7	Acknowledgments	9

1 Apstra Freeform Day-2 Configuration

Andy Ford - 10/31/2023

Using Tags, Property Sets, and Jinja to simplify Apstra Freeform Day-2 Configuration.

1.1 Introduction

Alongside the Juniper Apstra DC reference architecture built on L2 + L3 VXLAN EVPN, 3 and 5-stage Clos or Collapsed Fabric, Juniper has an additional Apstra reference architecture called Freeform. Freeform provides many of the features and functionality from the DC reference architecture currently enjoyed by the Juniper Apstra community and brings with it the ability to deploy any Junos- / Junos EVO-based network topology, utilizing any protocols supported by these platforms. When the Apstra DC reference design isn't the right solution for your architectural needs, Freeform is the answer. There are a couple of elements exposed in the Freeform architecture that allow you to design and build a network of your choosing, which are:

- The Blueprint: to build any topology
- The Jinja templates: to build any configuration

With great power comes great responsibility, and as such, Apstra provides a framework that provides various levels of context to assist in designing and building the Freeform config with accuracy. The Freeform Single Source of Truth (SSoT) is based on a Graph Database (GraphDB) that holds the interconnected state of your fabric. As you design your Freeform fabric, the following is also added to the Freeform SSoT:

- **Device Profiles** that accurately describe the capability of the switch in your topology
- **Tags** that can be used to pinpoint elements of the fabric to monitor or build configuration
- **Resource allocation**, where Freeform can dynamically create and allocate resources for systems and links in the Blueprint.
- **Property Sets** that can hold any Python-based dataset such as:

Lists Dictionaries Integers Dictionaries of dictionaries


To pull this context into an IDE-style friendly interface, Freeform provides a 3-pane IDE-like editor that consists of:

- **Pane-1:** The Jinja config template
- **Pane-2:** The Junos output that the Jinja config template generates
- **Pane-3:** Device Context that returns everything stored in the GraphDB for a given device for ease of lookup and use in the Jinja config template
- A **commit check** function so that once the configuration has been crafted, a check to determine whether the configuration is committable can be performed

1.2 Using Freeform Elements to Dynamically Build Configuration

This article explains how Apstra can simplify Day-2 configuration changes by utilizing Tags, Property Sets, and programmatic Jinja-based Config Templates. To do this, we start with the topology described below. This topology represents part of the London Underground for no reason other than it is a network of connected nodes. The nodes with a solid color represent a managed system where Freeform will build and deploy

configuration. The nodes outlined with color are unmanaged systems. They are purely there to describe to Freeform, how they are connected to the managed nodes and therefore provide valuable context in the SSoT, as described above.

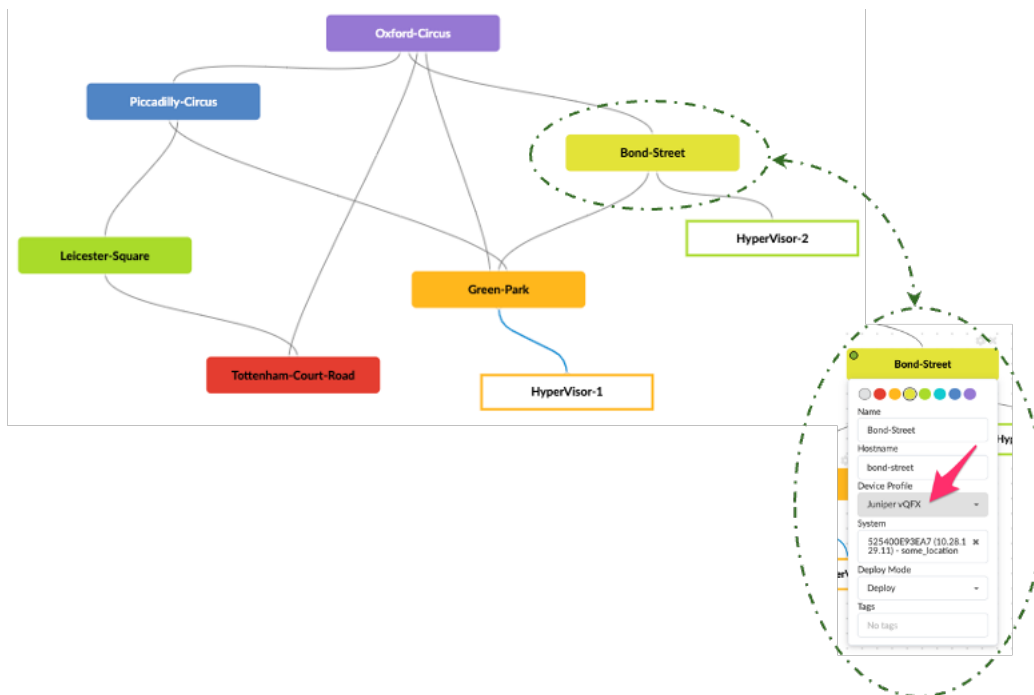

By graphically editing the Blueprint, you can assign a color, blueprint name. Hostname, Device Profile, Agent ID, the Deploy Mode, and any Tags required.

1.2.1 Tags

Tags are metadata that can be assigned to elements in the device context. These tags can be used in programmatic language to identify elements and take actions on those elements.

For example, notice that a mouseover of the link between HyperVisor-1 and Green-Park, and under Staged / Physical / Links, a Tag 'redTrunk' has been assigned:

Name	Role	Tags	Speed	Name
HyperVisor-2<->Bond-Street	external		10G	HyperVisor-2
Server1<->Green-Park	external		10G	HyperVisor-1
Server1<->Green-Park [1]	external	redTrunk	10G	HyperVisor-1
sys22 <-> sys23	internal	195	10G	Oxford-Circus
sys22 <-> sys48	internal	98	10G	Oxford-Circus
sys22 <-> sys86	internal	177	10G	Oxford-Circus

We will use this Tag name as a string that can be used to look up data objects in a Property Set to access the relevant information that may be needed to form a trunk on the link wherever the Tag has been assigned.

In this instance, the Property Set holds a dictionary of dictionaries, where the high-level keys are the Tags, as shown below.

1.2.2 Property Sets

Under Staged / Catalog / Property Sets, a new Property Set has been created called TrunkVars, which has been assigned to all systems in the Blueprint. You may choose to assign any given Property Set to one, many, or all systems.

Name	System
data	all systems
TrunkVars	all systems

Clicking on TrunkVars reveals the dictionary of dictionaries with redTrunk and (in this example) pinkTrunk. Under each 'headline' key in the dictionary is another dictionary that holds:

- VLAN ID
- Subnet
- Description
- Gateway


Values

```
"redTrunk": {
  "200": {
    "subnet": "1.1.200.0/24",
    "description": "going nowhere",
    "gateway": "1.1.200.1/24"
  },
  "201": {
    "subnet": "1.1.201.0/24",
    "description": "going somewhere",
    "gateway": "1.1.201.1/24"
  }
},
"pinkTrunk": {
  "88": {
    "subnet": "1.1.88.0/24",
    "description": "vMotionVN",
    "gateway": "1.1.88.1/24"
```

In this example, we can modify the contents of the Property Set dictionary to add or remove VNs from the trunk. With Freeform, the incremental or full configs can be viewed in the Blueprint for each device.

1.2.3 Device Context


The contextual information for each system is stored in the Freeform Single Source of Truth, the GraphDB. This can be viewed by selecting the system in the Blueprint and clicking on 'Device Context' or in a separate pane in the 3-pane editor.

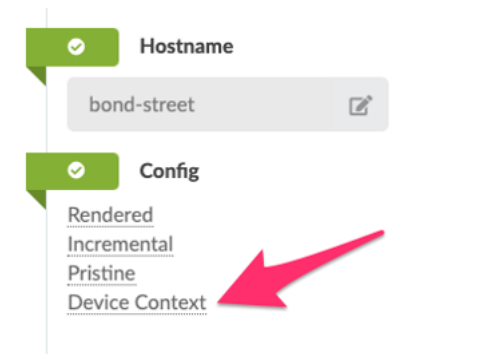

1.2.4 3-Pane Editor


The 3-pane editor provides an IDE-style interface so the config template can be viewed and edited in:

- **Pane-1:** The Jinja Config Template
- **Pane-2:** The Junos output that the Jinja Config Template generates
- **Pane-3:** Device Context that returns everything stored in the GraphDB for a given device for ease of lookup and use in the Jinja Config Template. Notice in this example that the TrunkVars Property Set expanded to show the top-level keys of our dictionary of dictionaries.

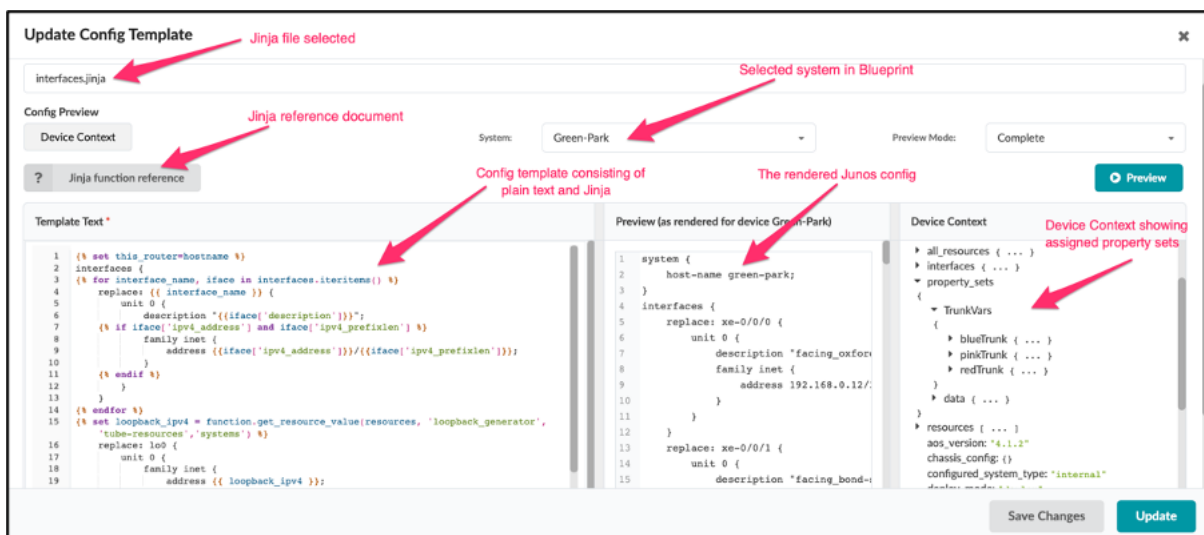

1.2.5 The Jinja Templates

The Jinja Templates are nested, where the top-level jinja is assigned to a system in the Blueprint.

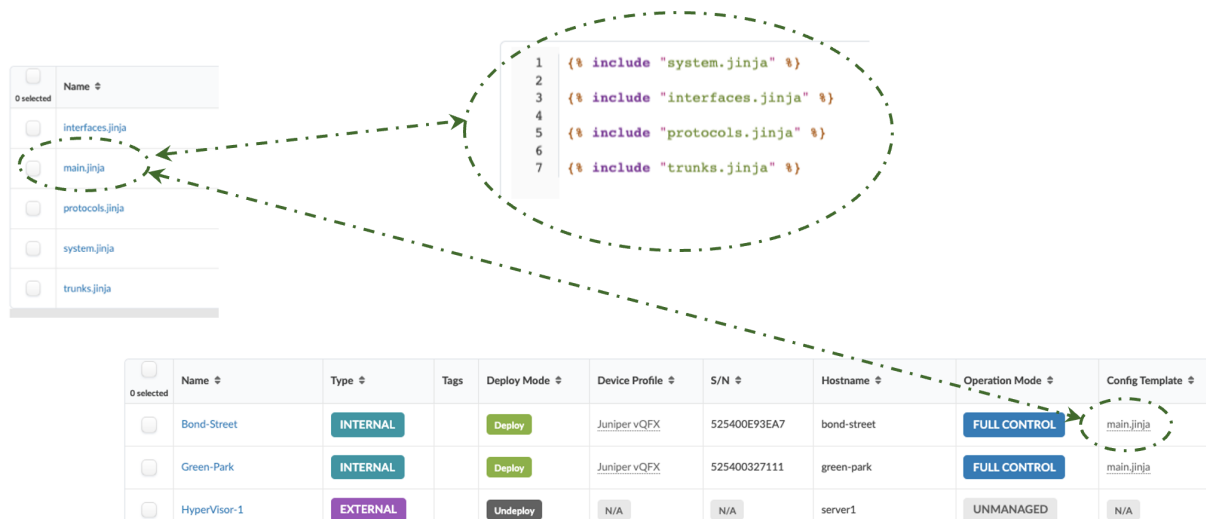

1.3 Pulling This All Together

We will now integrate these concepts to form a config template that utilizes tags to generate configurations dynamically.

1.3.1 trunks.jinja Config Template

The trunk configuration is built by the trunks.jinja Config Template. The link between Green-Park and Hypervisor-1 has a Tag 'redTrunk' assigned, as described above. The Property Set 'TrunkVars' has a key 'redTrunk'. All that remains is to walk both data sets (TrunkVars and the Blueprint links) and when we get a match build configuration.

By selecting Green-Park in the Blueprint and then 'Rendered,' we can view the full rendered config for this system. Below is a snippet of the rendered output from trunks.jinja:

```

1 interfaces {
2   xe-0/0/4 {
3     description redTrunk
4     unit 0 {
5       family ethernet-switching {
6         interface-mode trunk
7         vlan {
8           members [
9             vn201
10            vn200
11          ]
12        }
13      }
14    }
15  }
16 }
17
18 irb {
19   unit 201 {
20     family inet {
21       mtu 9000;
22       address 1.1.201.1/24;
23     }
24   }
25   unit 200 {
26     family inet {
27       mtu 9000;
28       address 1.1.200.1/24;
29     }
30   }
31 }

```

```

30     }
31   }
32 }
33
34 vlans {
35   vn201 {
36     vlan-id 201;
37     description going somewhere-201;
38     l3-interface irb.201;
39   }
40   vn200 {
41     vlan-id 200;
42     description going nowhere-200;
43     l3-interface irb.200;
44   }
45 }

```

1.3.2 trunks.jinja Config Template

Jinja2 in Purple & plain text in black

```

1  {% set Rendered_VNs = {} %} # creating a place to store the VLAN and IRB details as we iterate
2  {% for ps_tag in property_sets.TrunkVars %} # iterate through TrunkVars and pull out the high-
3  {% for interface_name, iface in interfaces.iteritems() %} # iterate through the interfaces in
4  {% if ((iface.link_tags) and (ps_tag in iface.link_tags)) %} # check to see if there is a tag
5  on the interface AND there is a match between the tag assigned to the link and the key
6  in the TrunkVars Property Set dictionary
7
8  interfaces { # if we get here, a match has been found
9    {{interface_name}} { # print the interface name found in the Blueprint interfaces
10     description {{ ps_tag }} # add an optional description. In this case we use the tag itself
11     unit 0 {
12       family ethernet-switching {
13         interface-mode trunk
14         vlan {
15           members [
16             {% for vlan_id in property_sets.TrunkVars[ps_tag] %} # retrieve the vlan IDs from
17             the TrunkVars Property Set by using the ps_tag as a key to the dictionary below
18             {% set _ = Rendered_VNs.update({vlan_id: ps_tag}) %} # store the vlan ID against
19             the tag name in the Rendered_VNs dictionary as a key/value pair
20             vn{{ vlan_id }} # print out the vlan ID to STDOUT
21             {% endfor %} # end the for loop for vlan IDs
22           ]
23         }
24       }
25     }
26   }
27   {% endif %} # end the if statement checking the interface tags
28   {% endfor %} # end the for statement iterating through the interfaces
29   {% endfor %} # end the for statement iterating through the TrunkVars Property Set
30
31   {% if Rendered_VNs|length > 0 %} # if we have stored anything in Rendered_VNs, then we have
32   found a match above. It's now time to print the irb and the vlan configuration
33
34   irb {
35     {% for vn in Rendered_VNs %} # iterate through the VLAN IDs in Rendered_VNs
36     {% set tag = Rendered_VNs[vn] %} # set the tag variable stored in Rendered_VNs[vn]
37     unit {{ vn }} { # output the unit number
38       family inet {
39         mtu 9000;
40         address {{ property_sets.TrunkVars[tag][vn]['gateway'] }}; # output the gateway address
41       }
42     }
43     {% endfor %} # end the for loop to iterate through the Rendered_VNs dictionary
44   }
45
46   vlans {
47     {% for vn in Rendered_VNs|unique %} # repeat the same to create the vlan configuration. The
48     interface description is also used in the TrunkVars Property Set by using the tag name and
49     the vn as keys to access the embedded dictionary in this Property Set.
50     {% set tag = Rendered_VNs[vn] %}
51     vn{{ vn }} {
52       vlan-id {{ vn }};
53       description {{ property_sets.TrunkVars[tag][vn]['description'] }}-{{ vn }};

```

```

46     l3-interface irb.{{ vn }}; # in this instance we created an L3 IRB.
47 }
48 {% endfor %} # end the iteration
49 }
50 {% endif %} # end the if statement checking whether the Rendered_VNs dictionary for content
51 TrunkVars Property Set
52 {
53     "blueTrunk": {
54         "99": {
55             "subnet": "1.1.99.0/24",
56             "description": "vMotionVN",
57             "gateway": "1.1.99.1/24"
58         },
59         "100": {
60             "subnet": "1.1.100.0/24",
61             "description": "storageVN",
62             "gateway": "1.1.100.1/24"
63         },
64         "101": {
65             "subnet": "1.1.101.0/24",
66             "description": "mgmtVN",
67             "gateway": "1.1.101.1/24"
68         }
69     },
70     "redTrunk": {
71         "200": {
72             "subnet": "1.1.200.0/24",
73             "description": "going nowhere",
74             "gateway": "1.1.200.1/24"
75         },
76         "201": {
77             "subnet": "1.1.201.0/24",
78             "description": "going somewhere",
79             "gateway": "1.1.201.1/24"
80         }
81     },
82     "pinkTrunk": {
83         "88": {
84             "subnet": "1.1.88.0/24",
85             "description": "vMotionVN",
86             "gateway": "1.1.88.1/24"
87         },
88         "89": {
89             "subnet": "1.1.89.0/24",
90             "description": "storageVN",
91             "gateway": "1.1.89.1/24"
92         },
93         "90": {
94             "subnet": "1.1.90.0/24",
95             "description": "mgmtVN",
96             "gateway": "1.1.90.1/24"
97         }
98     }
99 }

```

1.4 Summary

There are many creative ways to build switch configurations with Freeform. Still, the most important part to consider is how you will improve Day-2 changes by reducing the manual change workload, which can be a complex challenge when using a limited tool such as Ansible, which has no dynamic connectivity information or device state. In this example, we've shown how to create one Jinja2 Configuration Template utilizing tags to render the creation of a trunk configuration. The variables required to build the config are stored in a Property Set. Adding or removing VNs from a trunk in this example is as simple as modifying the Property Set values., instead of modifying complex Jinja2 programmatic code. Adding and removing trunks is as simple as assigning a new tag. Consider adding another trunk with the data in the Property Set under blueTrunk.

Interestingly, you could use a variation of this approach to achieve something similar by adding all the information you need in the tag itself and bypassing using a Property Set. For example, you could build a trunk using the following Tag, which can be assigned to an interface in the Blueprint topology:

Trunk1::VRF::vlanID::Description::Gateway

As described above, we can iterate through the interfaces, and wherever I see a tag with this format, 'split' the contents using :: as a delimiter and form the config from the variables in the Tag.

1.5 Useful links

To try this yourself, contact your Juniper SE to set up a Freeform topology in Apstra CloudLabs (<https://cloudlabs.apstra.com/login>). Copy and paste the TrunkVars Property Set and trunks.jinja config template above, and assign the relevant tags to the interfaces in your Blueprint.

1.6 Glossary

- DC: Data Center
- EVPN: Ethernet Virtual Private Network
- IDE: Integrated Developer Environment
- Jinja: A template engine
- L2: Layer 2
- L3: Layer 3
- SSoT: Single Source of Truth
- VLAN: Virtual Local Area Network
- VN: Virtual Network
- VXLAN: Virtual eXtensible Local Area Network

1.7 Acknowledgments

The following people contributed content or editorial changes to this document: Adam Grochowski, Kathy Tally, Bill Wester and Jeff Doyle



DC – AI – Routing – Switching – Security – Wireless – Automation

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgments, if needed. All third-party marks are the property of their respective owners.

HEWLETT PACKARD ENTERPRISE

HPE.com

