



DC – AI – Routing – Switching – Security – Wireless – Automation

Telemetry Collector and Graphical Frontend on Junos Evolved

An HPE Juniper Networking Techpost

Anton Elita

2022-07-18

HPE




Contents

1	Telemetry Collector and Graphical Front End on Junos Evolved	2
1.1	Introduction	2
1.2	Prepare Junos Evolved for Streaming Telemetry	2
1.3	Create Configuration Files	3
1.4	Start Docker Containers	4
1.5	Work with a Graphical Interface	4
1.6	Resources Management	5
1.7	Useful links	6
1.8	Glossary	6

1 Telemetry Collector and Graphical Front End on Junos Evolved

Anton Elita - 07/18/2022

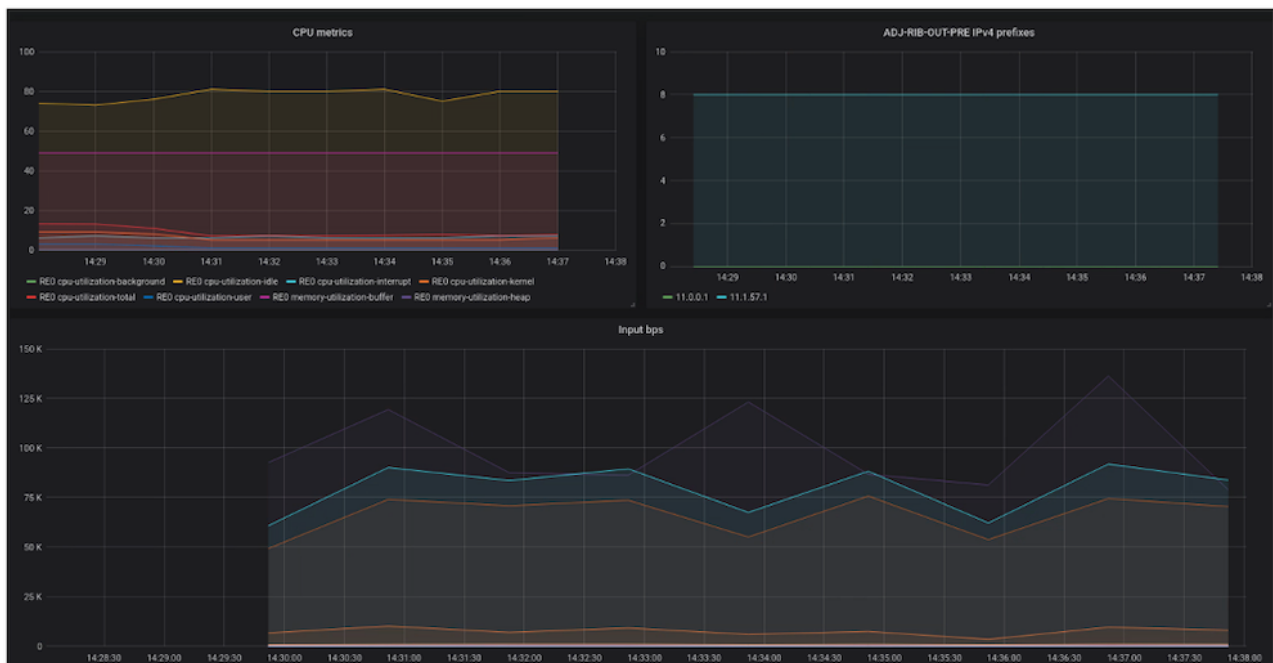

1.1 Introduction

- Configure Junos to accept Remote Procedure Calls (gRPC)
- Prepare configuration files for docker containers
- Start Docker containers
- Access the graphical interface and create own dashboards for interesting telemetry streams

1.2 Prepare Junos Evolved for Streaming Telemetry

Junos Evolved 21.4R1 is used here as an example. Streaming measurements out of a networking node can be performed in a few ways. In this guide, OpenConfig gRPC Network Management Interface (GNMI) is used for data encoding and transport. It is a widely adopted choice.

Basic configuration of gRPC:

```
1 system {
2   management-instance;
3   services {
```

```

4     extension-service {
5         request-response {
6             grpc {
7                 clear-text {
8                     port 32767;
9                 }
10                max-connections 30;
11                routing-instance mgmt_junos;
12            }
13        }
14    }
15 }
16 }
17 routing-instances {
18     mgmt_junos {
19         description default;
20     }
21 }

```

```

1 > start shell user root
2 # export DOCKER_HOST=unix:///run/docker-mgmt_junos.sock
3 # docker image pull grafana/grafana:5.4.5
4 # docker image pull influxdb:1.8.10
5 # docker image pull telegraf

```

```

1 docker image pull grafana/grafana:5.4.5
2 docker image pull influxdb:1.8.10
3 docker image pull telegraf
4 docker save grafana/grafana -o /var/tmp/grafana.tar
5 docker save influxdb:1.8.10 -o /var/tmp/influxdb.tar
6 docker save telegraf -o /var/tmp/telegraf.tar
7 scp /var/tmp/grafana.tar /var/tmp/influxdb.tar /var/tmp/telegraf.tar 11.254.253.7:/var/tmp/

```

```

1 > start shell user root
2 # export DOCKER_HOST=unix:///run/docker-mgmt_junos.sock
3 # docker load < /var/tmp/telegraf.tar
4 # docker load < /var/tmp/grafana.tar
5 # docker load < /var/tmp/influxdb.tar

```

```

1 > start shell user root
2 # mkdir -p /var/home/root/grafana/dashboards /var/home/root/telegraf /var/home/root/influxdb
3 # chmod -R 777 /var/home/root/grafana/

```

1.3 Create Configuration Files

```

1 > start shell user root
2 # cat <<EOF > /var/home/root/influxdb/env
3 INFLUXDB_DB=telegraf
4 INFLUXDB_USER=telegraf
5 INFLUXDB_ADMIN_ENABLED=true
6 INFLUXDB_ADMIN_USER=admin
7 INFLUXDB_ADMIN_PASSWORD=lab123
8 EOF

```

```

1 > start shell user root
2 # cat <<EOF > /var/home/root/telegraf/conf
3 [[outputs.influxdb]]
4     urls = ["http://10.100.3.120:8086"]
5     database = "telegraf"
6     write_consistency = "any"
7     timeout = "5s"
8     username = "admin"
9     password = "lab123"
10 [[inputs.jti_openconfig_telemetry]]
11     servers = ["10.100.3.120:32767"]
12     username = "user"
13     password = "SECRET-PASSWORD"
14     client_id = "telegraf"
15     sample_frequency = "60000ms"
16     sensors = [
17         "60000ms bgp /network-instances/network-instance/protocols/protocol/bgp/neighbors/neighbor/
18         state/session-state",
19         "60000ms task /junos/task-memory-information/",

```

```

19      "60000ms num_routes /bgp-rib/afi-safis/afi-safi/ipv4-unicast/neighbors/neighbor/adj-rib-out-
20      pre/num-routes",
21      "60000ms re0 /components/component[contains(name,'Engine0')]/properties/property[contains(
22      name,'utilization')]/state/value/",
23      "60000ms interfaces /interfaces/interface/"
24    ]
25    str_as_tags = false
26    [[processors.converter]]
27    [processors.converter.fields]
28    float = ["/components/component/properties/property/state/value"]
29  EOF

```

1.4 Start Docker Containers

```

1  > start shell user root
2  # export DOCKER_HOST=unix:///run/docker-mgmt_junos.sock
3
4  # docker run \
5  -d --name grafana \
6  -v /var/home/root/grafana:/var/lib/grafana/ \
7  -v /var/home/root/grafana/dashboards:/usr/share/grafana/conf/provisioning/dashboards/ \
8  -v /etc/localtime:/etc/localtime:ro \
9  --cap-add=NET_ADMIN \
10 --network=host \
11 --restart=always \
12 grafana/grafana:5.4.5
13
14 # docker run \
15 -d --name influxdb \
16 --env-file=/var/home/root/influxdb/env \
17 -v /etc/localtime:/etc/localtime:ro \
18 -v /var/home/root/influxdb:/var/lib/influxdb \
19 --cap-add=NET_ADMIN \
20 --network=host \
21 --restart=always \
22 influxdb:1.8.10
23
24 # docker run \
25 -d --name telegraf \
26 -v /var/home/root/telegraf/conf:/etc/telegraf/telegraf.conf:ro \
27 -v /etc/localtime:/etc/localtime:ro \
28 --cap-add=NET_ADMIN \
29 --network=host \
30 --restart=always \
31 telegraf

```

```

1  # docker ps
2  CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
3  8c105cb2a587 telegraf "/entrypoint.sh tele..." 21 hours ago Up 21 hours telegraf
4  332e790beb6c influxdb:1.8.10 "/entrypoint.sh infl..." 9 days ago Up 9 days influxdb
5  a40d11a0c2f0 grafana/grafana:5.4.5 "/run.sh" 9 days ago Up 9 days Grafana

```

```

1  # docker stats --no-stream
2  CONTAINER ID NAME CPU % MEM USAGE / LIMIT MEM % NET I/O BLOCK I/O PIDS
3  8c105cb2a587 telegraf 1.20% 30.96MiB / 15.39GiB 0.20% 0B / 0B 0B / 0B 0
4  332e790beb6c influxdb 0.15% 265.3MiB / 15.39GiB 1.68% 0B / 0B 0B / 0B 0
5  a40d11a0c2f0 grafana 0.02% 20.56MiB / 15.39GiB 0.13% 0B / 0B 0B / 0B 0



```

1.5 Work with a Graphical Interface

```

1  http://11.254.253.7:3000/

```

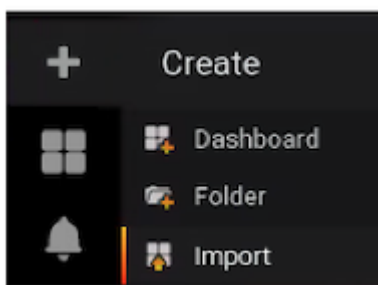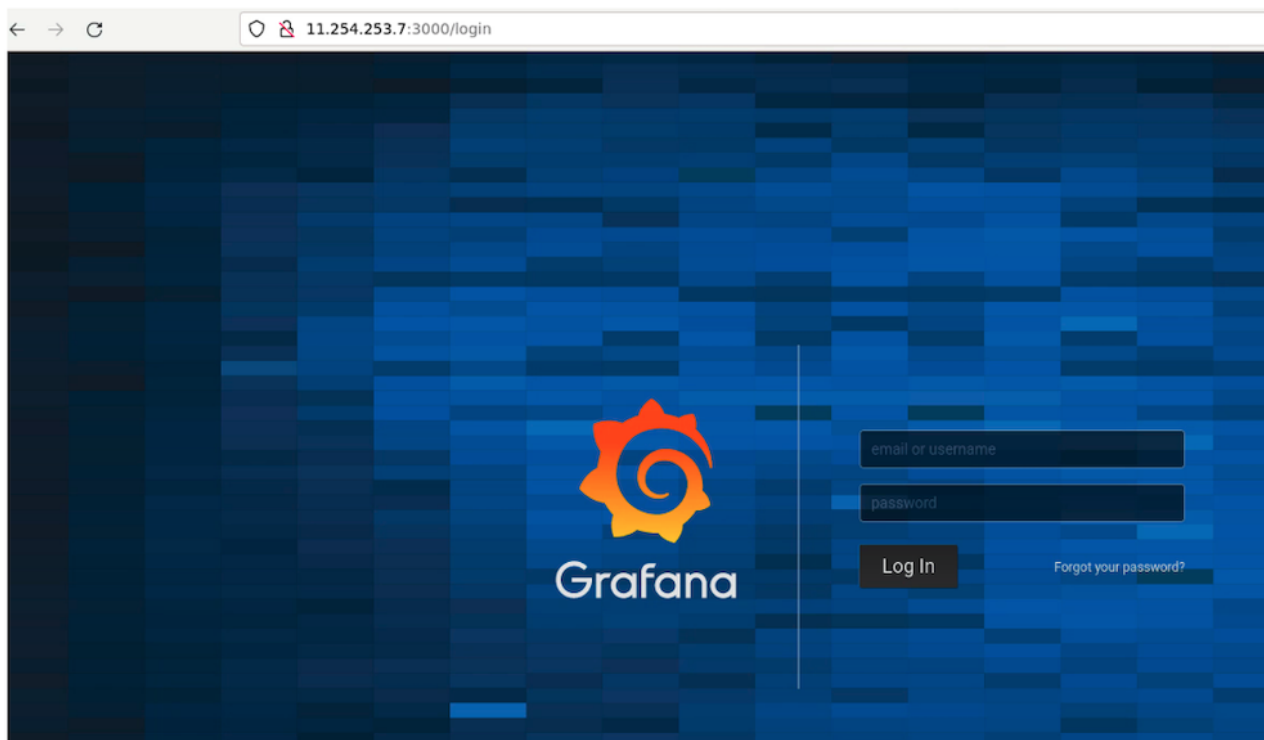

1.6 Resources Management

```
1 > start shell user root
```

```

2 # export DOCKER_HOST=unix:///run/docker-mgmt_junos.sock
3
4 # cat /etc/extensions/platform_attributes
5 ## Edit to change upper cap of total resource limits for all containers.
6 ## applies only to containers and does not apply to container runtimes.
7 ## memory.mems.limit_in_bytes = EXTENSIONS_MEMORY_MAX_MIB + EXTENSIONS_MEMORY_SWAP_MAX_MIB:-0
8 ## check current defaults, after starting extensions-cglimits.service
9 ## $ /usr/libexec/extensions/extensions-cglimits get
10 ## please start extensions-cglimits.service to apply changes here
11
12 ## device size limit will be ignored once extensionsfs device is created
13 #EXTENSIONS_FS_DEVICE_SIZE_MIB=
14 #EXTENSIONS_CPU_QUOTA_PERCENTAGE=
15 #EXTENSIONS_MEMORY_MAX_MIB=
16 #EXTENSIONS_MEMORY_SWAP_MAX_MIB=

```

- **EXTENSIONS_FS_DEVICE_SIZE_MIB=** is the maximum storage space in bytes that containers can use. The default value is 8 GB or 30% of the total size of /var, whichever is smaller.
- **EXTENSIONS_CPU_QUOTA_PERCENTAGE=** is the maximum percentage of CPU usage that containers can use. The default value is 20% max CPU use across all cores.
- **EXTENSIONS_MEMORY_MAX_MIB=** is the maximum amount of physical memory in bytes that containers can use. The default value is 2 GB or 10% of total physical memory, whichever is smaller.

```

1 > start shell user root
2 # export DOCKER_HOST=unix:///run/docker-mgmt_junos.sock
3
4 # systemctl restart extensions-cglimits.service

```

```

1 > start shell user root
2 # export DOCKER_HOST=unix:///run/docker-mgmt_junos.sock
3
4 # docker exec -it influxdb influx -database telegraf -execute "show retention policies"
5 name duration shardGroupDuration replicaN default
6 ----
7 autogen 0s 168h0m0s 1 true
8
9 # docker exec -it influxdb influx -database telegraf -execute "ALTER RETENTION POLICY autogen ON
10 telegraf DURATION 168h DEFAULT"
11
12 # docker exec -it influxdb influx -database telegraf -execute "show retention policies"
13 name duration shardGroupDuration replicaN default
14 ----
15 autogen 168h0m0s 168h0m0s 1 true

```

1.7 Useful links

- Running third-party applications on Junos Evolved: <https://www.juniper.net/documentation/us/en/software/junos/overview-evo/topics/task/third-party-applications-deploying.html>
- Telegraf: <https://www.influxdata.com/time-series-platform/telegraf/>
- InfluxDB: <https://www.influxdata.com/products/influxdb-overview/>
- Grafana: <https://grafana.com/>

1.8 Glossary

- RPD: Routing Process Daemon
- JSD: Juniper Extension Toolkit (JET) Service Process
- TIG: Telegraf, InfluxDB, Grafana
- GNMI: gRPC (Remote Procedure Call) Network Management Interface
- DB: database

- CPU: central processing unit



DC – AI – Routing – Switching – Security – Wireless – Automation

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgments, if needed. All third-party marks are the property of their respective owners.

HEWLETT PACKARD ENTERPRISE

HPE.com

HPE

