GQA / TRAINING DURATION

The 3,000-update runs show clear overfitting

Width 256 · LR 0.00125 · fresh seeds 2811 / 2812 / 2813 · means with seed ranges; no smoothing

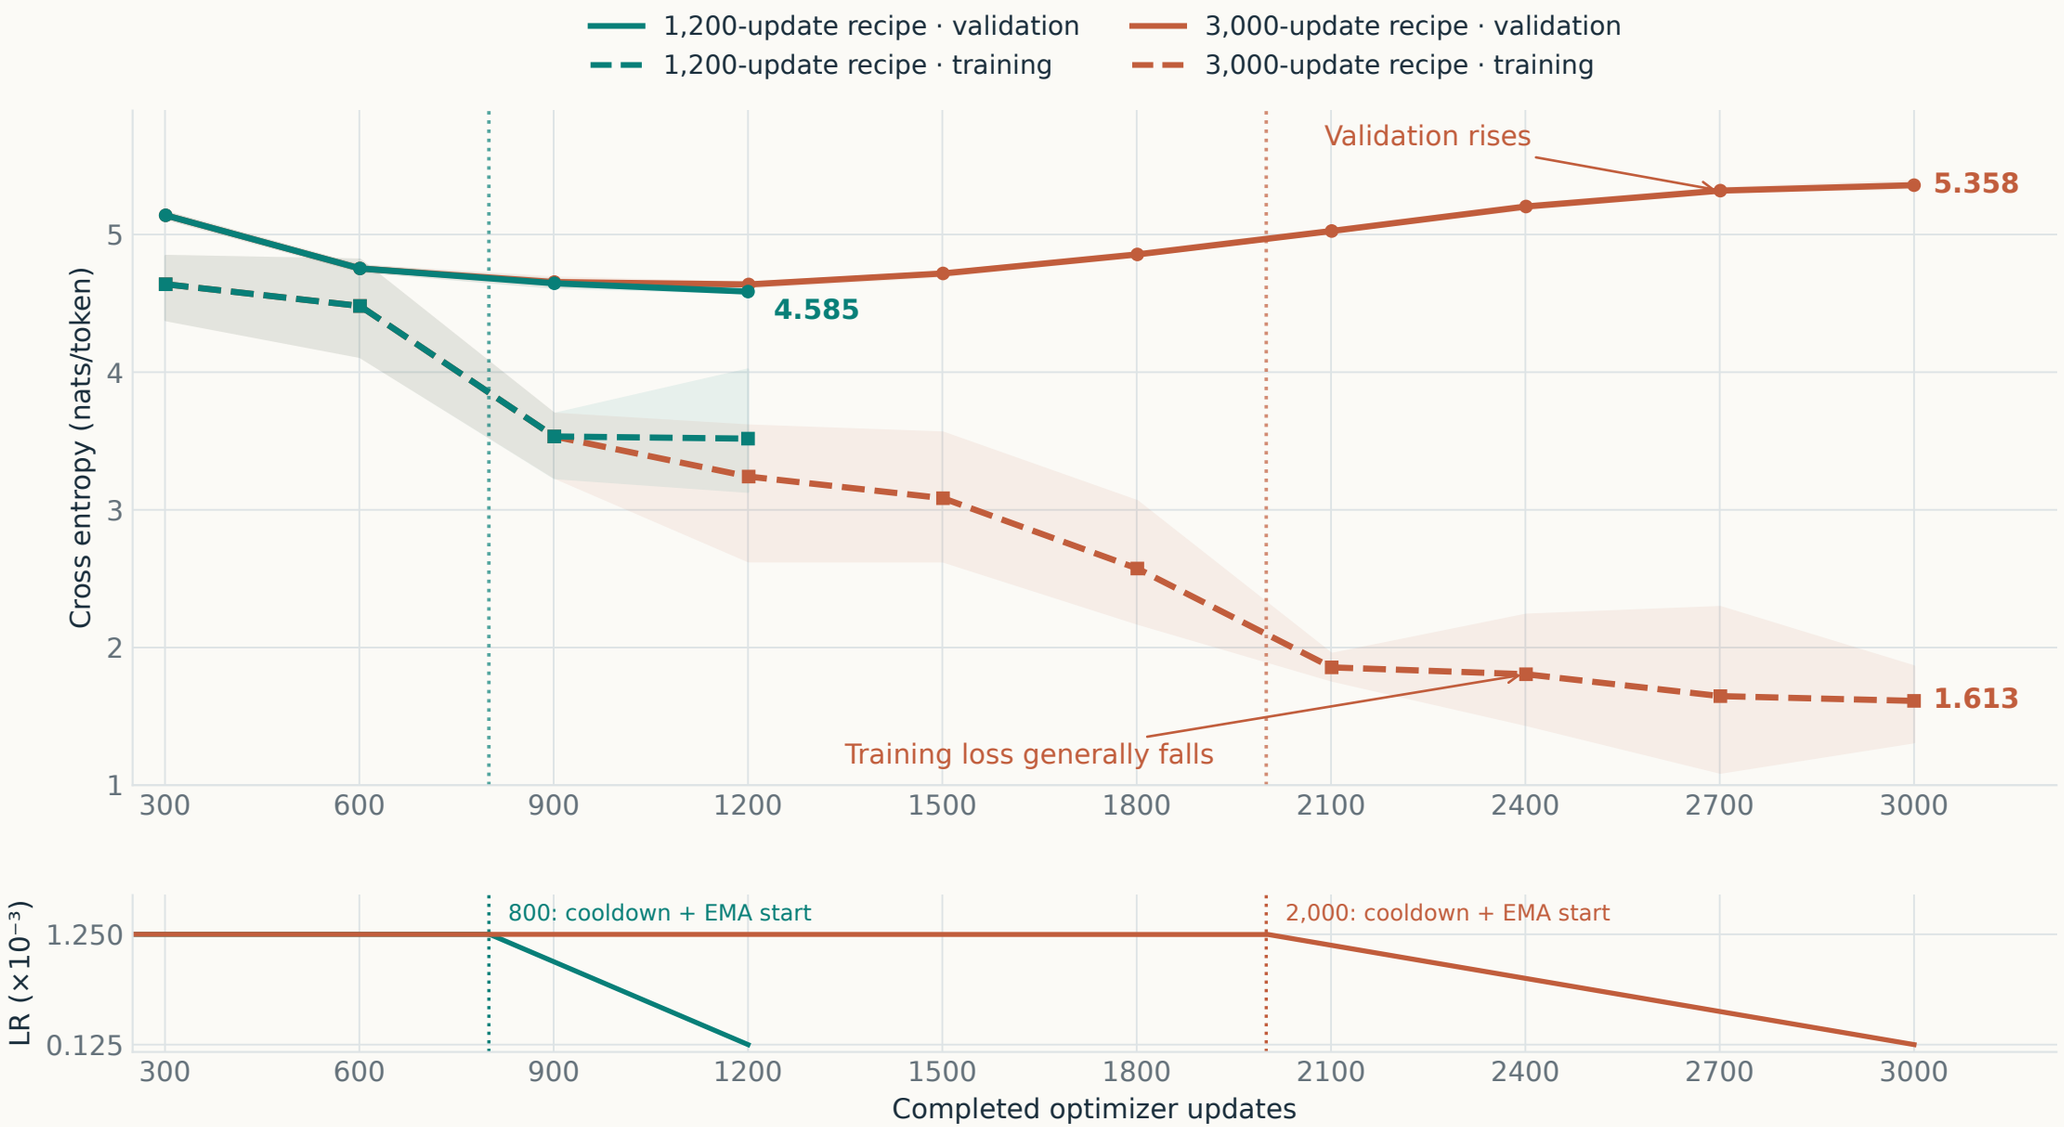

Detail from update 301 onward; full startup and individual seeds are on page 2. Shading = three-seed min–max, not confidence intervals.
Train: one minibatch before its update. Validation: the same 10 sampled batches after its update, using online weights (not EMA).
Logged about every 300 updates. These curves differ from full-validation final H200 scores: 4.753 (short) vs 5.464 (long).

GQA / TRAINING DURATION

The validation reversal appears in every long-run seed

Top: detail from update 301 · bottom: complete logged curves including startup · straight lines connect observations

Dotted lines mark each recipe's configured cooldown and EMA start (800 / 2,000). These are separate runs, not truncations of one trajectory.
The 3,000-update sampled validation minimum occurs at update 901 (seed 2811) or 1,201 (2812 / 2813); exact onset is unresolved between logs.
Training points are noisy minibatch losses. Validation is a fixed sampled subset. No historical checkpoints were re-scored and the test holdout stays closed.