


HW7

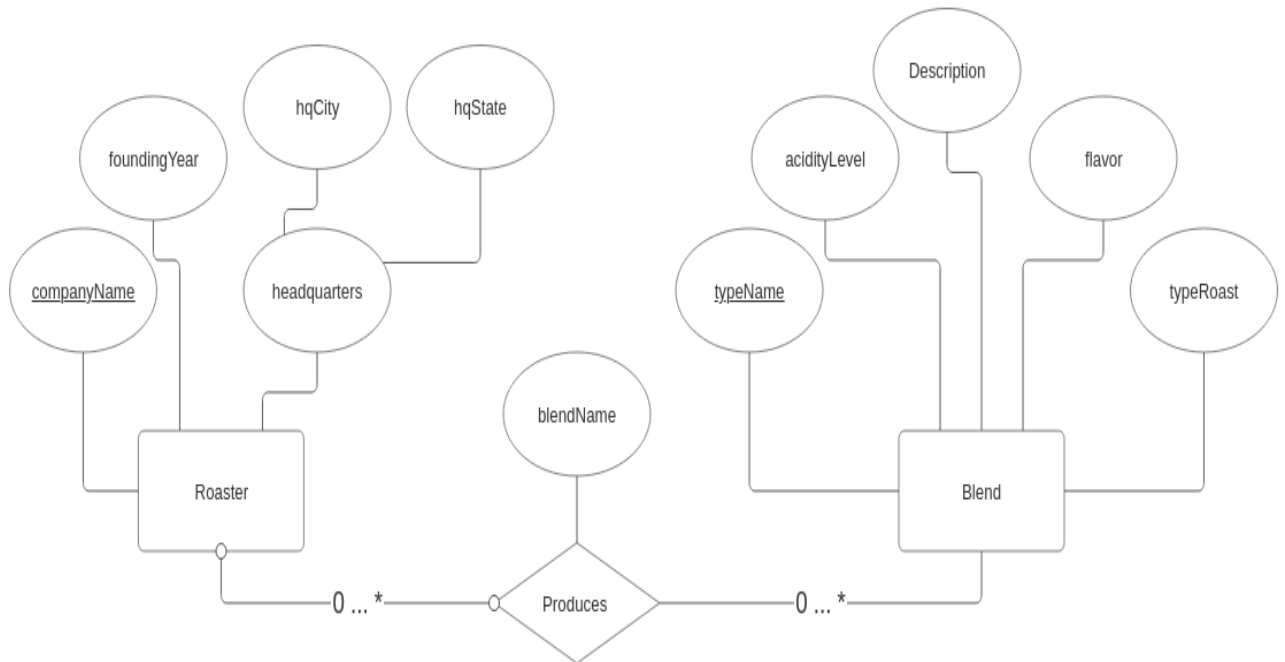


-
- Roaster(companyName, foundingYear, hqCity, hqState)

Blend(typeName, acidityLevel, flavor, typeRoast, Description)

Produces(companyName, typeName, blendName)

 - FK: companyName references Roaster(companyName)
 - typeName references Blend(typeName)

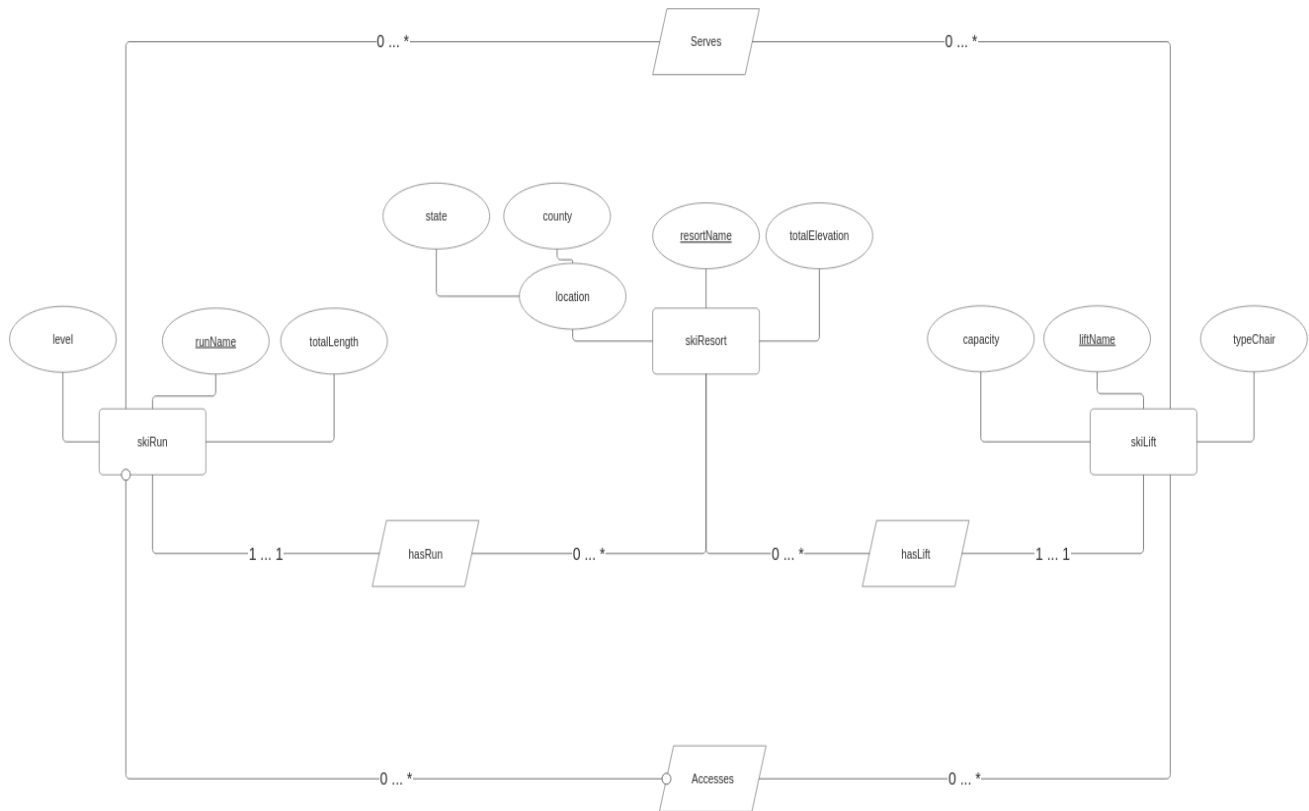

3.

4. skiResort(resortName, totalElevation, county, state)

skiRun(runName, level, totalLength, resortName)

- FK: resortName references skiResort(resortName)

skiLift(liftName, capacity, typeChair, resortName)

- FK: resortName references skiResort(resortName)

Serves(liftName, runName)


- FK: liftName references skiLift(liftName)

runName references skiRun(runName)

Accesses(liftName, runName)

- FK: liftName references skiLift(liftName)

runName references skiRun(runName)

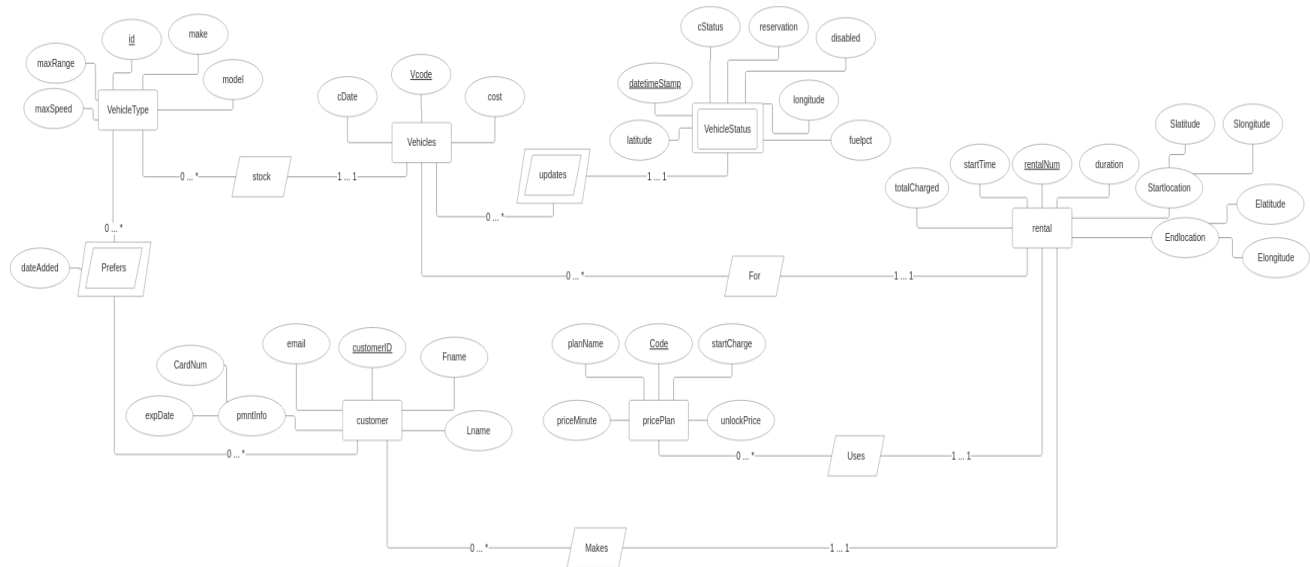

5.

6. - VehicleType (id, make, model, maxSpeed, maxRange)

- Vehicles(Vcode, cDate, cost, id)

- FK: id references VehicleType(id)

- customer(customerID, Fname, Lname, email, cardNum, expDate)

- pricePlan(Code, planName, priceMinute, unlockPrice, startCharge)

- VehicleStatus(Vcode, datetimeStamp, cStatus, reservation, disabled, latitude, longitude, fuelpct)

- FK: Vcode references Vehicles(Vcode)

- rental(rentalNum, startTime, totalCharged, duration, Slatitude, Slongitude, Elatitude, Longitude, customerID, Vcode, Code)

- FK: customerID references customer(customerID)

Vcode references Vehicles(Vcode)

Code references pricePlan(Code)

Prefers(customerID, id, dateAdded)

- FK: customerID references customer(customerID)

id references VehicleType(id)