

Exploration of an Interdisciplinary Scientific Landscape

Juste Raimbault^{1,2}

Received: date / Accepted: date

Abstract Patterns of interdisciplinarity in science can be quantified through diverse complementary dimensions. This paper studies as a case study the scientific environment of a generalist journal in Geography, *Cybergeo*, in order to introduce a novel methodology combining citation network analysis and semantic analysis. We collect a large corpus of around 200,000 articles with their abstracts and the corresponding citation network that provides a first citation classification. Relevant keywords are extracted for each article through text-mining, allowing us to construct a semantic classification. We study the qualitative patterns of relations between endogenous disciplines within each classification, and finally show the complementarity of classifications and of their associated interdisciplinarity measures. The tools we develop accordingly are open and reusable for similar large scale studies of scientific environments.

Keywords Citation Network · Semantic Network · Interdisciplinarity · Geography

Introduction

Gerow et al (2018) : topics / citations framework

The development of interdisciplinary approaches is increasingly necessary for most of disciplines, both for further knowledge discovery but also societal impact of discoveries, as it was recently coined by the special issue of Nature (Nature, 2015). Banos (2013) suggests that the development of such approaches must occur within a subtle spiral between and inside disciplines.

J. Raimbault

¹ UMR CNRS 8504 Géographie-cités

² UMR-T IFSTTAR 9403 LVMT

Tel.: +33140464000

E-mail: juste.raimbault@polytechnique.edu

An other way to understand this phenomenon is to understand it as the emergence of vertically integrated fields conjointly with horizontal questions as detailed in the Complex Systems roadmap (Bourgine et al (2009)). There are naturally multiple views on what is exactly interdisciplinarity (many other terms such as trans-disciplinarity, cross-disciplinarity also exist) and it actually depends on involved domains : recent hybrid disciplines (see e.g. the ones underlined by Bais (2010) such as astro-biology) are a good illustration of the case where entanglement is strong and new discoveries are vertically deep, whereas more loose fields such as “urbanism”, which have no precise definition and where integration is by essence horizontal, are an other illustration of how transversal knowledge can be produced. Interaction between disciplines are not always smooth, as shows the misunderstandings when urban issues were recently introduced to physicists as Dupuy and Benguigui (2015) recalls.

Quantitative studies of knowledge

These concerns are part of an understanding of processes of knowledge production in which evidence-based perspectives, involving quantitative approaches, play an important role. These paradigms can be understood as a *quantitative epistemology* following Chavalarias and Cointet (2013). Quantitative measures of interdisciplinarity would therefore be part of a multidimensional approach of the study of science that is in a way “beyond bibliometrics” (Cronin and Sugimoto, 2014). The focus of this paper is positioned within this stream of research. ~~We first review existing approaches to the measure of interdisciplinarity.~~

The possible methods for quantitative insights into epistemology are numerous. A good illustration of the variety of approaches is given by network analysis Using citation network features, a good predicting power for citation patterns is for example obtained by Newman (2013). Co-authorship networks can also be used for predictive models (Sarigöl et al, 2014). Disciplines can be stratified into layers to reveal communities between them and therein collaboration patterns (Battiston et al, 2015). Keyword networks are used in other fields such as economics of innovation: for example, Choi and Hwang (2014) proposes a method to identify technological opportunities by detecting important keywords from the point of view of topological measures. In a similar manner, Shibata et al (2008) uses topological analysis of the citation network to detect emerging research fronts. The case of Nanoscience is studied by Bonaccorsi and Vargas (2010) as a case of an emerging field exhibiting proliferating patterns for the keywords used.

Defining and measuring interdisciplinarity

Definitions of interdisciplinarity itself and indicators to measure it have already been tackled by a large body of literature. Huutoniemi et al (2010) recall the difference between *multidisciplinary* (an aggregate of works from

different disciplines) and *interdisciplinary* (implying a certain level of integration) approaches. They construct a qualitative framework to classify types of interdisciplinarity, and for example distinguish empirical, theoretical and methodological interdisciplinarity. Wagner et al (2011) find that knowledge integration is crucial for interdisciplinarity, and that it can occur at different levels, from the single scientist to the research team or the field. Hall et al (2008) confirm the role of the social aspect in potential interdisciplinary collaborations, by proposing to include the readiness to collaborate in the evaluation of corresponding research units. The multidimensional aspect of interdisciplinarity is confirmed even within a specific field such as literature (Austin et al, 1996).

A first way to quantify interdisciplinarity of a set of publications is to look at the proportion of disciplines outside a main discipline in which they are published, as Rinia et al (2002) do for the evaluation of projects in physics, complementary with judgement of experts. Porter et al (2007) designate this measure as *specialization*, and compares it with a measure of *integration*, given by the spread of citations done by a paper within the different Subject Categories (classification of the Web of Knowledge), which is also called the *Rao-Stirling* index. Larivière and Gingras (2010) uses it on a Web of Science corpus to show the existence of an optimal intermediate level of interdisciplinarity for the citation impact within a five year window. A similar work is done in (Larivière and Gingras, 2014), focusing on the evolution of measures on a long time range. The influence of missing data on this index is studied by Moreno et al (2016), providing an extended framework taking into account uncertainty.

Mugabushaka et al (2016) show that most of existing indices are a particular cases of *Leinster-Cobbold diversity indices*, which correspond to a third generation of indices to measure diversity in ecology. Leydesdorff and Rafols (2011) compare different indices at the level of journals, and show that they appear to capture different dimensions of this phenomenon in a complementary way.

The use of networks has also been proposed to quantify interdisciplinary research: Porter and Rafols (2009) combine the integration index with a mapping technique which consists in visualisation of synthetic networks constructed by co-citations between disciplines. Leydesdorff (2007) shows that the betweenness centrality is a relevant indicator of interdisciplinarity, when considering appropriate citation neighborhood. A multilayer network approach was proposed in Omodei et al (2017), using bipartite networks of papers and scholars, in order to produce measures of interdisciplinarity using generalized centrality measures.

Proposed approach

We develop in this paper a case study coupling citation network exploration and analysis with text-mining, aiming at mapping the scientific landscape in the neighborhood of a particular journal. We study an electronic journal in

Geography, namely *Cybergeol*¹, that publishes articles within all subfields of Geography and is in that way multidisciplinary. The choice is initially due to data availability, but ensures several constraints making it highly relevant to the context given above. First of all, the “discipline” of Geography is very broad and by essence interdisciplinary Bracken (2016): the spectrum ranges from Human and Critical geography to physical geography and geomorphology, and interactions between these subfields are numerous. Secondly, bibliographical data is difficult to obtain, raising the concern of how the perception of a scientific landscape may be shaped by actors of the dissemination and thus far from objective, and making technical solutions as the ones we will consequently develop here crucial tools for an open and neutral science. Finally it makes a particularly interesting case study as the editorial policy is generalist and concerned with open science issues such as peer-review ethics transparency (Wicherts, 2016), open data and model practices, as recalled by Pumain (2015), and this work contributes to these by fostering the opening of reflexivity.

Our approach combine semantic communities analysis with citation network to extract features such as interdisciplinarity measures. Our contribution differs from the previous works quantifying interdisciplinarity as it does not assume predefined domains nor classification of the considered papers, but reconstructs from the bottom-up the fields with the endogenous semantic information.

Zhang et al (2010) describe cross-journals citation clusters in terms of their semantic content, but does not compare them to semantic clusters.

Boyack et al (2011) propose a benchmark between several text-based clustering methods.

Nichols (2014) already introduced a similar approach, using Latent Dirichlet Allocation topic modeling to characterize interdisciplinarity of awards in particular sciences. Palchykov et al (2016) do the same for papers in physics based on concept extraction from full texts, and show that the endogenous classes differ from the top-down subjects classification. Semantic networks are otherwise well studied in social sciences, such as for example Gurciullo et al (2015) which~~that~~ analyze semantic networks of political debates.

Our contribution is original and significant on at least two aspects :

1. we combine endogenous classifications in a network multilayer fashion, using semantic information ;
2. a large dataset is constructed from scratch to study a journal not referenced in main databases, tackling both data retrieval and large scale data processing issues.

Bouveyron et al (2016) : topic block modeling ; similar to paper by Moore Brás et al (2017) study Oncology by coupling the semantic aspects with institutional aspects.

The rest of the paper is organized as follows : we describe in the next section the dataset used and the data collection procedure. We then study

¹ <https://journals.openedition.org/cybergeol/>

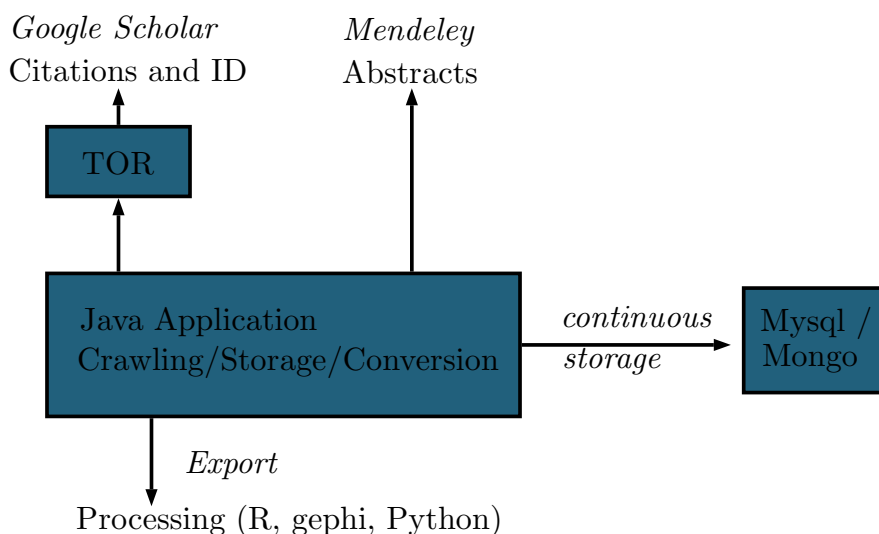


Fig. 1 Heterogeneous Bibliographical Data Collection and processing. Architecture of the application for content (semantic data), metadata and citation data collection. The heterogeneity of tasks requires the use of multiple languages : data collection and management is done in Java, and data stored in databases (Mysql and MongoDB) ; data processing is done in python for Natural Language Processing and in R for statistical and network analyses; graph visualizations are done with Gephi software.

properties of the citation network and describe the procedure to construct the semantic classification through text-mining. We finally study complementary measures of interdisciplinarity obtained with the different classifications.

Database Construction

Our approach imposes some requirements on the dataset used, namely: (i) cover a certain neighborhood of the studied journal in the citation network in order to have a consistent view on the scientific landscape; (ii) have at least a textual description for each node. For these to be met, we need to gather and compile data from heterogeneous sources. We use therefore an application specifically designed, which general architecture is given in Fig. 1. Source code of the application and all scripts used in this paper are available on the open git repository of the project². Raw and processed data are also openly available on Dataverse³. We recall that an important contribution of this paper is the construction of such an hybrid dataset from heterogeneous sources, and the development of associated tools that can be reused and further developed for similar purposes.

² at <https://github.com/JusteRaimbault/HyperNetwork>

³ at <http://dx.doi.org/10.7910/DVN/VU2XKT>

Initial Corpus

The production database of *Cybergeio* (snapshot taken in February 2016, provided by the editorial board), provides after pre-processing the initial database of articles, with basic information (title, abstract, publication year, authors). The processed version used is available together with the full database constructed, as a `mysql` dump, at the address given above. This base provide also bibliographical records of articles that give all references cited by the initial base (*forward citations* for the initial corpus).

Citation Data

Citation data is collected from **Google Scholar**, that is the only source for incoming citations (Noruzi, 2005) in our case as the journal is poorly referenced in other databases⁴. We are aware of the possible biases using this single source (see e.g. Bohannon (2014))⁵, but these critics are more directed towards search results or possible targeted manipulations than the global structure of the citation network. The automatic collection requires the use of a crawling software to pipe requests, namely **TorPool** (Raimbault, 2016) that provides a Java API allowing an easy integration into our application of data collection. A crawler can therethrough retrieve html pages and get backward citation data, i.e. all citing articles for a given initial article. We retrieve that way two sub-corpus: references citing papers in *Cybergeio* and references *citing the ones cited* by *Cybergeio*. At this stage, the full corpus contains around $4 \cdot 10^5$ references.

For the sake of simplicity, we will denote by *reference* any standard scientific production that can be cited by another (journal paper, book, book chapter, conference paper, communication, etc.) and contains basic records (title, abstract, authors, publication year). We work in the following on networks of references, linked by citations.

Text Data

A textual description for all references is necessary for a complete semantic analysis. We use for this an other source of data, that is the online catalog of *Mendeley* reference manager software Mendeley (2015). It provides a free API allowing to get various records under a structured format. Although not complete, the catalog provides a reasonable coverage in our case, around 55% of the full citation network. This yields a final corpus with full abstracts of size $2.1 \cdot 10^5$. The structure and descriptive statistics of the corresponding citation network is recalled in Fig. 2.

⁴ or was just added as in the case of *Web of Science*, indexing *Cybergeio* since May 2016 only

⁵ or <http://iscpif.fr/blog/2016/02/the-strange-arithmetic-of-google-scholars>

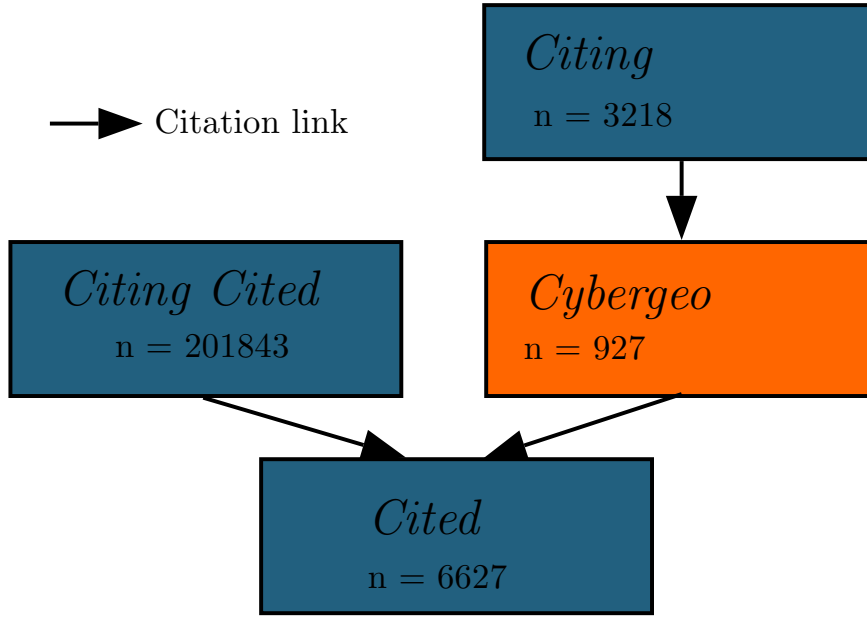


Fig. 2 Structure and content of the citation network. The original corpus of *Cybergegeo* is composed by 927 articles, themselves cited by a slightly larger corpus (yielding a stationary impact factor of around 3.18), cite $\simeq 6600$ references, themselves co-cited by more than $2 \cdot 10^5$ works for which we have a textual description.

Methods and Results

Citation Network Properties

Properties

As detailed above, we are able by the reconstruction of the citation network at depth ± 1 from the original 927 references of the journal to retrieve around $45 \cdot 10^6$ references, on which $2.1 \cdot 10^5$ have an abstract text allowing semantic analysis. A first glance on citation network properties provides useful insights. Mean in-degree (that can be interpreted as a stationary integrated impact factor) on references for which it can be defined has a value of $\bar{d} = 121.6$, whereas for articles in *Cybergegeo* we have $\bar{d} = 3.18$. This difference suggests a variety for status of references, from old classical works (the most cited has 1051 incoming citations) to recent less influential works.

This diversity is confirmed by the hierarchical organisation examined in Fig. 3 that unveils three superposed regimes. More precisely, we look at the rank-size plot, given by the logarithm of the number of citations received as a function of the rank of the paper. We find, as expected (Redner, 1998), localized power-law behaviors. A first set of around 150 references shows a very low hierarchy (rank-size exponent $\alpha = 0.01$) and corresponds to classical

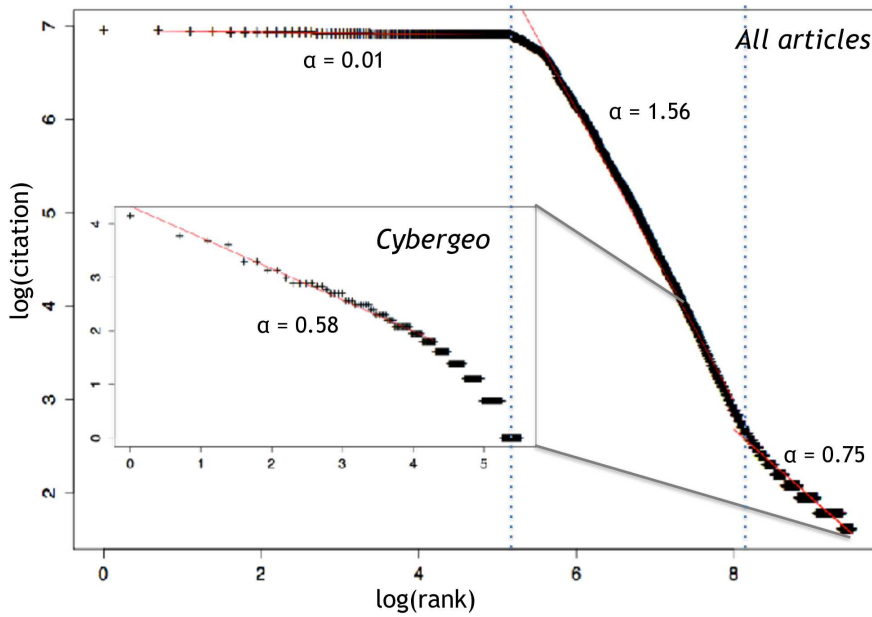


Fig. 3 Rank-size plot of citations received. The plot unveils three superposed citations regimes, corresponding to power laws with different levels of hierarchy. The references in *Cybergeog* (inset plot) are themselves in the tail and less hierarchical.

references in different disciplines. A second regime ($\alpha = 1.56$) is much more hierarchized, followed by a last regime less hierarchical ($\alpha = 0.75$) containing more recent papers (average publication year mid-2005, against mid-1998 for the second and 1983 for the first).

Other topological properties reveal typical patterns of citation practices: for example, the existence of high-order cliques (complete sub-networks) implies citation practices which compatibility with the cumulative nature of knowledge may be questionable (Pumain, 2005), since these need always to source back the production of knowledge in the most recent works. An exemple of such a clique in shown in Fig. 4, where 6 publications studying the fractal nature of urban structures all cite the previous publications in the clique.

Citation communities

The citation network is a first opportunity to construct endogenous disciplines, by extracting citation communities. More precisely, this step aims at finding recurrent patterns in citations that would define a field by its citation practices. In order to be consistent with the particular data structure we have (missing incoming citations for sub-corpus at maximal depth), we filter the network by removing all nodes with degree smaller than one. This ensures that kept

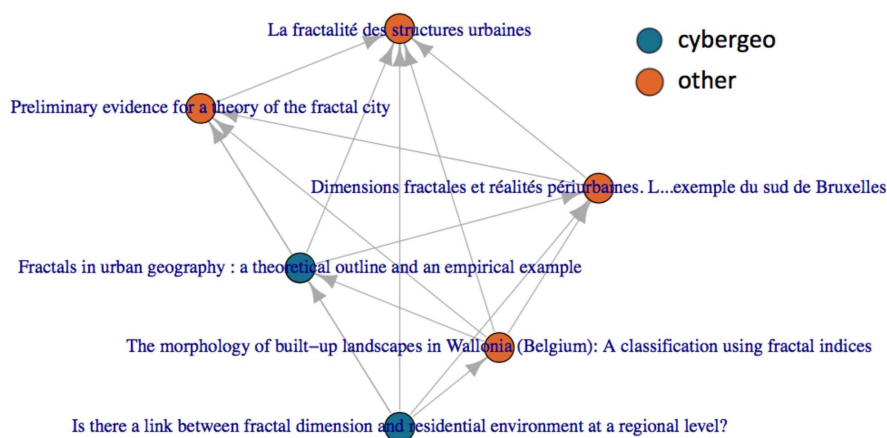


Fig. 4 Example of a maximal clique in the citation network, paper of *cybergeogeo* being in blue. Such topological structure reveal citation practices such as here a systematic citation of previous works in the research niche.

nodes are either at least cited by an other node (and thus there are no missing edges for these nodes) or cite at least two other nodes, what can make “bridges” between sub-communities. The resulting network has a size of $|V| = 107164$ nodes and $|E| = 309778$ edges. It is visualized in Fig. 5.

We use a standard modularity optimization algorithm to identify communities (Blondel et al, 2008) in this citation network. It provides 29 communities with a modularity of 0.71. In comparison, a bootstrap of 100 randomisations of links in the network gives an average modularity of $-1.0 \cdot 10^{-4} \pm 4.4 \cdot 10^{-4}$ which means that communities are highly significant.

We name the communities by inspection of the titles of most cited references in each. The 14 communities that have a size larger than 2.5% of the network are : Complex Networks, Ecology, Social Geography, Sociology, GIS, Spatial Analysis, Agent-based Modeling and Simulation (ABMS), Socio-ecology, Urban Networks, Urban Simulation, Urban Studies, Economic Geography, Accessibility/Land-use, Time Geography. These categories do not directly correspond to well-defined disciplines, as some correspond more to methods (ABMS), objects of study (Urban Studies), or paradigms (Complex Networks). Some are “specializations” of others : most papers in Urban Studies can also be classified as Critical and Social geography. This way, we construct endogenous disciplines that correspond to *scientific practices* (what is cited) more than their representation (the “official” disciplines). The relative positioning of communities in Fig. 5, obtained with a Force-Atlas algorithm, tells a lot about their respective relations : for example, social geography makes a bridge between Urban Studies and Economic Geography, whereas the connection between Socio-ecology and Urban simulations is done by GIS (what can be expected as geomatics is an interdisciplinary field). GIS also separates and connects two subfield of Ecology, on one side more thematic studies on

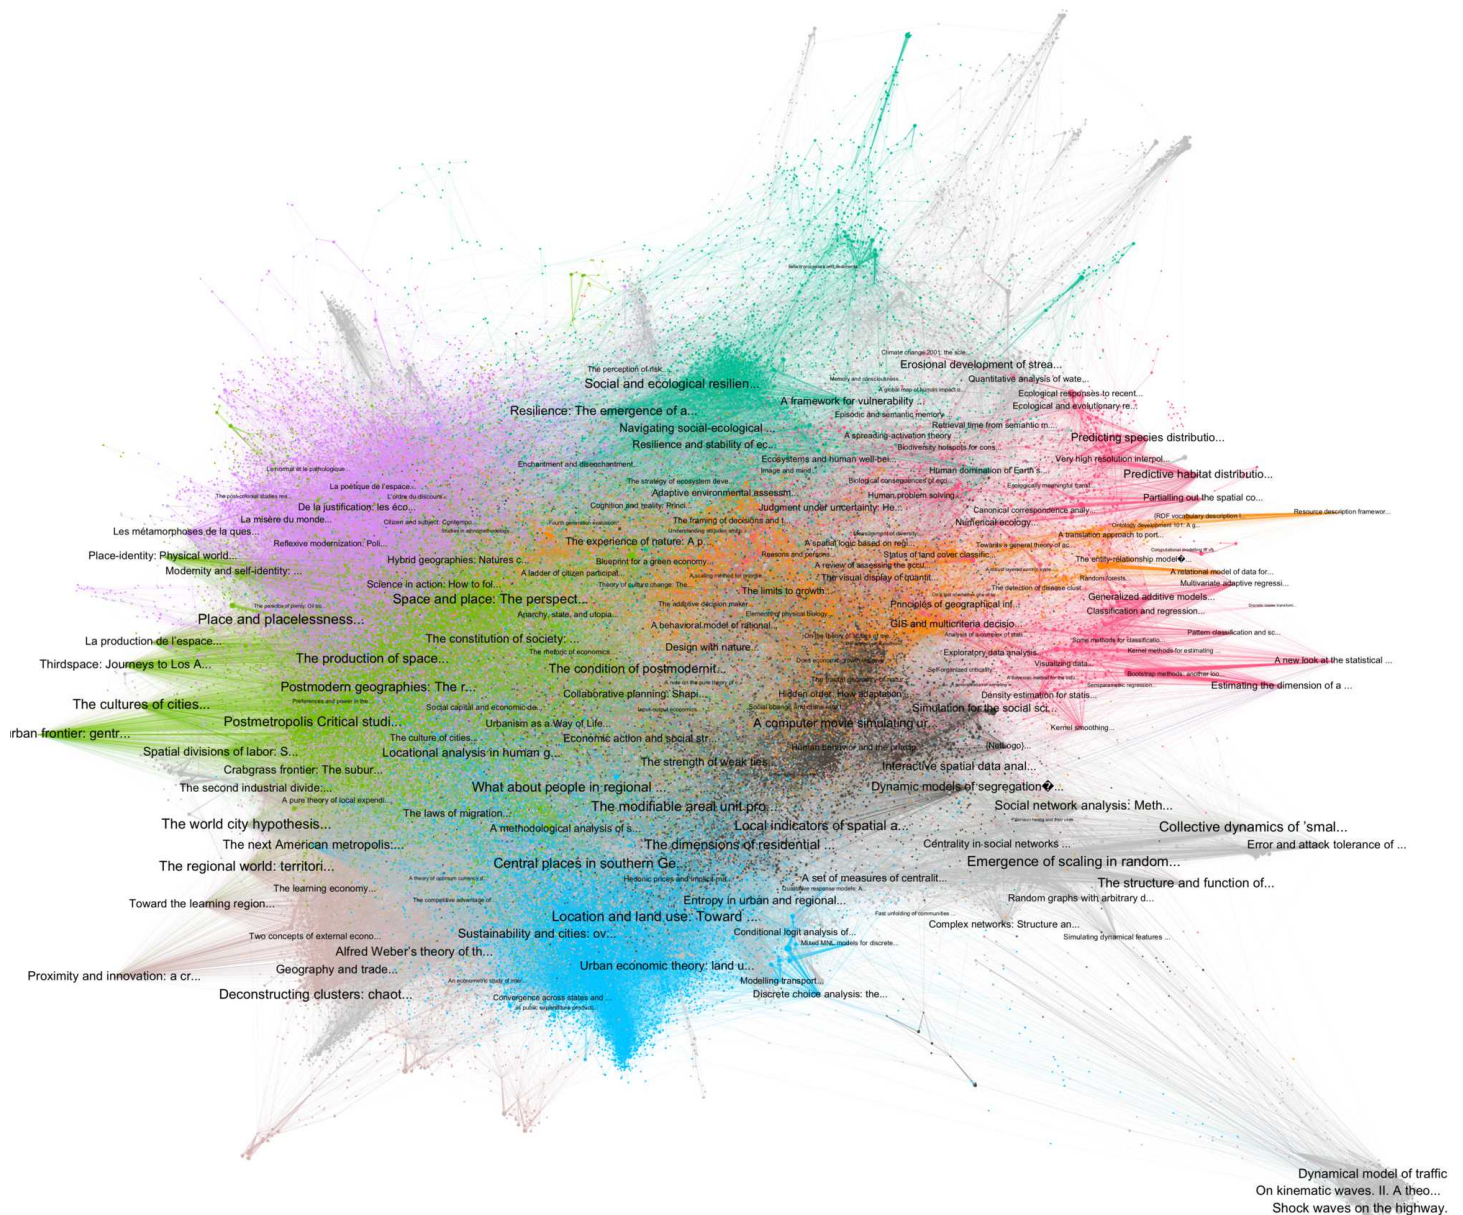


Fig. 5 Citation Network. We show only the “core” of the citation network, composed by references with a degree larger than one ($|V| = 107164$ and $|E| = 309778$). The community detection algorithm provides 29 communities with a modularity of 0.71. Nodes and edges color gives the main community (for example ecology in magenta, GIS in orange, Socio-ecology in turquoise, Social geography in green, Spatial analysis in blue). Node labels give shortened titles of most cited papers, size is scaled according to their in-degree. The graph is spatialized using a Force-Atlas algorithm.

ecological habitats, and on the other sides statistical methods. These relations already inform qualitatively patterns of interdisciplinarity, in the sense of integration measures. We will also in the following use these communities to situate the semantic classification.

Semantic Communities Construction

We now turn to the methodological details for the construction of the semantic classification. This step adapts the methodology described by Bergeaud et al (2017), who construct a semantic classification on patent data.

Relevant Keywords Extraction

We recall that our corpus with available text consists of around $2 \cdot 10^5$ abstracts of publications at a topological distance shorter than 2 from the journal *Cyberge* in the citation network. The first important step is to extract relevant keywords from abstracts. Text processing is done with the python library `nltk` (Bird, 2006). We add a particular treatment to the method of Bergeaud et al (2017), as our corpus is multilingual: language detection is done with the technique of *stop-words* (Baldwin and Lui, 2010). We also use a specific tagger (the function allowing the attribution of grammatical function to words), `TreeTagger` (Schmid, 1994), for languages other than English.

To summarize, the keyword extraction workflow goes through the following steps :

1. Language detection is done using *stop-words*
2. Pos-tagging (detection of word functions) and stemming (extraction of the *stem*) are done differently depending on language :
 - English : `nltk` built-in pos-tagger, combined to a *PorterStemmer*
 - French or other : use of `TreeTagger` (Schmid, 1994)
3. Selection of potential *n-grams* (keywords of length n with $1 \leq n \leq 4$) following the given grammatical rules: for English $\bigcap \{NN \cup VBG \cup JJ\}$, and for French $\bigcap \{NOM \cup ADJ\}$. More elaborated procedures to infer grammatical rules for noun phrases from learning corpus exist (Cardie and Pierce, 1998), but are devised to gain knowledge on grammar specifically. We follow the simple procedure of Chavalarias and Cointet (2013) with these simple fixed rules. Other languages are a negligible proportion of the corpus and are discarded.
4. Estimation of the relevance *n-grams*, by attributing a score following the deviation of the statistical distribution of co-occurrences to a random distribution.

Semantic Network

We keep at this stage a fixed number K_W of *n-grams*, based on their relevance score, that will be designated as the relevant keywords. We find that for large

values of K_W , results are not sensitive to the total number of keywords, and take a reasonably large value for computational performance, $K_W = 50,000$. We construct the co-occurrence matrix of the relevant keywords. This co-occurrence matrix provides the semantic network as its adjacency matrix : nodes are keywords, and they are linked according to their co-occurrences.

Sensitivity Analysis

We observe the same phenomenon than in Bergeaud et al (2017), that is the existence of nodes with large degree and not specific to a particular field : for example `model` and `space` are used in most of subfields of Geography. We also adapt the original filtering procedure, as we do not have here an exogenous information to calibrate parameters. We assume the highest degree terms do not carry specific information on particular classes and can be thus filtered given a maximal degree threshold k_{max} . We keep the second filter on a minimal edge weight threshold θ_w . We add the supplementary constraint that keywords are also filtered on a document frequency window $[f_{min}, f_{max}]$ (number of references in which they appear), what is slightly different from network filtering.

A sensitivity analysis of resulting network topology to these four parameters is presented in Fig. 6. Given a filtered network, we detect communities using modularity optimization as before for the citation network. Various properties of the network can be optimized, and we look in particular at its size (number of keywords after filtering), the optimal modularity, the number of communities, and the balance between their sizes (defined as a concentration index $\sum_k s_k^2 / (\sum_k s_k)^2$). This multi-objective optimization problem does not have a unique solution as objectives are contradictory in a complex way, and a compromise point must be chosen. We take a compromise point between modularity and network size, with a high balance and a reasonable number of communities, given by $k_{max} = 1200, \theta_w = 100, f_{min} = 50, f_{max} = 10000$. These values give a network of size 2868, with 18 communities and a modularity of 0.57.

Note that the small proportion of keywords in French is always separated from the rest of the network as they cannot co-occur with English keywords, and that with these parameter settings no French keywords are kept. All communities described in the following therefore contain only keywords in English.

Semantic Communities

We obtain therein communities in the semantic network with the optimized filtering parameters. At the exception of a small proportion apparently resulting from noise (representing less than 10 keywords in 3 communities that we remove, i.e. 0.33% of keywords), communities correspond to well-defined scientific fields, domains, or approaches. Naming is also done by inspection of the most relevant keywords in each community, in order to stick here to a certain level of supervision.

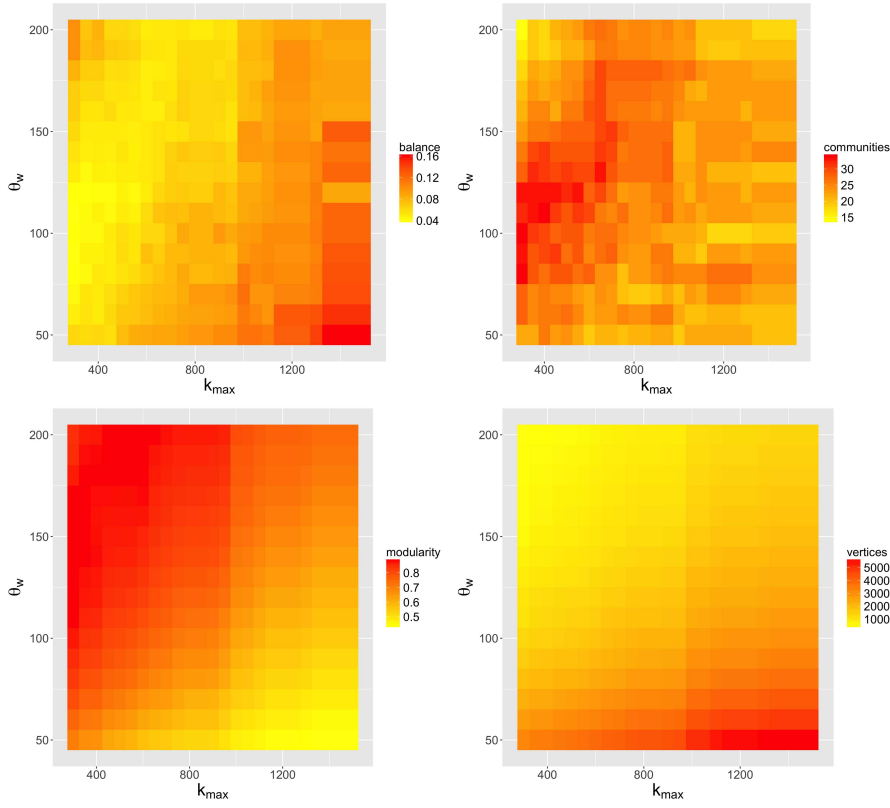


Fig. 6 Sensitivity analysis of network indicators to filtering parameters. We show here 4 indicators (balance between community sizes, modularity of the decomposition, number of communities, number of vertices), as a function of parameters k_{max} and θ_w , at fixed $f_{min} = 50$, $f_{max} = 10000$. Close values for these two last parameters (in a reasonable range) give similar behavior.

Table 1 summarizes the communities, giving their names, sizes, and corresponding keywords. The most important community is related to issues in political science and critical geography, what could have been expected as several previously obtained citations communities (Social geography, Urban studies) deal with these issues. We then obtain a large cluster of terms related to biogeography, that must correspond to publications in Ecology and Socio-ecology identified before, together with a community in Environment and Climate.

In a way similar to the citation communities, but more pronounced here, we obtain endogenous “disciplines” that can correspond to real disciplines, to methodologies, to object of studies. This classification thus also unveil *effective scientific practices*, here in terms of semantic content. A class here related to complex systems can be associated to a paradigm and various approaches that were separated in the citation communities : agent-based models and complex

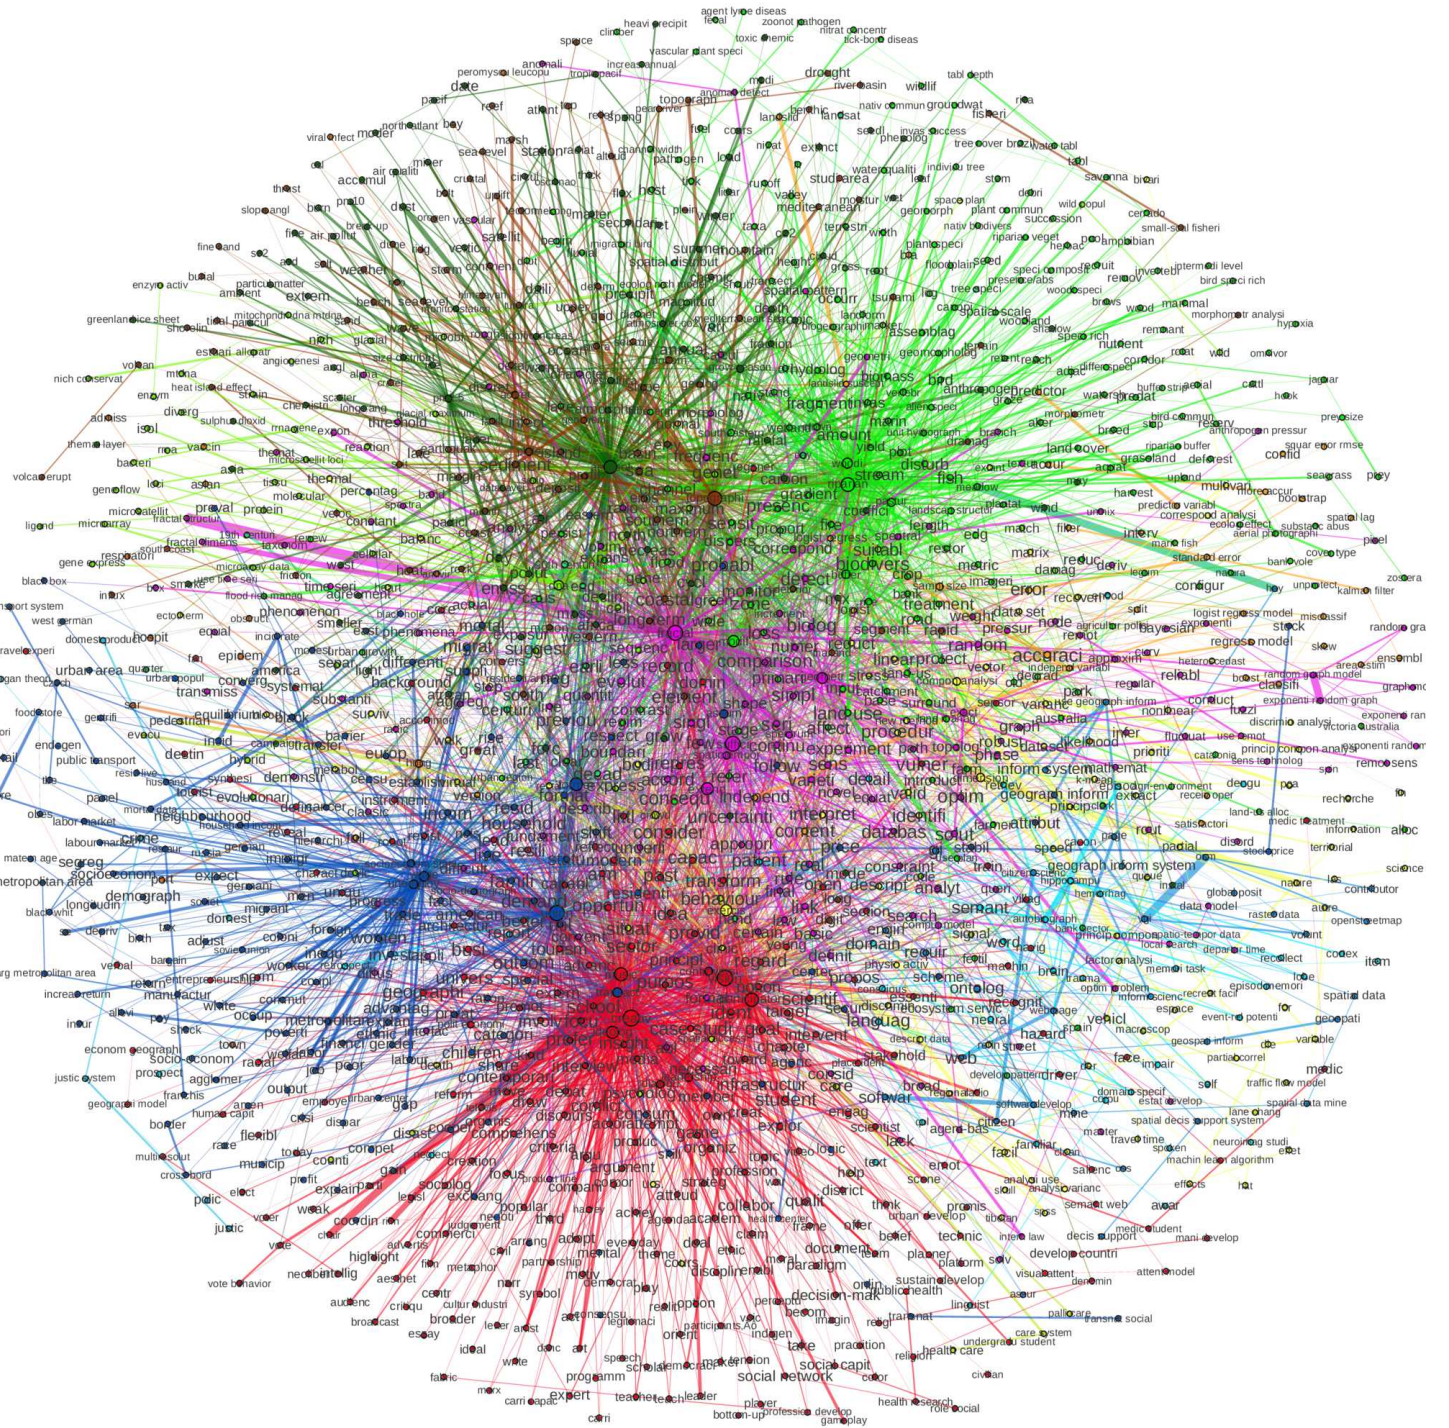


Fig. 7 Visualization of the semantic network. Network is constructed by co-occurrences of most relevant keywords. Filtering parameters are here taken according to the multi-objective optimization done in Fig. 6, i.e. ($k_{max} = 1200, \theta_w = 100, f_{min} = 50, f_{max} = 10000$). The graph spatialization algorithm (Fruchterman-Reingold), despite its stochastic and path-dependent character, unveils information on the relative positioning of communities.

Table 1 Semantic communities reconstructed from community detection in the semantic network.

Name	Size	Keywords
Political sciences/critical geography	535	decision-mak, polit ideolog, democraci, stakehold, neoliber
Biogeography	394	plant densiti, wood, wetland, riparian veget
Economic geography	343	popul growth, transact cost, socio-econom, household incom
Environnment/climate	309	ice sheet, stratospher, air pollut, climat model
Complex systems	283	scale-fre, multifract, agent-bas model, self-organ
Physical geography	203	sedimentari, digit elev model, geolog, river delta
Spatial analysis	175	spatial analysi, princip compon analysi, heteroscedast, factor analysi
Microbiology	118	chromosom, phylogenet, borrelia
Statistical methods	88	logist regress, classifi, kalman filter, sampl size
Cognitive sciences	81	semant memori, retrospect, neuroimag
GIS	75	geograph inform scienc, softwar design, volunt geograph inform, spatial decis support
Traffic modeling	63	simul model, lane chang, traffic flow, crowd behavior
Health	52	epidem, vaccin strategi, acut respiratori syndrom, hospit
Remote sensing	48	land-cov, landsat imag, lulc
Crime	17	crimin justic system, social disorgan, crime

networks for example. On the contrary, some studies that were gathered in a large domain before can be precisely differentiated in the semantic network, such as microbiology and health here that are used by studies related to socio-ecology or ecology in the citation network. Some very specific domains appear here as they have very few connections in their actual semantic content : for example, Geography of crime is very precise and disconnected from other communities.

We show in Fig. 7 a visualisation of the semantic network, in which the positioning of communities, induced by a Fruchterman-Reingold algorithm (that we use here to have a more precise layout in the relative positioning compared to Force Atlas (Jacomy et al, 2014)). The bridging between distant disciplines is done quite differently compared to the citation network, and reveals thus qualitatively an other dimension of interdisciplinarity, i.e. the semantics shared by disciplines. Here, the communities corresponding to Economic Geography (blue) and to Critical Geography (red) are close as in the citation network, but are linked to ecology and geomorphology (green and brown) by Complex Systems (magenta), although these were not present as a community in the citation network. Complexity methodologies such as Fractals, Scaling (West, 2017) or Networks (Newman, 2003) are indeed widely used both in social sciences and in physics or biology. The semantic analysis reveals thus that very distant disciplines, that are distant in their citation patterns, are finally close in terms of actual content.

In terms of overlaps between communities, in the sense of co-occurrences of corresponding keywords within texts of references, we show a synthesis of links between semantic communities in Fig. 8. We see that communities such as Critical Geography and Biogeography are not totally disconnected and share still a certain number of co-occurrences. More isolated communities can be spotted such as Health and Crime Geographies. Surprisingly, Statistical Methods does

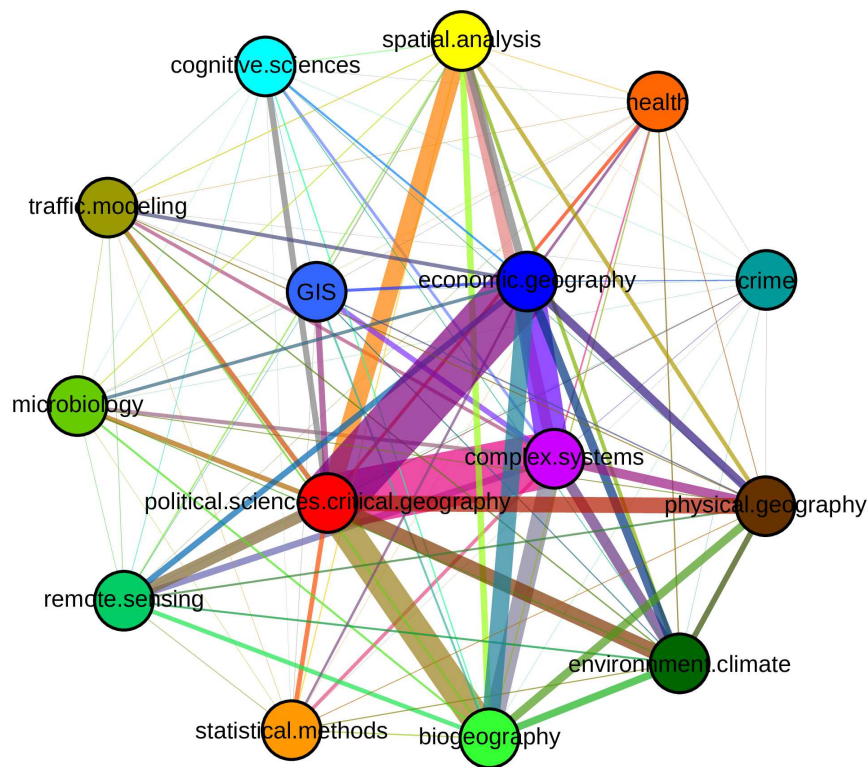


Fig. 8 Synthesis of semantic communities and their links. Weights of links are computed as probabilities of co-occurrences of corresponding keywords within references.

not share strong links with other communities, what could mean that articles dealing with methodological issues in this field are rather disconnected from the field of application, or at least do not describe it extensively. On the contrary, methods in Complex Systems are organically integrated with the thematic issues they tackle.

Sensitivity to corpus definition

To give a stronger confidence in the results we obtain, we need to study the influence of corpus choice, since (i) our case study is a narrow part of the related disciplines; and (ii) the interaction between missing data and the methodology introduced may play a role in the result obtained, that then could be solely due to spurious effects between both.

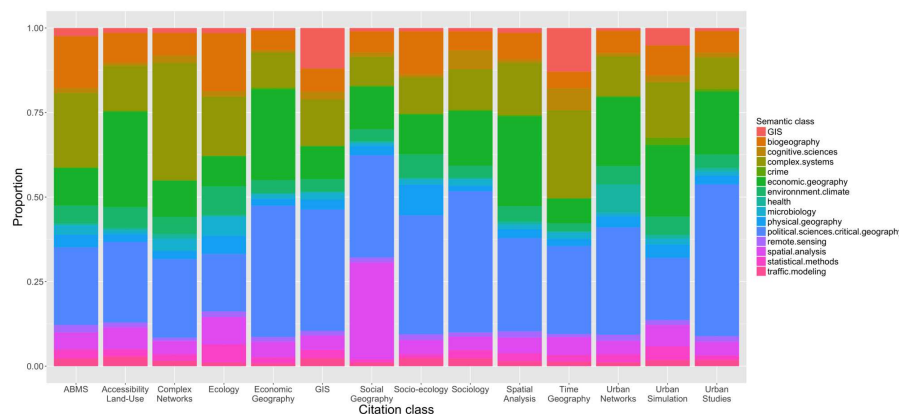


Fig. 9 Composition of citation communities in terms of semantic content. For each citation class (horizontally), the bar is decomposed as the proportions of each semantic class (given by color).

Our positioning regarding data, i.e. working only with the open dataset in a case of a low data availability, does not allow us to proceed to “ground truth” validations with an exogenous classification.

Trajanovski et al (2013)

Semantic composition of citation communities

We can now turn to the study of the relation between classifications. First, a simple way to link them is to look at the semantic content of citation communities. Each reference has a given proportion of keywords within each semantic class, and an average composition in terms of semantic classes for each citation class can thus be computed. We show these composition in Fig. 9. Some expected results are obtained, such as Complex Networks (citation) having the largest part in Complex Systems (semantic), or GIS (citation) the largest in GIS (semantic), and similarly for Economic Geography.

But the study of patterns that could have not been expected is very informative, and unveils practices of interdisciplinarity. For example, Time Geography (citation) uses as much GIS (semantic) as GIS (citation), what means that they should be using the corresponding methods and tools to study the thematic question of spatio-temporal trajectories of geographical agents. The most important in terms of political science (semantic) are Urban Studies, what suggest a convergence of the City as an object of study and of the disciplines of Political Science and Critical Geography. Also interestingly, the citation communities using most biogeography are Ecology (what could have been expected) and ABMS, confirming again the role of the thematic application in complex systems methodologies.

Measuring interdisciplinarity

We had up to now a qualitative view on interdisciplinarity patterns, by looking at the relative localisation of communities within the citation and semantic classifications, and the relation between the classifications. We propose now to look at quantitative measures of interdisciplinarity, for each classification.

More precisely, for a given classification $C \in \{Citation, Semantic\}$ a reference i can be viewed as a probability vector $(p_{ij}^{(C)})_j$ on classes j that give for each class the probability to belong to it. Given this setting, we measure interdisciplinarity of one reference using Herfindhal concentration index (Porter and Rafols, 2009), that can also be called an originality index. We define originality as

$$o_i^{(C)} = 1 - \sum_j p_{ij}^{(C)2}$$

For the semantic classification, probabilities are defined as the proportion of keywords of the abstract within each semantic class. With the deterministic citation classification, each reference has only one class and the originality index is always 0. Therefore in order to be able to compare the two classification, we associate a probability to each citation class for each article as the proportion of citations received from this class. The induced index is original, and measures interdisciplinarity as *how a reference is used* by different disciplines in its lifetime.

We show in Fig. 10 the statistical distribution for both indexes $o^{(Semantic)}$ and $o^{(Citation)}$, stratified by citation class. This allow a direct comparison between the two and also an indirect comparison by the variation of semantic distribution between citation classes. For the distribution of semantic originalities, all citation classes exhibit a similar pattern, that is a peak around large values and a smaller peak at zero. It means that either references are highly specialized and have keywords in one class only, or they use keywords from different classes in a quite even manner (for comparison, an abstract with half keywords in a class and half in an other gives an originality of 0.5). The most original, i.e. the most mixed, citation class, is Complex Networks, with a distribution clearly detached from others, what would confirm their use as a method with a lot of different problems. Social Geography is from far the less original, with a large number of single class references, and an average far lower than other classes, what would mean an increased presence of compartmentalization within the associated disciplines.

In terms of citation originality index, the global picture is fundamentally different, as average originality indexes are all lower than 0.4 and most of distributions show their mode in 0, meaning that most references are only cited by their own citation class. Again, Social Geography is the less original, confirming a similar behavior in terms of citation practice than in terms of research content. The most original classes in average, with a peak in large values, are Spatial Analysis and Urban Simulation: this corresponds to the fact that these class feature quite generic methods that can be applied in

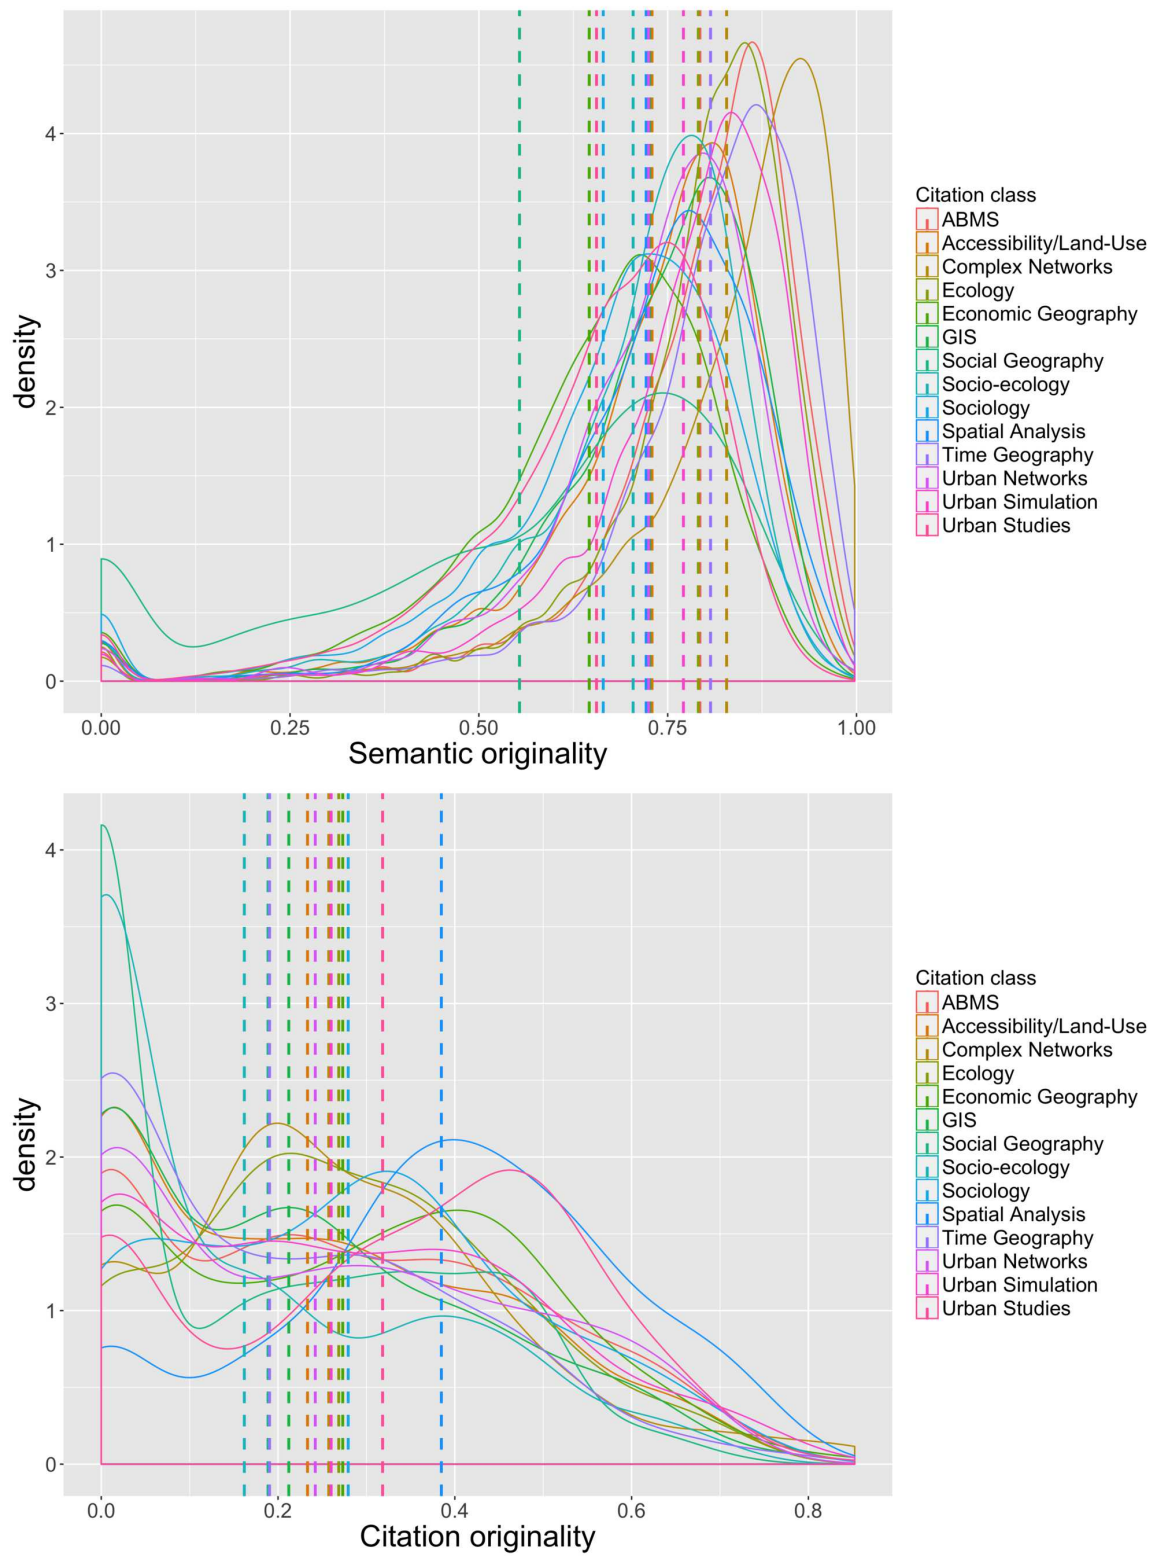


Fig. 10 Statistical distribution of originalities. We show the smoothed probability densities of originality indexes, by citation class (given by color), for the Semantic originality $o^{(Semantic)}$ (top plot) and for the Citation originality $o^{(Citation)}$ (bottom plot). Dashed lines give the mean for each distribution, with the corresponding color.

several fields and are cited accordingly. Complex Networks do not reach the same level, but however exhibit a peak around 0.2 and no peak in 0, together with Ecology, suggesting disciplines having still significant impact in other disciplines.

To summarize, we show (i) different patterns of interdisciplinarity, depending on disciplines, in terms of scientific content (semantic) and of scientific impact (citation); and (ii) a strong qualitative difference in behavior of originalities between the two classifications, what suggests their complementarity.

Correlation between classifications

In order to strengthen the idea of a complementarity of classifications, that would each capture different dimensions of processes of knowledge production, we finally look at the correlation matrix between classifications. We use this time effective class probabilities for the citation classification, i.e. a vector of zeros expect with a one at the index of the class of the reference. We compute a Pearson correlation coefficient between classes k (in semantic) and k' (in citation) as

$$\rho_{k,k'} = \frac{\text{Cov} \left[(p_{ik}^{(Sem)})_i, (p_{ik'}^{(Cit)})_i \right]}{\sqrt{\text{Var} \left[(p_{ik}^{(Sem)})_i \right] \text{Var} \left[(p_{ik'}^{(Cit)})_i \right]}}$$

where the covariance is estimated with the unbiased estimator.

The structure of the correlation matrix recalls the conclusions obtained when studying the semantic composition of citation communities, such as GIS being strongly correlated with GIS ($\rho = 0.26$), or Sociology with Political Science ($\rho = 0.16$). More importantly for our question are summary statistics of the overall matrix. It has a minimum of -0.16 (Ecology (citation) against Political Sciences (semantic)), an average of -0.002 and a maximum of 0.33 (Social geography (citation) and Spatial Analysis (semantic)). The “high” values are highly skewed, as the first decile is at -0.06 and the last at 0.09 , what means that 80% of coefficient lie within that interval, corresponding to low correlations. In a nutshell, classifications are consistent as highest correlations are observed where one can expect them, but most of classes are uncorrelated, meaning that the classifications are quite orthogonal and therefore complementary.

Discussion

We have this way shown the complementarity of classifications in the qualitative patterns they unveil, but also quantitatively in terms of interdisciplinarity measures and quantitatively in terms of correlations. Our work can be extended regarding several aspects, of which we give some suggestions below.

Developments

A first development consists in the comparison of journals. The starting point for construction of the scientific environment, the journal *Cybergeio*, was the entry point but not the subject of our study. A development more focused on journals, trying for example to answer comparative issues, or to classify journals according to their effective level of interdisciplinarity regarding different dimensions, would be potentially interesting. The collection of precise data on the origin of references is however a first step that need to be solved first.

The performance of the semantic classification was also not quantified here. A further validation of the relevance of using complementary information contained in both classifications could be done by the analysis of modularities within the citation network, as done in Bergeaud et al (2017). This would however require a baseline classification to compare with, which is not available in the type of data we use. Open repository such as arXiv (for physics mainly) or Repec (for Economics) provide API to access metadata including abstracts, and could be starting points for such targeted case studies.

Applications

A first potential application of our methodology relies on the facts that both classifications unveils thematic domains (objects of study), classical disciplines, methodological communities. These different types of communities can indeed be understood as different *Knowledge Domains*. Raimbault (2017) postulates co-evolving Knowledge Domains in every process of scientific knowledge production, that are Theoretical, Empirical, Modeling, Methodology, Tools and Data domains. Most of them are necessary for any process, and investigations within one conditions the advances in others. A refinement of classifications, associated with supervised classification to associate knowledge domains to some communities (potentially using full texts to have more precise information on the proportion of each knowledge domains involved in each), would allow to quantify relations between domains. Furthermore, using temporal data with the date of publications, would yield an effective quantification of the *co-evolution* of domains in the sense of patterns of temporal correlations (e.g. Granger causality).

An other interesting direction is the application of our classifications to the quantification of spatial diffusion of knowledge, as Maisonobe (2013) does for the diffusion of a specific question in **molecular biologygenetics**. It is not clear if different dimensions of knowledge diffuse the same way: for example citation practices can be correlated to social networks and thus exhibit different patterns than effective research contents. **This phenomenon is suggested in terms of a co-evolution for semantics and social networks by Roth and Cointet (2010).** Therefore, our work would allow to study such questions from complementary point of views.

remark Marion : localisation of authors ? → we could then do spatialized networks.

Positioning

The analysis developed did not pretend to construct maps of a given discipline, but indeed to allow authors and readers of the journal to better situate their work in their scientific neighborhood. As our approach is fully reproducible and does not require access to restricted databases, we argue that our contribution could foster open science and reflexivity.

Finally, we believe the tool we developed can contribute to an increased empowerment of authors and to the development of open science practices. Among the various visions of Open Science (Fecher and Friesike, 2014), the opening of data is always an important aspect, together with a development of reflexivity in all disciplines, beyond the sole Social Sciences to which it is classically associated. The first point is dealt with by our open tools for dataset construction, whereas the second is implied by the new knowledge of the different dimensions of the scientific environment we studied.

Conclusion

We have introduced a multi-dimensional approach to the understanding of interdisciplinarity, based on citation network and semantic network analysis. Starting from a generalist journal in Geography, we construct a large corpus of the citation neighborhood, from which we extract relevant keywords to elaborate a semantic classification. We then show qualitatively and quantitatively the complementarity of classifications. The methodology and associated tools are open and can be reused in similar studies for which data is difficult to access or poorly referenced in classical databases.

Acknowledgements The author would like to thank the editorial board of *Cybergeog*, and more particularly Denise Pumain and Christine Kosmopoulos, for having offered the opportunity to work on that subject and provided the production database of the journal.

References

- Austin TR, Rauch A, Blau H, Yudice G, van Den Berg S, Robinson LS, Henkel J, Murray T, Schoenfield M, Traub V, et al (1996) Defining interdisciplinarity. *Publications of the Modern Language Association of America* pp 271–282
- Bais S (2010) *In Praise of Science: Curiosity, Understanding, and Progress*. MIT Press

- Baldwin T, Lui M (2010) Language identification: The long and the short of the matter. In: Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics, Association for Computational Linguistics, pp 229–237
- Banos A (2013) Pour des pratiques de modélisation et de simulation libérées en géographies et shs. HDR Université Paris 1
- Battiston F, Iacovacci J, Nicosia V, Bianconi G, Latora V (2015) Emergence of multiplex communities in collaboration networks. ArXiv e-prints 1506.01280
- Bergeaud A, Potiron Y, Raimbault J (2017) Classifying patents based on their semantic content. PloS one 12(4):e0176310
- Bird S (2006) Nltk: the natural language toolkit. In: Proceedings of the COLING/ACL on Interactive presentation sessions, Association for Computational Linguistics, pp 69–72
- Blondel VD, Guillaume JL, Lambiotte R, Lefebvre E (2008) Fast unfolding of communities in large networks. Journal of statistical mechanics: theory and experiment 2008(10):P10,008
- Bohannon J (2014) Scientific publishing. google scholar wins raves—but can it be trusted? Science (New York, NY) 343(6166):14
- Bonaccorsi A, Vargas J (2010) Proliferation dynamics in new sciences. Research Policy 39(8):1034–1050
- Bourgine P, Chavalarias D, al (2009) French Roadmap for complex Systems 2008-2009. ArXiv e-prints 0907.2221
- Bouveyron C, Latouche P, Zreik R (2016) The stochastic topic block model for the clustering of vertices in networks with textual edges. Statistics and Computing pp 1–21
- Boyack KW, Newman D, Duhon RJ, Klavans R, Patek M, Biberstine JR, Schijvenaars B, Skupin A, Ma N, Brner K (2011) Clustering more than two million biomedical publications: Comparing the accuracies of nine text-based similarity approaches. PLOS ONE 6(3):1–11, DOI 10.1371/journal.pone.0018029, URL <https://doi.org/10.1371/journal.pone.0018029>
- Bracken LJ (2016) Interdisciplinarity and Geography. Wiley Online Library
- Brás OR, Cointet JP, Cambrosio A, David L, Nunes JA, Cardoso F, Jerónimo C (2017) Oncology research in late twentieth century and turn of the century portugal: a scientometric approach to its institutional and semantic dimensions. Scientometrics 113(2):867–888
- Cardie C, Pierce D (1998) Error-driven pruning of treebank grammars for base noun phrase identification. In: Proceedings of the 17th international conference on Computational linguistics-Volume 1, Association for Computational Linguistics, pp 218–224
- Chavalarias D, Cointet JP (2013) Phylomemetic patterns in science evolution—the rise and fall of scientific fields. Plos One 8(2):e54,847
- Choi J, Hwang YS (2014) Patent keyword network analysis for improving technology development efficiency. Technological Forecasting and Social Change 83:170–182

- Cronin B, Sugimoto CR (2014) Beyond bibliometrics: Harnessing multidimensional indicators of scholarly impact. MIT Press
- Dupuy G, Benguigui LG (2015) Sciences urbaines: interdisciplinarités passive, naïve, transitive, offensive. *Métropoles* (16)
- Fecher B, Friesike S (2014) Open science: one term, five schools of thought. In: *Opening science*, Springer, pp 17–47
- Gerow A, Hu Y, Boyd-Graber J, Blei DM, Evans JA (2018) Measuring discursive influence across scholarship. *Proceedings of the National Academy of Sciences* p 201719792
- Gurciullo S, Smallegan M, Pereda M, Battiston F, Patania A, Poledna S, Hedblom D, Tolga Oztan B, Herzog A, John P, Mikhaylov S (2015) Complex Politics: A Quantitative Semantic and Topological Analysis of UK House of Commons Debates. *ArXiv e-prints* 1510.03797
- Hall KL, Stokols D, Moser RP, Taylor BK, Thornquist MD, Nebeling LC, Ehret CC, Barnett MJ, McTiernan A, Berger NA, et al (2008) The collaboration readiness of transdisciplinary research teams and centers: findings from the national cancer institute's trec year-one evaluation study. *American journal of preventive medicine* 35(2):S161–S172
- Huutoniemi K, Klein JT, Bruun H, Hukkinen J (2010) Analyzing interdisciplinarity: Typology and indicators. *Research Policy* 39(1):79–88
- Jacomy M, Venturini T, Heymann S, Bastian M (2014) Forceatlas2, a continuous graph layout algorithm for handy network visualization designed for the gephi software. *PloS one* 9(6):e98,679
- Larivière V, Gingras Y (2010) On the relationship between interdisciplinarity and scientific impact. *Journal of the Association for Information Science and Technology* 61(1):126–131
- Larivière V, Gingras Y (2014) Measuring interdisciplinarity. In: *Beyond bibliometrics: Harnessing multidimensional indicators of scholarly impact*, MIT Press, p 187
- Leydesdorff L (2007) Betweenness centrality as an indicator of the interdisciplinarity of scientific journals. *Journal of the Association for Information Science and Technology* 58(9):1303–1319
- Leydesdorff L, Rafols I (2011) Indicators of the interdisciplinarity of journals: Diversity, centrality, and citations. *Journal of Informetrics* 5(1):87–100
- Maisonobe M (2013) Diffusion et structuration spatiale d'une question de recherche en biologie moléculaire. *Mappe Monde* 110(2):13,202
- Mendeley (2015) Mendeley reference manager. <http://www.mendeley.com/>
- Moreno MdCC, Auzinger T, Werthner H (2016) On the uncertainty of interdisciplinarity measurements due to incomplete bibliographic data. *Scientometrics* 107(1):213–232
- Mugabushaka AM, Kyriakou A, Papazoglou T (2016) Bibliometric indicators of interdisciplinarity: the potential of the leinster–cobbold diversity indices to study disciplinary diversity. *Scientometrics* 107(2):593–607
- Nature (2015) Interdisciplinarity, nature special issue. *Nature* 525(7569):289–418

- Newman ME (2003) The structure and function of complex networks. *SIAM review* 45(2):167–256
- Newman MEJ (2013) Prediction of highly cited papers. *ArXiv e-prints* 1310.8220
- Nichols LG (2014) A topic model approach to measuring interdisciplinarity at the national science foundation. *Scientometrics* 100(3):741–754
- Noruzi A (2005) Google scholar: The new generation of citation indexes. *Libri* 55(4):170–180
- Omodei E, De Domenico M, Arenas A (2017) Evaluating the impact of interdisciplinary research: A multilayer network approach. *Network Science* 5(2):235–246
- Palchykov V, Gemmetto V, Boyarsky A, Garlaschelli D (2016) Ground truth? concept-based communities versus the external classification of physics manuscripts. *EPJ Data Science* 5(1):28
- Porter A, Rafols I (2009) Is science becoming more interdisciplinary? measuring and mapping six research fields over time. *Scientometrics* 81(3):719–745
- Porter AL, Cohen AS, Roessner JD, Perreault M (2007) Measuring researcher interdisciplinarity. *Scientometrics* 72(1):117–147
- Pumain D (2005) Cumulativité des connaissances. *Revue européenne des sciences sociales European Journal of Social Sciences (XLIII-131)*:5–12
- Pumain D (2015) Adapting the model of scientific publishing. *Cybergeog: European Journal of Geography*
- Raimbault J (2016) Torpool v1.0, doi : 10.5281/zenodo.53739
- Raimbault J (2017) An applied knowledge framework to study complex systems. *arXiv preprint arXiv:170609244*
- Redner S (1998) How popular is your paper? an empirical study of the citation distribution. *The European Physical Journal B-Condensed Matter and Complex Systems* 4(2):131–134
- Rinia E, van Leeuwen T, van Raan A (2002) Impact measures of interdisciplinary research in physics. *Scientometrics* 53(2):241–248
- Roth C, Cointet JP (2010) Social and semantic coevolution in knowledge networks. *Social Networks* 32(1):16–29
- Sarigöl E, Pfitzner R, Scholtes I, Garas A, Schweitzer F (2014) Predicting Scientific Success Based on Coauthorship Networks. *ArXiv e-prints* 1402.7268
- Schmid H (1994) Probabilistic part-of-speech tagging using decision trees. In: *Proceedings of the international conference on new methods in language processing, Citeseer*, vol 12, pp 44–49
- Shibata N, Kajikawa Y, Takeda Y, Matsushima K (2008) Detecting emerging research fronts based on topological measures in citation networks of scientific publications. *Technovation* 28(11):758–775
- Trajanovski S, Martín-Hernández J, Winterbach W, Van Mieghem P (2013) Robustness envelopes of networks. *Journal of Complex Networks* 1(1):44–62
- Wagner CS, Roessner JD, Bobb K, Klein JT, Boyack KW, Keyton J, Rafols I, Börner K (2011) Approaches to understanding and measuring interdisciplinary scientific research (idr): A review of the literature. *Journal of informetrics* 5(1):14–26

- West G (2017) *Scale: The Universal Laws of Growth, Innovation, Sustainability, and the Pace of Life in Organisms, Cities, Economies, and Companies*. Penguin
- Wicherts JM (2016) Peer review quality and transparency of the peer-review process in open access and subscription journals. *PLoS ONE* 11(1):e0147913, DOI 10.1371/journal.pone.0147913
- Zhang L, Janssens F, Liang L, Glänzel W (2010) Journal cross-citation analysis for validation and improvement of journal-based subject classification in bibliometric research. *Scientometrics* 82(3):687–706