



CoGrammar

OOP: Components & Best Practices

**SKILLS
FOR LIFE**

SKILLS BOOTCAMPS



Department
for Education

Software Engineering Lecture Housekeeping

- The use of disrespectful language is prohibited in the questions, this is a supportive, learning environment for all - please engage accordingly.
(FBV: Mutual Respect.)
- No question is daft or silly - **ask them!**
- There are **Q&A sessions** midway and at the end of the session, should you wish to ask any follow-up questions. Moderators are going to be answering questions as the session progresses as well.
- If you have any questions outside of this lecture, or that are not answered during this lecture, please do submit these for upcoming Open Classes.
You can submit these questions here: [Open Class Questions](#)

Software Engineering Lecture Housekeeping cont.


- For all **non-academic questions**, please submit a query: www.hyperiondev.com/support
- Report a **safeguarding** incident: www.hyperiondev.com/safeguardreporting
- We would love your **feedback** on lectures: [Feedback on Lectures](#)

Lecture Objectives

1. Identify common best practices when working with classes and objects and apply these practices to your code.

Classes in OOP

A class is a blueprint or template for creating objects. It defines the attributes and methods that all objects or instances of that class will have.

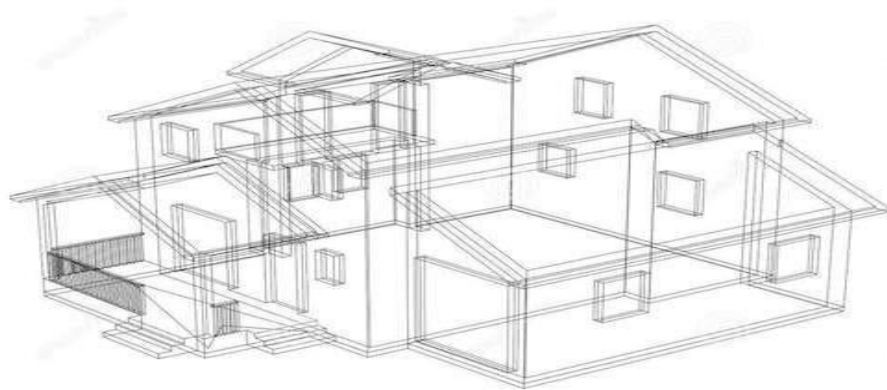


Attributes (Properties)

- Attributes, also known as **properties or data members** are the characteristics associated with an object.
- Attributes define the **state** of an object and provide information about its **current condition**.
- For a class named 'House', some relevant attributes could be:
 - **number of bedrooms**
 - **year built**


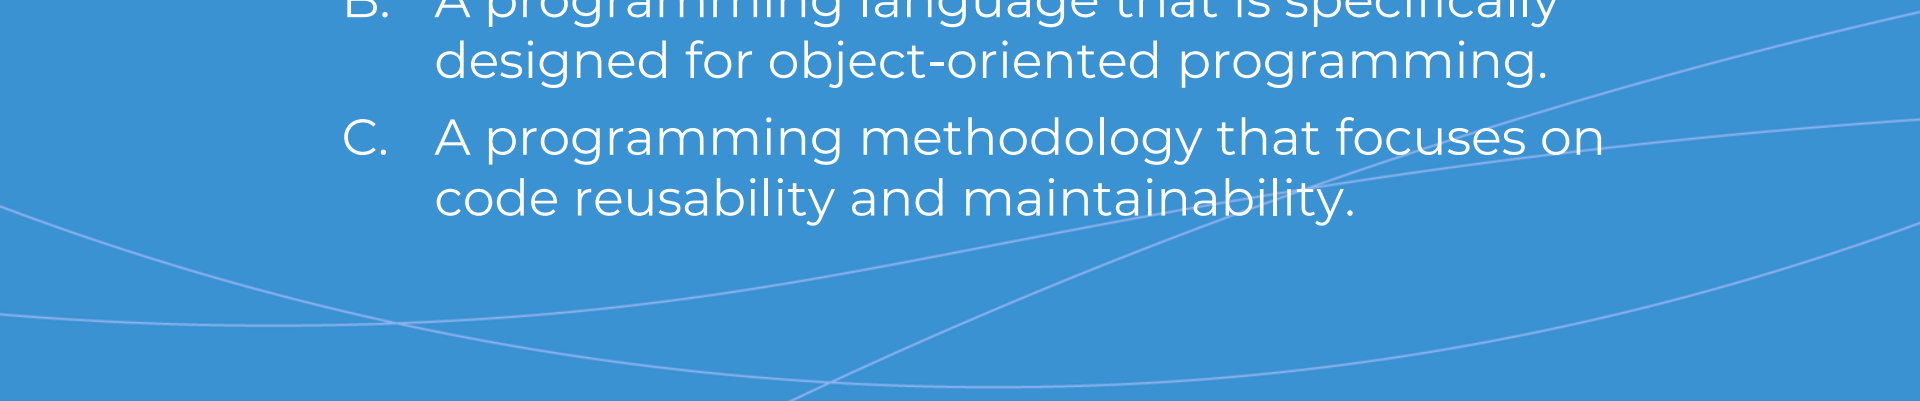
Methods (Behaviours)

- Methods, also known as behaviours, define the actions or behaviours that objects can perform.
- They encapsulate the functionality of objects and allow them to interact with each other and the outside world.
- For a class named 'House', some relevant method could be:
 - `set_location()`: Allows updating the location of the house

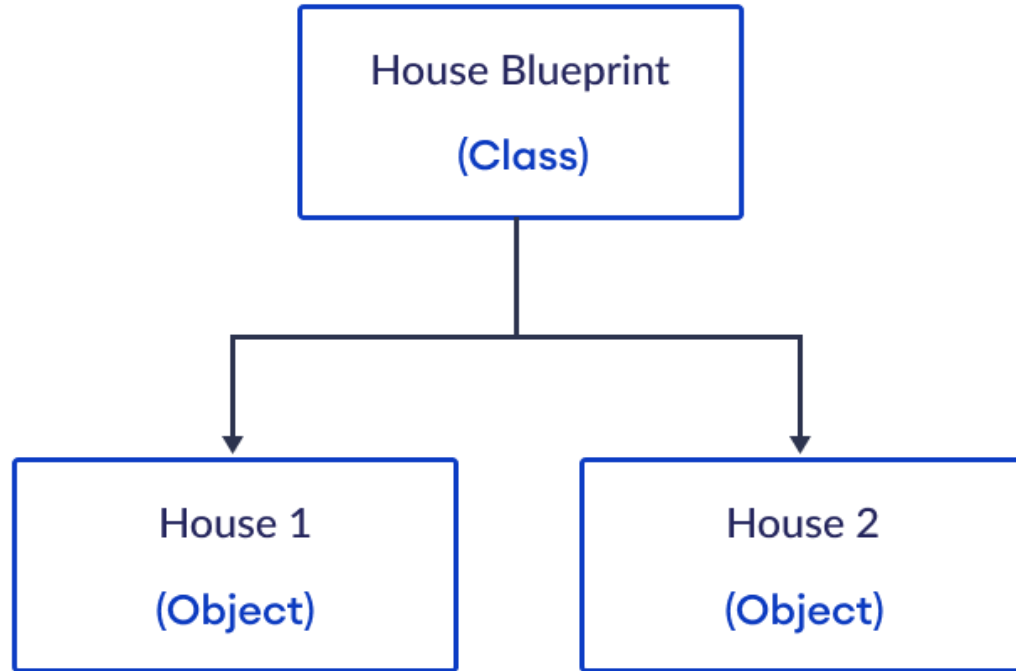


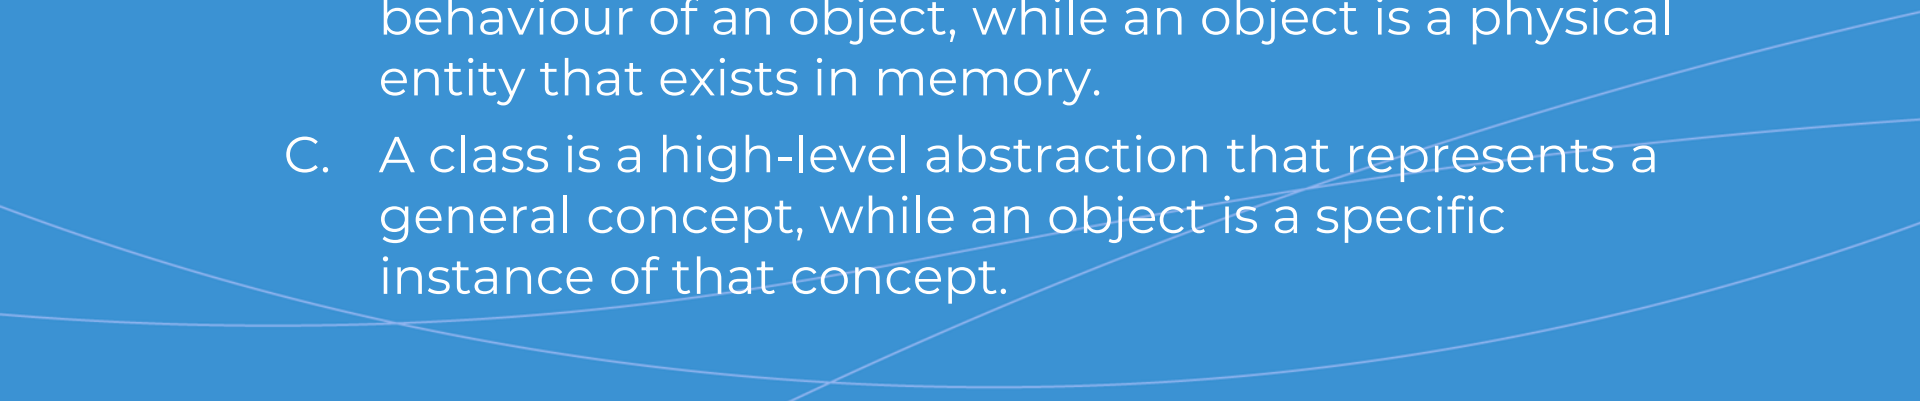


What is object-oriented programming (OOP)?

- 
- A. A programming paradigm that emphasizes creating objects to represent real-world entities.
 - B. A programming language that is specifically designed for object-oriented programming.
 - C. A programming methodology that focuses on code reusability and maintainability.
- 


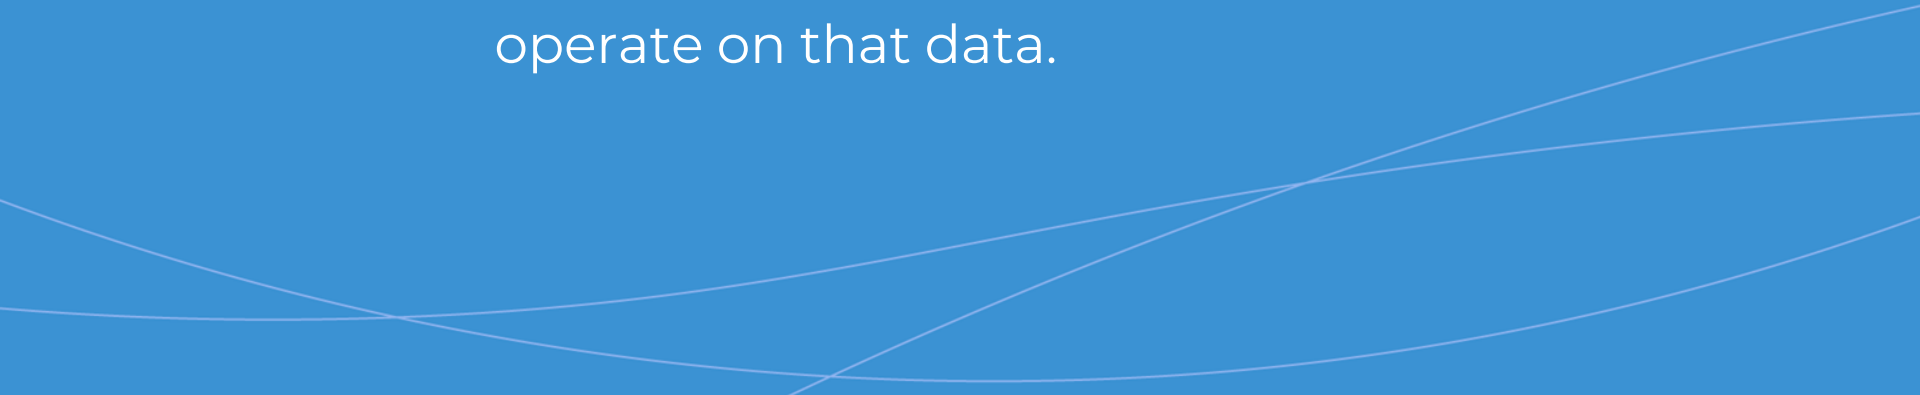


What is the difference between a class and an object?

- 
- A. A class is a blueprint or template for creating objects, while an object is an instance of a class.
 - B. A class is a set of instructions that define the behaviour of an object, while an object is a physical entity that exists in memory.
 - C. A class is a high-level abstraction that represents a general concept, while an object is a specific instance of that concept.
- 



What is an attribute?

- 
- A. A variable within an object that holds data.
 - B. A procedure or function associated with an object that encapsulates data and behaviour.
 - C. A collection of data and the methods that operate on that data.
- 

Best Practices



Naming Convention

- Python classes use the CamelCase naming convention.
- Each word within the class name will start with a capital letter.
- E.g. Student, WeightExercise

```
class Student:
```

```
class WeightExercise:
```

Use Meaningful Names

- Give your classes meaningful and descriptive names.
- Other developers should already have an idea what your class is used for when they read the class name.

Not Good

```
class CNum:
```

Good

```
class ContactNumber:
```

Docstrings

- A form of documenting your classes and methods. Think of these as user manuals for each function.

```
class Pet:
    """
    Represents a virtual pet.

    Attributes:
    - pet_name (str): The name of the pet.
    - pet_type (str): The type or breed of the pet.
    """

    def __init__(self, pet_name: str, pet_type: str) -> None:
        """
        Initialize a Pet object with a name and type.

        Parameters:
        - pet_name (str): The name of the pet.
        - pet_type (str): The type or breed of the pet.

        Returns: None
        """
        self.pet_name = pet_name
        self.pet_type = pet_type
```

Type Annotations

- Type hints make your code more understandable by offering developers to see what types of arguments a class or method expects while giving them an idea of what will be returned.

```
class Pet:
    def __init__(self, pet_name: str, pet_type: str) -> None:
        self.pet_name = pet_name
        self.pet_type = pet_type

    def display_pet(self) -> str:
        return f"{self.pet_name} the {self.pet_type}"
```


Encapsulation

- Encapsulate data within your classes and limit access to the data through methods.
- We want to hide the internal state and implementation of the object from the outside world.
- Access Modifiers
 - **Public:** Attributes and methods used for accessibility from outside the class.
 - **Protected:** Attributes and methods used for accessibility within the class and its subclasses.
 - **Private:** Attributes and methods used for accessibility only within the class itself.

Encapsulation (Continue)

- In python we cannot enforce encapsulation but we can use naming convention to show which properties and attributes should be accessible outside of the class.
- We can add a single underscore at the start of a variable name to signify that it should be protected. E.g. `_name` or `_grades`
- We can add 2 underscores at the start of a variable name to signify that it should be private. E.g. `__name` or `__grades`

Encapsulation

- We can now add getter and setter methods to our class to control access to data.

```
class Student:

    def __init__(self, name):
        self.__name = name

    def name(self):
        return self.__name

    def set_name(self, name):
        self.__name = name
```

Single Responsibility

- Make sure your classes represent a single idea.
- If we have a person class that can have a pet, we won't add all the pet attributes to the person class. We will rather create a new class.

```
class Person:  
  
    def __init__(self, name, surname, pet_name, pet_type):  
        self.name = name  
        self.surname = surname  
        self.pet_name = pet_name  
        self.pet_type = pet_type
```

Single Responsibility

```
class Person:
    def __init__(self, name, surname):
        self.name = name
        self.surname = surname

class Pet:
    def __init__(self, name, type):
        self.name = name
        self.type = type
```



Challenge:



Explain the scope and purpose of instance variables in OOP?



Wrapping Up

Classes

A class is a blueprint for creating objects. Objects are instances of a class, and they encapsulate attributes and the methods that operate on those attributes.

Attributes and Methods of a Class

Attributes are variables that store data within a class or an object. Methods are functions within a class that operate on its data.

Progression Criteria

✓ Criterion 1: Initial Requirements

- Complete 15 hours of Guided Learning Hours and the first four tasks within two weeks.

✓ Criterion 2: Mid-Course Progress

- Software Engineering: Finish 14 tasks by week 8.
- Data Science: Finish 13 tasks by week 8.

✓ Criterion 3: Post-Course Progress

HyperionDev.com

- Complete all mandatory tasks by 24th March 2024.
- Record an Invitation to Interview within 4 weeks of course completion, or by 30th March 2024.
- Achieve 112 GLH by 24th March 2024.

✓ Criterion 4: Employability

- Record a Final Job Outcome within 12 weeks of graduation, or by 23rd September 2024.

CoGrammar

Questions around classes



CoGrammar

Thank you for joining