
How the app starts up


A person runs the Mac launcher, which starts the database, picks a local speech service, and brings up the app so the page opens in a browser.

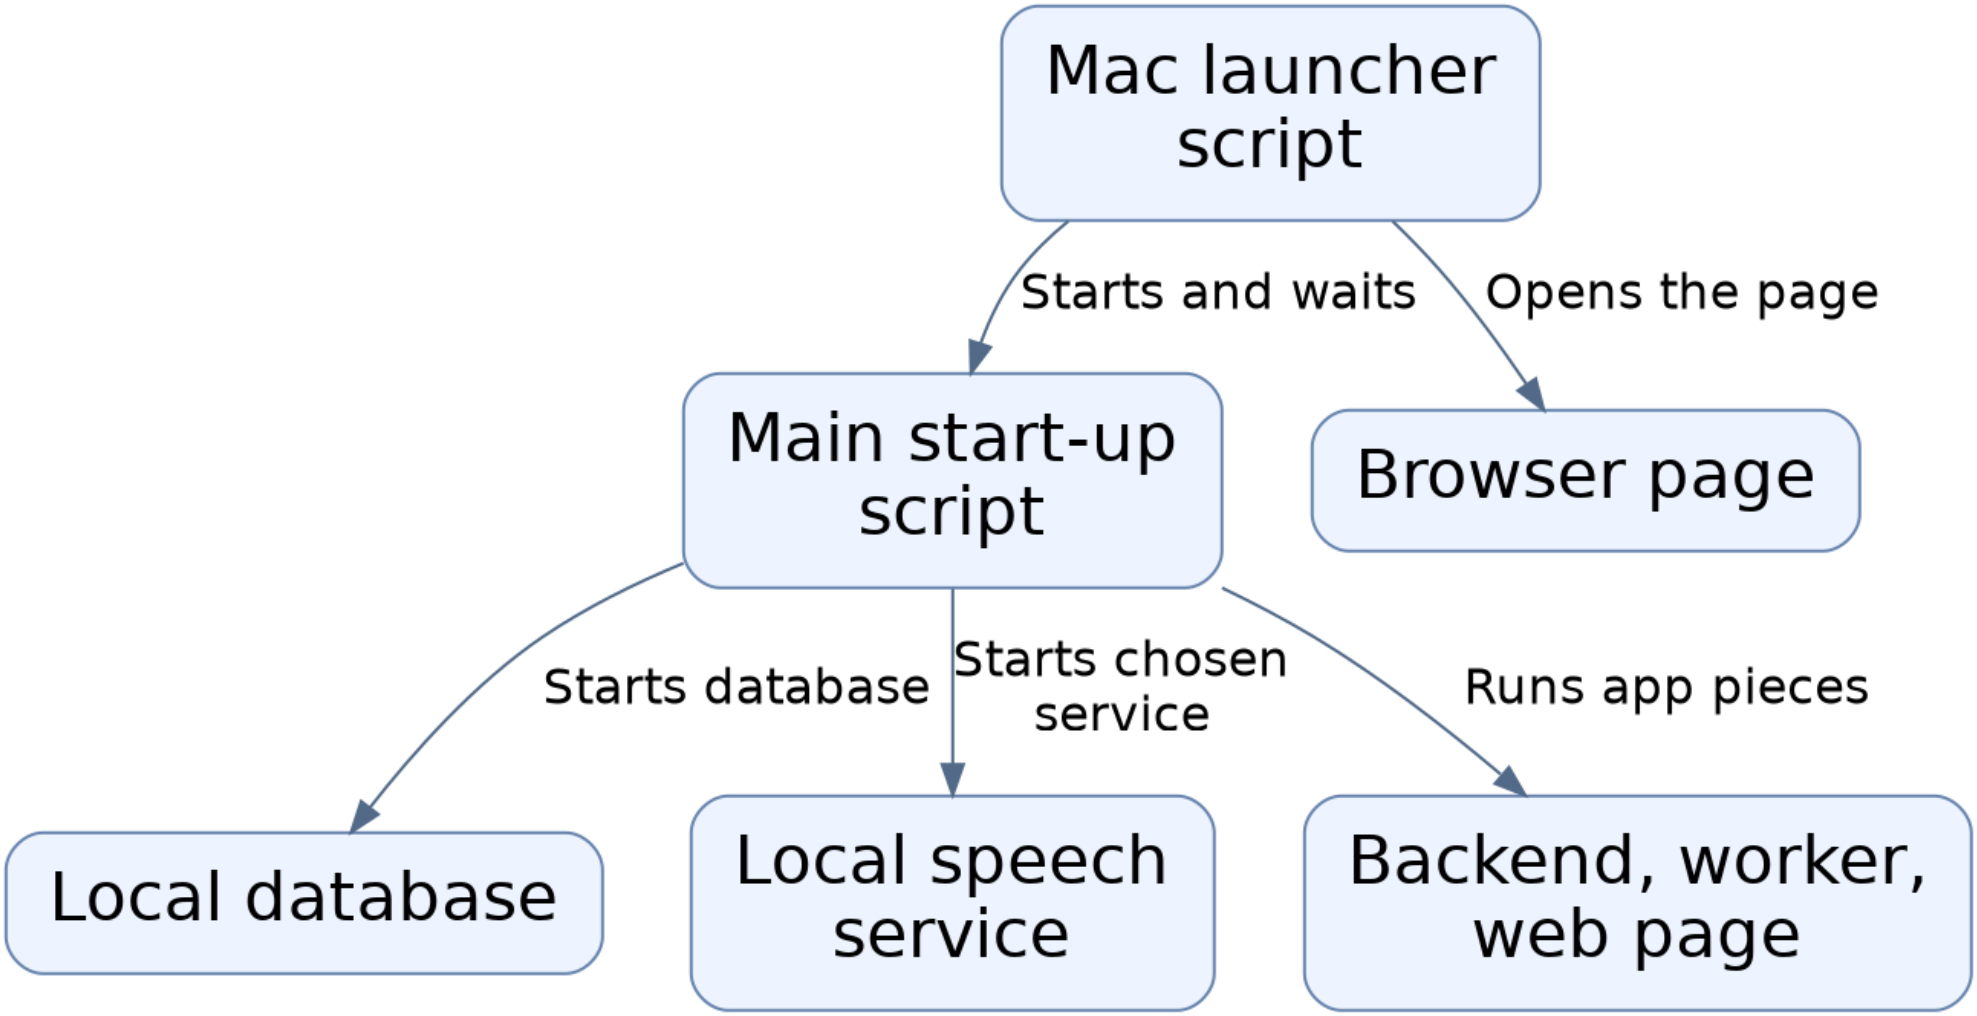

Read from top to bottom. Arrows show the direction of the interaction.

How the app is shut down


A stop script checks recorded process identities, kills the start-up process tree and local speech services, then takes the database down while keeping saved classes.

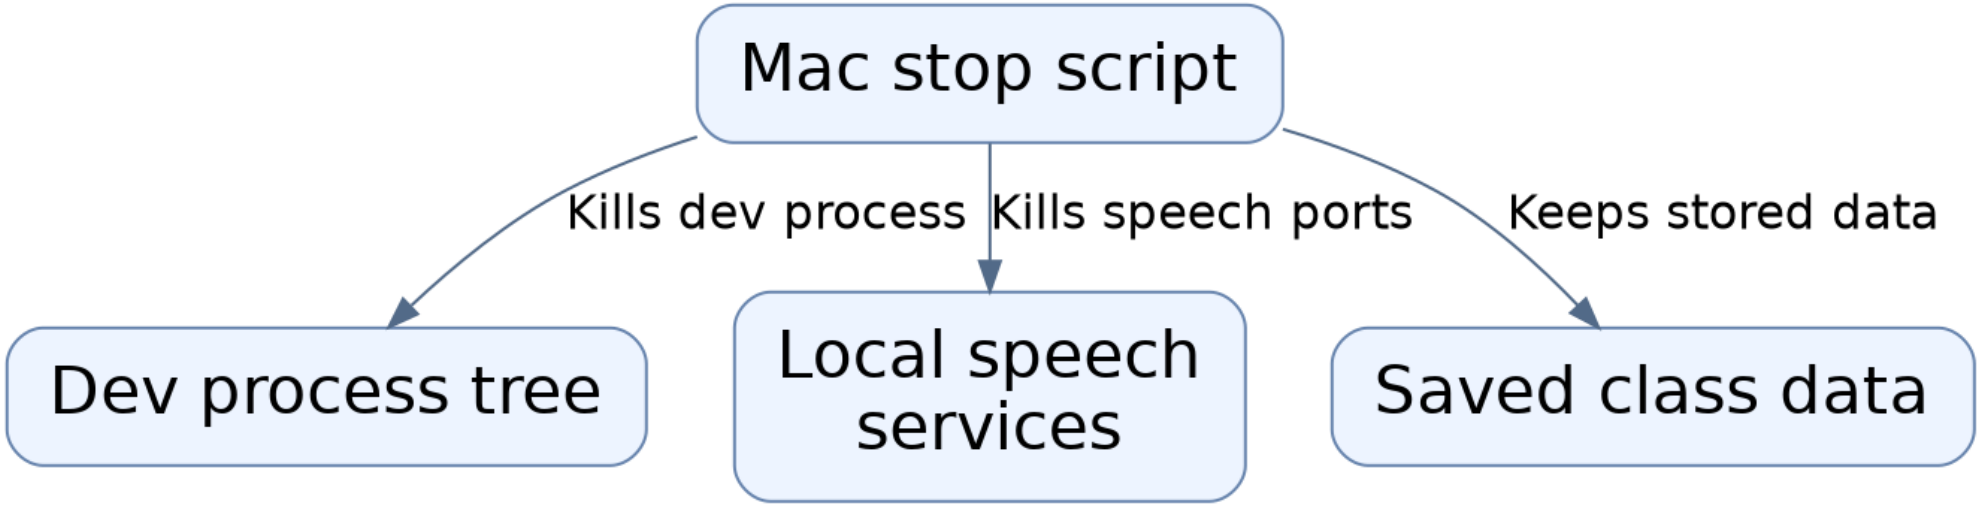

Read from top to bottom. Arrows show the direction of the interaction.

How a transcription request is served locally


A local transcription request is checked for the fixed key, model match, and size, then audio is decoded and run through the speech model on one dedicated thread.

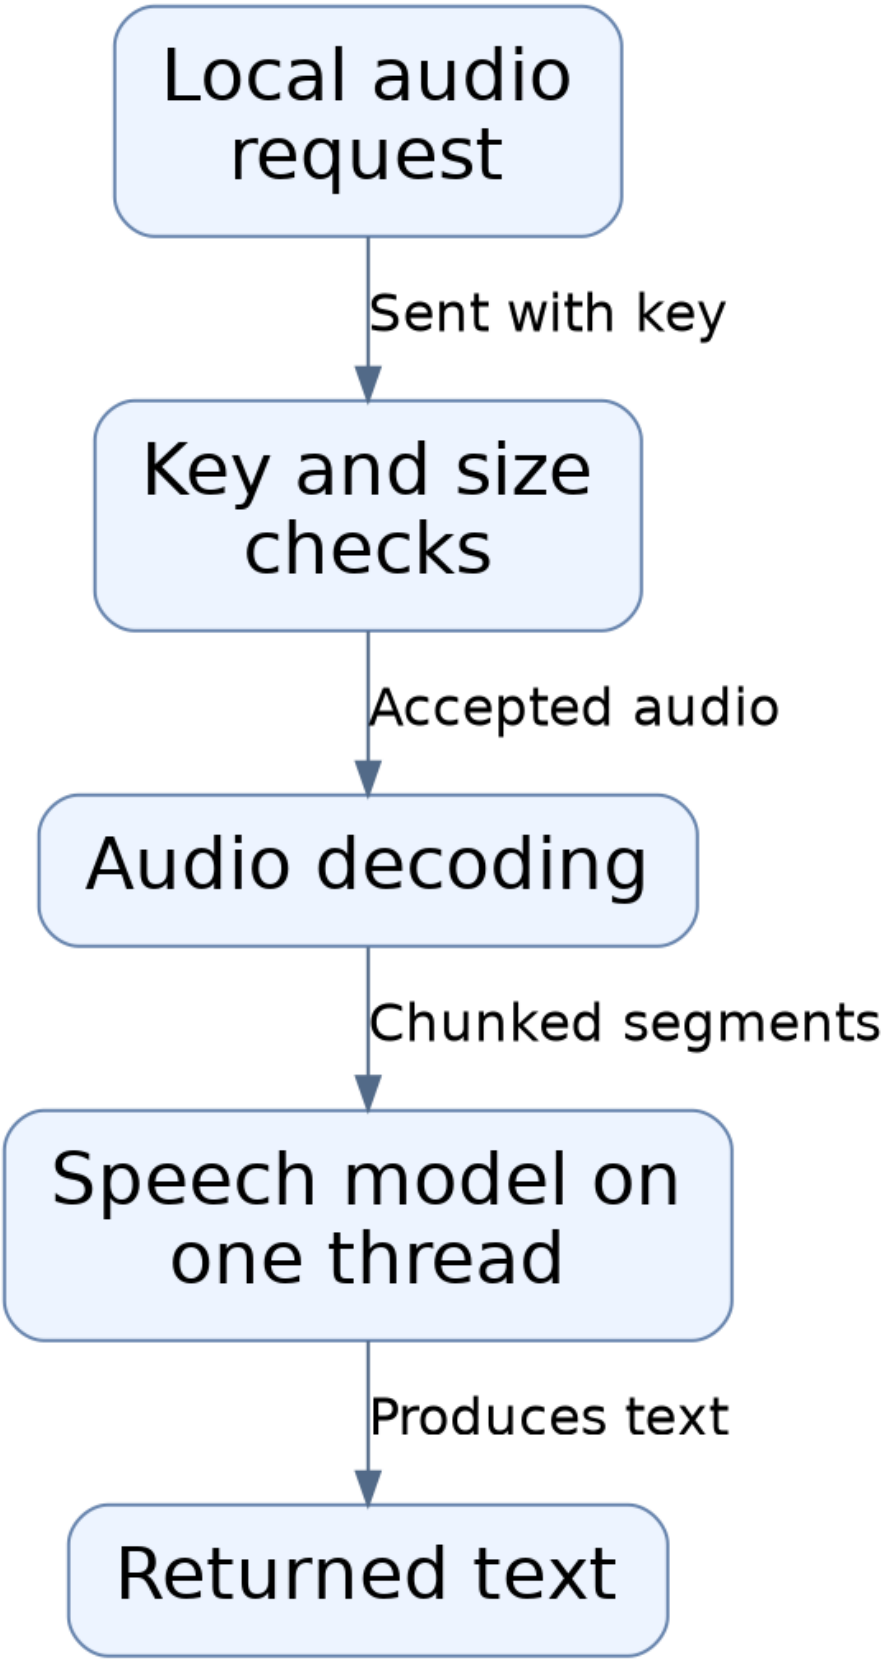

Read from top to bottom. Arrows show the direction of the interaction.

What the automated checks do

Continuous integration checks the backend against a test database, applies and verifies database migrations, builds the server image, and separately installs, checks, and builds the web page.

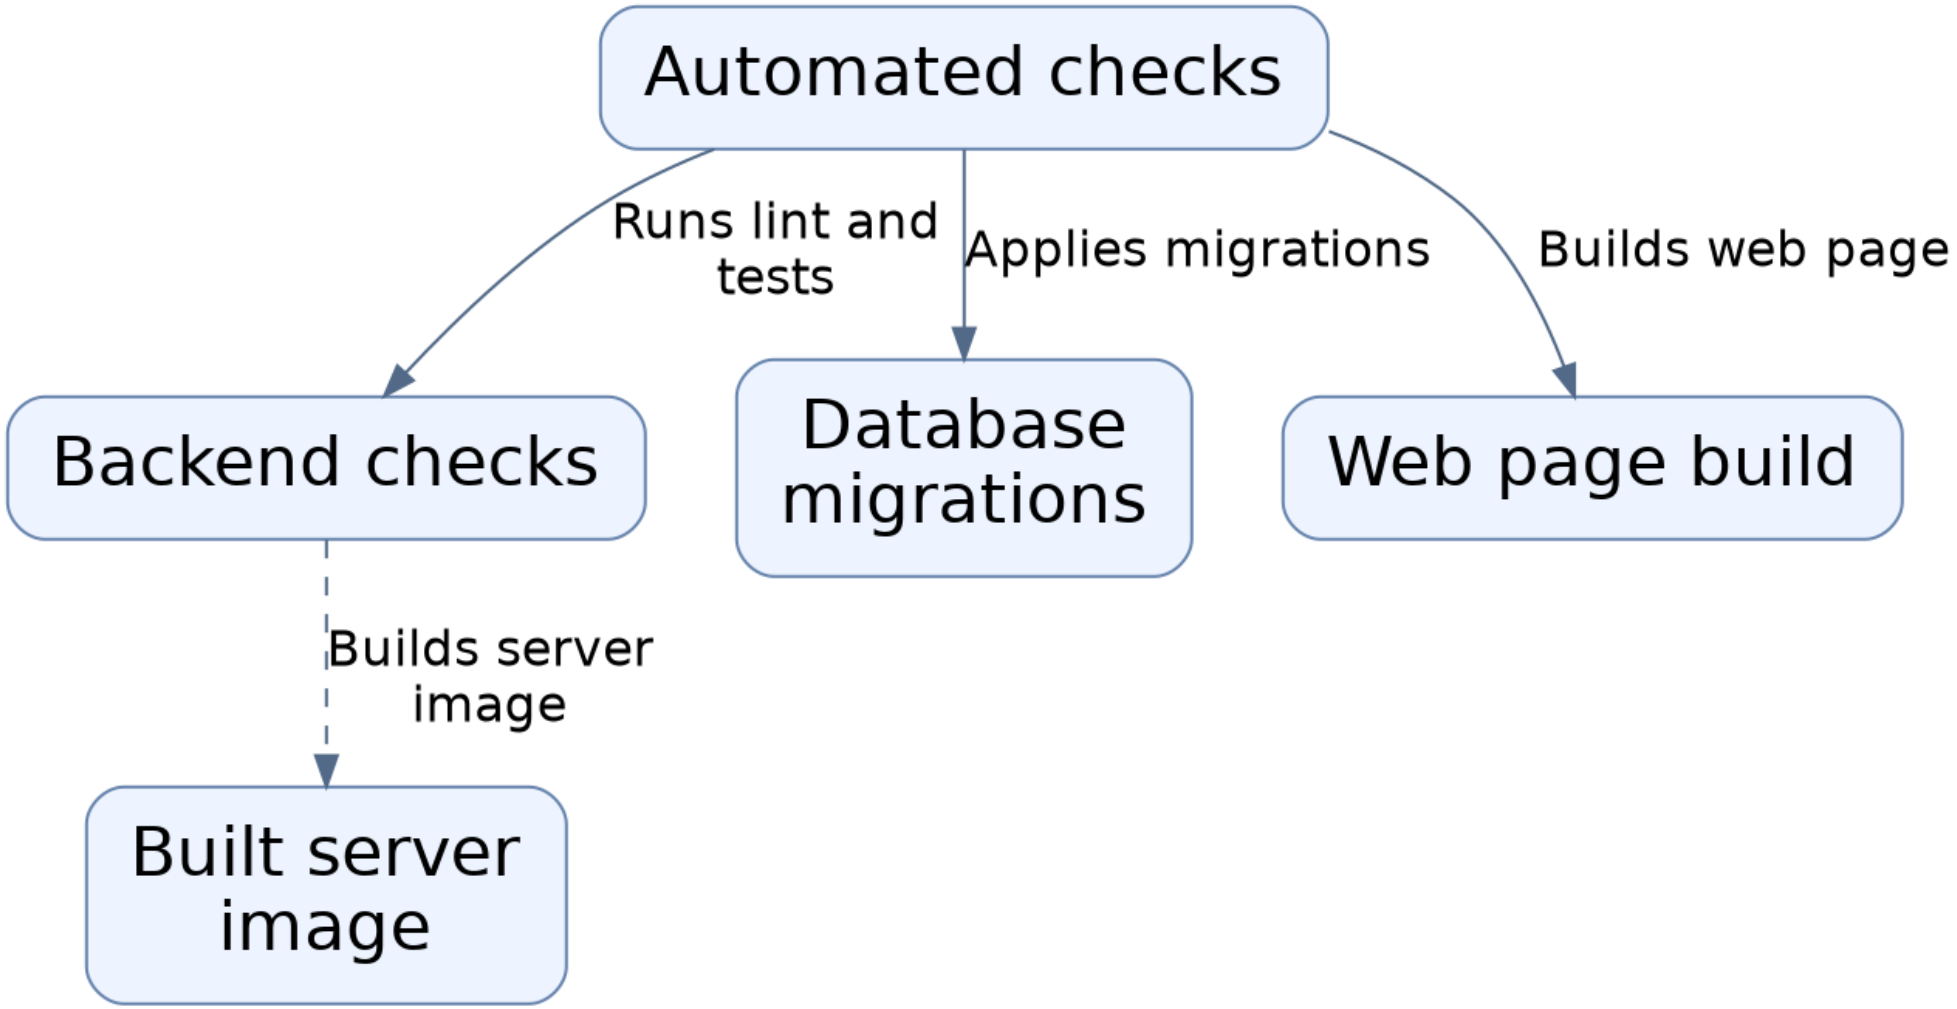

Dashed arrows: connections that need confirmation.