
How a recording becomes meeting notes


A background worker process loops continuously, claiming one queued job at a time, transcribing and then summarizing it, and saving the outcome.

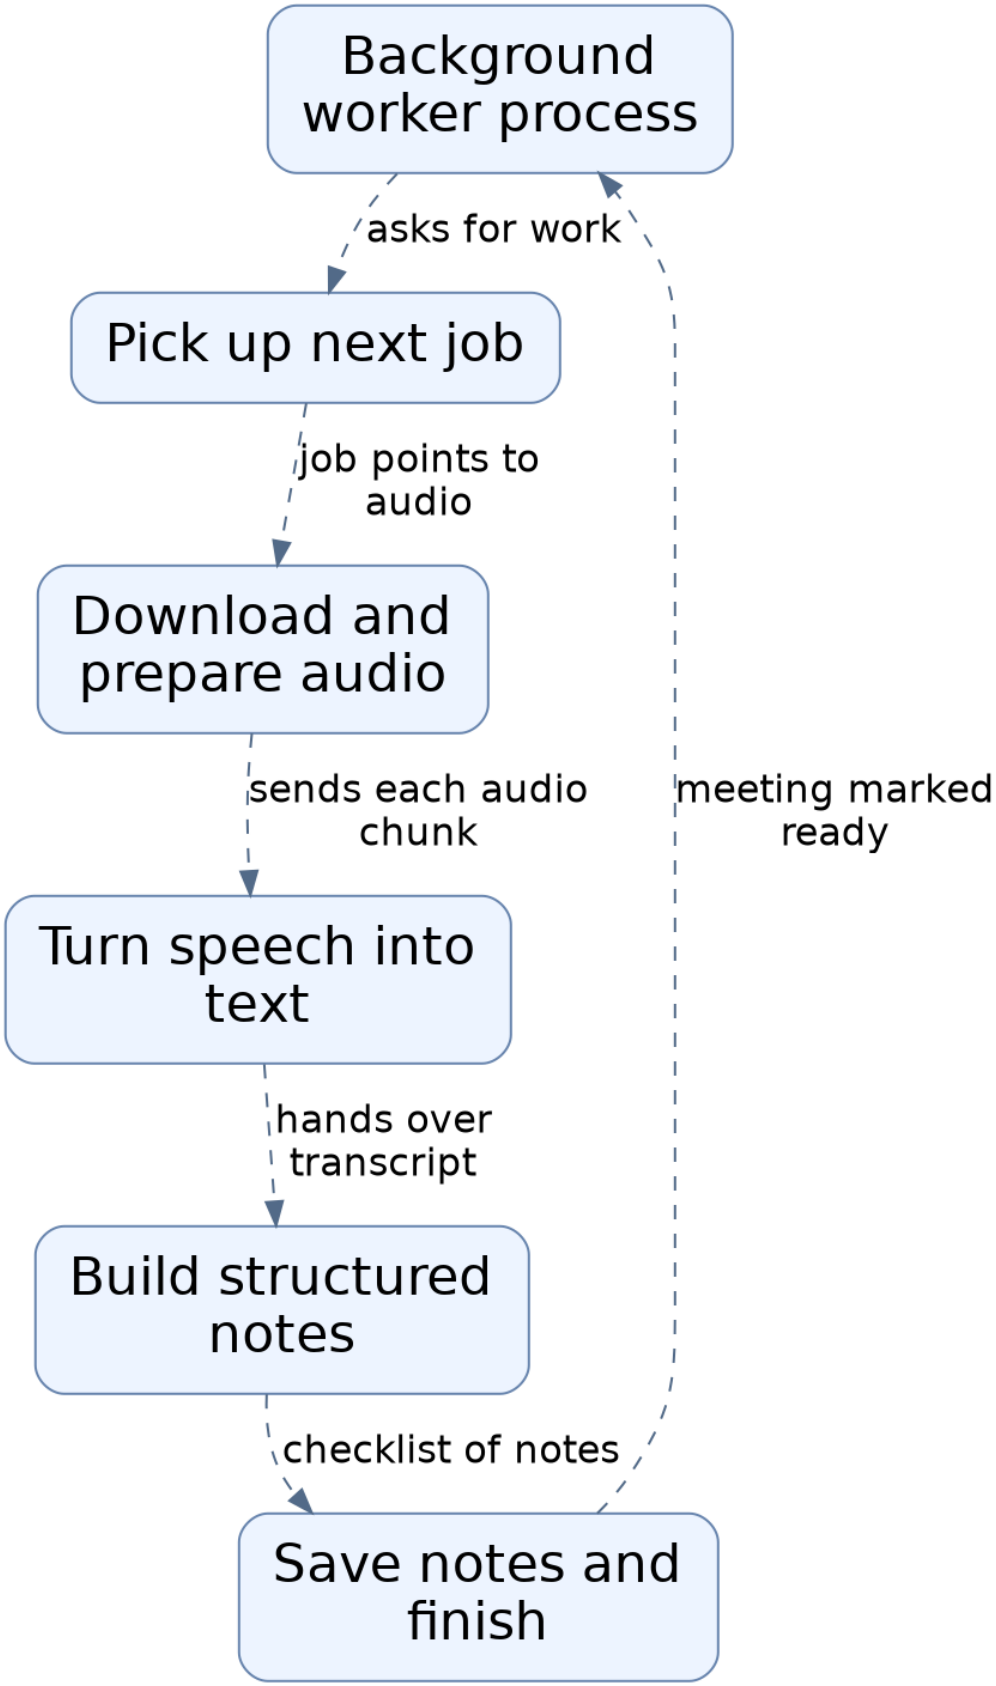

Dashed arrows: connections that need confirmation.

Keeping the job safe while it runs


Shows how the worker holds onto a claimed job, renews its lease, checks the job is still valid mid-summarization, and copies queued transcripts back onto TranscriptSegment rows so retries are safe.

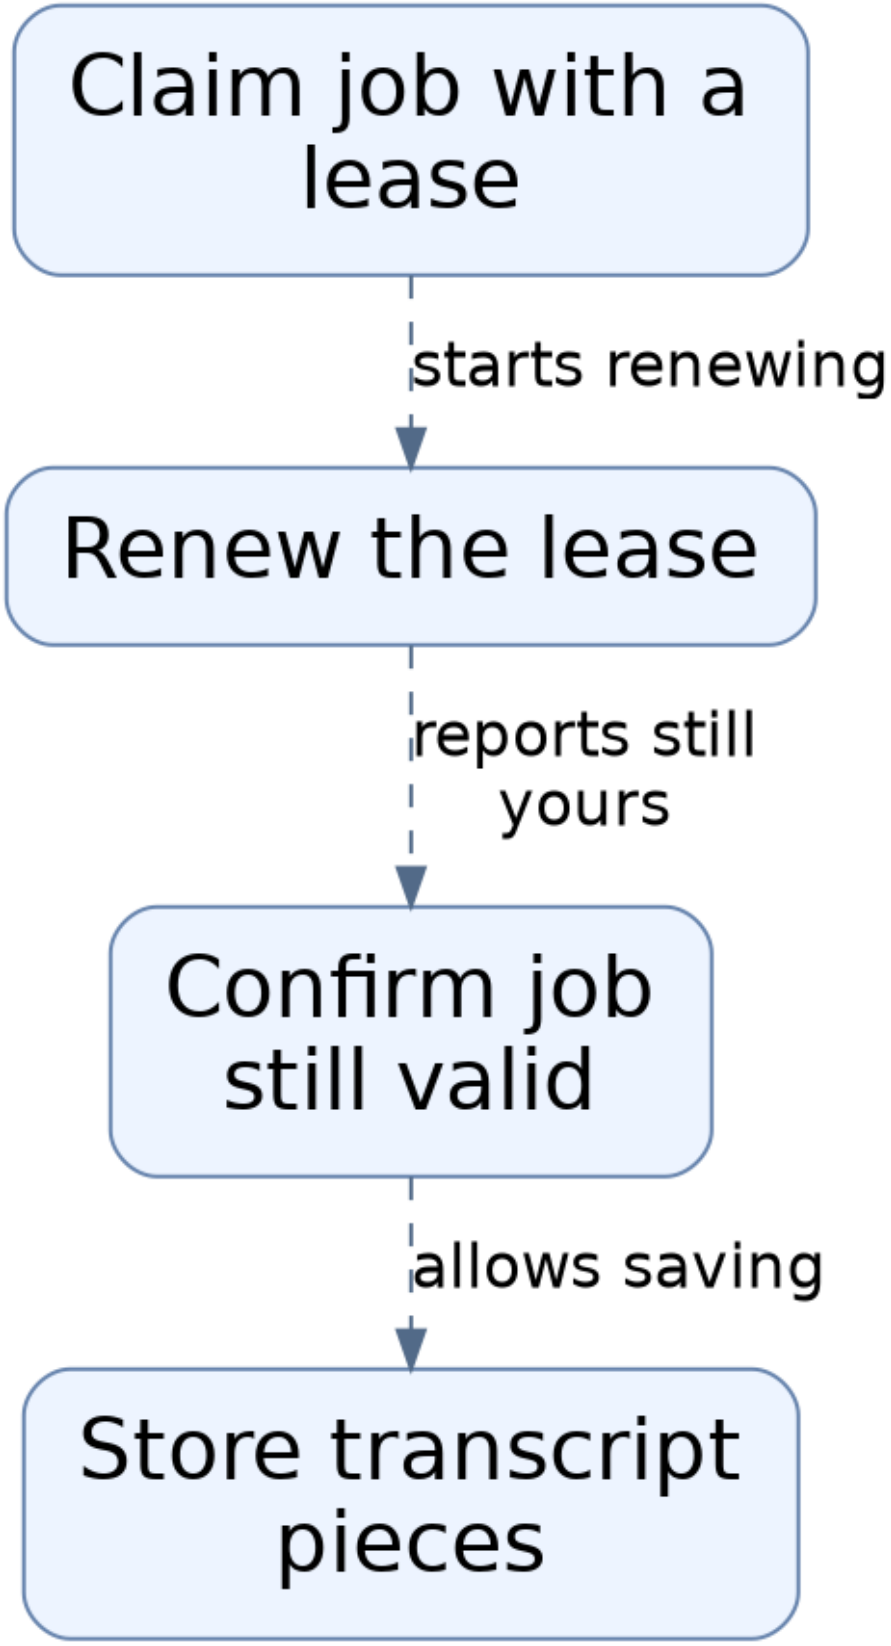

Dashed arrows: connections that need confirmation.

What happens when a job fails


Failures are classified as temporary or permanent. Temporary ones wait and retry with growing delays; permanent ones mark both the job and the meeting as failed.

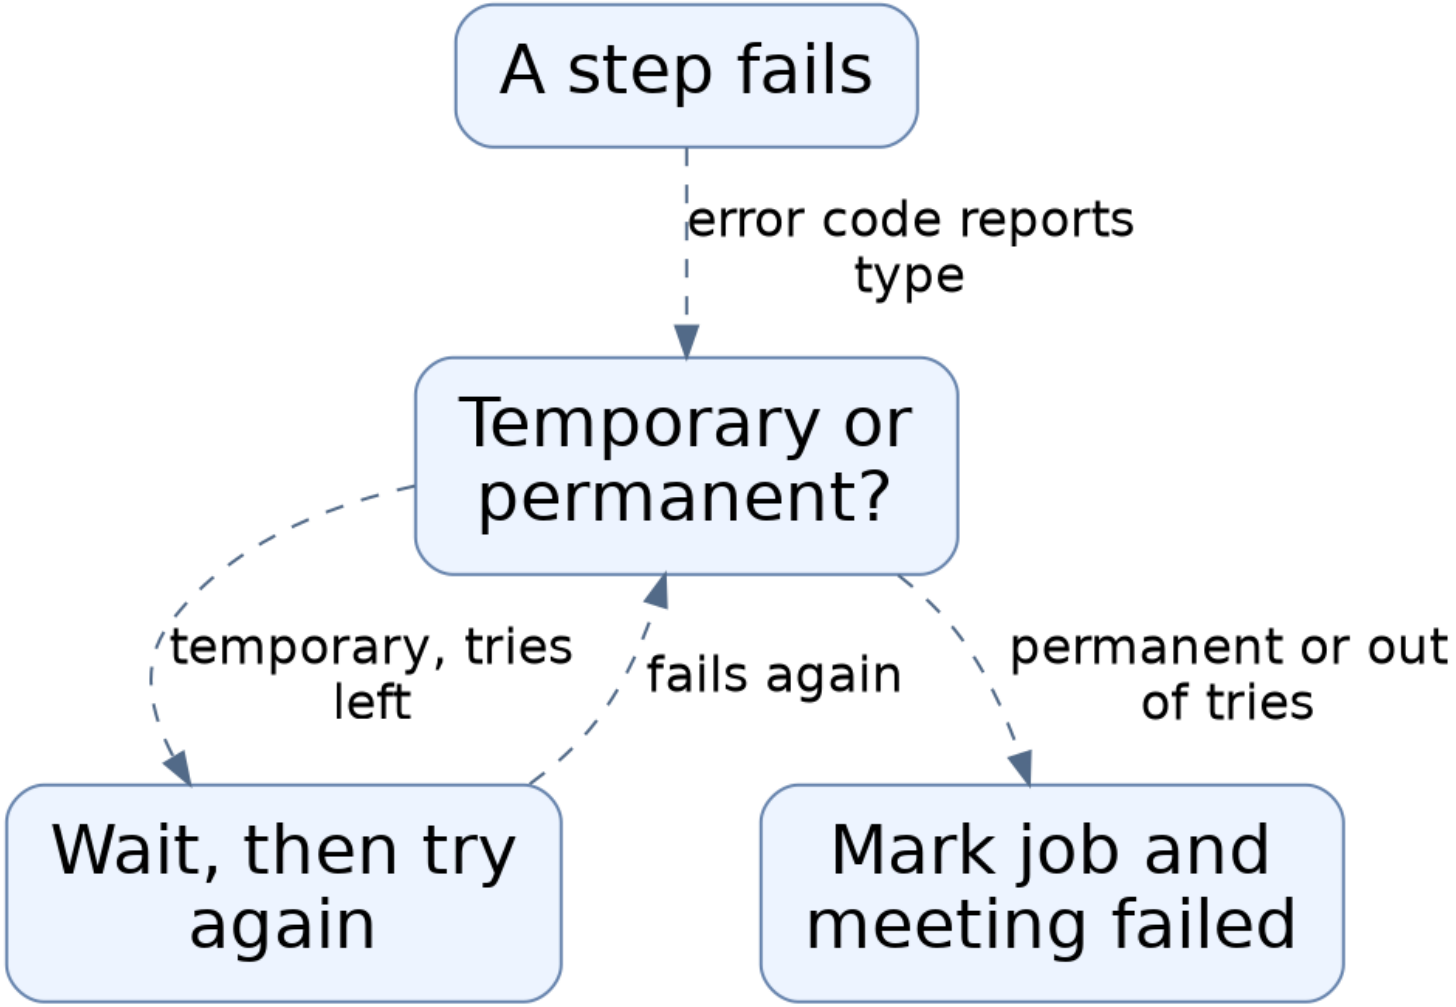

Dashed arrows: connections that need confirmation.

Hourly housekeeping


Every hour the same worker separately runs maintenance: expires abandoned uploads, deletes soft-deleted meetings and their stored objects, purges audio past its retention date, and clears orphaned files.

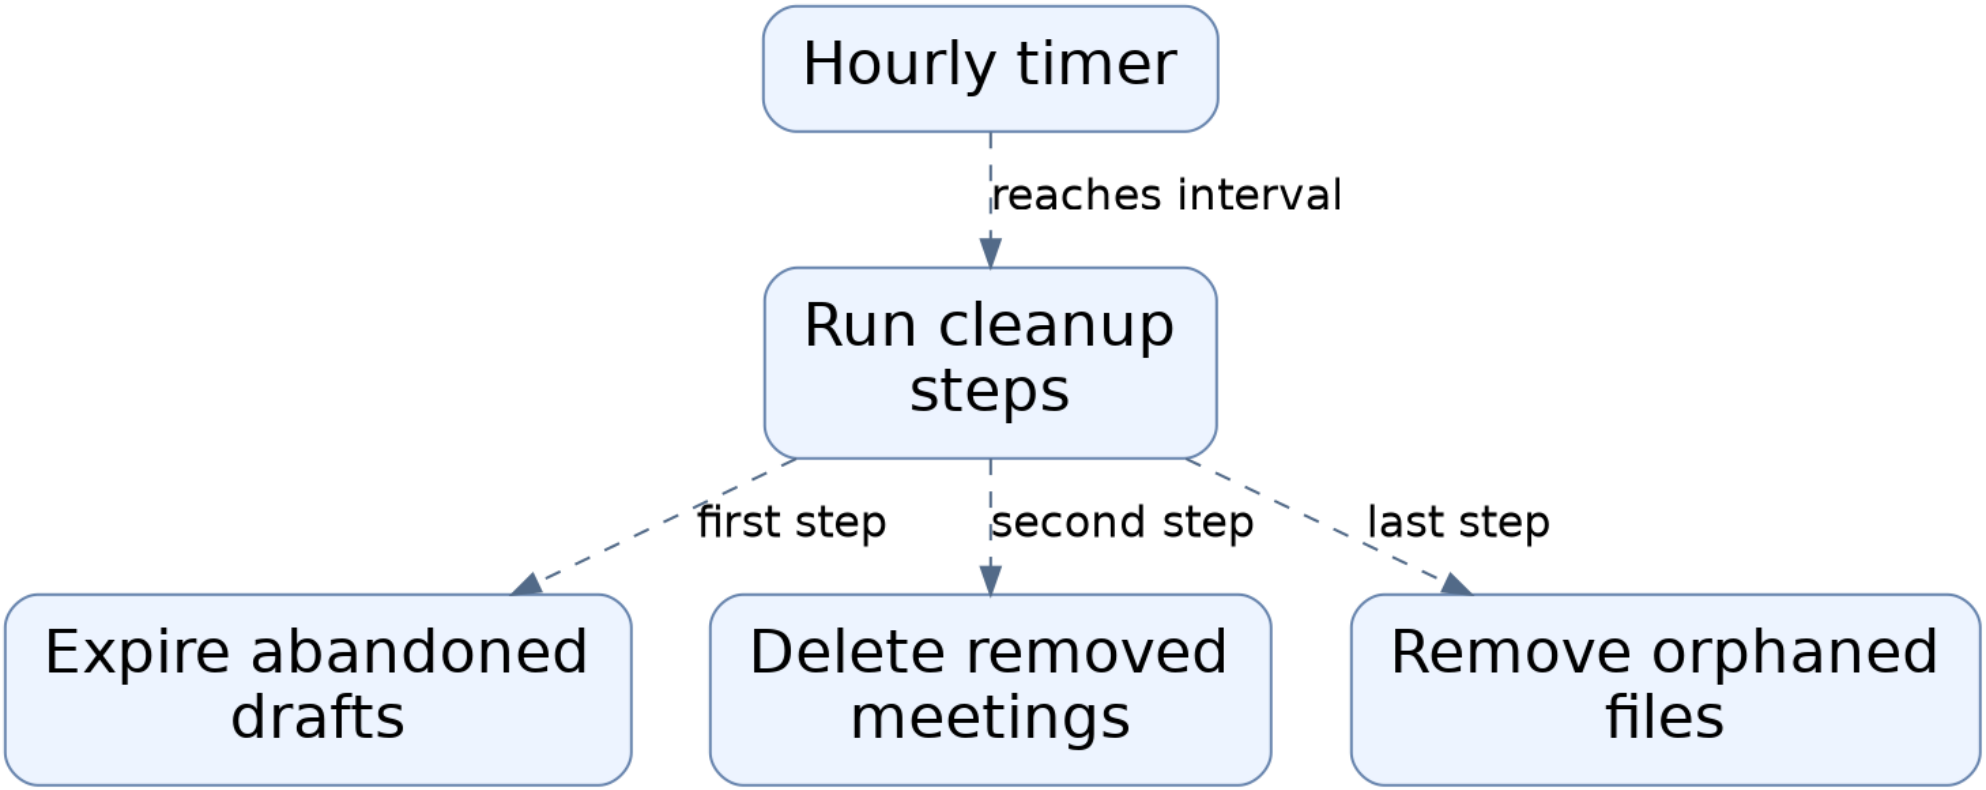

Dashed arrows: connections that need confirmation.

Rejecting bad or oversized uploads


Before any job is queued, an upload is inspected: its claimed type must match the file's actual bytes, it must contain audio and no video, and it must fit the duration limit.

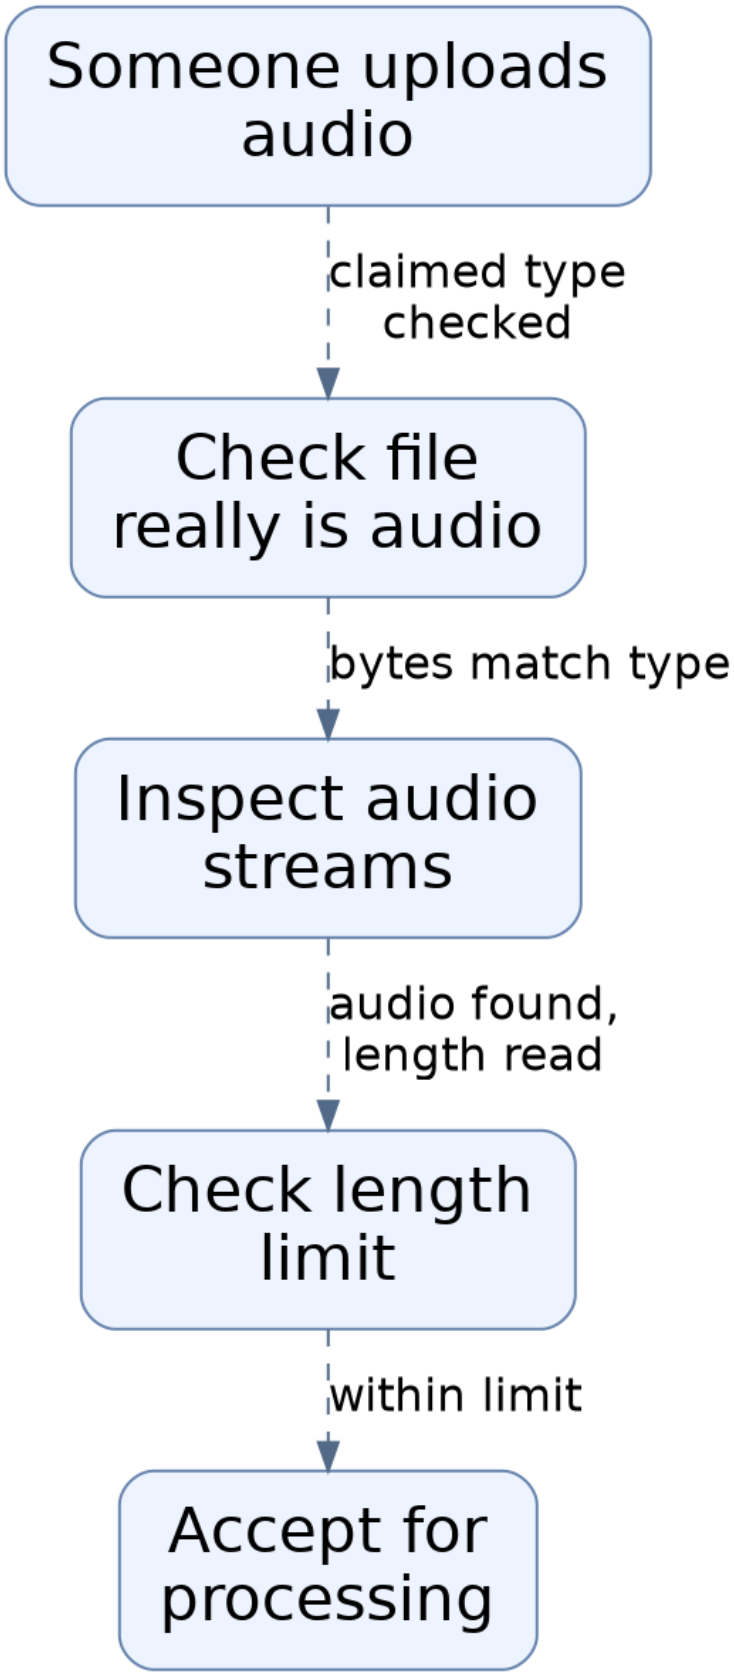

Dashed arrows: connections that need confirmation.

Keeping audio local with the Cohere option

When configured for the local Cohere option, a separate helper process runs on the same machine, bound to 127.0.0.1, and transcribes audio that is temporarily written to a private temp folder and deleted afterwards.

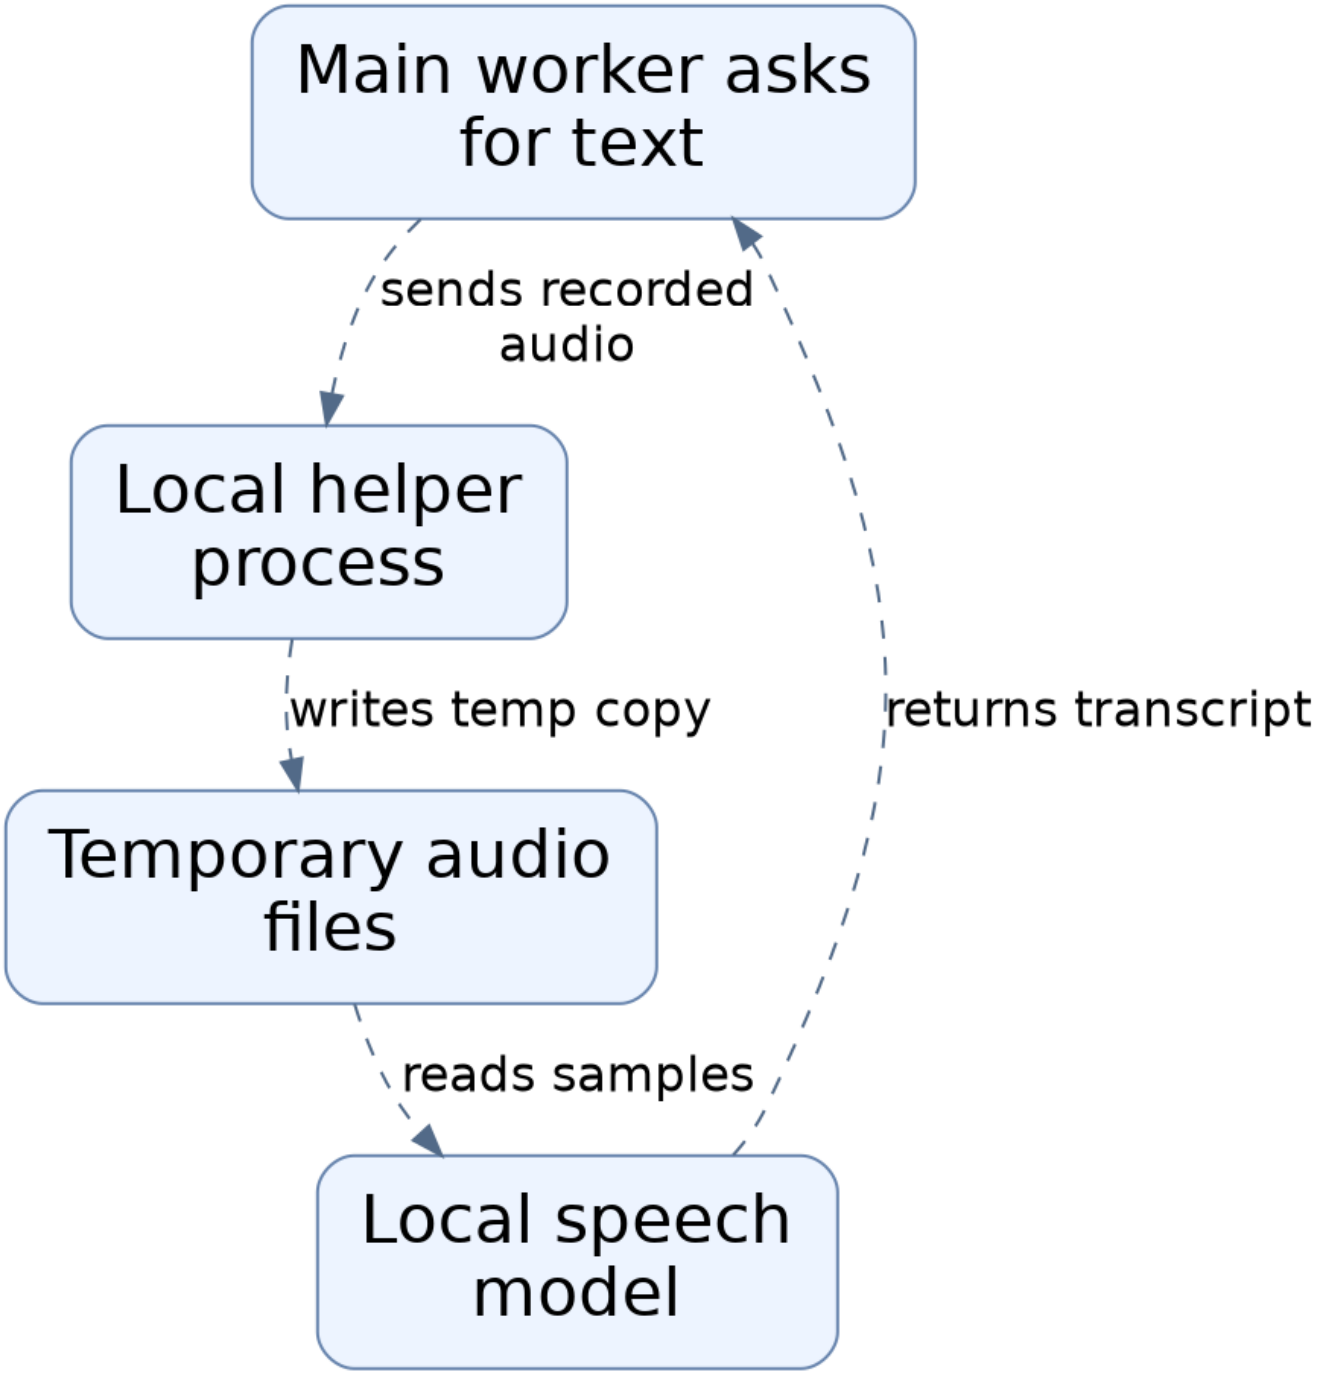

Dashed arrows: connections that need confirmation.