
Architecture

Application-owned protocols define the boundary; the opt-in Cohere adapter and the deterministic fake both implement GenerationProvider. The configured factory gates live generation on credentials, but caller wiring is not evidenced.



Generation request lifecycle

A validated request becomes a non-streaming chat with a hard timeout and SDK retries disabled; the response is strictly re-validated into a result or mapped to a sanitized ProviderError.

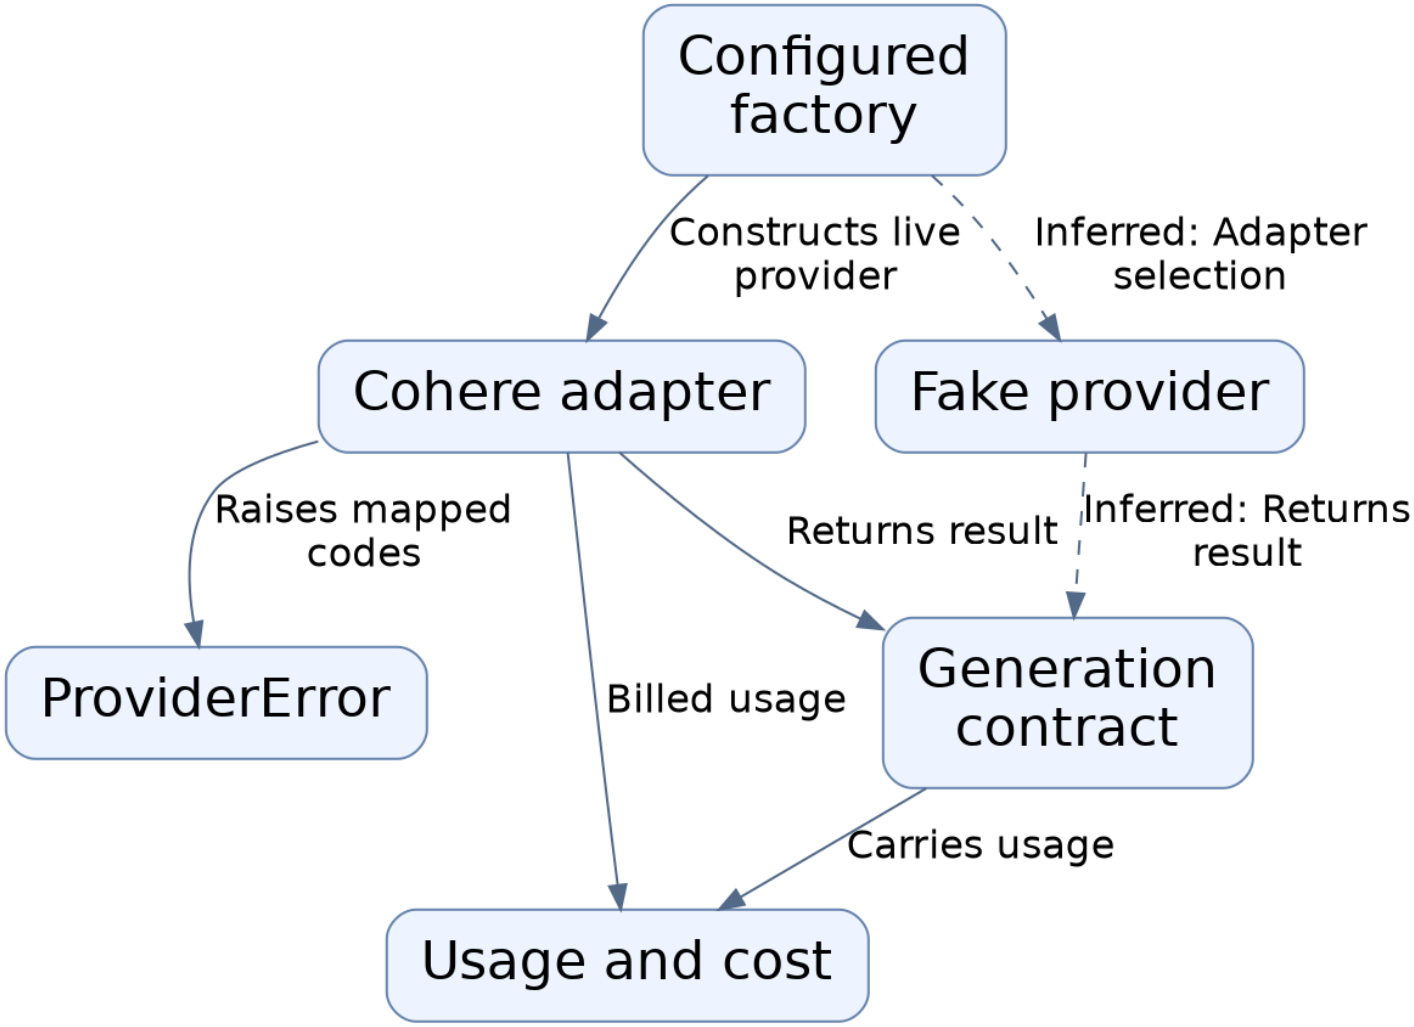