

Architecture

The FastAPI app reads shared Settings and mounts health and evaluation routes; the same Settings feeds schema management and dependency probes. Makefile, Compose, and CI form the orchestration boundary around app, schema, and tests.

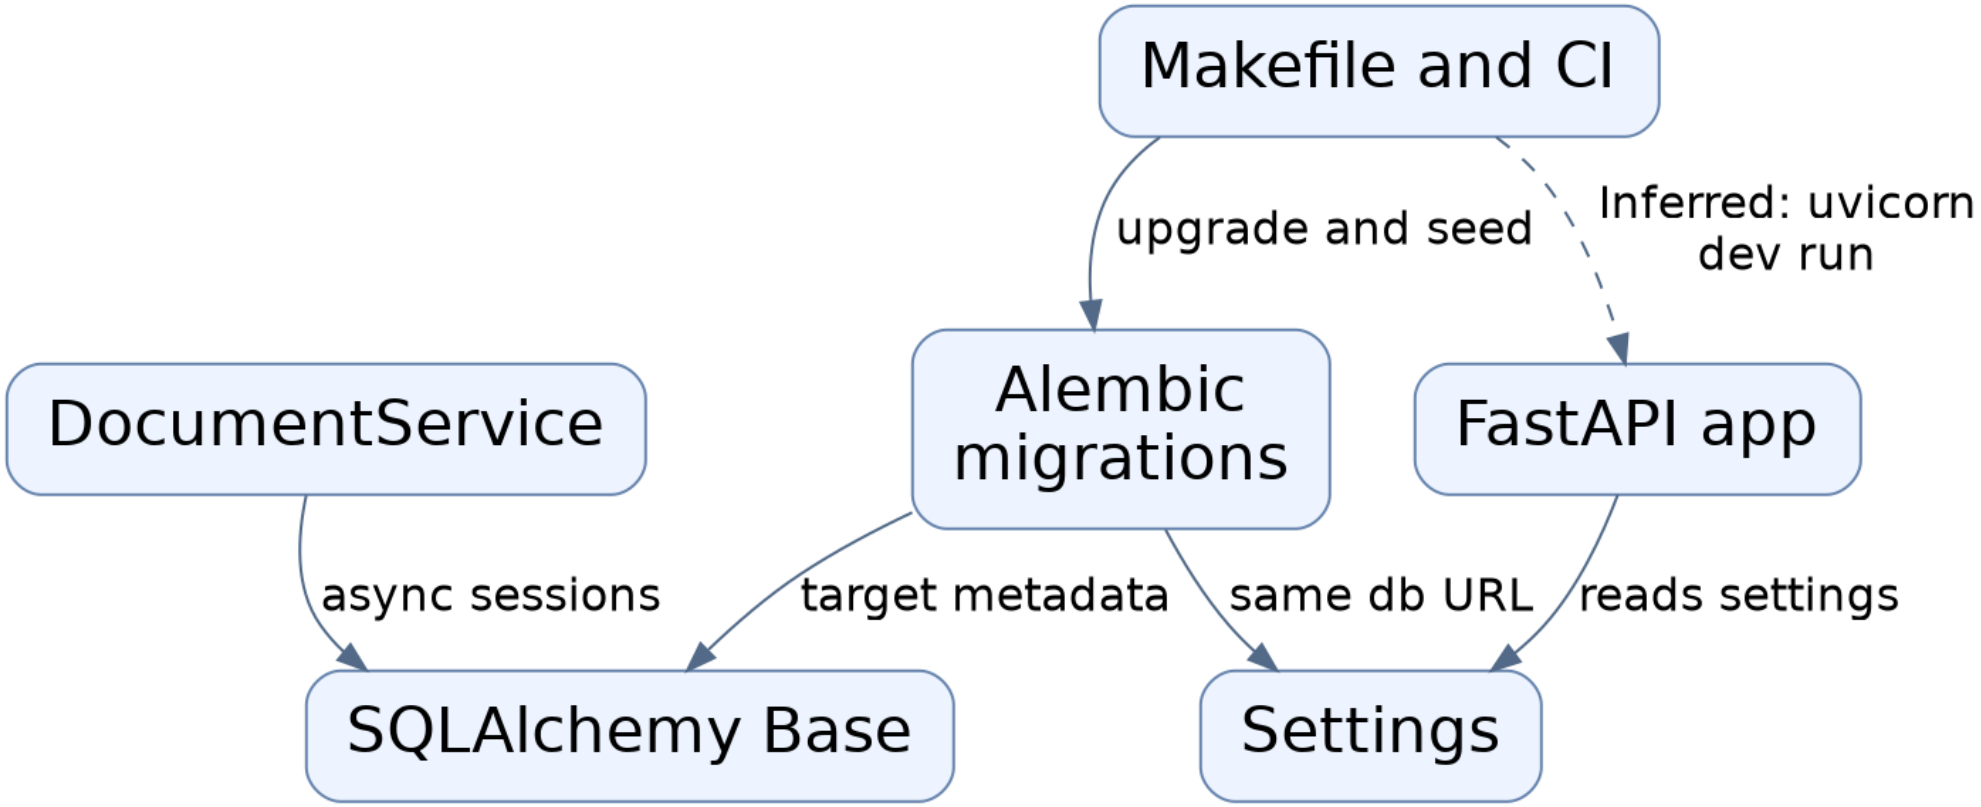


Tenancy and persistence

Tenant ownership is structural: composite tenant-scoped foreign keys and uniqueness let PostgreSQL reject cross-tenant references, while immutability triggers and status checks push lifecycle invariants out of application code.

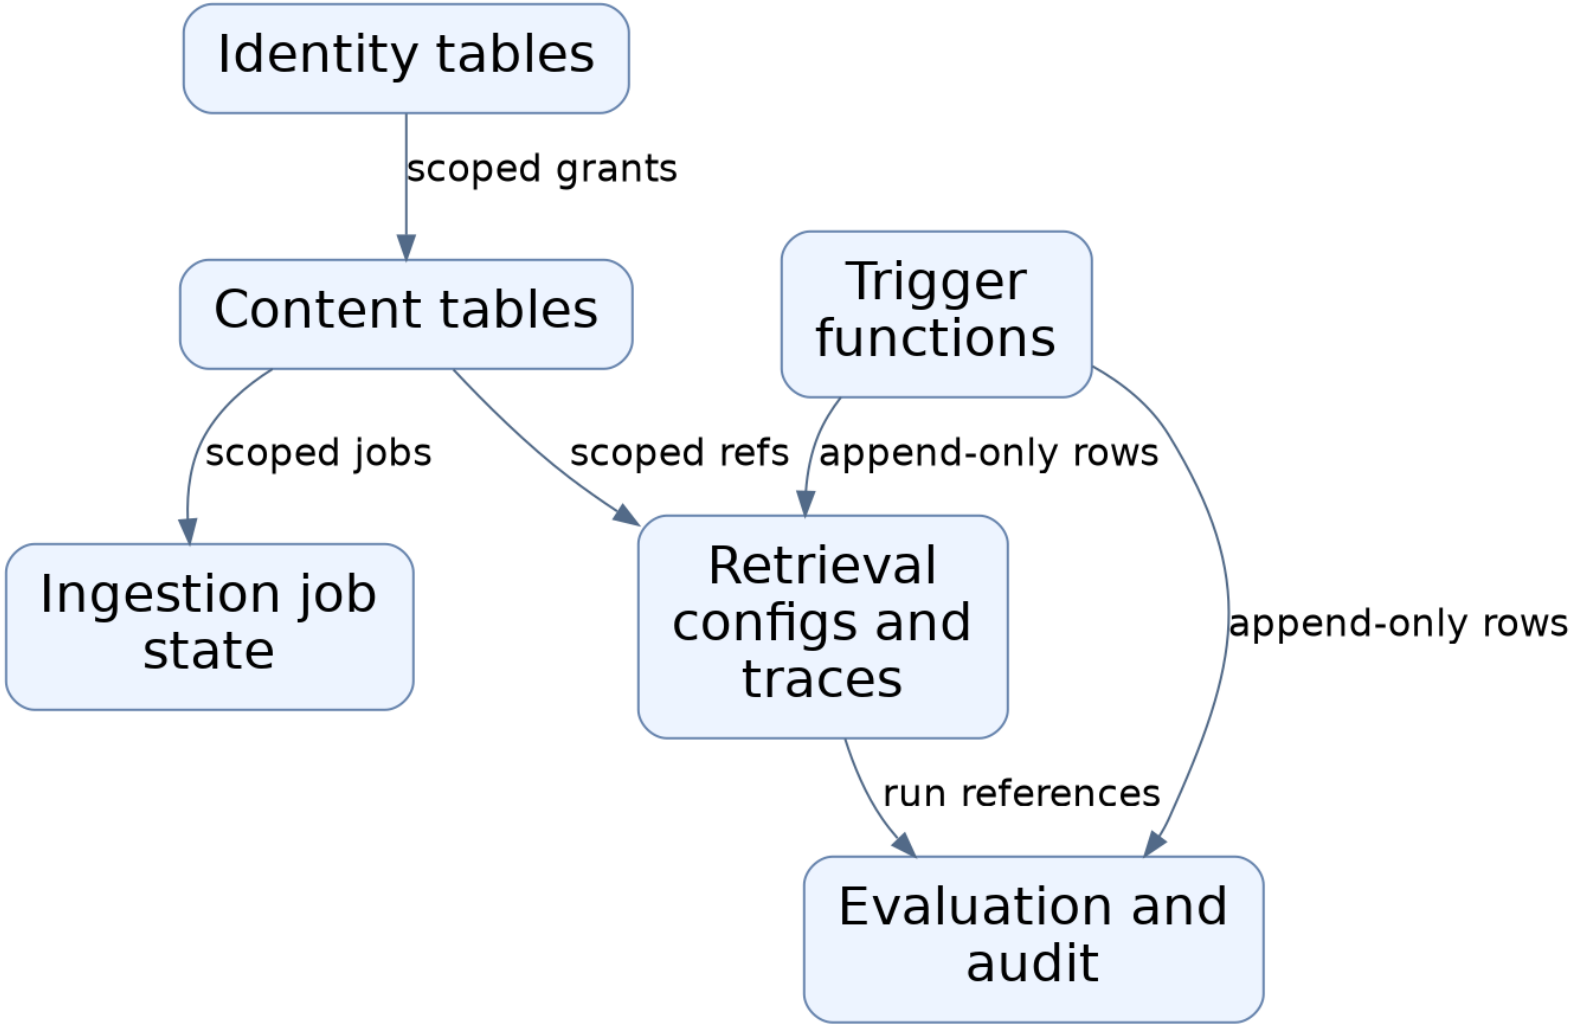


Health and dependency probing

Liveness is a static response; readiness fans out concurrent probes against configured external dependencies and returns 503 when any probe reports false, isolating partial failure.

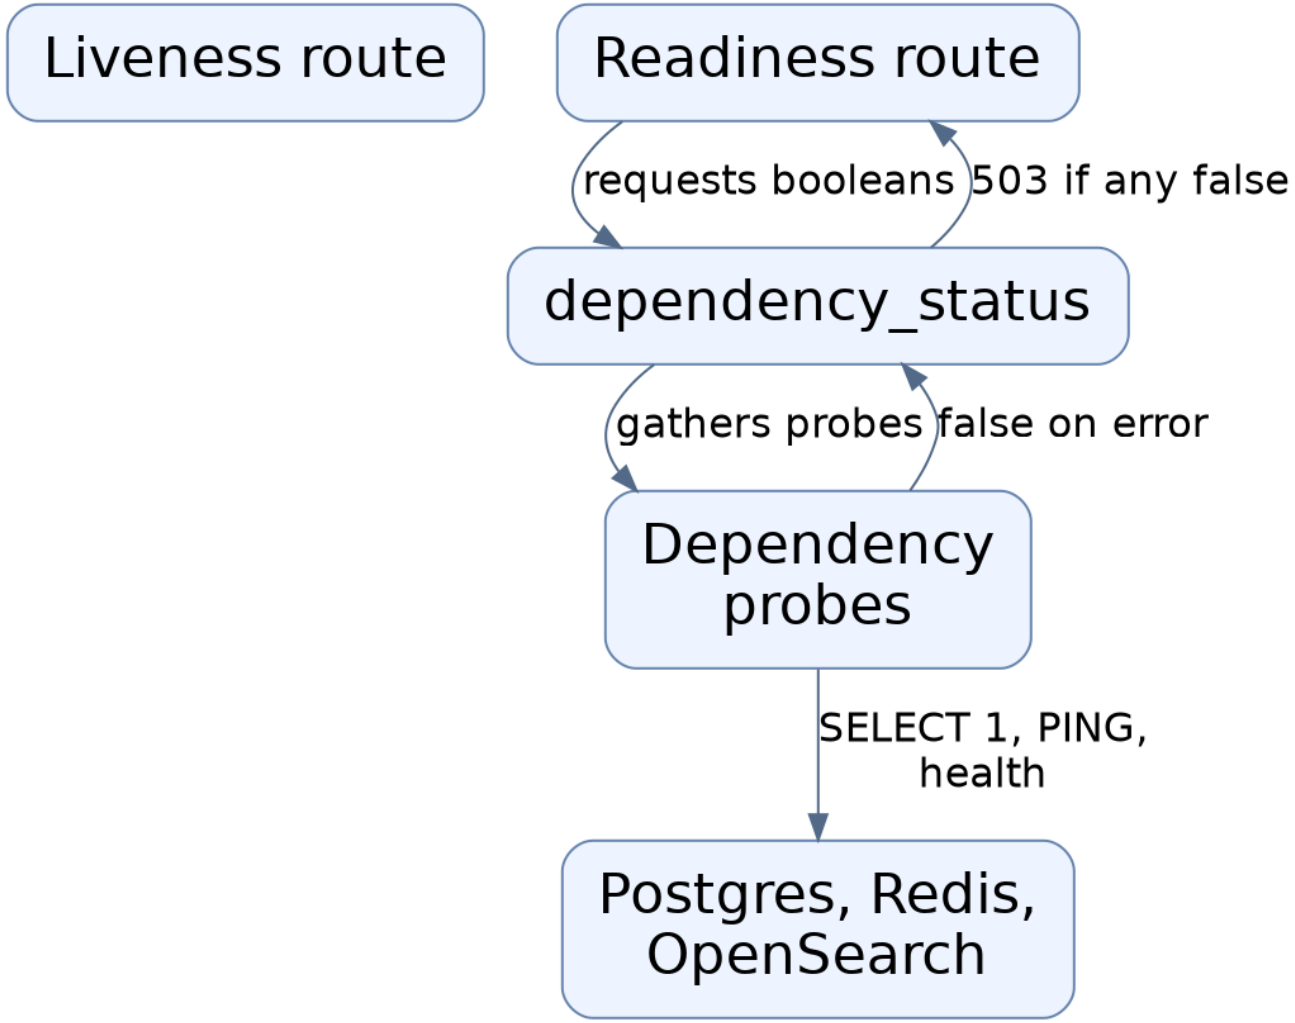

Document lifecycle service

DocumentService owns transactions and requires an already authorized tenant/collection scope. Upload locks the collection to serialize dedupe and stages the file off the event loop; delete commits intent before removing storage, accepting non-atomic DB and disk.

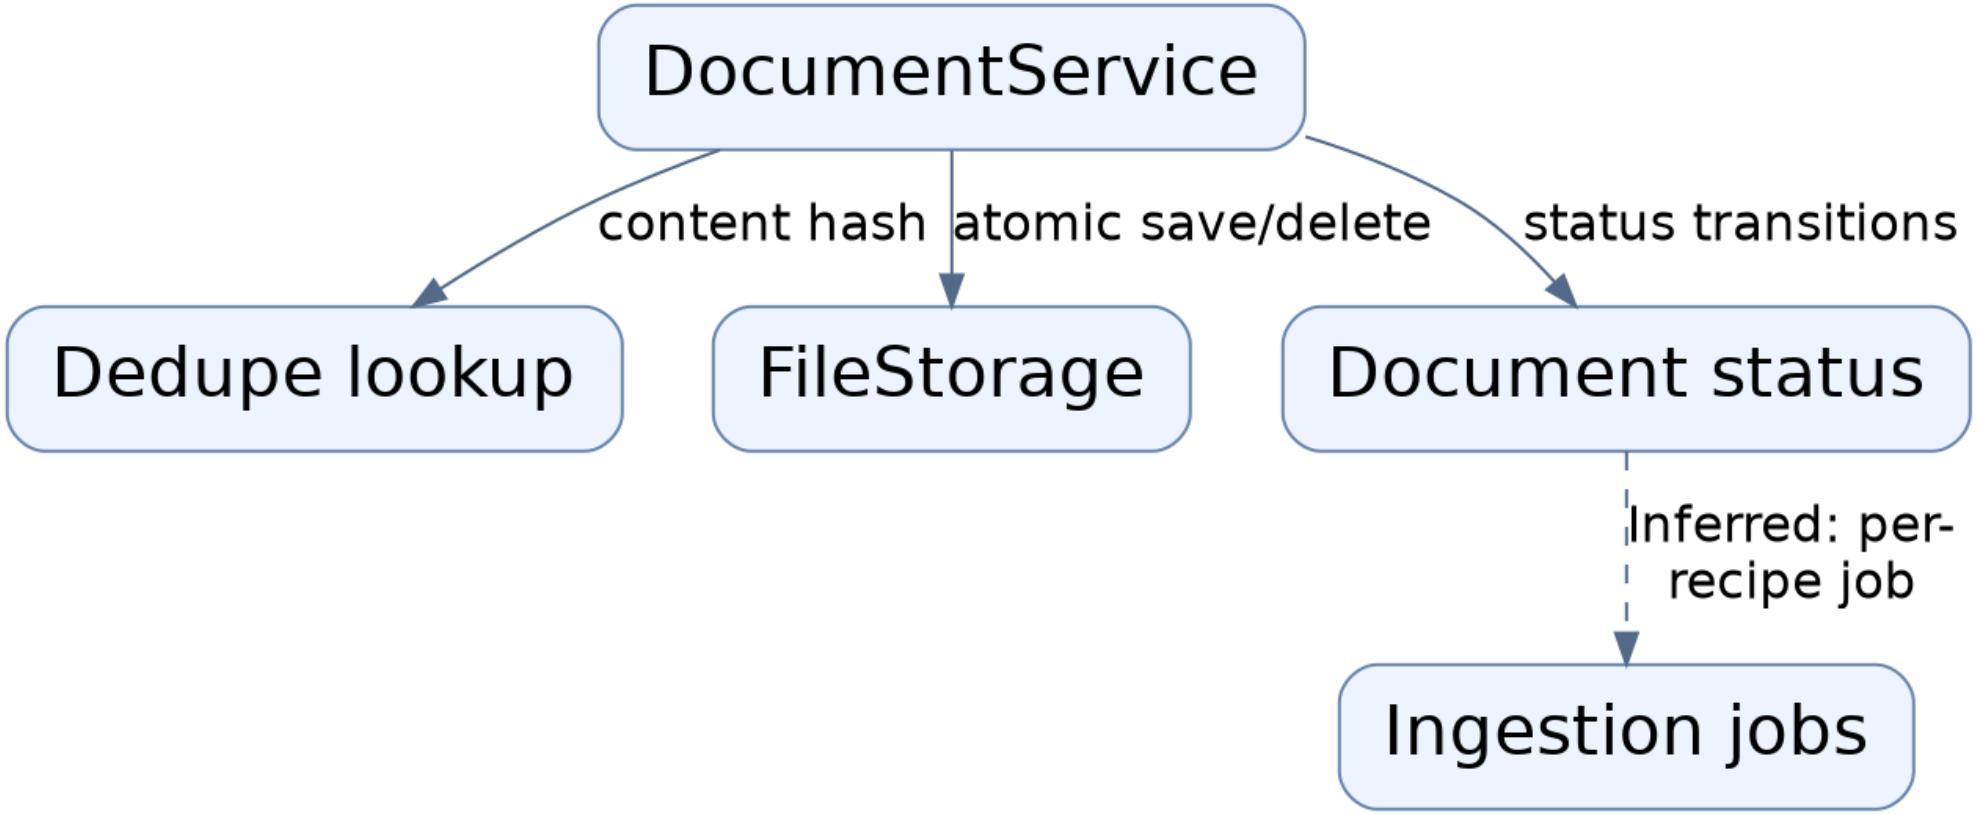

External integration and async boundary

Settings names every external dependency the backend expects, including Cohere providers and Redis/Dramatiq; however these sources show configuration and a worker actor but no runtime wiring that connects them to ingestion execution.

