

Architecture

The chunking package groups parsed blocks per heading section, packs them under the token budget, enriches embedding text, and emits Chunk contracts whose identities are derived from config and document digests.

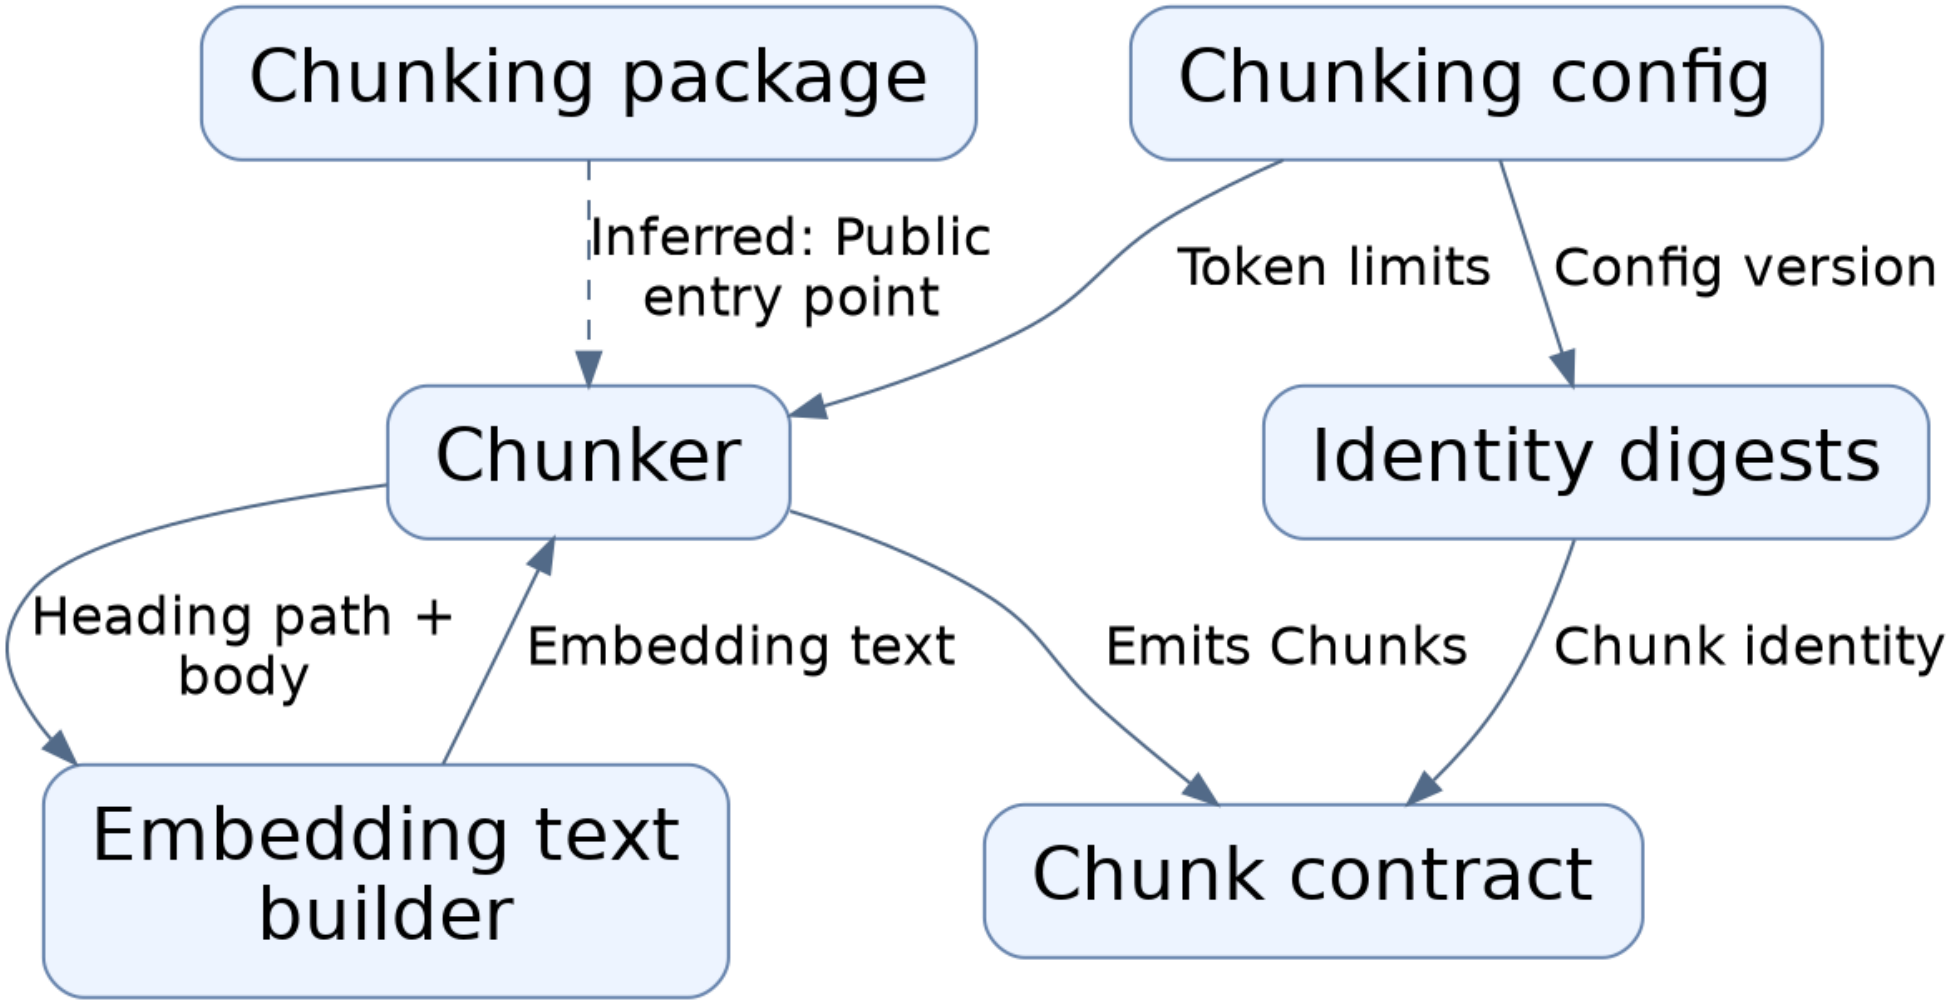


Section boundary

Blocks are grouped by heading path so chunking operates per section; the heading boundary is enforced so no chunk spans sections.

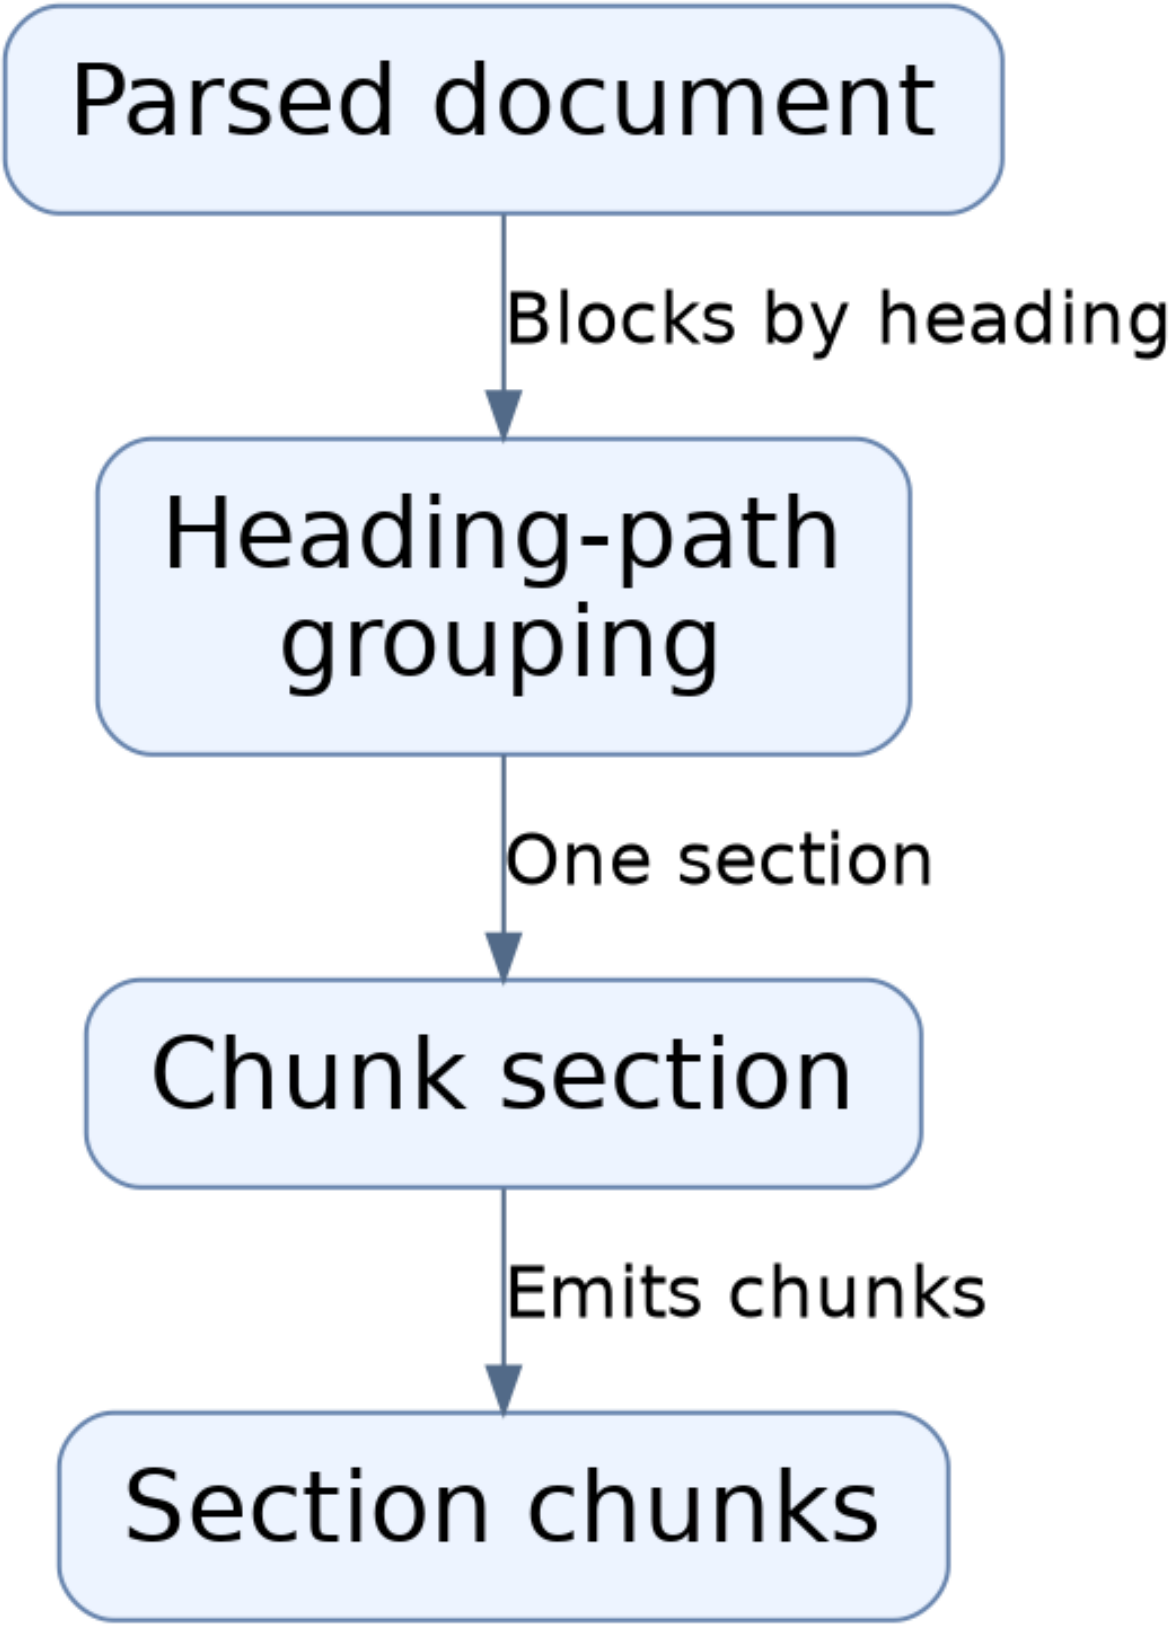

Packing and splitting

Blocks accumulate while the candidate stays within the token budget; oversized blocks are split by binary prefix search, and trailing overlap seeds the next candidate when pending blocks remain.

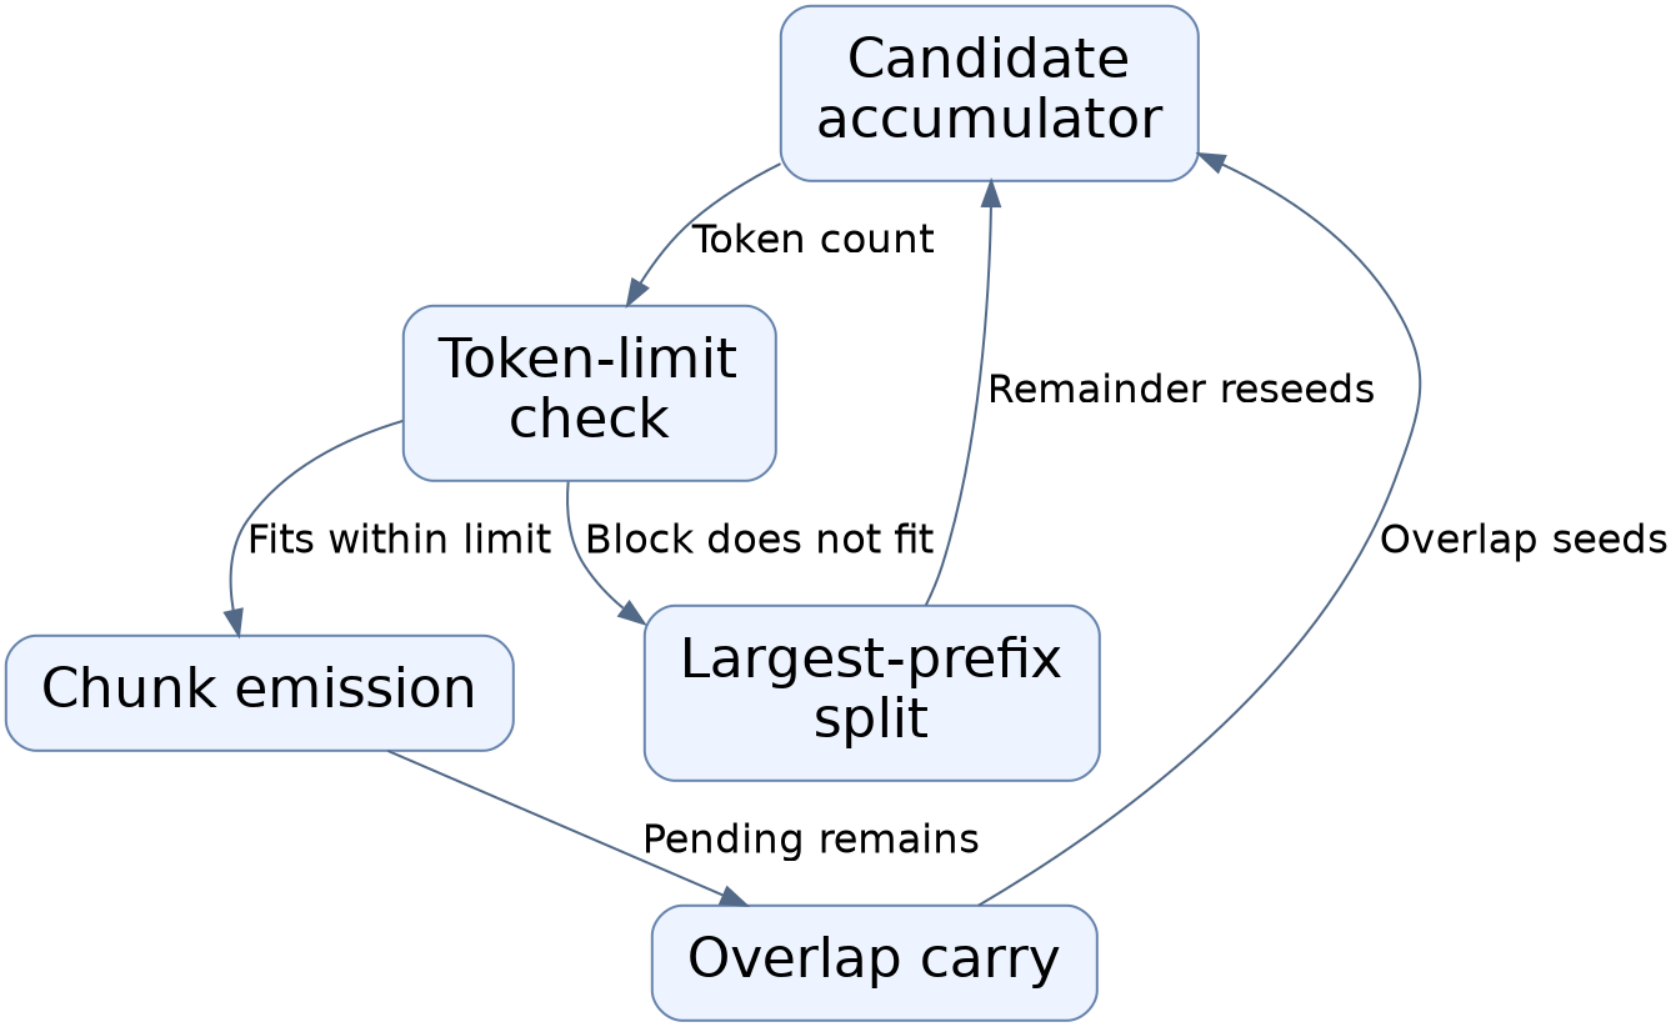

Identity derivation

ChunkingConfig validates limits and derives a version digest pinning the tokenizer; chunk ids combine document id, config version, order, and canonical content via a shared digest primitive.

