

Architecture

Settings derive a dense config and connection details; the retriever injects an embedding provider, queries the OpenSearch read alias with tenant-scoped filters, and emits shared results plus a separate trace.

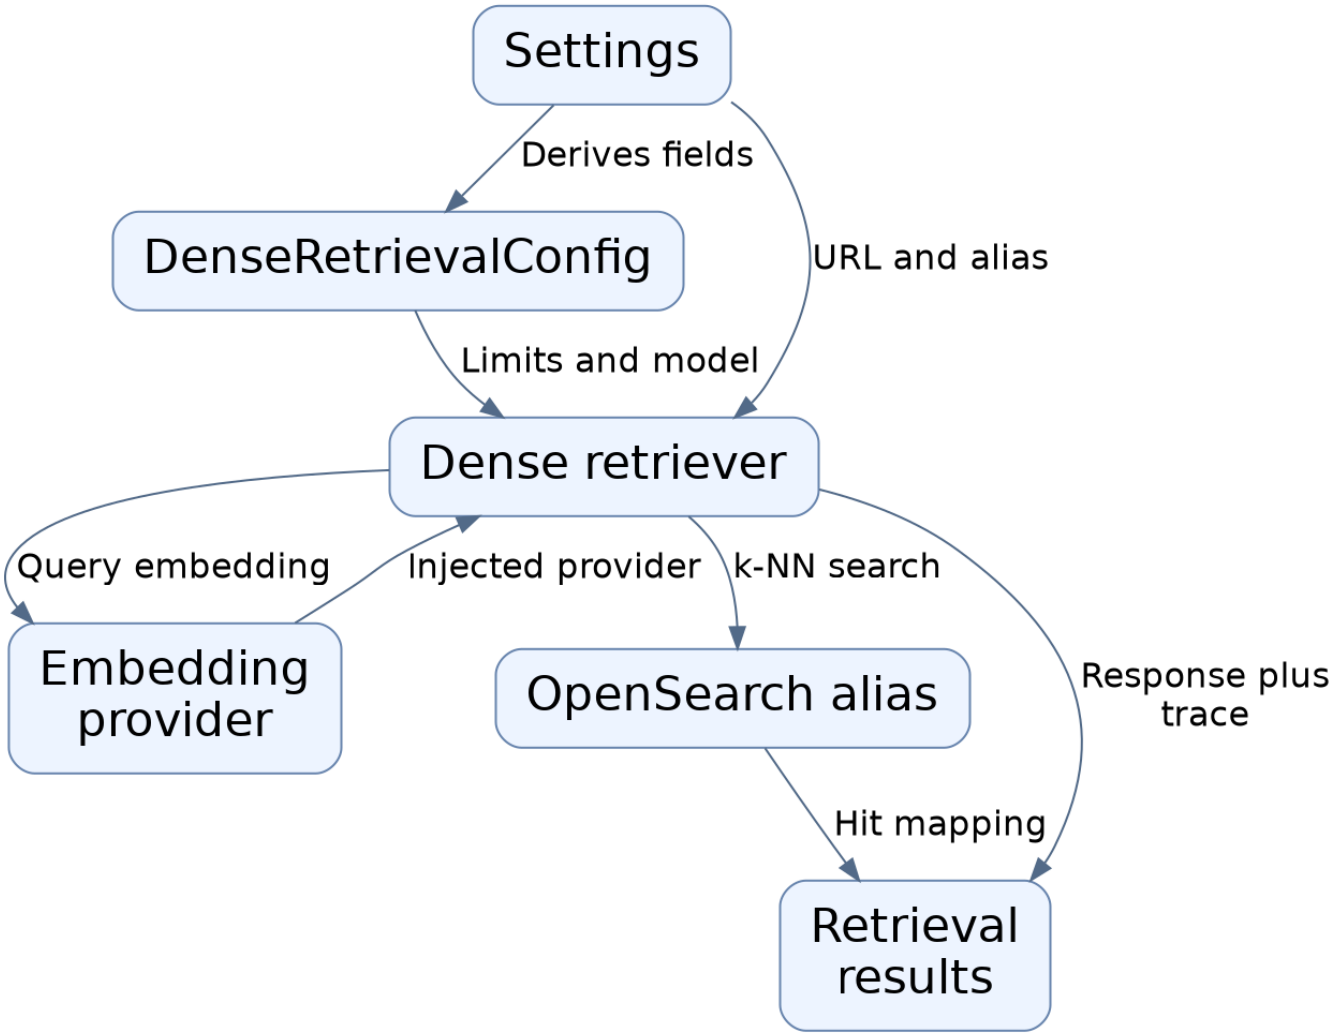


Request Lifecycle

A query is normalized, validated, embedded, and issued as a k-NN search; empty queries short-circuit before any external call, and stage timings are recorded in a trace kept separate from evidence.

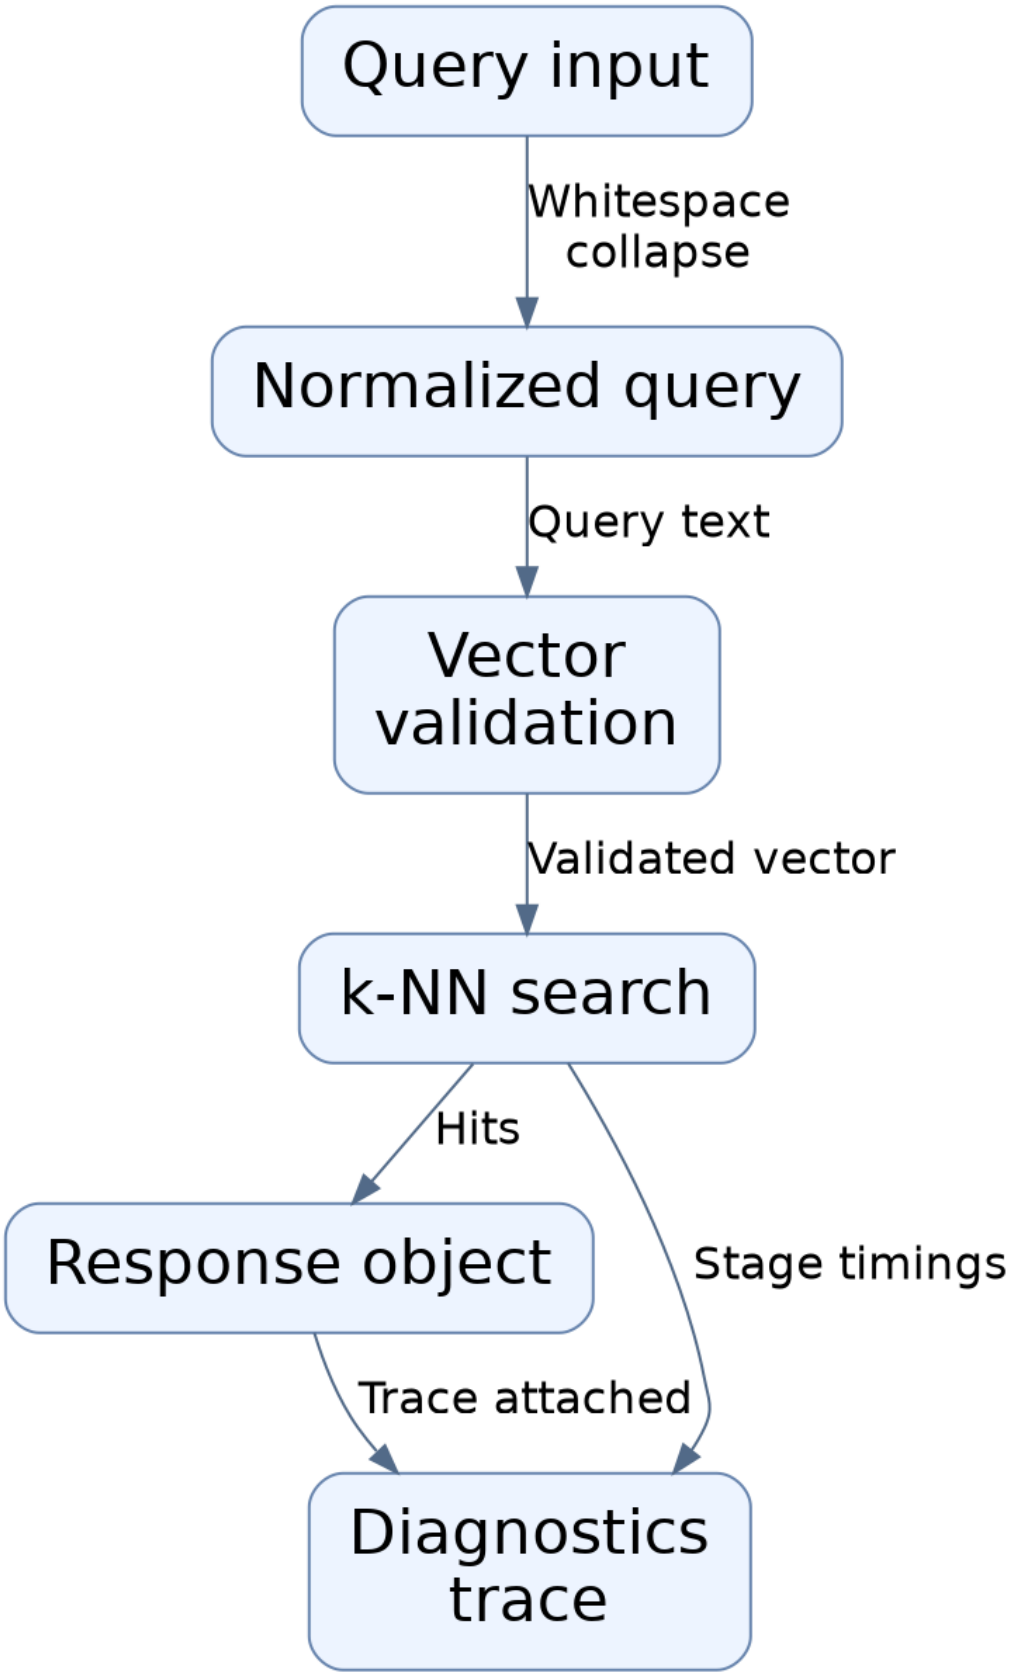


Data Ownership And Filtering

Tenant scoping is pushed into the k-NN query as filter clauses rather than post-filtering, and the search body selects the source fields required to rebuild the shared result contract.

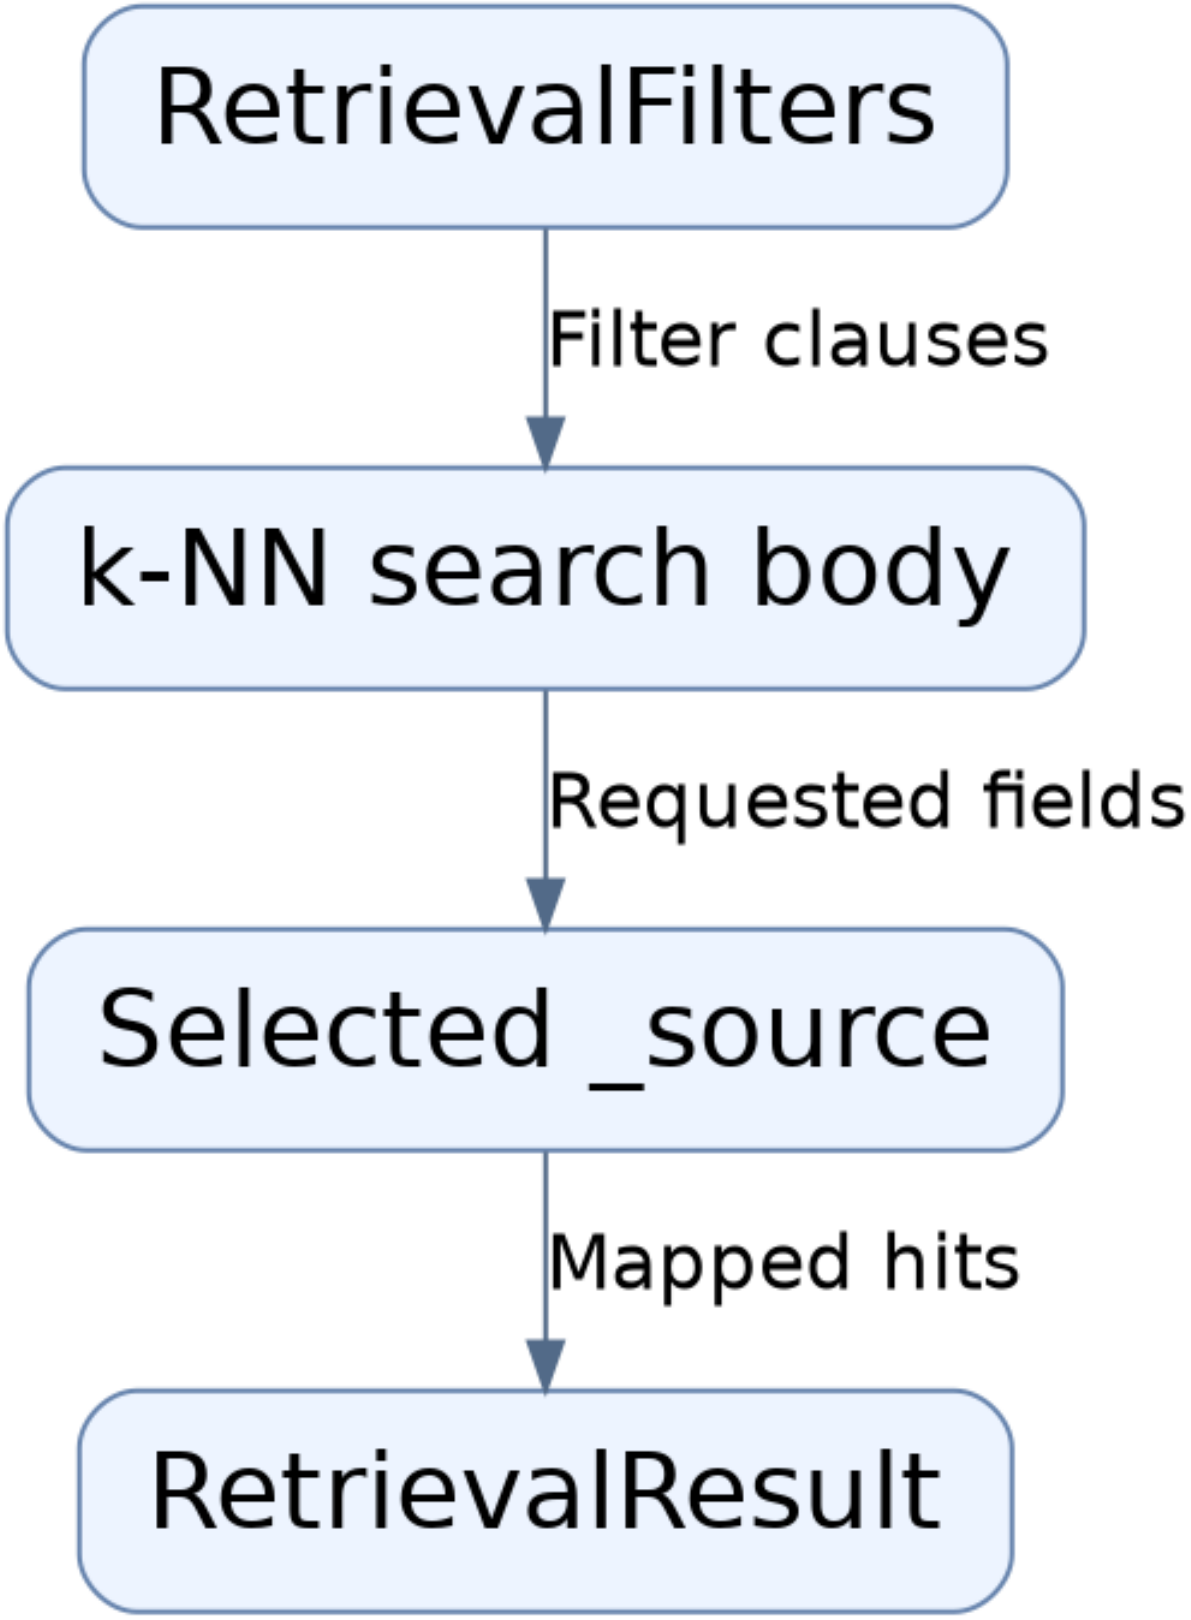

Failure And Error Contract

Transport and error responses from OpenSearch are normalized into a single RetrievalError type, with retryability distinguishing transient unavailability from malformed payloads.

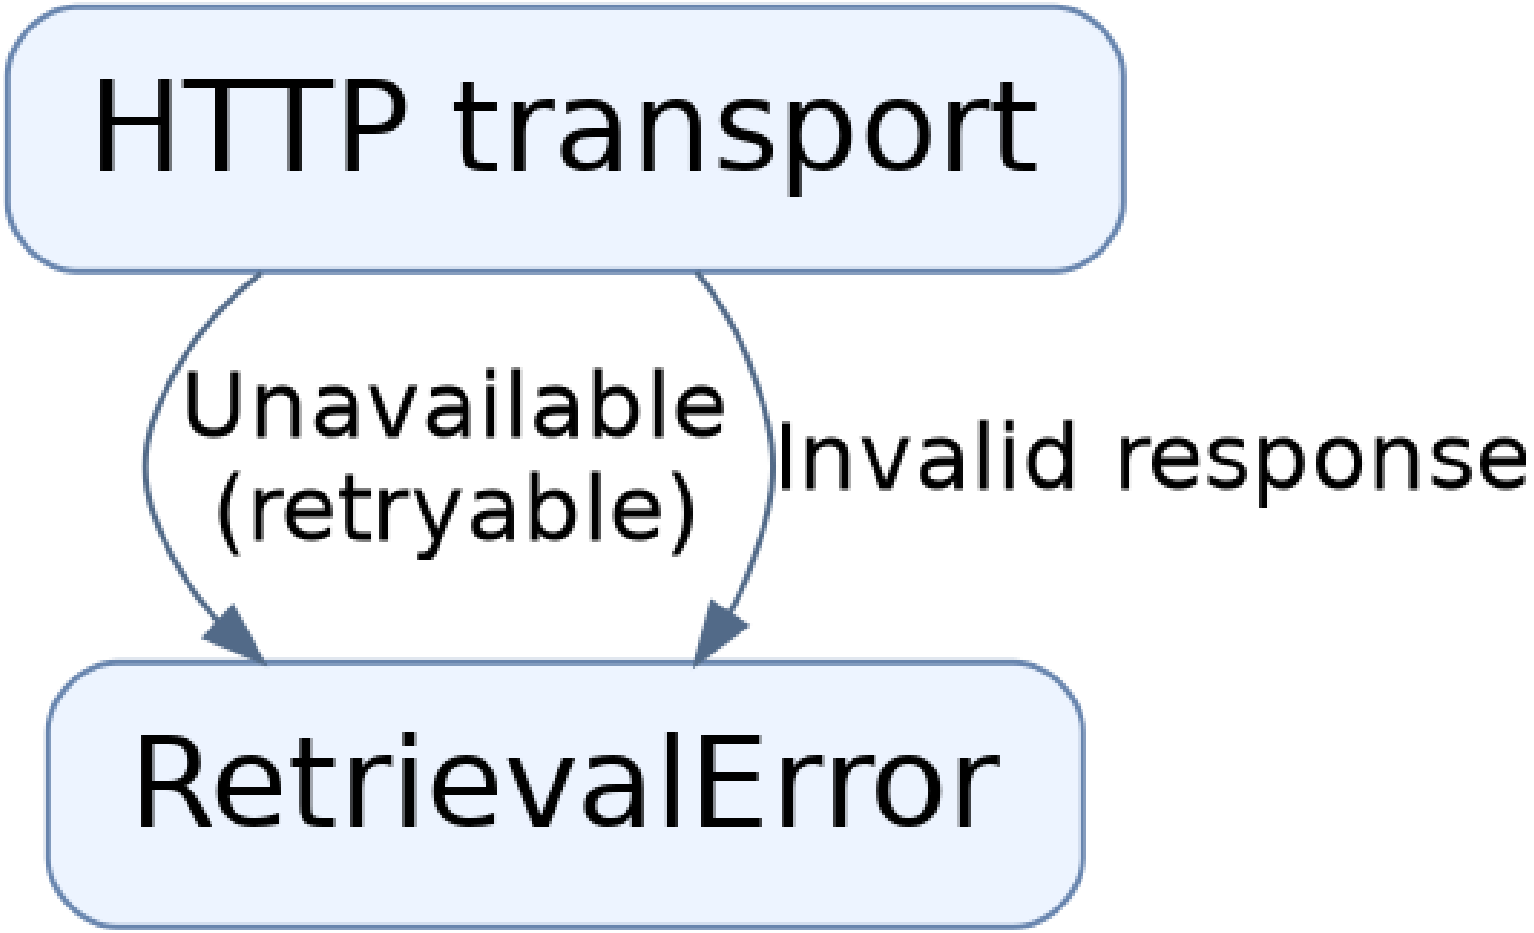

Debug CLI Entry

The only local entry point is a debug CLI that parses query, tenant, and optional collection/limit, opens the configured embedding provider, and builds the retriever from settings.

