
How a prompt becomes an answer


A caller supplies validated chat messages; the answer provider forwards one non-streaming request to the model service, re-checks the reply, and returns answer text with finish reason and usage.

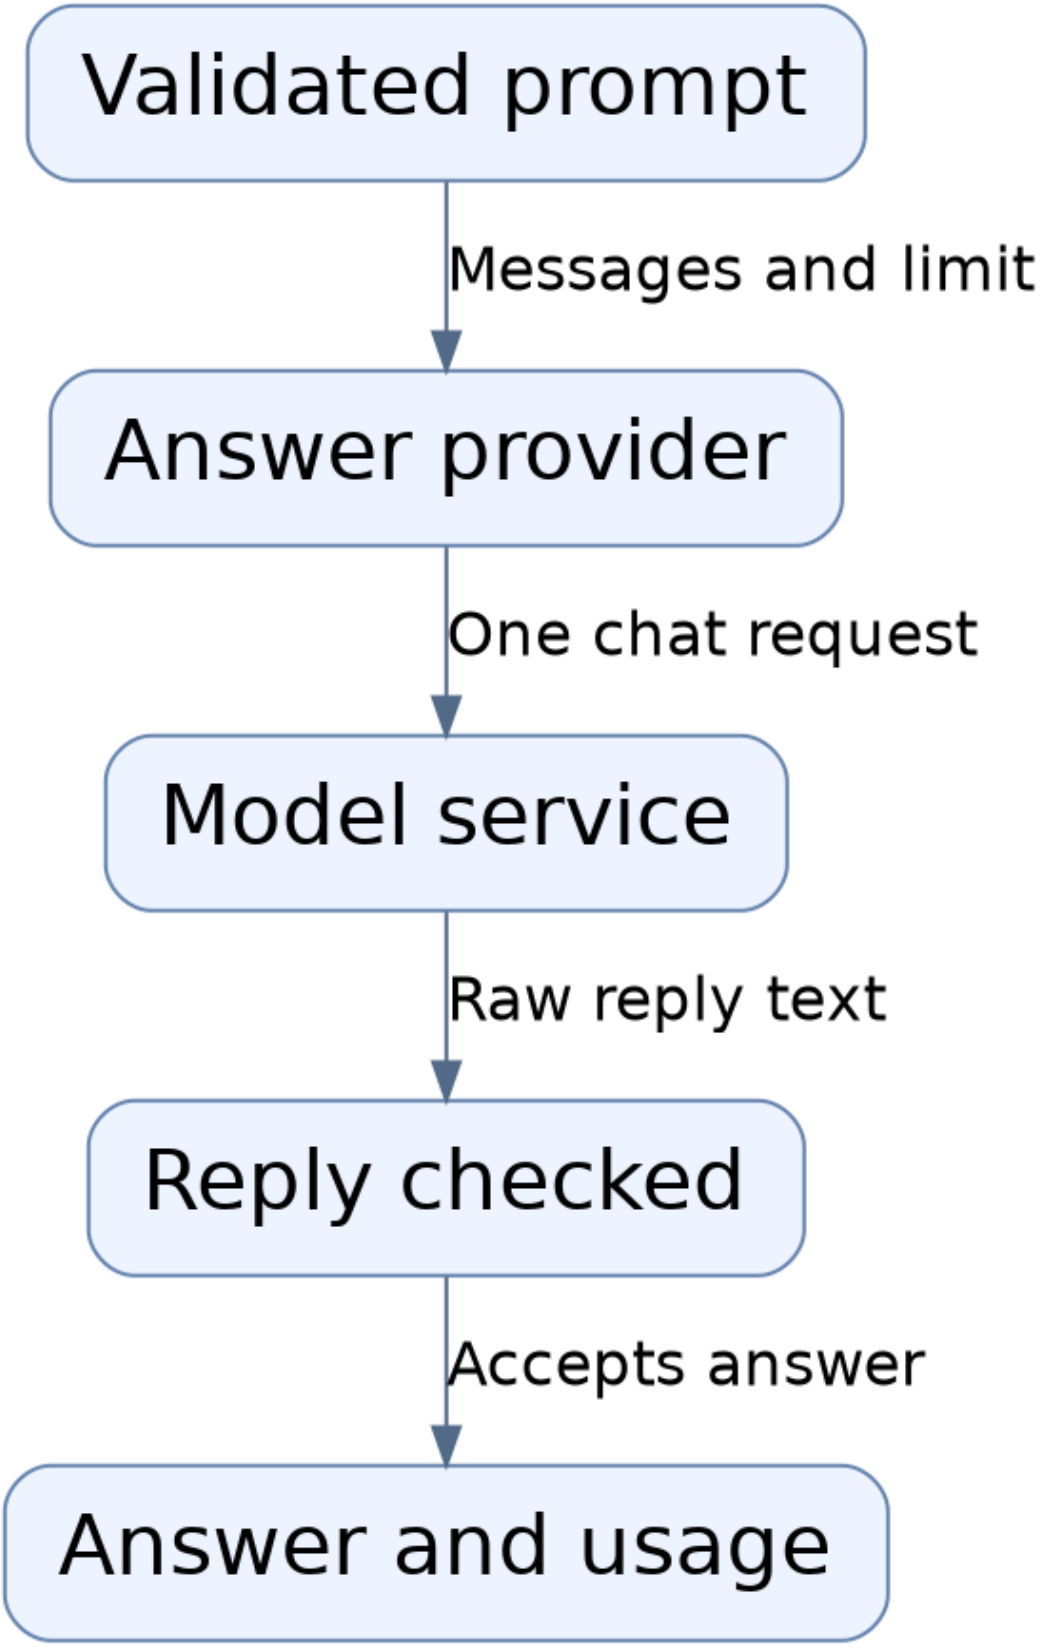

Read from top to bottom. Arrows show the direction of the interaction.

Choosing a provider and its limits


Two interchangeable providers exist: a live online service gated by an API key, and a deterministic stand-in for testing. Both return the same answer shape. Which one runs is not evidenced.

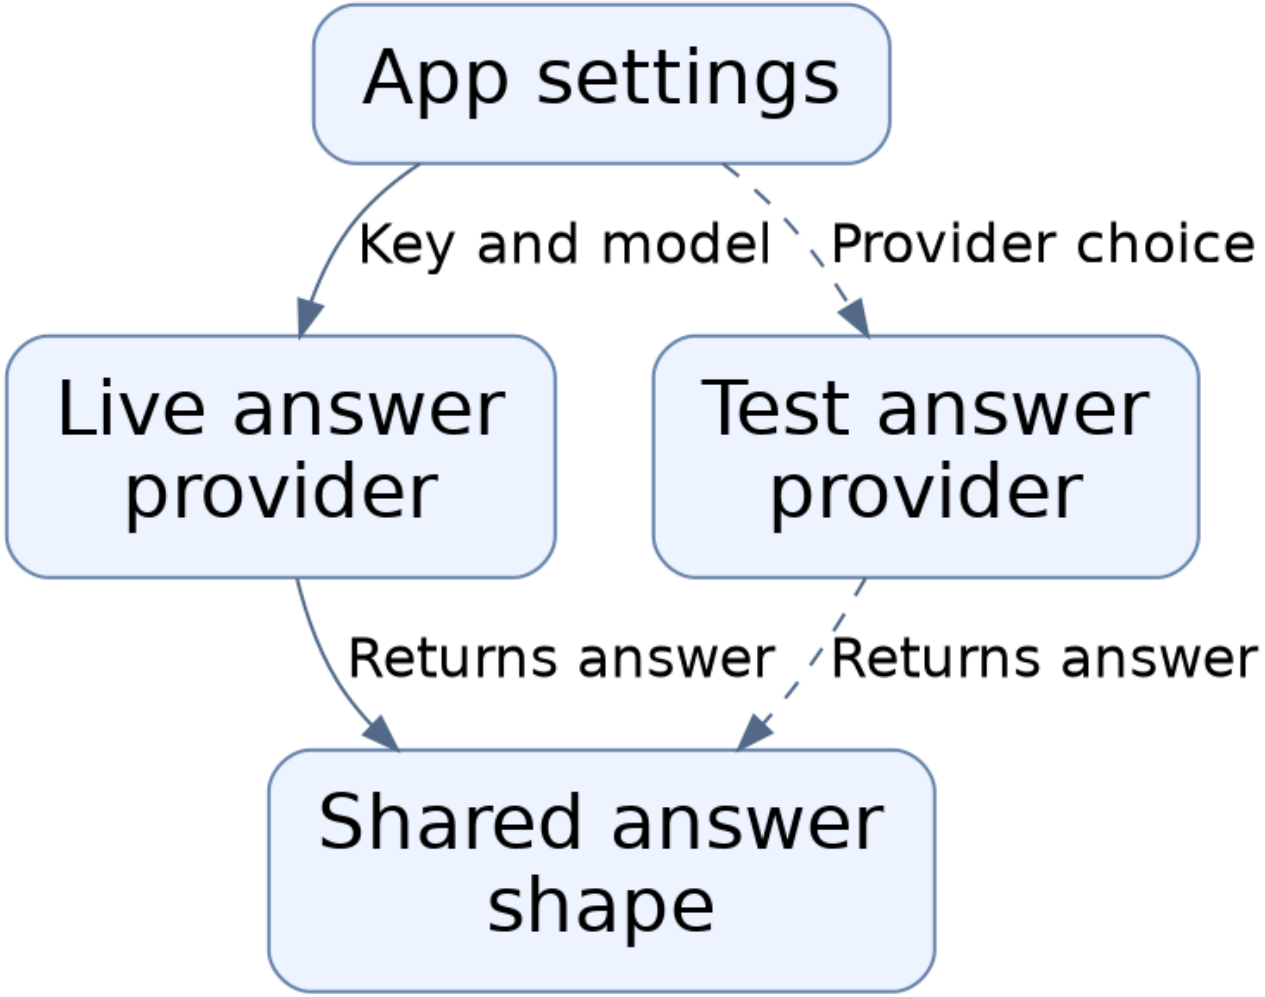

Dashed arrows: connections that need confirmation.

When the model service fails

Failures from the online service are turned into one closed set of error codes with retry guidance, and messages never include the provider's raw reply body or headers.

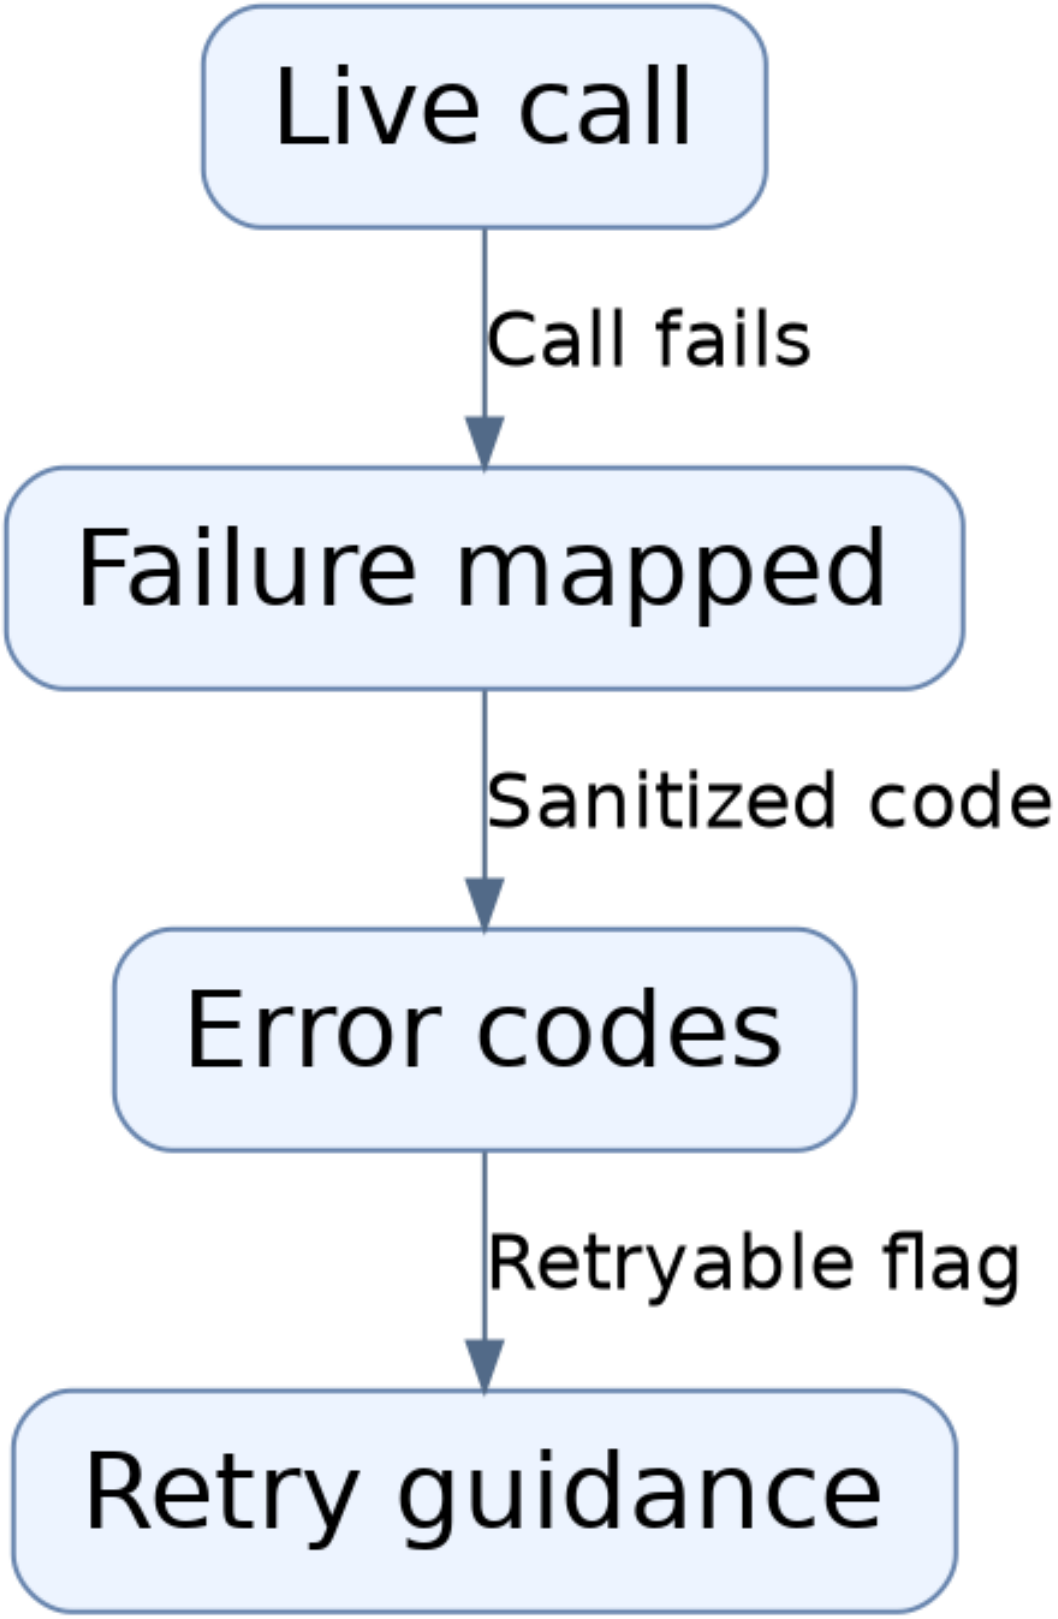

Read from top to bottom. Arrows show the direction of the interaction.