
How a dataset becomes a scored report


A verified dataset bundle is prepared into its own search index, every test question is searched in four ways, results are scored against human relevance labels, and a repeatable report is written.

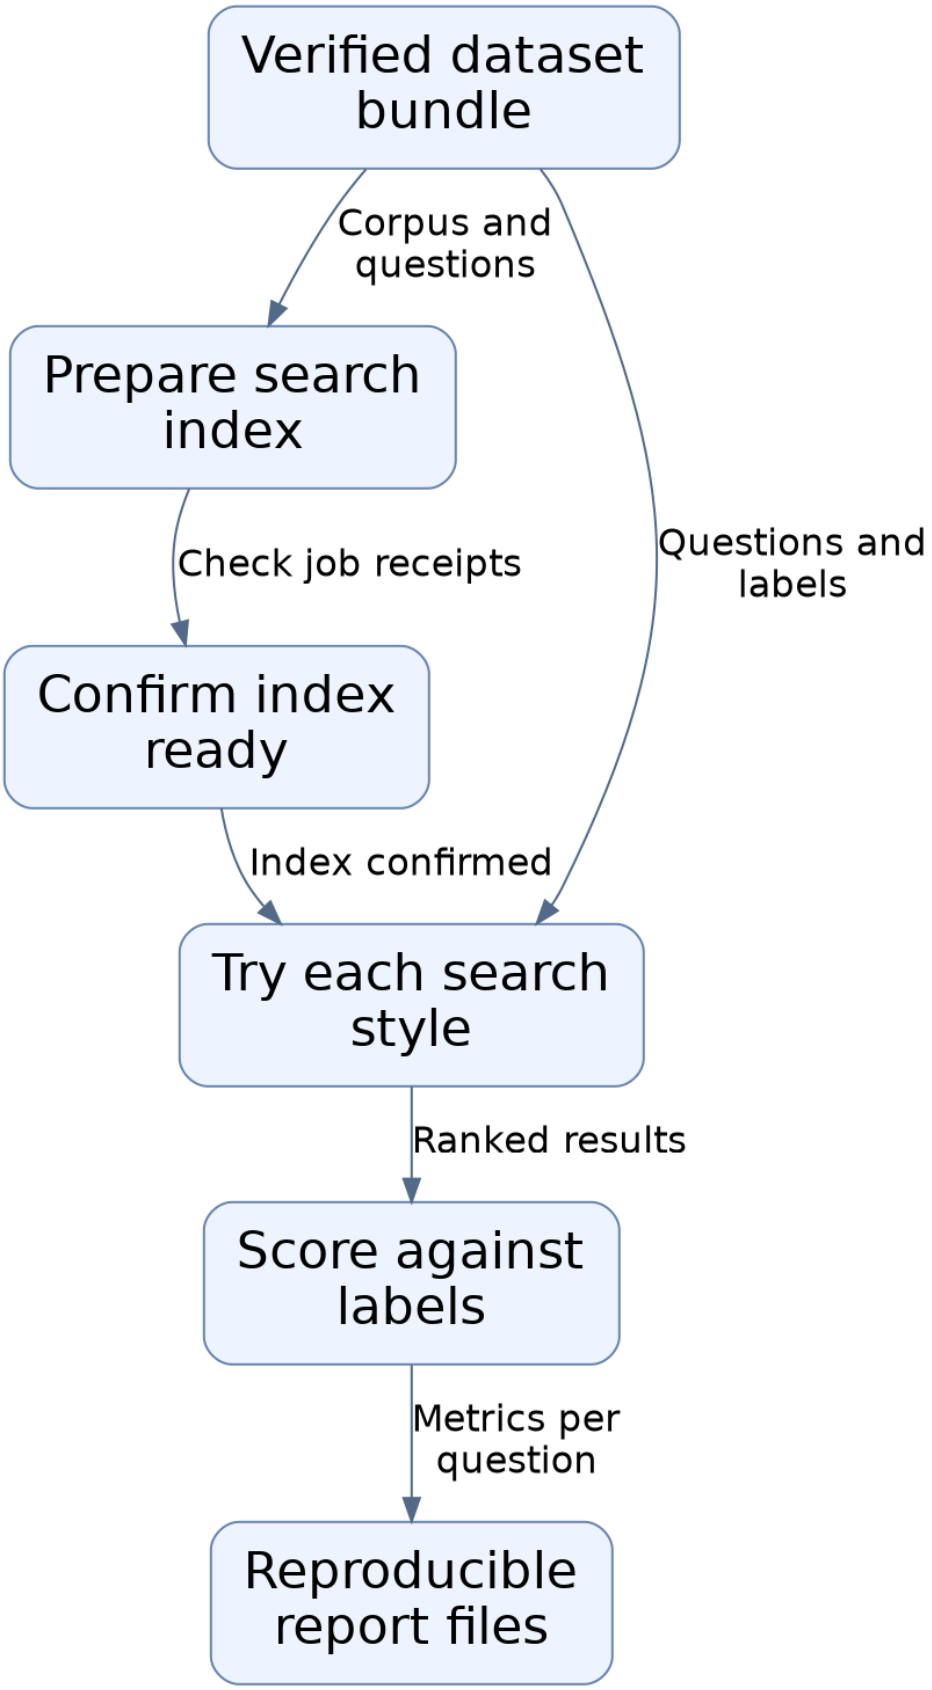

Read from top to bottom. Arrows show the direction of the interaction.

How a debug search request is answered


A local-only request names a dataset and question, the service checks the dataset is prepared, runs one search style in an isolated scope, and returns ranked results or a clear error status.

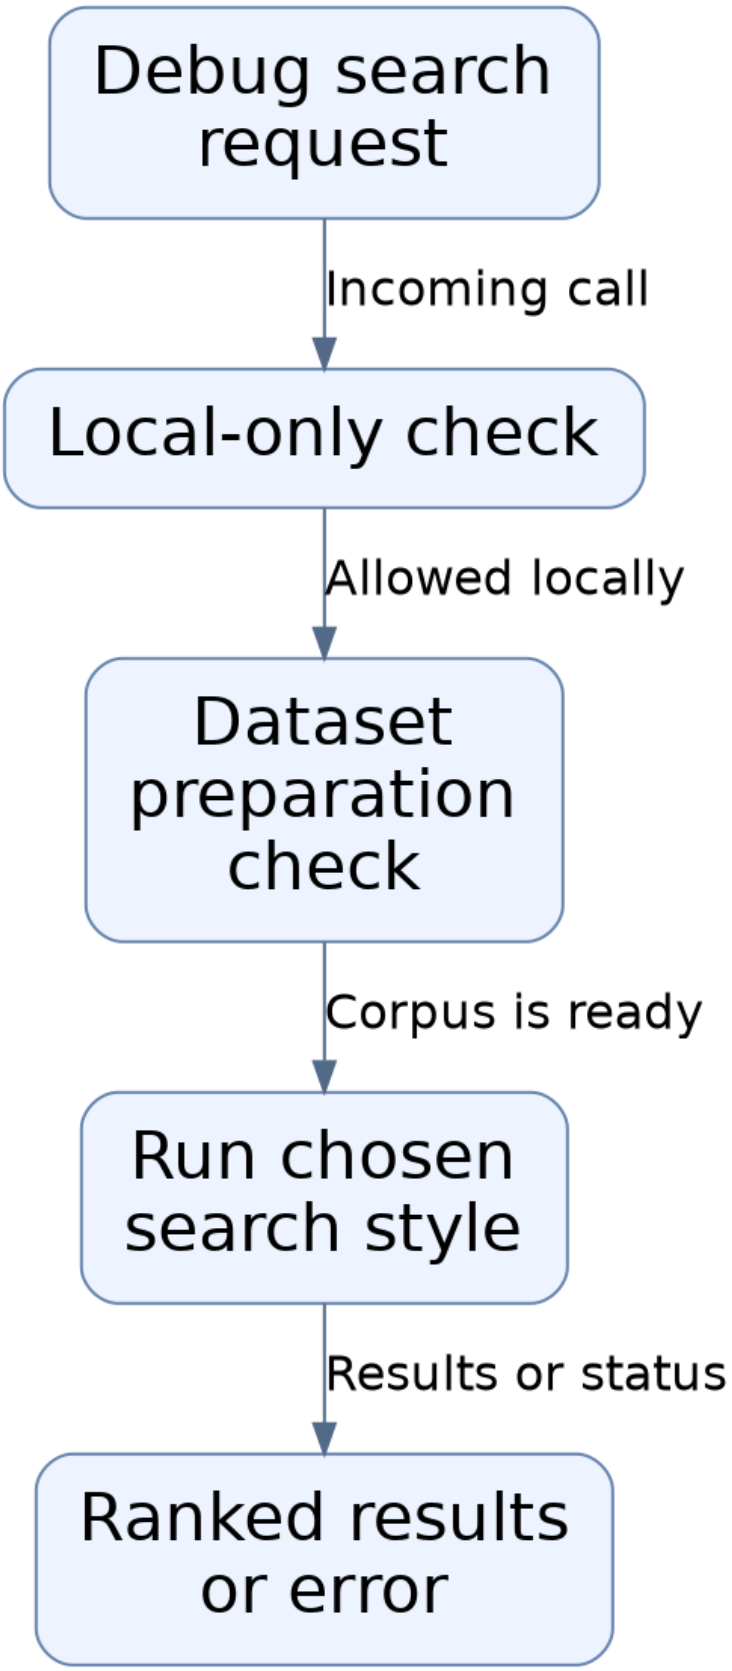

Read from top to bottom. Arrows show the direction of the interaction.

How the SciFact test set is built

A pinned public archive is downloaded and hash-checked, converted into the shared dataset format, trimmed to a deterministic 30-question, 500-document baseline, and re-loaded to prove it is valid.

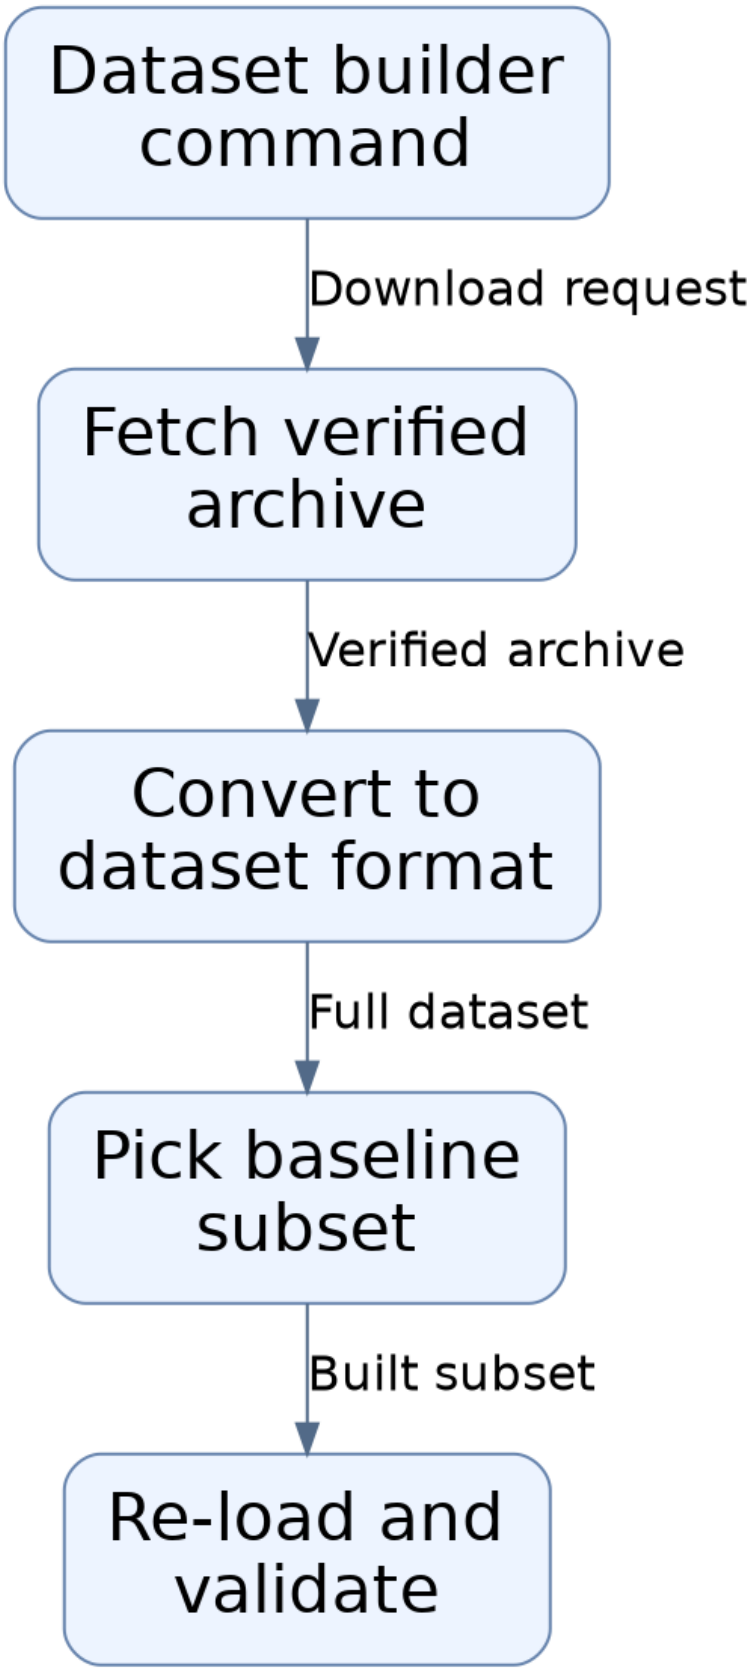

Read from top to bottom. Arrows show the direction of the interaction.