
How an uploaded file becomes a stored document


A caller supplies an authorized tenant and collection scope with file bytes. The service fingerprint-checks for duplicates, saves the file, and records its status.

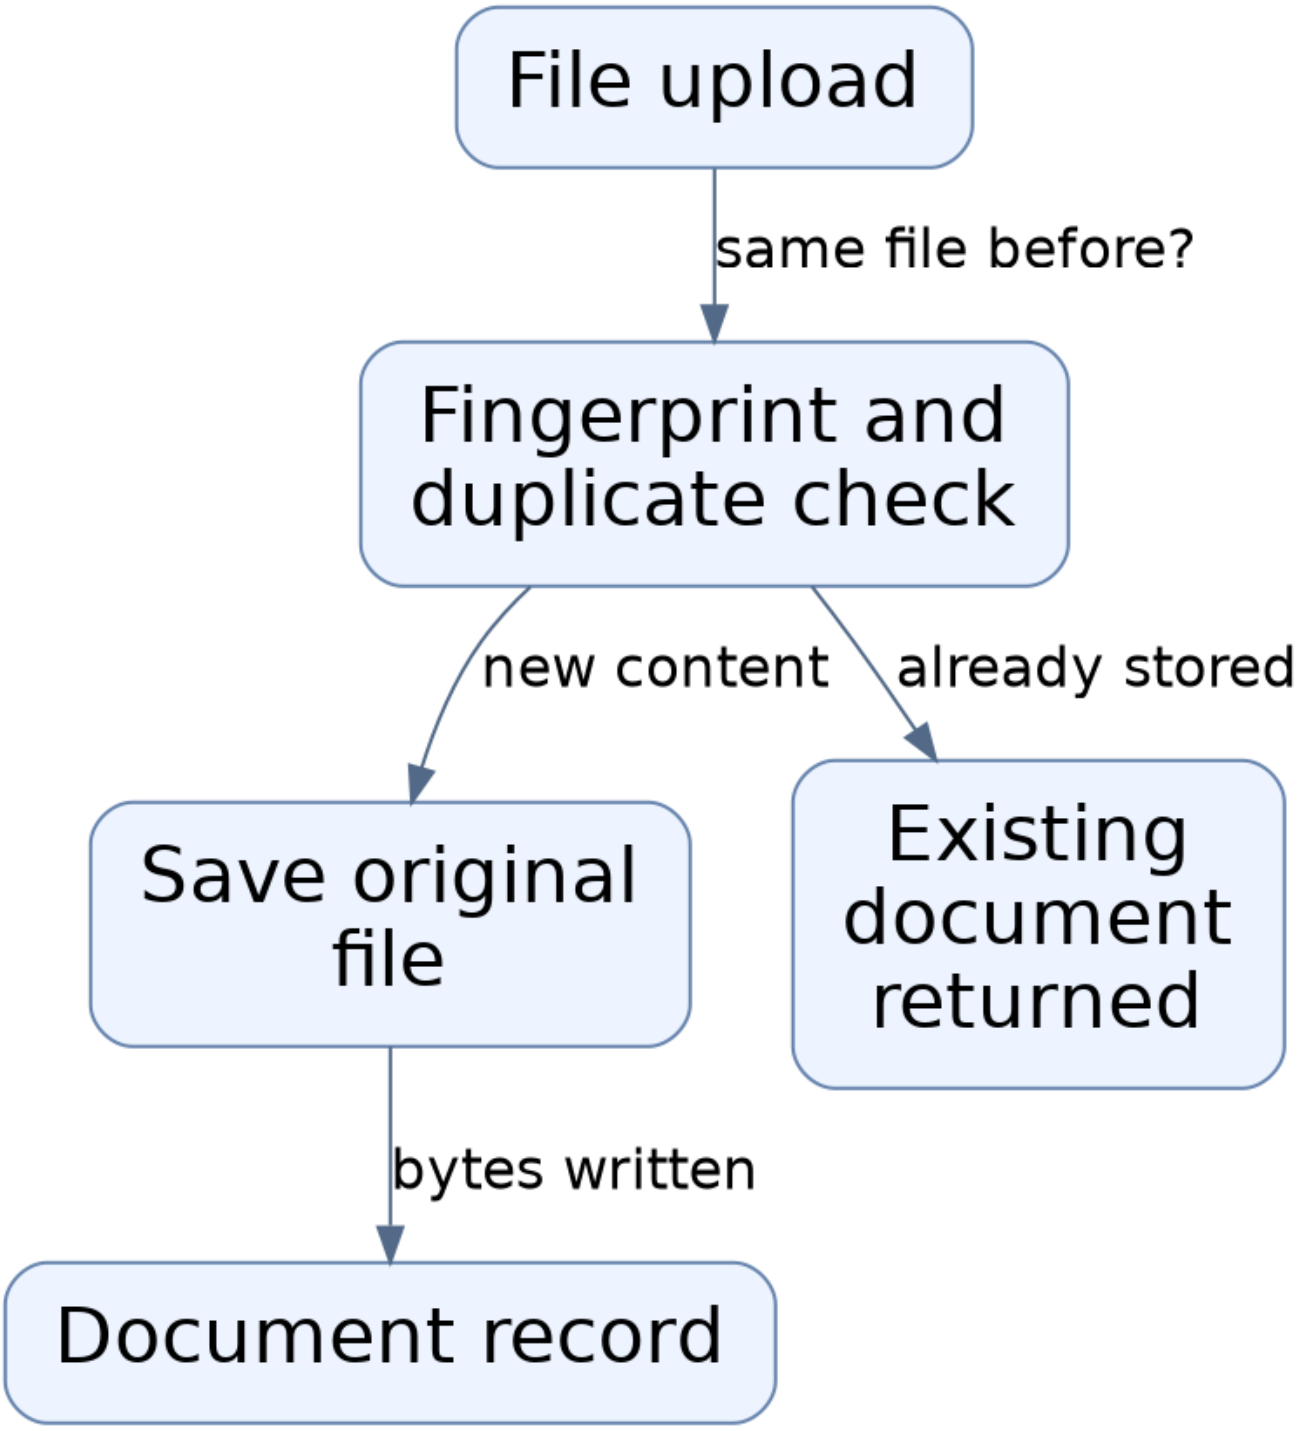

Read from top to bottom. Arrows show the direction of the interaction.

How a document is removed


Deletion is two steps: first the intent is saved, then the stored file is removed and the record marked deleted. If removal fails, the document stays unavailable and can be retried.

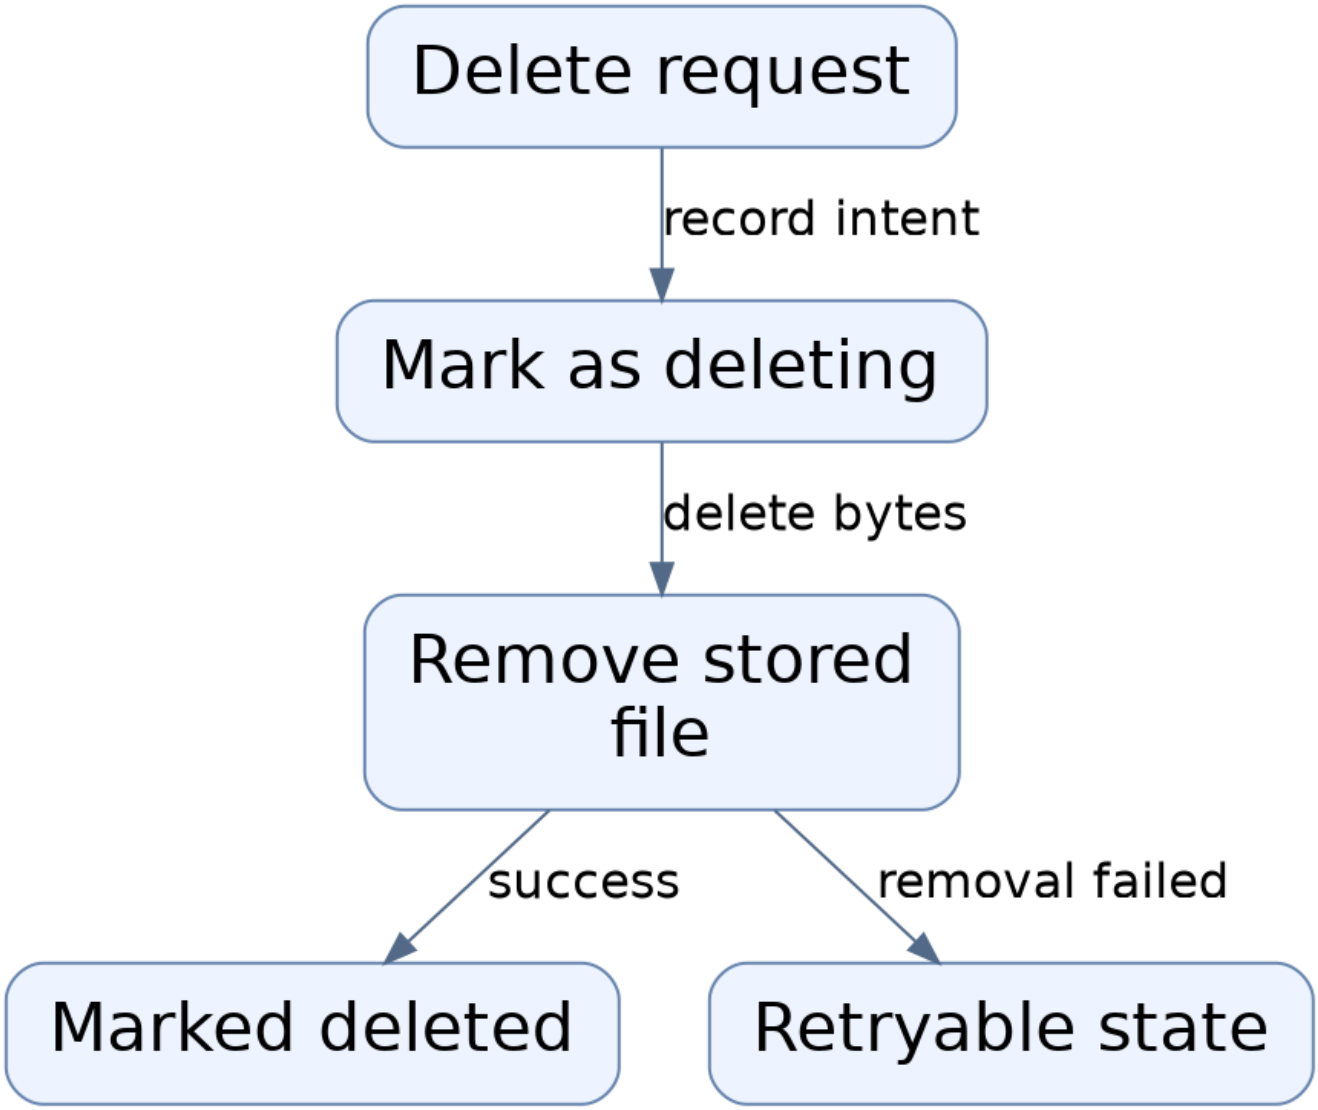

Read from top to bottom. Arrows show the direction of the interaction.

How readiness is answered


The readiness check probes three external services at once and reports ready only when every probe succeeds, otherwise it answers unavailable.

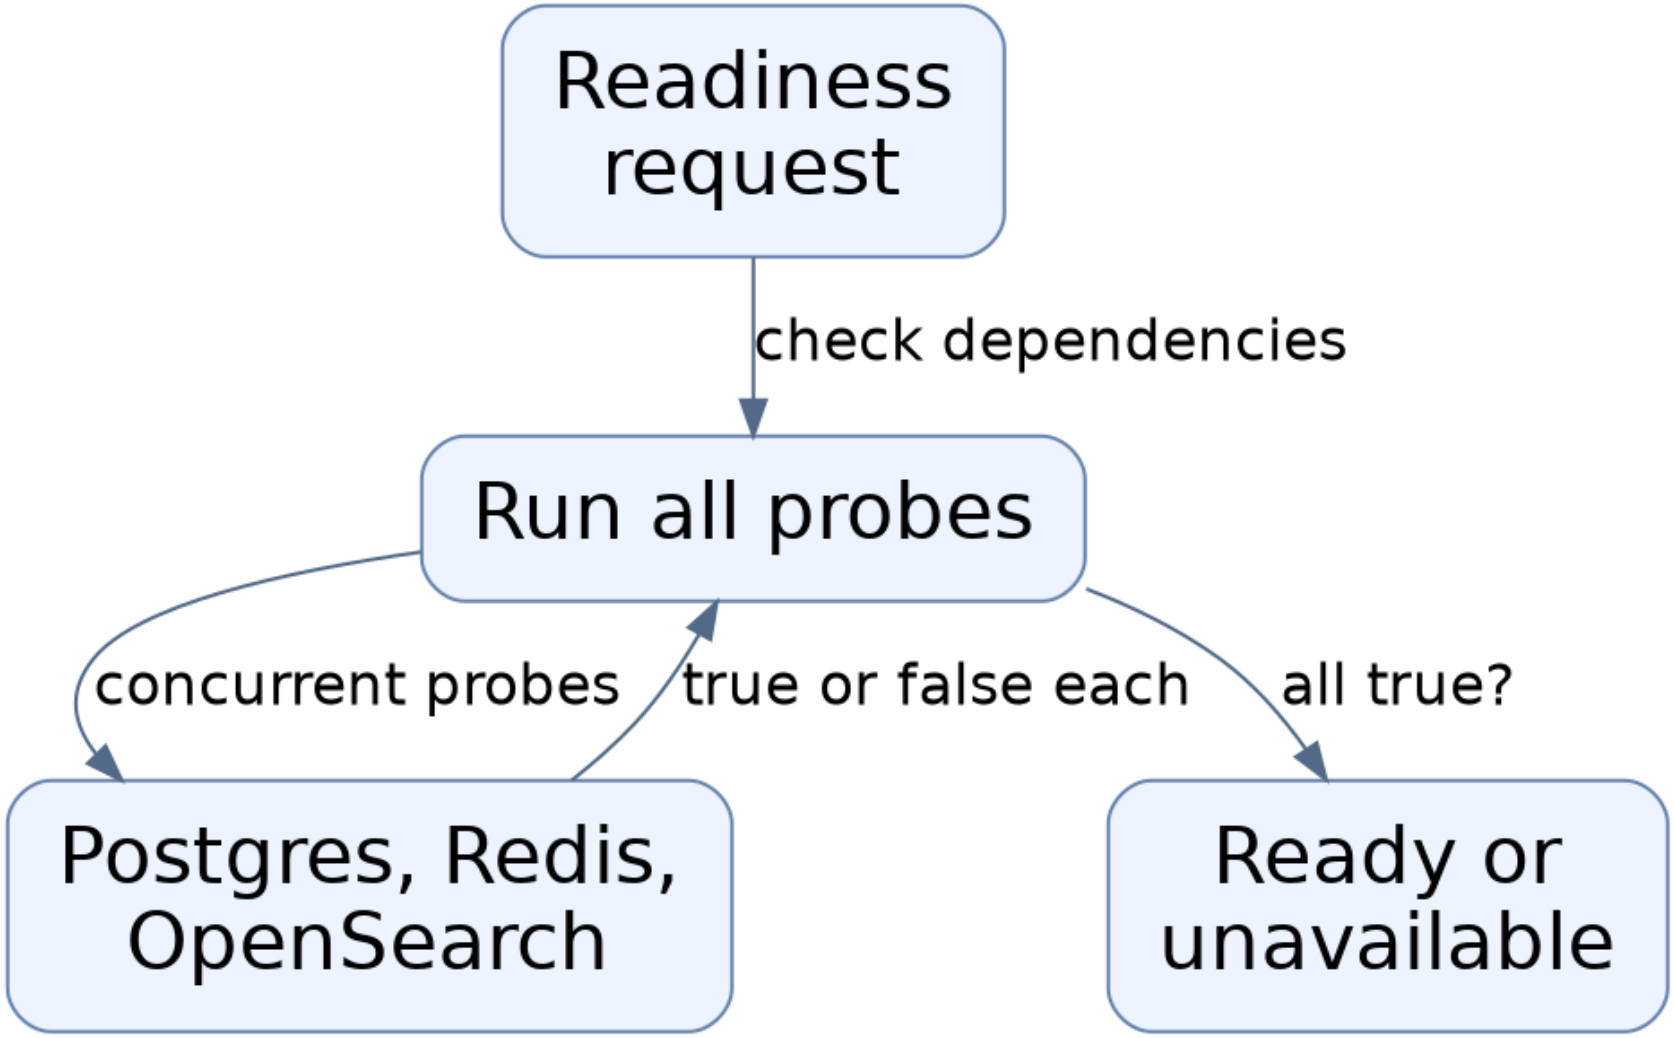

Read from top to bottom. Arrows show the direction of the interaction.

How the stored structure stays consistent


Database migrations create the tables that hold tenants, collections, documents, upload jobs, retrieval settings, evaluation labels, and audit entries. Database rules keep tenant boundaries and append-only records enforced.

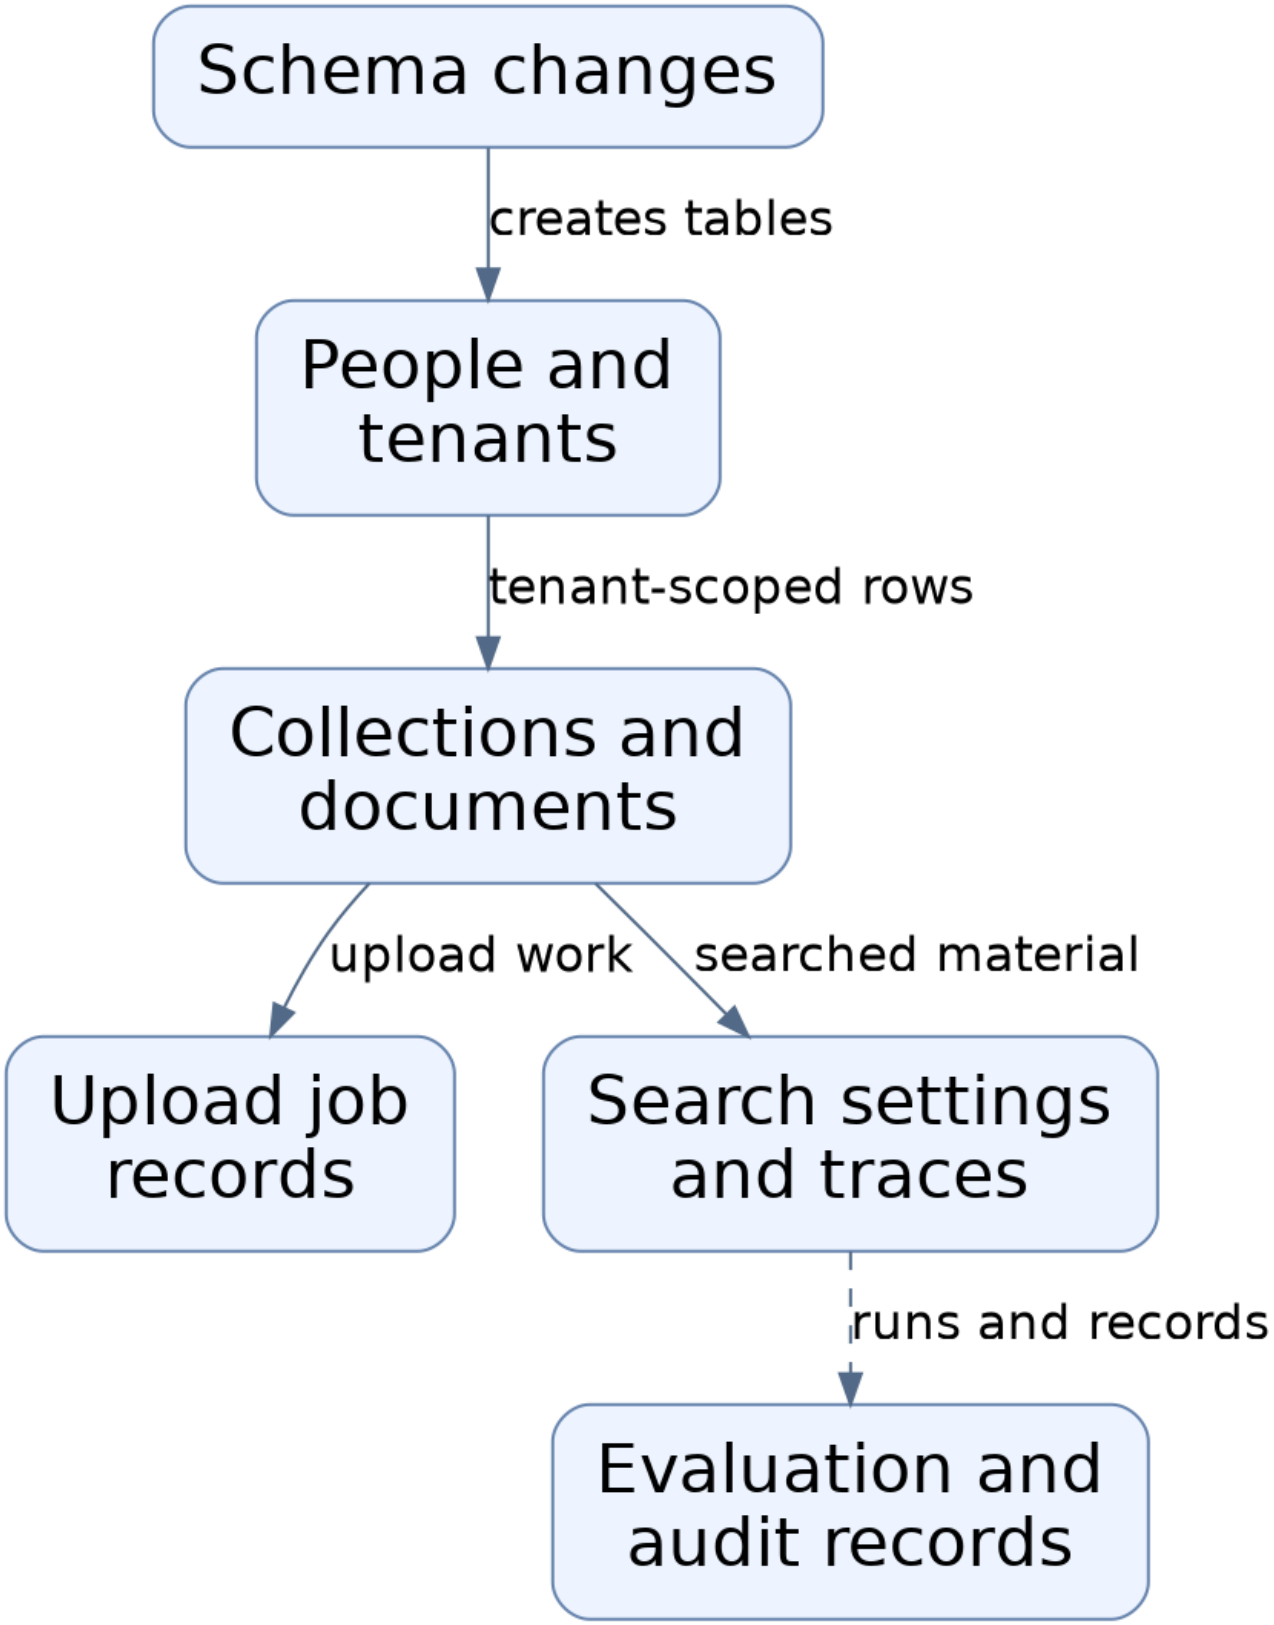

Dashed arrows: connections that need confirmation.

How developers run and check the service

Commands start the web server, prepare the database, load demo data, and run checks. Local orchestration starts the supporting services the application expects.

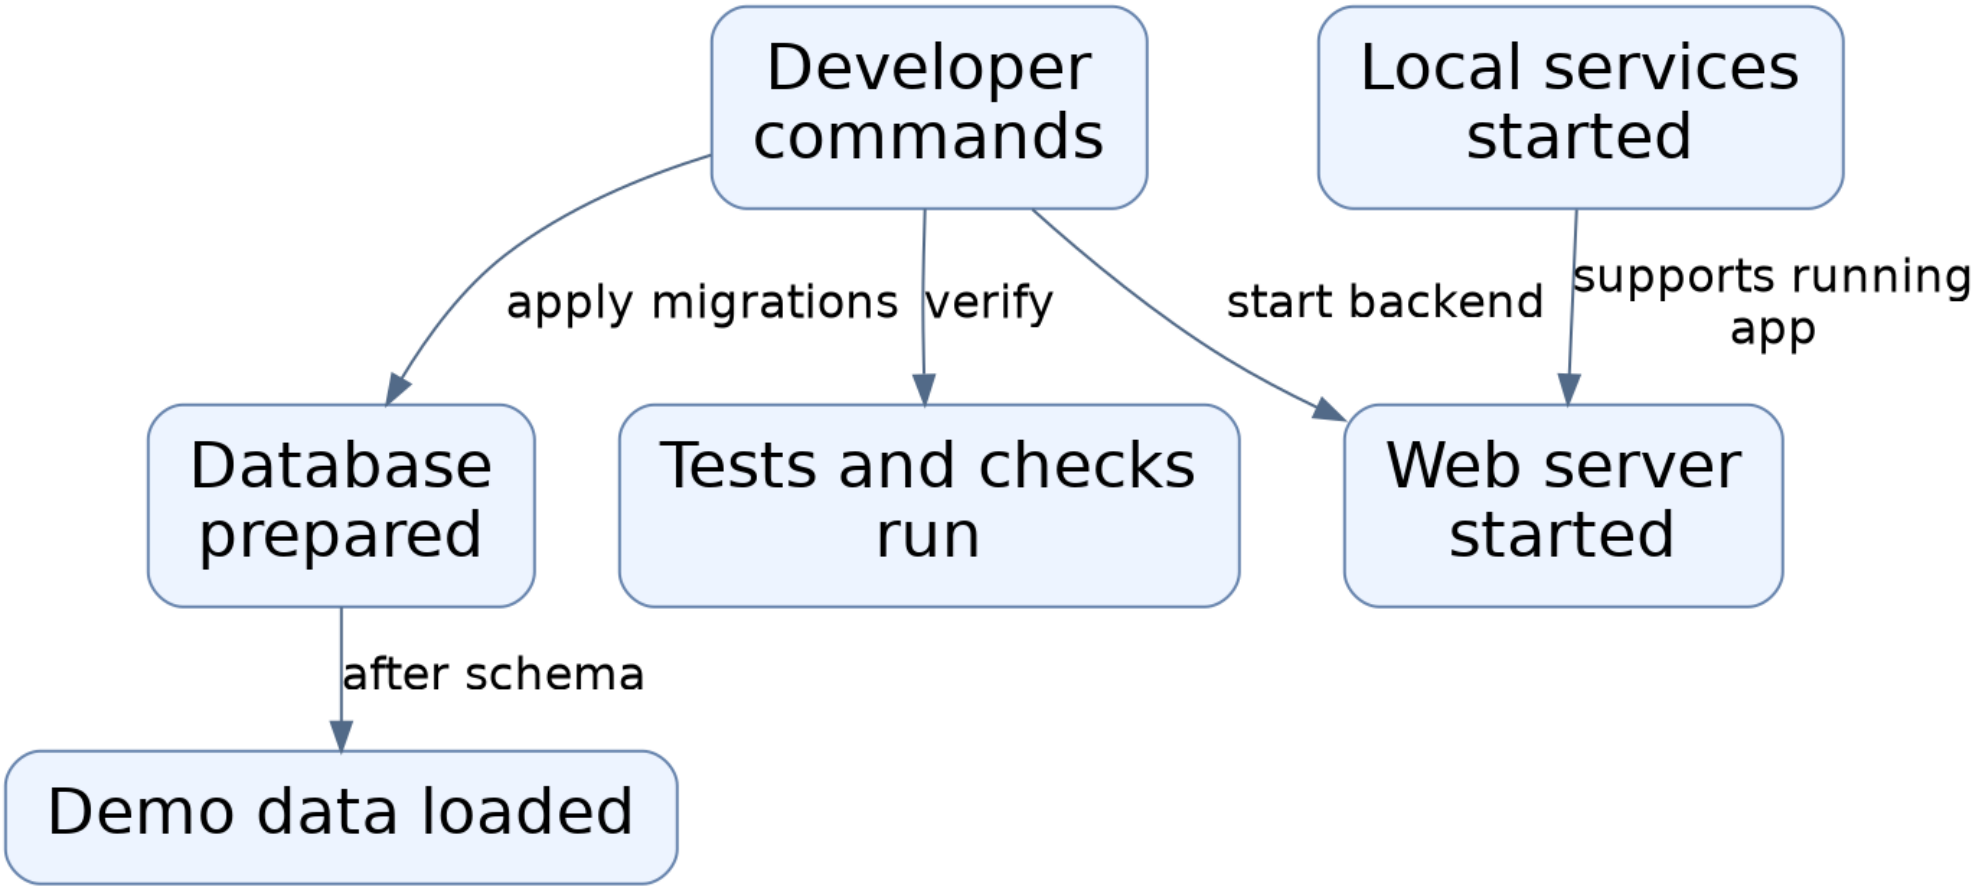

Read from top to bottom. Arrows show the direction of the interaction.